

Name of the
Experiment

HISTORY OF SELENIUM

- * In 2004, invented by Jason R. Huggins and team.
- * Original name is Javascript Functional Tester (JFT)
- * Open source browser based integration test framework built originally by Thoughtworks.
- * 100% Javascript and HTML.
- * Web testing tool.
- * Supports for cross-browser testing
- * And multiple operating systems
- * Cross browser - IE 6/7, Firefox 8+, Opera 9.5, Safari 2.0
- Selenium: Javascript Framework that runs in your web browser works anywhere Javascript is supported hooks for many other languages.
- * Implemented entirely using browser technologies - Javascript, DHTML, Frames
- Selenium IDE:
Selenium Integrated Development Environment is a Firefox plugin that lets testers to record their actions as they follow workflow that they need to test.

Name of the
Experiment _____

Date : _____

Ex. No. : _____

* It provides a Graphical User Interface (GUI) for recording user actions using Firefox or Google Chrome which is used to learn and use selenium.

* Recorded scripts can be converted into various programming languages.

Selenium IDE Download

step-1: Launch Firefox and navigate to the following URL -
<http://seleniumhq.org/download/>

* Under the selenium IDE section, click on the link that shows current version number as shown below.

step-2: Firefox add-ons notifier pops up with allow and disallow options. User has to allow installation.

step-3: The add-ons installer warns the user about untrusted add-ons. click 'Install now'.

step-4: The selenium IDE can now be accessed by navigating to Tools >> selenium IDE.

step-5: Selenium IDE can also be accessed directly from quick access menu bar.

Name of the
Experiment


Date :

Ex. No. :

Creating selenium IDE Tests

The following steps are involved in creating selenium tests using IDE -

- 1) Recording and adding commands in a test
- 2) Saving recorded test
- 3) Saving test suite
- 4) Executing recorded test



Aim: Recording in context sensitive mode and analog mode using selenium IDE

CONTEXT SENSITIVE MODE



- * It is the default mode of recording which takes full advantage of quick test professionals test object model.
- * It recognizes objects in the application regardless of their location on the screen.
- * It records the operations that are performed in an application by identifying GUI objects.


ANALOG RECORDING

- * Records the inputs from keyboard, mouse, clicks the x and y coordinate that are travelled by the mouse pointer across the screen.
- * It can't capture GUI windows and objects.

PROCEDURE:


- (1) Recording (Recording uses interactions with browser)
- step-1: Name the project as "Demo Test"
- step-2: Name test-case as "Demo1 Test"

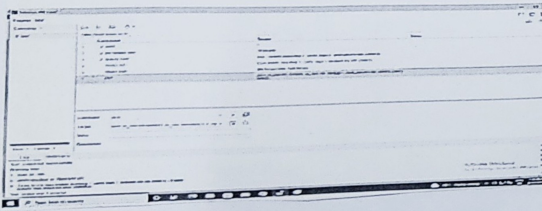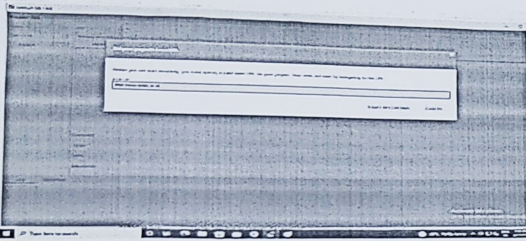

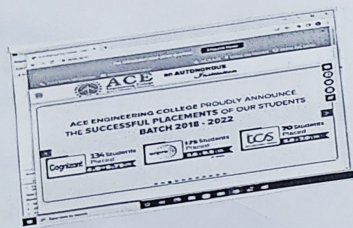


- step-3: click on the "start recording" button present on the top right corner on IDE to start recording the test case.
- step-4: Type <http://www.aceac.ac.in> in the search box
- step-5: Hit enter to go to home page
- step-6: It will redirect you to that webpage and what operations you perform will be recorded. Meanwhile you will get notifications of the actions performed by IDE at the extreme right corner of your web browser.
- step-7: Now go to IDE and click on "stop Recording" button to stop recording your actions further.

[Handwritten signature]

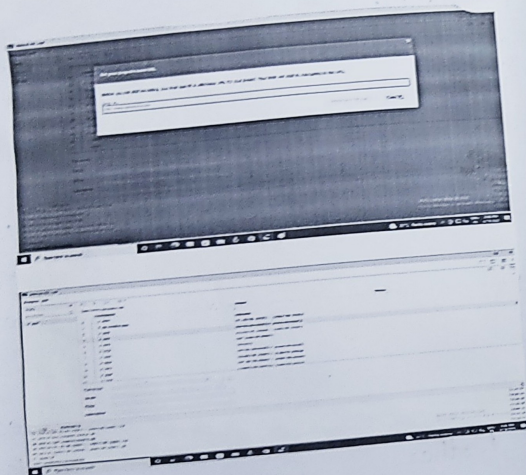

GUI CHECKPOINT FOR SINGLE PROPERTY:

- The GUI checkpoints help to find the defects in the application, by examining the objects.
- GUI testing evaluates design elements such as layout, colors, fonts, font sizes, labels, text boxes, text-formatting, captions, buttons, lists, icons, links and content.
- GUI testing processes can be either done by two categories are manual or automatic, and are often performed by third party companies, rather than developers or end-users.
- It can require a lot of programming and is time consuming whether manual or automatic.
- Usually, the software author writes out the intended function of a menu or graphical button.
- GUI testing also tends to test for certain program behaviours that users expect.

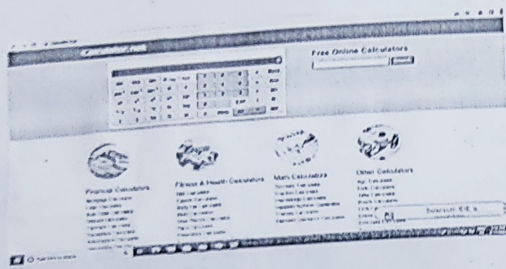

PROCEDURE:

- Step-1: Open Selenium IDE and open a new test.
- Step-2: Name the project as "Demo Test".
- Step-3: Name the test case as "single property test".
- Step-4: Click on "Start Recording" button present on top right corner on IDE to start recording the test case. It will redirect you to the google search engine page.
- Step-5: Type "calculator.com" in the google search bar.
- Step-6: Hit to enter to get the search results. Click on the link provided under URL "https://www.calculator.com".
- Step-7: Perform certain operation for single property.
- Step-8: After recording, the single click then stop recording.
- Step-9: Click on "Run Current Test" button present on tool bar menu of the IDE. It will execute your interactions with browser and gives you an overall summary of executed test script.

script

Name of the
Experiment


Date :


Ex. No. :

Step-10 : Give command and target to perform test and values as web page address.

Step-11 : create GUI checkpoint for click / enter of value to perform operation.

Step-12 : will now check in log and reference about GUI checkpoint and whether the test is successful or failure.



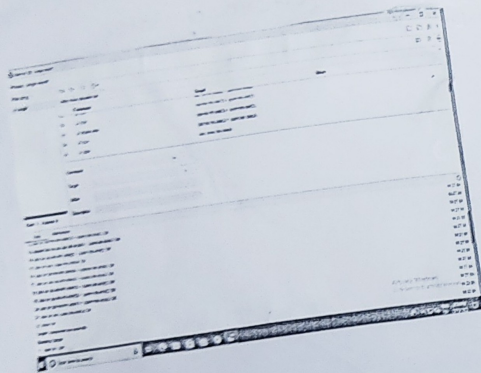

Name of the Experiment		Page No.
PROGRAM-3		Date :
		Ex. No. :

GUI CHECKPOINT FOR SINGLE OBJECT/WINDOW

AIM: GUI checkpoint for single object/window

GRAPHICAL USER INTERFACE:

- GUI testing evaluates design elements such as layouts, colors, fonts, font-sizes, labels, text boxes, text formatting, captions, buttons, lists, icons, links and content.
- GUI testing processes can be either done by the two categories are manual or automatic, and are often performed by third-party companies, rather than developers or end-users.
- It can be required a lot of programming and is time consuming whether manual or automatic.
- Usually the software author writes out the intended function of a menu or graphical button.

PROCEDURE:

- step-1: Open selenium IDE and open a new test
- step-2: Name project as "Demo Test"
- step-3: Name test case as "single object test"

Name of the
Experiment

Date :

Ex. No. :

Step-4: Click on "start recording" button present on the top right corner on IDE to start recording test case. It will redirect you to the google search engine page.

Step-5: Type "calculator.com" in the google search bar.

Step-6: Hit enter to get search results. Click on link provided under URL.

Step-7: Perform certain operations for check point for multiple projects.

Step-8: After recording, select multiple objects.

Step-9: Click on "Run current test" button present on the tool bar menu of IDE. It will execute all of your interactions with browser and gives you an overall summary of executed test script.

Step-10: Give command and target to perform test and value as webpage address.


Name of the
Experiment


Date :

Ex. No. :

Step-11 : Create GUI checkpoint for click / enter value to perform operation.

Step-12 : Will now check in log & reference about GUI checkpoint and whether the test is successful or failure.



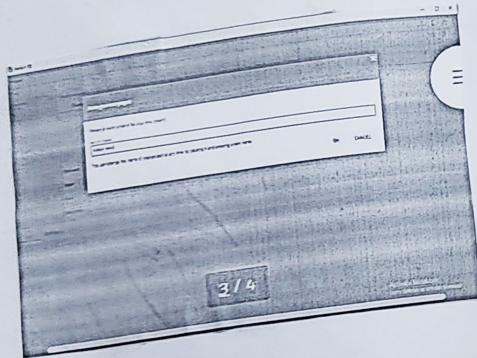

AIM: GUI checkpoint for multiple objects

You can use a GUI checkpoint to check two or more objects in a window. For a complete list of standard objects and the properties you can check.

PROCEDURE:

- step-1: Open selenium IDE and open a new test
- step-2: Name the project as "DEMO TEST"
- step-3: Name the test case as "multiple object test"
- step-4: click on 'start recording' button present on the top right corner on IDE to start recording the test case. It will redirect you to google search engine page.
- step-5: Type 'calculator.net' in google search box
- step-6: Hit enter to get the search results click on link provided under URL
"http://www.calculator.net"
- step-7: Perform certain operation for a checkpoints multiple objects.

Name of the
Experiment


step-8: After recording, select multiple objects

step-9: click on "Run current list" button present on the tool bar menu of IDE.

It will execute all of your interaction with browser and gives you an overall summary of executed test script.

step-10: create GUI checkpoints for click/enter value to perform operation

step-11: Now check in log and reference about GUI checkpoint and whether test is successful or failure.



Name of the
Experiment

PROGRAM- 5

Date :

Ex. No. :

AIM: KATALON TOOL

- Katalon is an open source test.
- Automation tool by KMS technology Katalon is very simple, easy to use GUI, which allows non-technical use also to write the test.
- Katalon will remove the complicity which makes tester more comfortable.
- Katalon basic platform is eclipse, only to you will get the same feel while working with Katalon.

FEATURE OF KATALON STUDIO:-

- 1) Katalon allows us to automate web applications
- 2) Open source- download use.
- 3) In Build library which saves lots of time for tester.
- 4) Record & playback for web and mobile app features
 - creation of testcase
 - Running of testcase
 - Maintenance

Name of the
Experiment _____

Date : _____

Ex. No. : _____

Test suite collections :

- 1) Click on test suite and select one of the suite.
- 2) Verify whether we have two test suites and not
- 3) Now, create a test suite collection, select new button and click on test suite collection, then click on OK.
- 4) Click on add button select check boxes of two test suites and click on OK.
- 5) If you want to run the test suites with chrome browser, select and test suite with firefox.
- 6) Run option you can enable or disable the options
- 7) Go to execution information section and select parallel execution mode.
- 8) Save the test case, and click on execute button for execution.
- 9) Now, test suite, will run on chrome and test suite on firefox.
- 10) Go to log viewer and you can view
- 11) Go to report section, you can get the test suite collection report by double clicking.

Name of the
Experiment

Date :

Ex. No. :

12) click on show details it will get you think you the defects of the 3 execution.

Test Execution Reports:

Procedure:

- 1) Go to Katalon studio
- 2) Pick one of the test case which is recorded in earlier session.
- 3) click on log viewer, then double click on log-viewer
- 4) Logviewer page will be opened
- 5) Then you can see the run information and test cases failed information.



Estd. : 2007