Hyperthreading and "Almost Amdahl"

Oregon State University
Mike Bailey
mjb@cs.oregonstate.edu



Each of the Multiple Cores keeps its own State



1 core, 1 state



2 cores, 2 states

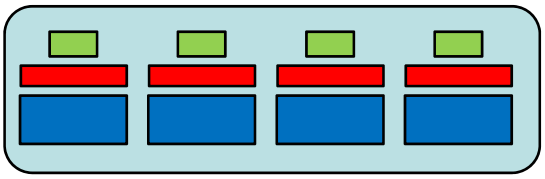

4 cores, 4 states



- Registers
- Program Counter
- Stack Pointer

So, if that's what Multicore is about, what is *Hyperthreading*?

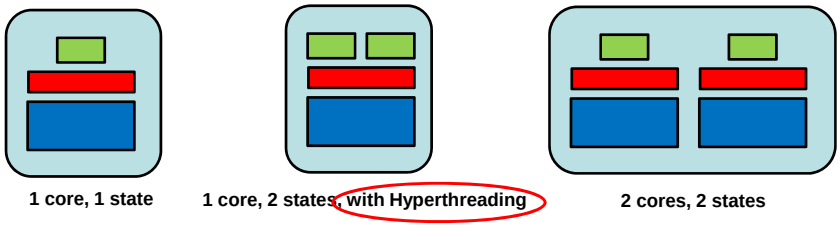

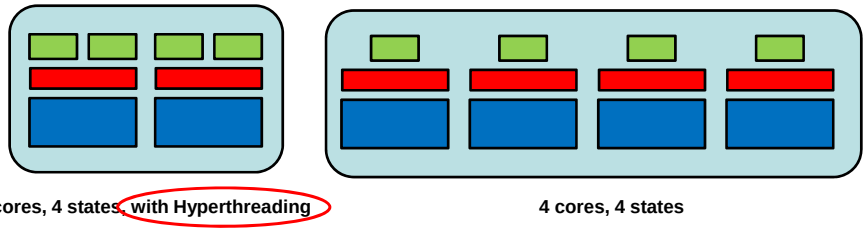



Oregon State University
Computer Graphics

What is Hyperthreading and what can it Do?

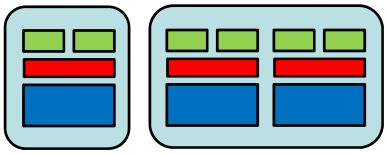



Hyperthreading is when a CPU chip has more states than cores.

In this case, if one thread of execution blocks (waiting for a memory fetch, for instance), then the other thread can resume execution with its state.

If we let **H** be the fraction of a CPU's capacity that one hyperthread can keep busy, then the remaining unused capacity is (1-H). If another hyperthread can keep H% of that capacity busy, then that leaves (1-H)*(1-H) remaining unused capacity and so on.

If we have **n** hyperthreads, then the final remaining unused capacity is **$(1-H)^n$**. The capacity actually in use would then be **$1-(1-H)^n$.** If one thread can only keep the CPU H% busy, then the speed-up is potentially:

$$SU = \frac{1-(1-H)^n}{H}$$

Oregon State University
Computer Graphics

What is Hyperthreading and what can it Do?



If we have **n** hyperthreads, then the final remaining unused capacity is **(1-H)^n**. The capacity actually in use would then be **1-(1-H)^n.** If one thread can only keep the CPU H% busy, then the speed-up is potentially:

$$SU = \frac{1-(1-H)^n}{H}$$

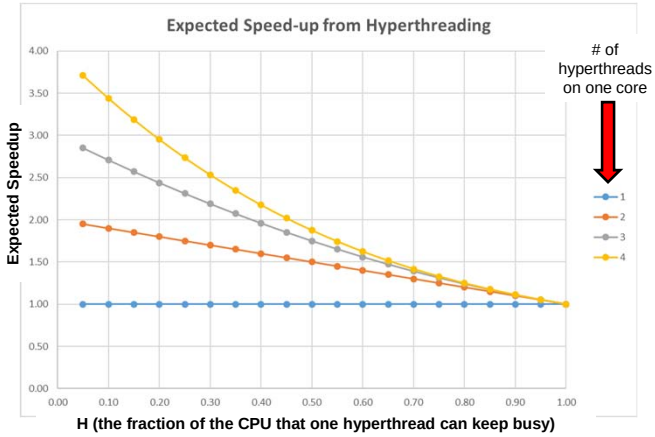

Oregon State University
Computer Graphics

William Leslie

A Lidar Application: Four Cores with Two Hyperthreads per Core

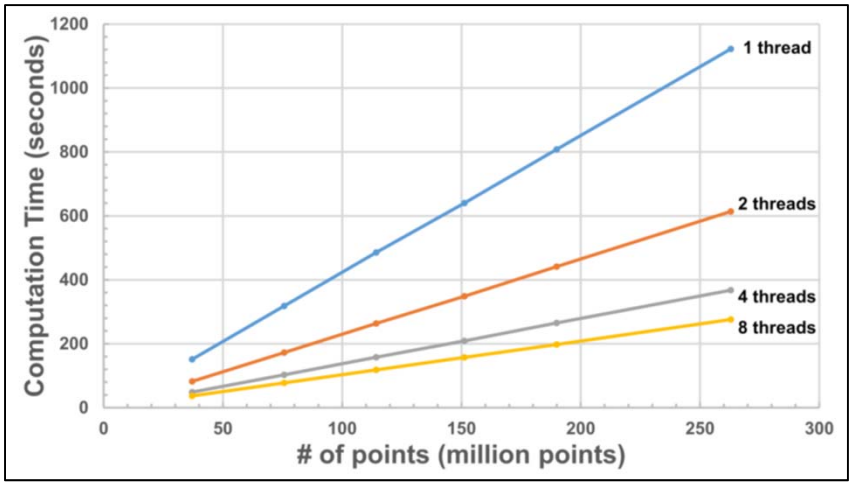

Source: Erzhuo Che

Oregon State University
Computer Graphics

Note that this is upside-down from our usual convention. Sorry. I got this from someone else.