

Food Data Analysis Using SQL

Total Orders:

```
SELECT COUNT(*) FROM orders;
```

(just now) ... x

Table	Chart	Pivot	Q	1 row	32ms	↕ ↗	↓	⌚
#	# COUNT(*)							
1			36000					

Min and Max Date:

```
SELECT MIN(date), MAX(date) FROM orders;
```

Results (just now)

Table	Chart	Pivot	Q	1 row	30ms	↕ ↗	↓	⌚
#	MIN(DATE)	MAX(DATE)						
1	2020-01-01	2020-07-01						

Revenue Statistics:

```
SELECT MIN(total_order),MAX(total_order),AVG(total_order)  
FROM orders;
```

Table

Chart

Pivot

🔍

📄

1 row

ⓘ

489ms

↶

↷

Sort ascending

📄	# MIN(TOTAL_ORDER)	# MAX(TOTAL_ORDER)	# AVG(TOTAL_ORDER)	:	⬆
1	0.00	381.69	87.89967972		

Members by Gender:

```
SELECT sex,COUNT(*) FROM members GROUP BY sex;
```

Table	Chart	Pivot	Q	2 rows	320ms	↕ ↗	↓	⌚
#	SEX	COUNT(*)						
1	M	100						
2	F	100						

No of Restaurants:

SELECT COUNT(*) FROM restaurants;

Results (1 minute ago)

Table	Chart	Pivot	1 row	27ms			
#	COUNT(*)						
1							30

No of cities

SELECT * FROM cities;

Table	Chart	Pivot	5 rows	350ms			
#	ID						CITY
1			1				Tel Aviv
2			2				Ramat Gan
3			3				Ramat Hasharon

Total Revenue

SELECT SUM(total_order) AS Total_Revenue FROM orders;

Table	Chart	Pivot	1 row	257ms			
#	TOTAL_REVENUE						
1							3164388.47


Total Orders:

SELECT COUNT(*) AS Total_Orders FROM orders;

Table	Chart	Pivot	1 row	69ms			
#	TOTAL_ORDERS						
1							36000

Restaurants by revenue:

```
SELECT r.restaurant_name, SUM(o.total_order) AS Revenue
FROM orders o JOIN restaurants r
ON o.restaurant_id = r.id
GROUP BY r.restaurant_name
ORDER BY Revenue DESC;
```

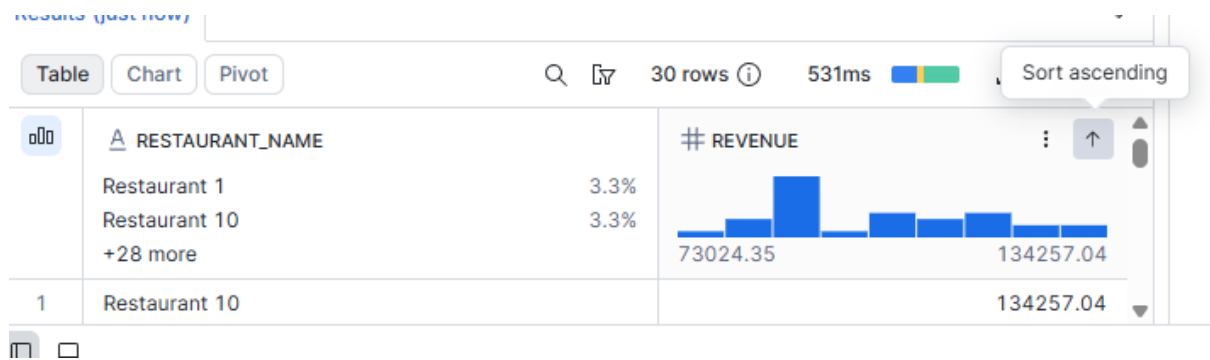

City With highest revenue

```
select c.city,sum(o.total_order) as Revenue
from orders o
join restaurants r
on o.restaurant_id=r.restaurant_type_id
join cities c
on r.city_id=c.id
GROUP BY c.city
order by Revenue DESC
limit 1;
```

just now

Table Chart Pivot 1 row 604ms

	CITY	# REVENUE
1	Herzlia	762293.34

Busiest Hour:

```
SELECT
EXTRACT(HOUR FROM hour) AS order_hour,
COUNT(*) AS total_orders
FROM orders
GROUP BY order_hour
ORDER BY order_hour;
```

Results (1 minute ago)

Table Chart Pivot			1 row ⓘ	481ms			
#	ORDER_HOUR	TOTAL_ORDERS					
1	12	4981					

Total Revenue

```
SELECT SUM(total_order) AS total_revenue
FROM orders;
```

Table Chart Pivot			1 row ⓘ	35ms			
#	TOTAL_REVENUE						
1	3164388.47						

Total Orders

```
SELECT COUNT(*) AS total_orders
FROM orders;
```

Table Chart Pivot			1 row ⓘ	26ms			
#	TOTAL_ORDERS						
1	36000						

Average Order Value

```
SELECT AVG(total_order) AS average_order_value
FROM orders;
```

Table Chart Pivot			1 row ⓘ	397ms			
#	AVERAGE_ORDER_VALUE						
1	87.89967972						

Top 10 Restaurants by Revenue

```
SELECT r.restaurant_name,SUM(o.total_order) AS revenue
FROM orders o JOIN restaurants r
ON o.restaurant_id = r.id GROUP BY r.restaurant_name
ORDER BY revenue DESC
LIMIT 10;
```

Table	Chart	Pivot	10 rows	495ms			
	RESTAURANT_NAME		# REVENUE				
	Restaurant 10	10.0%					
	Restaurant 11	10.0%					
	+8 more						
1	Restaurant 10						

Revenue by city

```
SELECT c.city,SUM(o.total_order) AS revenue
FROM orders o JOIN restaurants r
ON o.restaurant_id = r.id
JOIN cities c
ON r.city_id = c.id
GROUP BY c.city
ORDER BY revenue DESC;
```

Table	Chart	Pivot	5 rows	454ms			
	CITY		# REVENUE				
1	Herzelia						
2	Ramat Hasharon						
3	Tel Aviv						

Orders by Hour

```
SELECT
EXTRACT(HOUR FROM hour) AS order_hour,
COUNT(*) AS total_orders
FROM orders
GROUP BY order_hour
ORDER BY order_hour;
```

Table	Chart	Pivot	13 rows	377ms			
	ORDER_HOUR		# TOTAL_ORDERS				
	11						
	23						
1	11						

Customers by city

```
SELECT
c.city,
COUNT(m.id) AS total_members
```

```

FROM members m
JOIN cities c
ON m.city_id = c.id
GROUP BY c.city
ORDER BY total_members DESC;

```

Table Chart Pivot			5 rows ⓘ 465ms		
	A CITY	# TOTAL_MEMBERS			
1	Herzelia	48			
2	Ramat Hasharon	43			
3	Givatayim	42			

```

Male vs female
SELECT sex,
COUNT(*) AS total_members
FROM members
GROUP BY sex;

```

Table Chart Pivot			2 rows ⓘ 491ms		
	A SEX	# TOTAL_MEMBERS			
1	M	100			
2	F	100			

```

Restaurants having 100 orders
SELECT
    r.restaurant_name,
    COUNT(o.id) AS total_orders
FROM orders o
JOIN restaurants r
ON o.restaurant_id = r.id
GROUP BY r.restaurant_name
HAVING COUNT(o.id) > 100
ORDER BY total_orders DESC;

```

Table Chart Pivot			30 rows ⓘ 462ms		
	A RESTAURANT_NAME	# TOTAL_ORDERS			
	Restaurant 1	3.3%			
	Restaurant 10	3.3%			
	+28 more				
1	Restaurant 13	1310			

Top 5 customers

```

select m.id,sum(o.total_order) AS total_spending
from orders o
join members m
on o.member_id=m.id
group by m.id
order by total_spending desc
limit 5;

```

Table Chart Pivot			5 rows ⓘ 631ms
# ID	# TOTAL_SPENDING		
1	112	20017.52	
2	157	19849.72	
3	113	19351.00	



City with highest average order value

```

select c.city,avg(o.total_order) AS average_order_value
from restaurants r
join orders o
on r.id=o.restaurant_id
join cities c
on r.city_id=c.id
group by c.city
order by average_order_value DESC
limit 1;

```

Table Chart Pivot			1 row ⓘ 571ms
A CITY	# AVERAGE_ORDER_VALUE		
1 Herzelia	90.06879197		

Restaurant Rank by revenue

```

select r.id,r.restaurant_name,sum(o.total_order) AS Total_Revenue,
rank() over (order by Total_Revenue DESC) AS Restaurant_rank
from orders o
join restaurants r
on o.restaurant_id=r.id
group by r.id,r.restaurant_name;

```

just now ... ^

Table Chart Pivot

30 rows 822ms

# ID	RESTAURANT_NAME	TOTAL_REVENUE	RESTAURANT_RANK
1	Restaurant 1	73024.35	1
10	Restaurant 10	134257.04	1
1	Restaurant 10	134257.04	1

Top 3 Cities By Revenue

```
select c.id,c.city,sum(o.total_order) AS Total_revenue,
rank() over(order by Total_revenue DESC) As Top_3
from restaurants r
join orders o
on r.id=o.restaurant_id
join cities c
on r.city_id=c.id
group by c.id,c.city
order by Total_revenue DESC
Limit 3;
```

Table Chart Pivot

3 rows 224ms

# ID	CITY	TOTAL_REVENUE	TOP_3
4	Herzelia	847727.47	1
3	Ramat Hasharon	725903.30	2
1	Tel Aviv	641235.88	3

City with highest revenue

```
WITH city_revenue AS (
SELECT c.id,c.city,
SUM(o.total_order) AS total_revenue,
RANK() OVER (
ORDER BY SUM(o.total_order) DESC
) AS city_rank
FROM restaurants r JOIN orders o
ON r.id = o.restaurant_id
JOIN cities c ON r.city_id = c.id
GROUP BY c.id,C.city
)
SELECT *
FROM city_revenue
WHERE city_rank = 1;
```


Table Chart Pivot				
1 row 523ms				
# ID	CITY	TOTAL_REVENUE	CITY_RANK	
1	4 Herzelia	847727.47	1	

Restaurant Revenue view

CREATE OR REPLACE VIEW restaurant_revenue_view AS

SELECT

r.restaurant_name,

SUM(o.total_order) AS total_revenue

FROM restaurants r

JOIN orders o

ON r.id = o.restaurant_id

GROUP BY r.restaurant_name;

A status
View RESTAURANT_REVENUE_VIEW successfully created.

Top 5 Restaurants

SELECT *

FROM restaurant_revenue_view

ORDER BY total_revenue DESC

LIMIT 5;

Table Chart Pivot		
5 rows 531ms		
#	RESTAURANT_NAME	TOTAL_REVENUE
1	Restaurant 10	134257.04
2	Restaurant 11	132079.76
3	Restaurant 30	126389.11