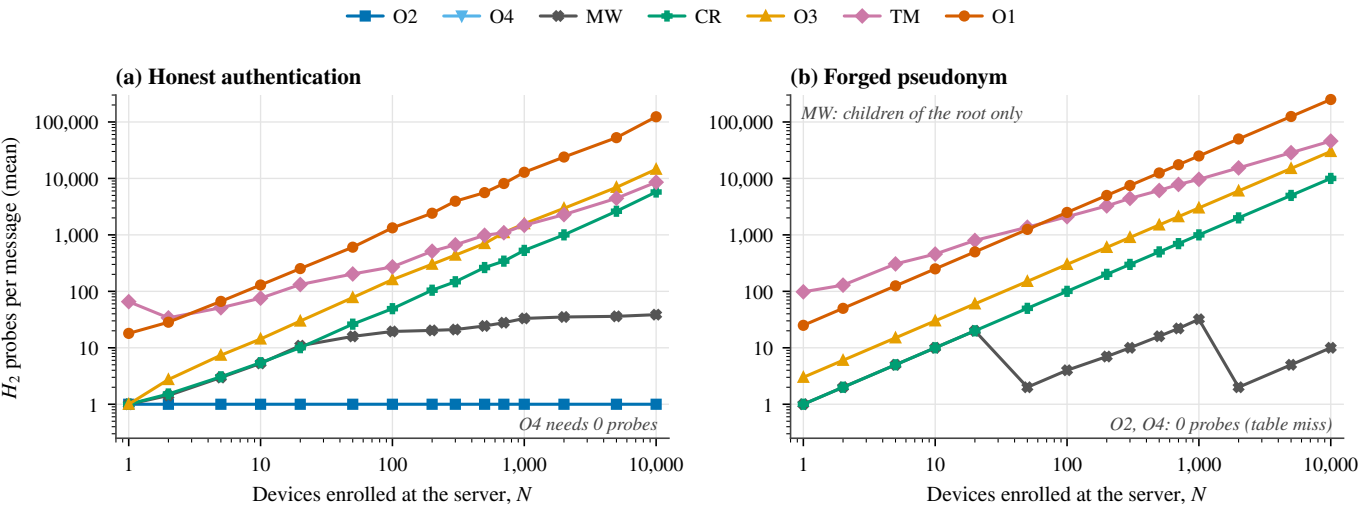
O2
O4
MW
CR
O3
TM
O1
(a) Honest authentication
(b) Forged pseudonym
H_2 probes per message (mean)
100,000
10,000
1,000
100
10
1
MW: children of the root only
O4 needs 0 probes
O2, O4: 0 probes (table miss)
1
10
100
1,000
10,000
Devices enrolled at the server, N