


Class 40 For_each+List



30 min-

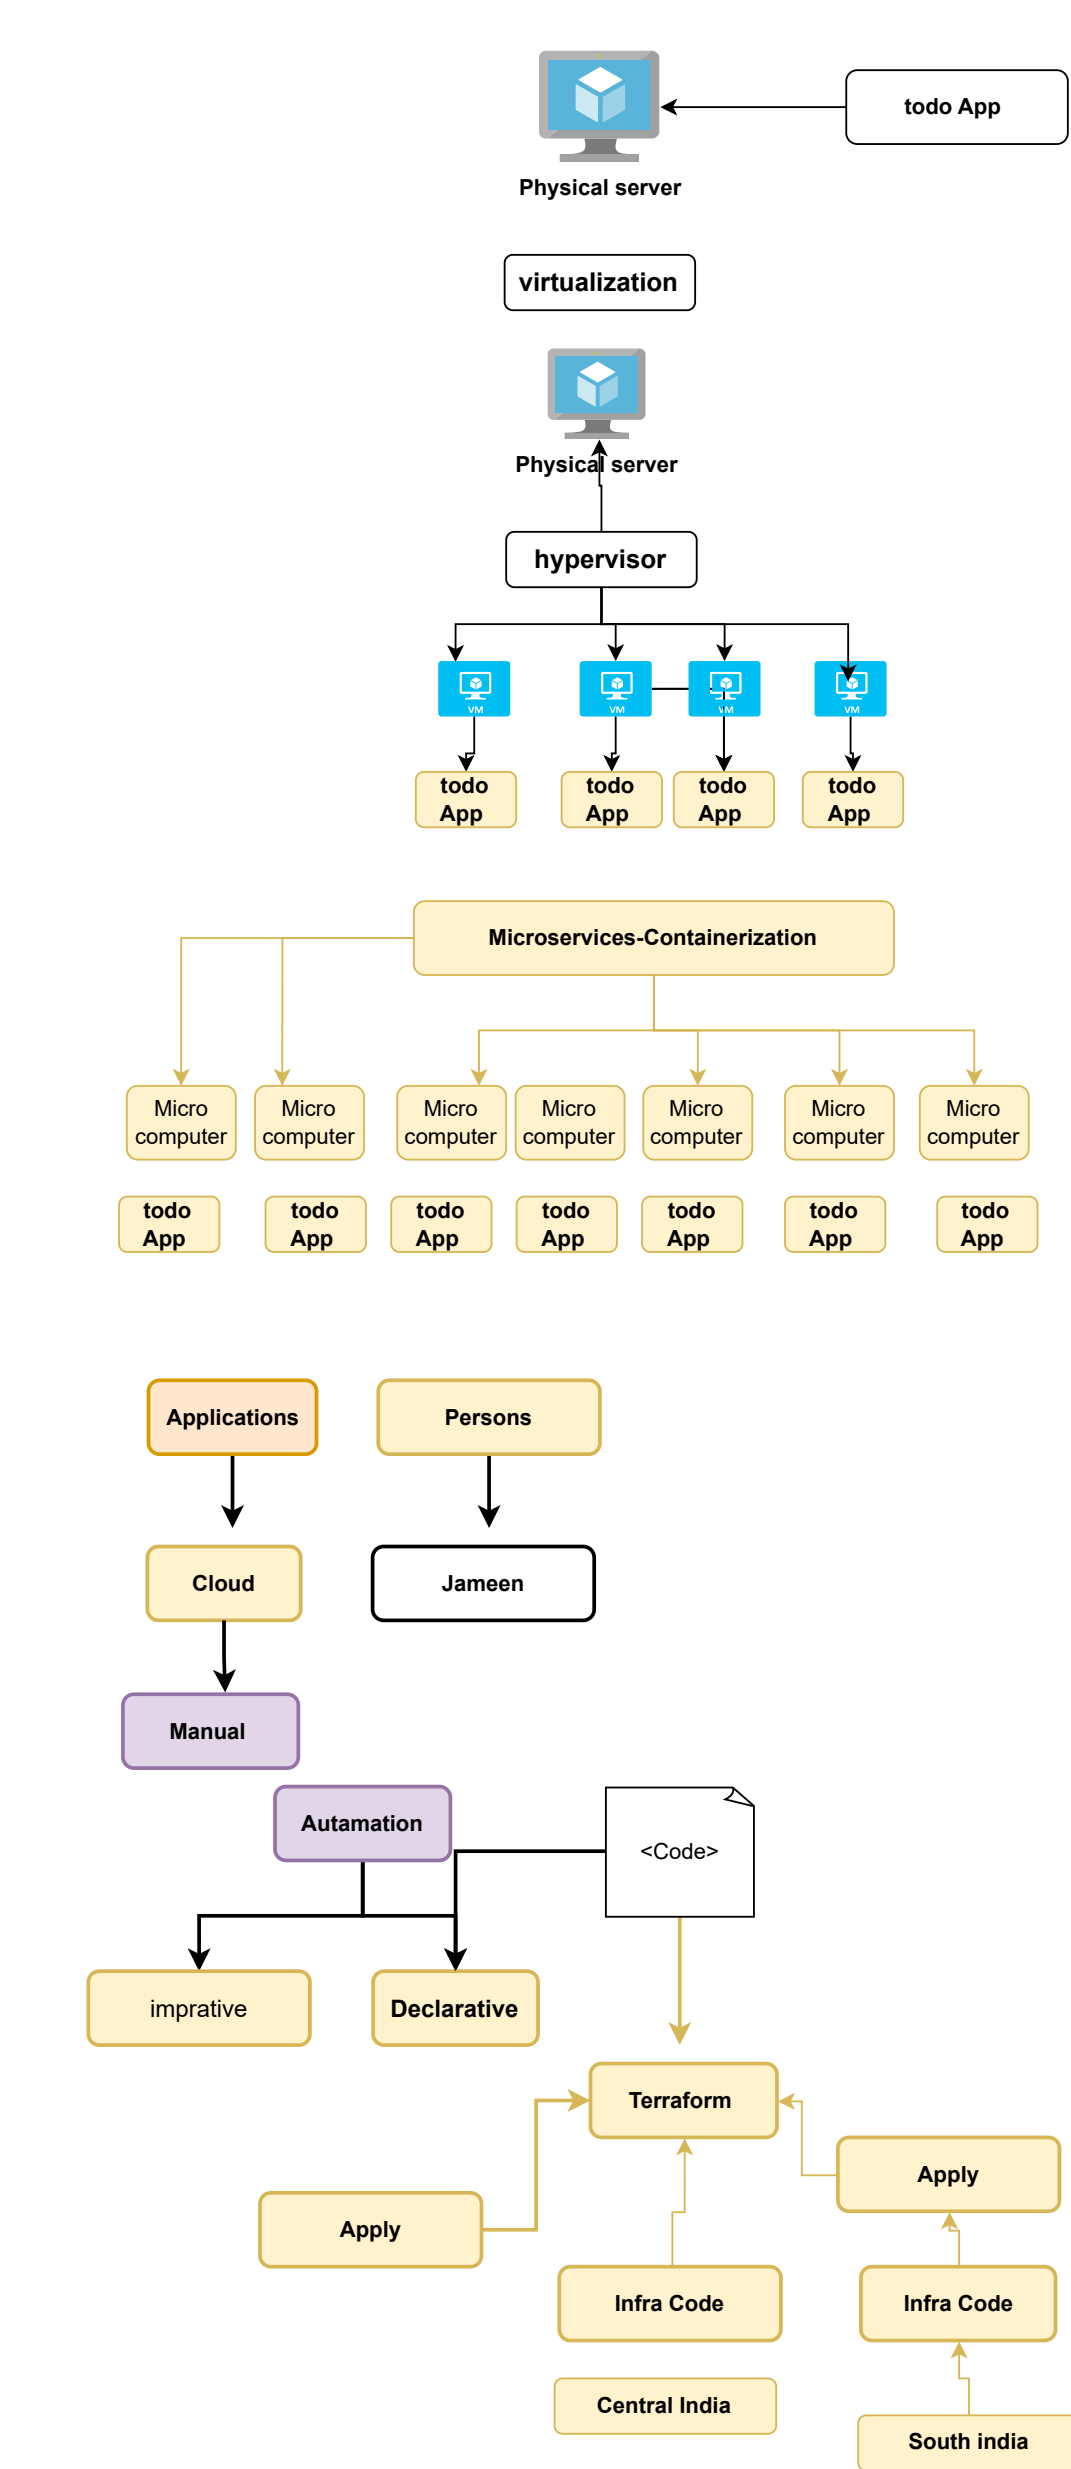

excele → Resources

For_each--Meta arguments

The `for_each` meta-argument accepts a map or a set of strings and creates an instance for each item in that map or set. Each instance is associated with a distinct infrastructure object. Terraform creates, updates, or destroys each instance when applying changes to the configuration.

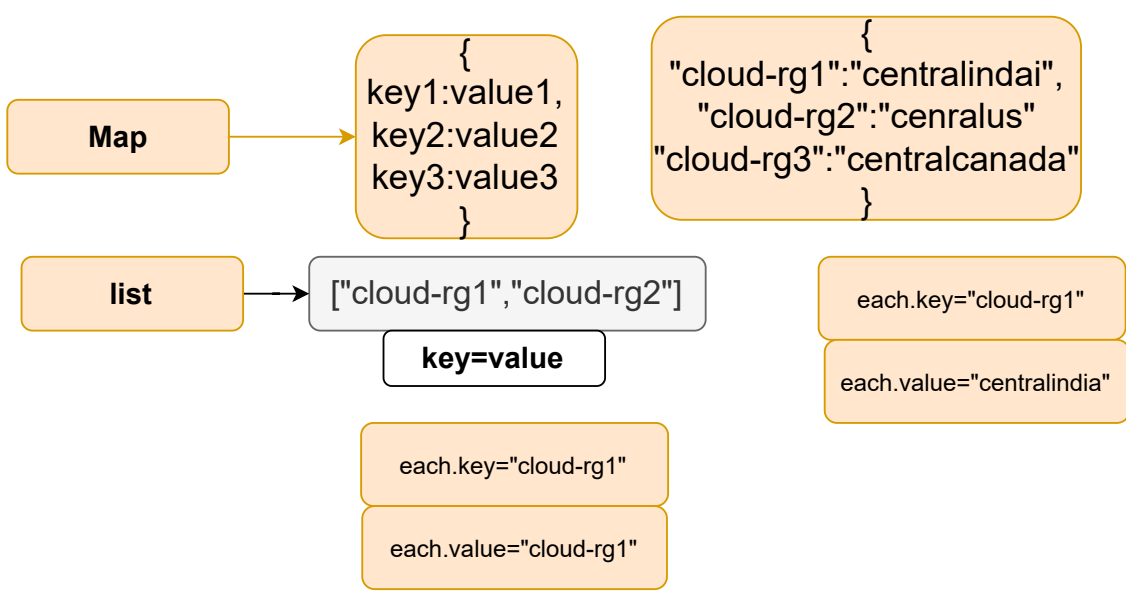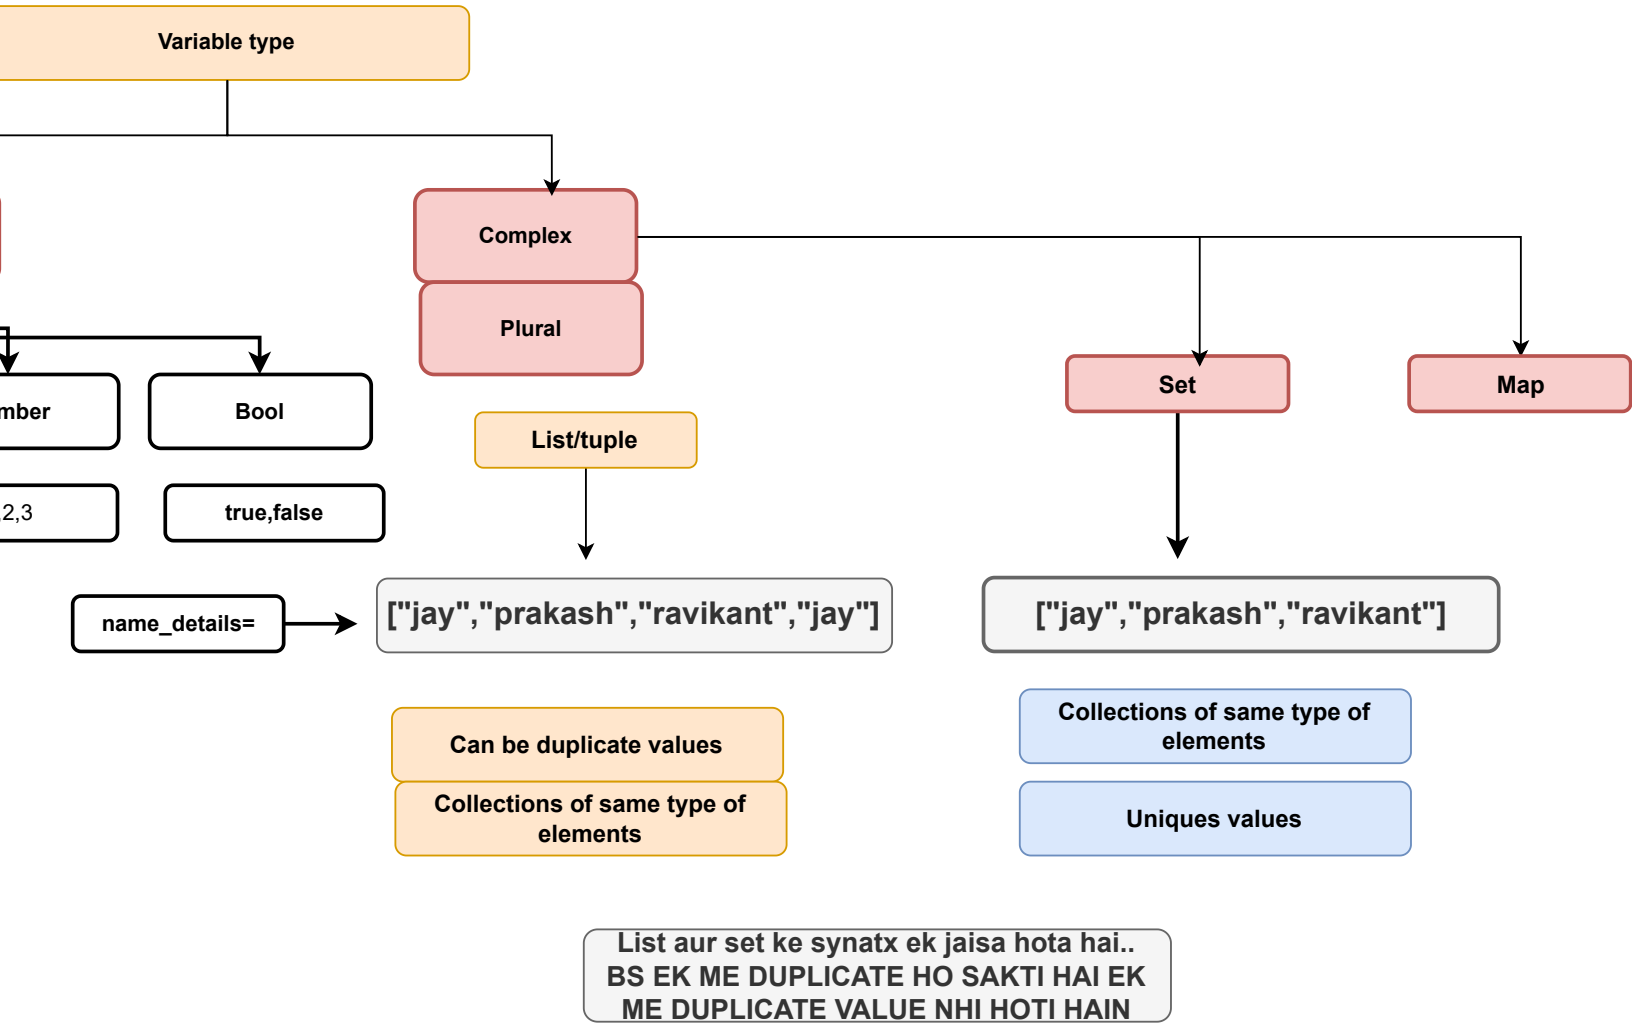


```
resource "azurerm_resource_group" "rg1" {
  for_each = ["cloud-rg1", "cloud-rg2", "cloud-rg3"]
  name = each.value
  location = "East US"
}
```

```
resource "azurerm_resource_group" "rg1["cloud-rg1"]" {
  name = each.value
  location = "East US"
}
```

```
resource "azurerm_resource_group" "rg1["cloud-rg2"]" {
  for_each = ["cloud-rg1", "cloud-rg2", "cloud-rg3"]
  name = each.value
  location = "East US"
}
```

```
resource "azurerm_resource_group" "rg1["cloud-rg3"]" {
  for_each = ["cloud-rg1", "cloud-rg2", "cloud-rg3"]
  name = each.value
  location = "East US"
}
```

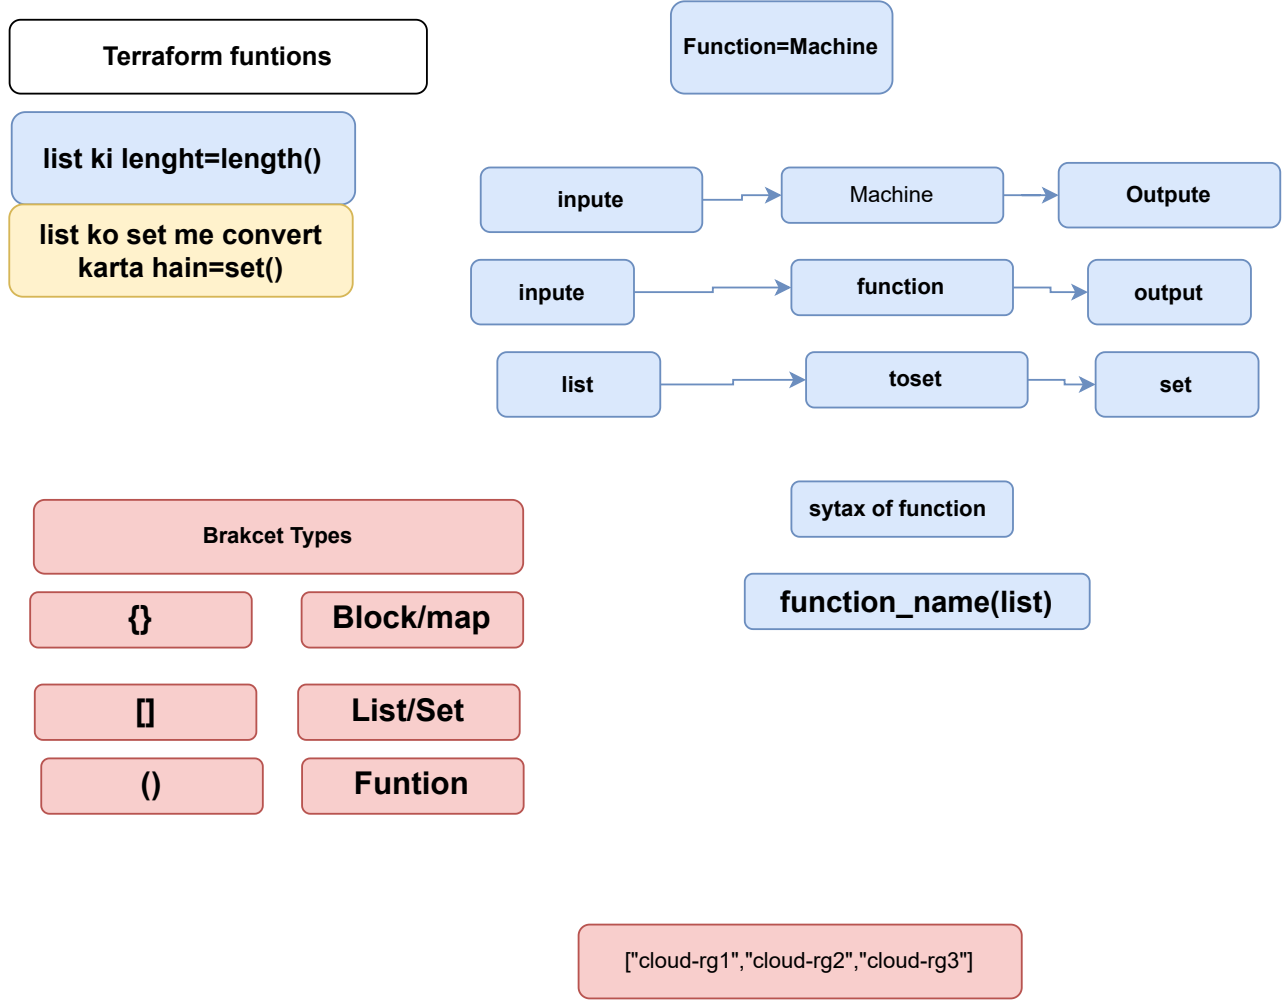

["cloud-rg1","cloud-rg2","cloud-rg3"]

["cloud-rg1"]