
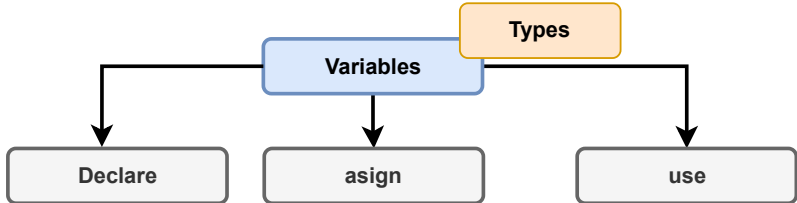
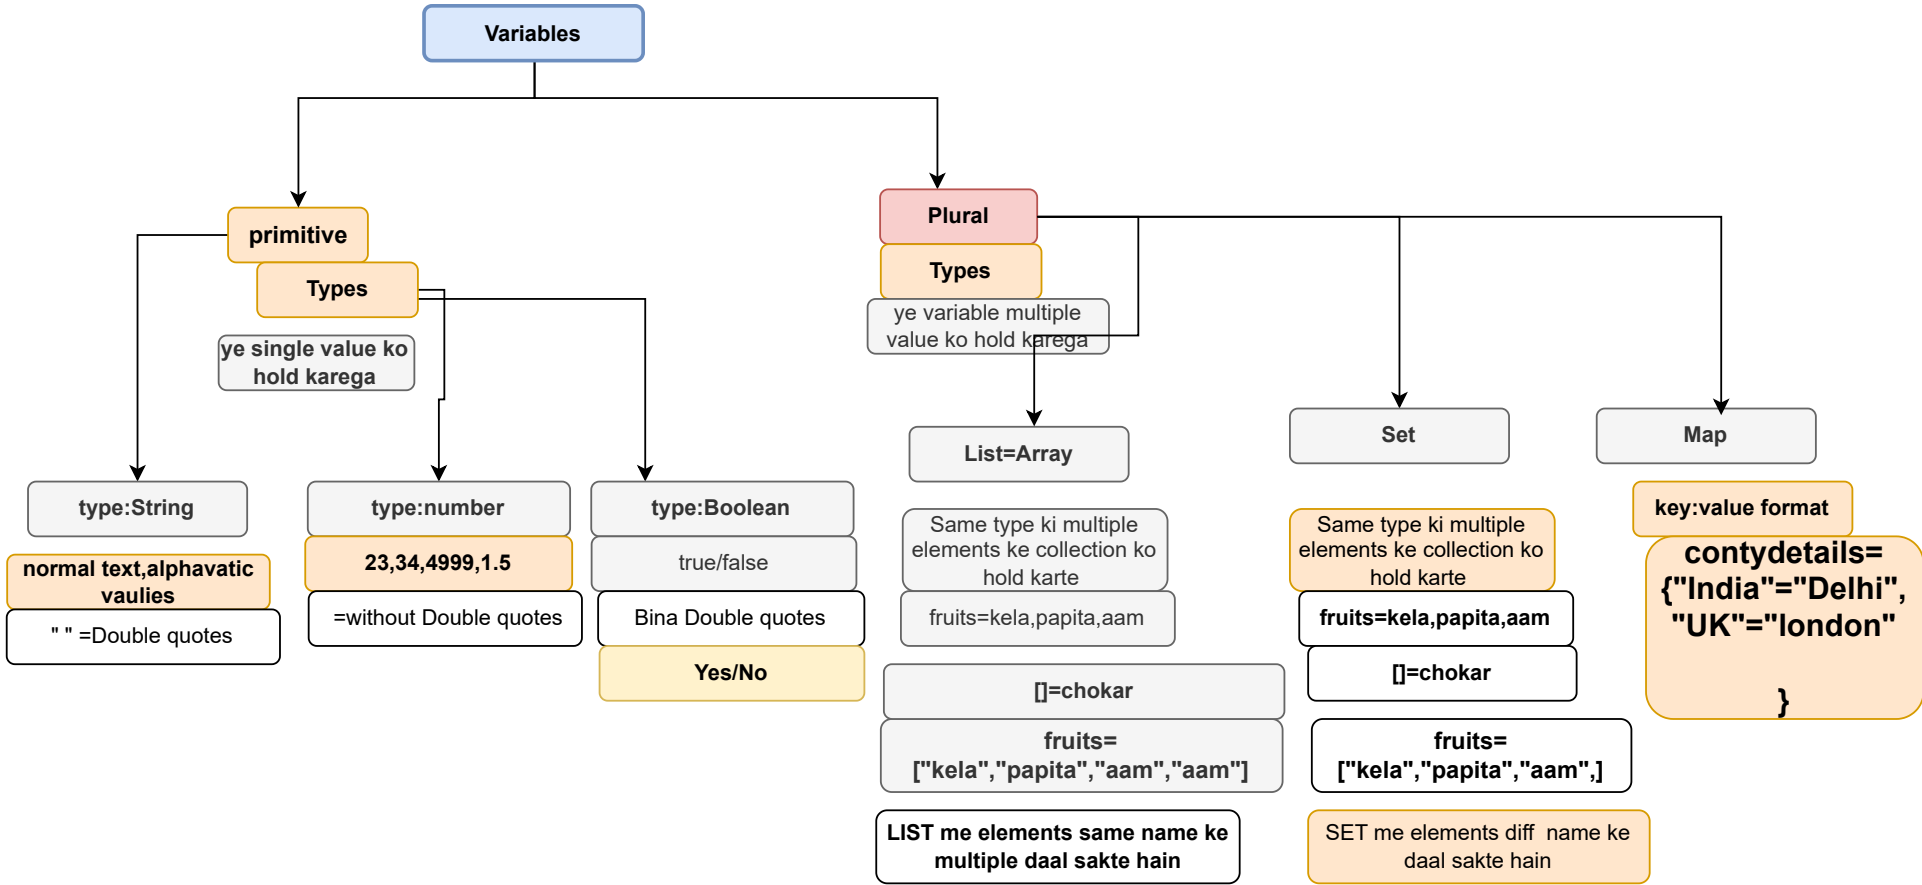


Class 35: Teraform Variables

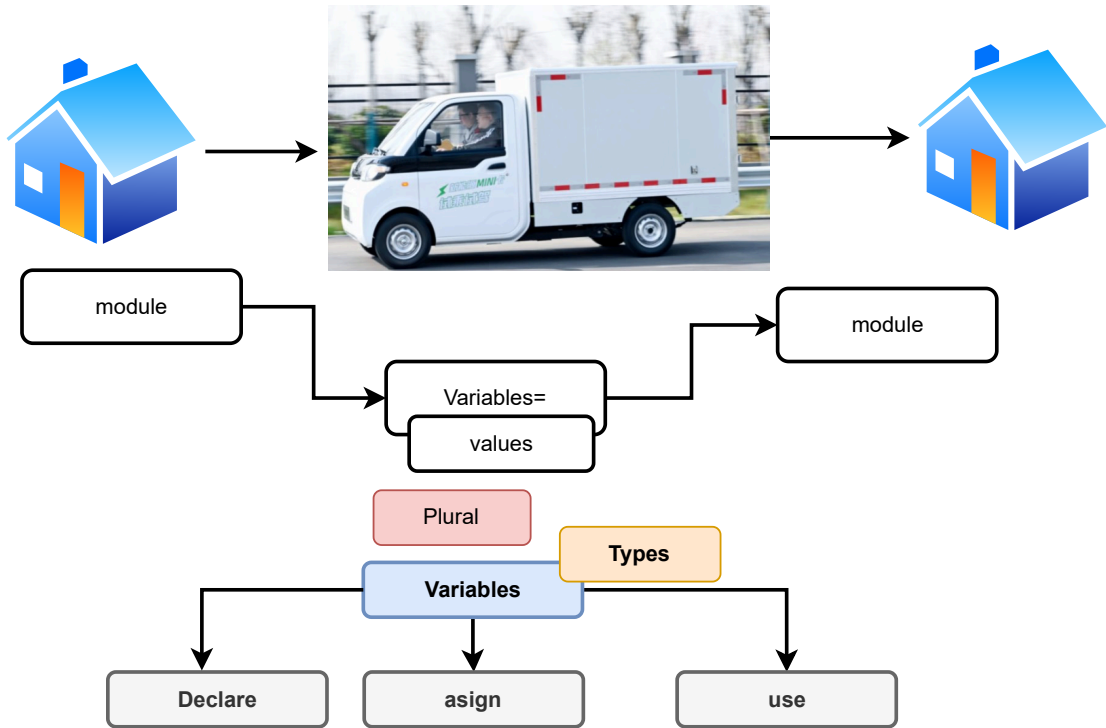

Terraform ki HCL language

Declare

Block

variable "ram" {}

```
variable "rg_name" { #variable declaration
  type=string
  description="This variable is used to define the name of the resource group"
}
variable "rg_location" { #variable declaration
  type=string
  description="This variable is used to define the location of the resource group"
}
```

Use

```
# ...
resource "aws_instance" "web" {
  ami           = data.aws_ami.ubuntu.id
  instance_type = var.instance_type
  subnet_id     = var.subnet_id

  tags = {
    Environment = var.environment
    Name        = "${var.environment}-web-server"
  }
}
```

Assign

```
module "resource_group" {
  source = "../../../Child_mudule/azurerm_resource_group"
  rg_name = "joyo-rg" #variable assigned to define the name of the resource group
  rg_location = "Central india" #variable assigned to define the name of the resource group
}

module "resource_group1" {
  source = "../../../Child_mudule/azurerm_resource_group"
  rg_name = "joyo-rg1" #variable assigned to define the name of the resource group
  rg_location = "Central india" #variable assigned to define the name of the resource group
}
```