MIT School of Computing
Depart of Information Technology
Machine Learning Lab
Assignment no: -1

<u>AIM</u>: Perform the K-means clustering on the dataset of your choice.

INDEX TERMS: Data Preprocessing, Kmean Clustering.

PROBLEM DEFINITION: Run a K Mean clustering to find insights having a business application.

Theory:

K-Means Clustering Algorithm

K-Means Clustering is an unsupervised learning algorithm that is used to solve the clustering problems in machine learning or data science. In this topic, we will learn what is K-means clustering algorithm is, how the algorithm works, along with the Python implementation of k-means clustering.

What is K-Means Algorithm?

K-Means Clustering is an Unsupervised Learning algorithm, which groups the unlabeled dataset into different clusters. Here K defines the number of pre-defined clusters that need to be created in the process, as if K=2, there will be two clusters, and for K=3, there will be three clusters, and so on.

It allows us to cluster the data into different groups and a convenient way to discover the categories of groups in the unlabeled dataset on its own without the need for any training.

It is a centroid-based algorithm, where each cluster is associated with a centroid. The main aim of this algorithm is to minimize the sum of distances between the data point and their corresponding clusters.


The algorithm takes the unlabeled dataset as input, divides the dataset into k-number of clusters, and repeats the process until it does not find the best clusters. The value of k should be predetermined in this algorithm.

The k-means clustering

the algorithm mainly performs two tasks:

- Determines the best value for K center points or centroids by an iterative process.
- Assigns each data point to its closest k-center. Those data points which are near to the particular k-center, create a cluster.

Hence each cluster has datapoints with some commonalities, and it is away from other clusters. The below diagram explains the working of the K-means Clustering Algorithm:

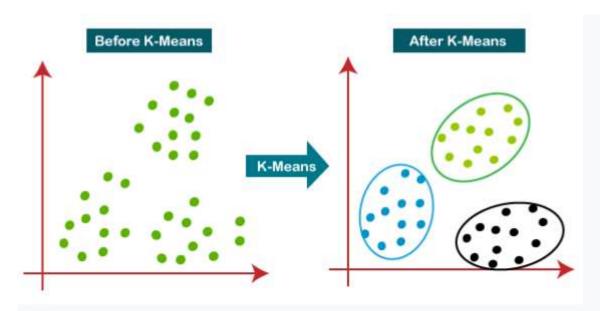

Algorithm:

- Step-1: Select the number K to decide the number of clusters.
- Step-2: Select random K points or centroids. (It can be other from the input dataset).
- Step-3: Assign each data point to their closest centroid, which will form the predefined K
- clusters.Step-4: Calculate the variance and place a new centroid of each cluster.
- Step-5: Repeat the third steps, which means reassign each datapoint to the new closest centroid of each cluster.
- Step-6: If any reassignment occurs, then go to step-4 else go to FINISH.Step-7: The model is ready.

Conclusion:

Your learning from this experiment