


Here are the easiest ways to check which Neo4j edition you're running on your Windows laptop.

Method 1: Using Neo4j Browser (Easiest)

This is the most straightforward method if you can start Neo4j.

1. **Start Neo4j** (either through Desktop or using neo4j.bat console in command line)
2. **Open Neo4j Browser** (usually at <http://localhost:7474>)
3. **Run this Cypher command:**

CALL dbms.components()

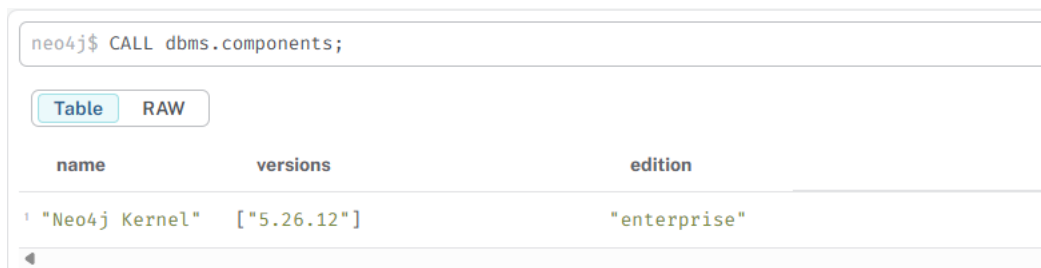

name	versions	edition
"Neo4j Kernel"	["5.26.12"]	"enterprise"

CALL dbms.components() YIELD name, versions
UNWIND versions AS version
RETURN name, version



```
1 CALL dbms.components() YIELD name, versions
2 UNWIND versions AS version
3 RETURN name, version
```

name	version
"Neo4j Kernel"	"5.26.12"

4. **Look at the results** - they will clearly show the edition:

- Neo4j Kernel: Neo4j Enterprise = **Enterprise Edition**
- Neo4j Kernel: Neo4j Community = Community Edition

You'll also see version information like 4.4.23 or 5.12.0.

Method 2: Using Command Line

If Neo4j is installed as a service or you can run commands:

1. **Open Command Prompt or PowerShell**

2. **Navigate to your Neo4j bin directory** (if it's in your PATH, you can skip this):

cmd

```
cd "C:\Program Files\Neo4j\neo4j-community-5.12.0\bin"
```

(Adjust the path to match your installation)

3. **Run:**

cmd

```
neo4j.bat version
```

```
C:\Users\jay_s\.Neo4jDesktop\relate-data\dbmss\dbms-3f800b77-ee90-45d0-bc0f-1f1882fadee1\bin>neo4j.bat version
neo4j 5.26.0
```

Method 3: Check Windows Services

1. Press Win + R, type services.msc, and press Enter
2. Look for services named "Neo4j"
3. **Right-click → Properties** on the Neo4j service
4. Check the "Path to executable" - it often contains "community" or "enterprise" in the path

Method 5: Using Neo4j Desktop (If you're using Desktop)

1. Open Neo4j Desktop
2. Look at your project and database
3. The edition is usually displayed in the database details panel

DELETING A NEO4J DATABASE:

Method 1: For Neo4j 4.x & 5.x (Enterprise Edition or with multiple databases)

If you have Neo4j Enterprise Edition and have created testload as a secondary database, you should use Cypher commands.

1. **Switch to the system database** to perform administrative tasks.
2. **Stop the database** (if it's running).
3. **Drop the database.**

You can do this in **Neo4j Browser** or **Bloom**:

// 1. Connect to the system database (often done via the UI dropdown)

// 2. Stop the database if it's running

```
STOP DATABASE testload;
```

```
neo4j$ STOP DATABASE testload;
```

✓ 1 system update

// 3. Wait for it to stop, then drop it

DROP DATABASE testload;

```
neo4j$ DROP DATABASE testload;
```

✓ 1 system update

Important Notes for this method:

- You must have the necessary administrator privileges.
- You **cannot** drop the default neo4j database.
- If the DROP DATABASE command fails, make sure it's stopped. You can check its status with:

SHOW DATABASE testload;

The screenshot shows the Neo4j Browser interface at localhost:7474/browser/. The top bar indicates the instance is neo4j://localhost:7687, the database is neo4j CYPHER 5, and the user is neo4j. The left sidebar shows the database information panel with icons for nodes, relationships, and property keys. The main panel displays the database information for neo4j, including nodes (0), relationships (0), and property keys (id, name, position, uri). The right sidebar shows the command history with the following commands and their status:

- neo4j\$ SHOW DATABASE testload: No changes, no records
- neo4j\$ DROP DATABASE testload;: ✓ 1 system update
- neo4j\$ STOP DATABASE testload;: ✓ 1 system update

The bottom of the right sidebar shows the prompt \$:welcome.

Method 2: For Neo4j Community Edition (or the default neo4j database)

The Community Edition only supports a single database per instance. To "delete" everything, you need to **clear the entire graph**.

This will delete all nodes, relationships, indexes, and constraints, giving you a completely fresh start.

Warning: This is irreversible. Double-check you're connected to the correct database instance.

// This is the nuclear option - it will delete EVERYTHING in your current database.

MATCH (n)

DETACH DELETE n;

What this does:

- **MATCH (n):** Finds all nodes n.
- **DETACH DELETE n:** The **DETACH** keyword first removes all relationships connected to the node, and then **DELETE** removes the node itself.

To also reset your constraints and indexes, you will need to drop and recreate them manually. You can see your current ones with:

SHOW CONSTRAINTS;

SHOW INDEXES;

Deleting indexes, relationships, and labels in Neo4j requires different Cypher commands. Here's a comprehensive guide for each.

1. Deleting Indexes

Indexes help with query performance but sometimes need to be cleaned up.

View All Indexes First

SHOW INDEXES

SHOW INDEXES YIELD name, type, labelsOrTypes, properties

WHERE name IS NOT NULL

RETURN name, type, labelsOrTypes, properties

Delete a Specific Index

DROP INDEX index_name

Method 2: Using APOC Library (If Available)

If you have APOC procedures installed, this works well:

CALL apoc.cypher.runMany("

SHOW INDEXES YIELD name

WHERE name IS NOT NULL

RETURN name

", {}) YIELD result

WITH result.name AS indexName

CALL apoc.cypher.run("DROP INDEX " + indexName, {})

YIELD value

```
RETURN count(*) AS indexesDropped
```

Method 3: Alternative APOC Approach

```
CALL apoc.cypher.runMany(  
  "SHOW INDEXES YIELD name WHERE name IS NOT NULL RETURN name;",  
  {}  
) YIELD result  
WITH collect(result.name) AS indexNames  
CALL apoc.cypher.runMany(  
  "DROP INDEX " + apoc.text.join(indexNames, "; DROP INDEX "),  
  {}  
)  
YIELD result  
RETURN result
```

Method 4: For Neo4j 5.x with UNWIND

Try this approach (works in some Neo4j 5.x versions):

```
SHOW INDEXES YIELD name  
WHERE name IS NOT NULL  
WITH collect(name) AS indexNames  
UNWIND indexNames AS indexName  
CALL {  
  WITH indexName  
  DROP INDEX indexName  
}  
RETURN count(indexName) AS droppedCount
```

Why This is Tricky:

- Neo4j's CALL {} subqueries have limitations on what commands can be inside
- SHOW commands are administrative and can't be nested in subqueries easily
- The syntax varies significantly between Neo4j versions