


The JOIN operation

Language: English • 日本語 • 中文

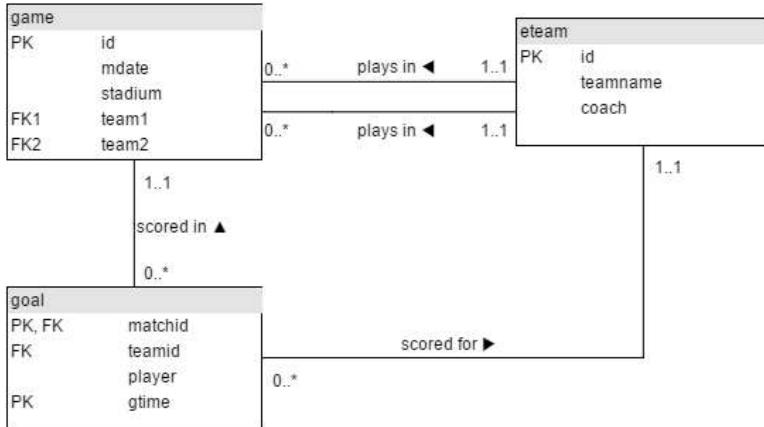

game				
id	mdate	stadium	team1	team2
1001	8 June 2012	National Stadium, Warsaw	POL	GRE
1002	8 June 2012	Stadion Miejski (Wroclaw)	RUS	CZE
1003	12 June 2012	Stadion Miejski (Wroclaw)	GRE	CZE
1004	12 June 2012	National Stadium, Warsaw	POL	RUS
...				

goal			
matchid	teamid	player	gtime
1001	POL	Robert Lewandowski	17
1001	GRE	Dimitris Salpingidis	51
1002	RUS	Alan Dzagoev	15
1002	RUS	Roman Pavlyuchenko	82
...			

eteam		
id	teamname	coach
POL	Poland	Franciszek Smuda
RUS	Russia	Dick Advocaat
CZE	Czech Republic	Michal Bilek
GRE	Greece	Fernando Santos
...		

JOIN and UEFA EURO 2012

This tutorial introduces JOIN which allows you to use data from two or more tables. The tables contain all matches and goals from UEFA EURO 2012 Football Championship in Poland and Ukraine.

The data is available (mysql format) at <http://sqlzoo.net/euro2012.sql>

Summary

1.

The first example shows the goal scored by a player with the last name 'Bender'. The * says to list all the columns in the table - a shorter way of saying `matchid`, `teamid`, `player`, `gtime`

Modify it to show the `matchid` and `player` name for all goals scored by Germany. To identify German players, check for: `teamid = 'GER'`

```
SELECT matchid, player FROM goal
WHERE teamid = 'GER';
```

Submit SQL**Restore default**

Correct answer

matchid	player
1008	Mario Gómez
1010	Mario Gómez
1010	Mario Gómez
1012	Lukas Podolski
1012	Lars Bender
1026	Philipp Lahm
1026	Sami Khedira
1026	Miroslav Klose
1026	Marco Reus

2.

From the previous query you can see that Lars Bender's scored a goal in game 1012. Now we want to know what teams were playing in that match.

Notice in the that the column `matchid` in the `goal` table corresponds to the `id` column in the `game` table. We can look up information about game 1012 by finding that row in the `game` table.

Show `id`, `stadium`, `team1`, `team2` for just game 1012

```
SELECT id,stadium,team1,team2
  FROM game
 WHERE id = 1012;
```

Submit SQL**Restore default**

Correct answer

id	stadium	team1	team2
1012	Arena Lviv	DEN	GER

3.



You can combine the two steps into a single query with a JOIN.

```
SELECT *
  FROM game JOIN goal ON (id=matchid)
```

The **FROM** clause says to merge data from the goal table with that from the game table. The **ON** says how to figure out which rows in **game** go with which rows in **goal** - the **matchid** from **goal** must match **id** from **game**. (If we wanted to be more clear/specific we could say **ON (game.id=goal.matchid)**)

The code below shows the player (from the goal) and stadium name (from the game table) for every goal scored.

Modify it to show the player, teamid, stadium and mdate for every German goal.

```
SELECT player, teamid, stadium, mdate
  FROM goal JOIN game ON goal.matchid = game.id
 WHERE teamid = 'GER';
```

[Submit SQL](#)

[Restore default](#)

Correct answer

player	teamid	stadium	mdate
Mario Gómez	GER	Arena Lviv	2012-06-09T00:00:00
Mario Gómez	GER	Metalist Stadium	2012-06-13T00:00:00
Mario Gómez	GER	Metalist Stadium	2012-06-13T00:00:00
Lukas Podolski	GER	Arena Lviv	2012-06-17T00:00:00
Lars Bender	GER	Arena Lviv	2012-06-17T00:00:00
Philipp Lahm	GER	PGE Arena Gdansk	2012-06-22T00:00:00
Sami Khedira	GER	PGE Arena Gdansk	2012-06-22T00:00:00
Miroslav Klose	GER	PGE Arena Gdansk	2012-06-22T00:00:00
Marco Reus	GER	PGE Arena Gdansk	2012-06-22T00:00:00

4.



Use the same JOIN as in the previous question.

Show the team1, team2 and player for every goal scored by a player called Mario player LIKE 'Mario%'

```
SELECT team1, team2, player FROM game
JOIN goal ON game.id = goal.matchid
WHERE player LIKE 'Mario%';
```


Correct answer

team1	team2	player
GER	POR	Mario Gómez
NED	GER	Mario Gómez
NED	GER	Mario Gómez
IRL	CRO	Mario Mandžukic
IRL	CRO	Mario Mandžukic
ITA	CRO	Mario Mandžukic
ITA	IRL	Mario Balotelli
GER	ITA	Mario Balotelli
GER	ITA	Mario Balotelli

5.

The table eteam gives details of every national team including the coach. You can JOIN goal to eteam using the phrase goal JOIN eteam on teamid=id

Show player, teamid, coach, gtime for all goals scored in the first 10 minutes gtime<=10

```
SELECT player, teamid, coach, gtime FROM goal
JOIN eteam ON goal.teamid = eteam.id
WHERE gtime<=10;
```


Correct answer

player	teamid	coach	gtime
Petr Jirácek	CZE	Michal Bílek	3
Václav Pilar	CZE	Michal Bílek	6
Mario Mandžukic	CRO	Slaven Bilic	3
Fernando Torres	ESP	Vicente del Bosque	4

6.



To JOIN game with eteam you could use either
`game JOIN eteam ON (team1=eteam.id)` or `game JOIN eteam ON (team2=eteam.id)`

Notice that because id is a column name in both game and eteam you must specify eteam.id instead of just id

List the dates of the matches and the name of the team in which 'Fernando Santos' was the team1 coach.

```
SELECT mdate, teamname FROM game
JOIN eteam ON game.team1 = eteam.id
WHERE eteam.coach = 'Fernando Santos';
```


Correct answer

mdate	teamname
2012-06-12T00:00:00	Greece
2012-06-16T00:00:00	Greece

7.



List the player for every goal scored in a game where the stadium was 'National Stadium, Warsaw'

```
SELECT player FROM goal
JOIN game ON goal.matchid = game.id
WHERE stadium = 'National Stadium, Warsaw';
```


Correct answer

```
player
Dimitris Salpingidis
Robert Lewandowski
Jakub Blaszczykowski
Alan Dzagoev
Giorgos Karagounis
```

Goalscorer
Mesut Özil
Mario Balotelli
Mario Balotelli

More difficult questions

8. 😊

The example query shows all goals scored in the Germany-Greece quarterfinal.

Instead show the name of all players who scored a goal against Germany.

HINT

Select goals scored only by non-German players in matches where GER was the id of either **team1** or **team2**.

You can use `teamid != 'GER'` to prevent listing German players.

You can use `DISTINCT` to stop players being listed twice.

```
SELECT DISTINCT player FROM game
JOIN goal ON matchid = id
WHERE (team1 = 'GER' OR team2 = 'GER')
AND teamid != 'GER';
```

[Submit SQL](#)

[Restore default](#)

Correct answer

player
Dimitris Salpingidis
Georgios Samaras
Mario Balotelli
Michael Krohn-Dehli
Robin van Persie

9.



Show teamname and the total number of goals scored.

COUNT and GROUP BY

```
SELECT teamname, COUNT(teamid) AS num_of_goals FROM eteam
JOIN goal ON id = teamid
GROUP BY teamname;
```


Correct answer

teamname	num_of_goals
Croatia	4
Czech Republic	4
Denmark	4
England	5
France	3
Germany	10
Greece	5
Italy	6
Netherlands	2

10.



Show the stadium and the number of goals scored in each stadium.

```
SELECT stadium, COUNT(matchid) AS num_of_goals FROM game
JOIN goal ON game.id = goal.matchid
GROUP BY stadium;
```


Correct answer

stadium	num_of_goals
Arena Lviv	9
Donbass Arena	7
Metalist Stadium	7
National Stadium, Warsaw	9
Olimpiyskiy National Sports Complex	14
PGE Arena Gdansk	13
Stadion Miejski (Poznan)	8
Stadion Miejski (Wroclaw)	9

11.

For every match involving 'POL', show the matchid, date and the number of goals scored.

```
SELECT matchid, mdate, COUNT(teamid) AS num_of_goals FROM game
JOIN goal ON matchid = id
WHERE (team1 = 'POL' OR team2 = 'POL')
GROUP BY matchid, mdate;
```

[Submit SQL](#)

[Restore default](#)

Correct answer

matchid	mdate	num_of_goals
1001	2012-06-08T00:00:00	2
1004	2012-06-12T00:00:00	2
1005	2012-06-16T00:00:00	1

12.

For every match where 'GER' scored, show matchid, match date and the number of goals scored by 'GER'

```
SELECT matchid, mdate, COUNT(teamid) AS num_of_goals FROM game
JOIN goal ON matchid = id
WHERE (teamid = 'GER')
GROUP BY matchid, mdate;
```

[Submit SQL](#)

[Restore default](#)

Correct answer

matchid	mdate	num_of_goals
1008	2012-06-09T00:00:00	1
1010	2012-06-13T00:00:00	2
1012	2012-06-17T00:00:00	2
1026	2012-06-22T00:00:00	4
1030	2012-06-28T00:00:00	1

13.



List every match with the goals scored by each team as shown. This will use "CASE WHEN" which has not been explained in any previous exercises.

mdate	team1	score1	team2	score2
1 July 2012	ESP	4	ITA	0
10 June 2012	ESP	1	ITA	1
10 June 2012	IRL	1	CRO	3
...				

Notice in the query given every goal is listed. If it was a team1 goal then a 1 appears in score1, otherwise there is a 0. You could SUM this column to get a count of the goals scored by team1. **Sort your result by mdate, matchid, team1 and team2.**

```
SELECT mdate, team1, SUM(CASE WHEN teamid=team1 THEN 1 ELSE 0 END) score1,
       team2, SUM(CASE WHEN teamid=team2 THEN 1 ELSE 0 END) score2 FROM game
LEFT JOIN goal ON matchid = id
GROUP BY mdate, matchid, team1, team2;
```

[Submit SQL](#)

[Restore default](#)

Correct answer

mdate	team1	score1	team2	score2
2012-06-08T00:00:00	POL	1	GRE	1
2012-06-08T00:00:00	RUS	4	CZE	1
2012-06-09T00:00:00	NED	0	DEN	1
2012-06-09T00:00:00	GER	1	POR	0
2012-06-10T00:00:00	ESP	1	ITA	1
2012-06-10T00:00:00	IRL	1	CRO	3
2012-06-11T00:00:00	FRA	1	ENG	1
2012-06-11T00:00:00	UKR	2	SWE	1
2012-06-12T00:00:00	GRE	1	CZE	2

What next?

[JOIN Quiz](#)

[Old JOIN Tutorial](#)

[More JOIN operations:](#) The next tutorial about the Movie database involves some slightly more complicated joins from the movie database.

Retrieved from "https://sqlzoo.net/w/index.php?title=The_JOIN_operation&oldid=40104"



This page was last edited on 26 May 2022, at 05:14.