


第一次使用 GitHub Repository

建立 repository、下載到本機、設定作者資訊、第一次 push 一次看懂

灰色 = 第一次設定 / 初次下載 / 初次授權才需要

藍色 = 之後常用流程



1. 先在 GitHub 建立 repository

1. [Web] 登入 GitHub
2. [Web] 點選 New repository
3. [Web] 輸入 repository 名稱，建立完成後複製 repository URL



2. 第一次下載到本機

1. [Git-Bash]
`git clone <repository-url>`
2. [Git-Bash]
`cd <repository-folder>`
3. 補充：之後不用再 clone，同一份專案直接進資料夾即可



3. 第一次設定作者資訊

1. [Git-Bash]
`git config --global user.name "你的名稱"`
 2. [Git-Bash]
`git config --global user.email "你的信箱"`
 3. 若 commit 出現 Author identity unknown，先執行上面兩行
- 註：name 與 email 都要各設定一次，以後沿用



4. 修改後提交到 GitHub

1. [Git-Bash] `git add .`
2. [Git-Bash] `git commit -m "<message>"`
3. [Git-Bash] `git push`

註：第一次 push 可能會跳出登入 / 授權，完成後即可正常上傳



5. 下次開始工作前

1. [Git-Bash] `cd <repository-folder>`
2. [Git-Bash] `git pull`
3. 先抓最新版本，再開始修改



重點整理

灰色步驟多半只做一次；平常最常用的是：

`cd <repository-folder> → git pull → 修改檔案 → git add . → git commit -m "<message>" → git push`

The screenshot shows the Git website's installation page for Windows. The page has a dark theme. On the left, there is a sidebar with links: About, Learn, Tools, Reference, **Install**, and Community. The main content area is titled 'Install' and shows the 'Windows' tab selected. It lists the latest version as 2.54.0. Under 'Other Git for Windows downloads', the 'Portable ("thumbdrive edition") Git for Windows/x64 Portable' option is highlighted with a red box. Below this, there is a section for 'Using winget tool' with a command to install Git. A lightbulb icon is positioned at the bottom left of the screenshot.

git --distributed-is-the-new-centralized

Type / to search entire site...

Install

Latest version: 2.54.0 (Release Notes)

Windows macOS Linux Build from Source

Click here to download the latest (2.54.0) x64 version of Git for Windows. This is the most recent maintained build. It was released over 2 months ago, on 2026-04-20.

Other Git for Windows downloads

Standalone Installer

Git for Windows/x64 Setup.

Git for Windows/ARM64 Setup.

Portable ("thumbdrive edition")

Git for Windows/x64 Portable.

Git for Windows/ARM64 Portable.

Using winget tool

Install **winget** tool if you don't already have it, then type this command in command prompt or Powershell.

```
winget install --id Git.Git -e --source winget
```


The current source code release is version 2.54.0. If you want the newer version, you can build it from the source code.

The entire **Pro Git** book written by Scott Chacon and Ben Straub is available to read online for free. Dead tree versions are available on Amazon.com.

本篇介紹流程僅供以使用 **Portable** 版本為範例

Setup 版本在安裝時有很多設定流程，請以後續講師教學的為主

在 GitHub 新增自己的專案 (Repository)

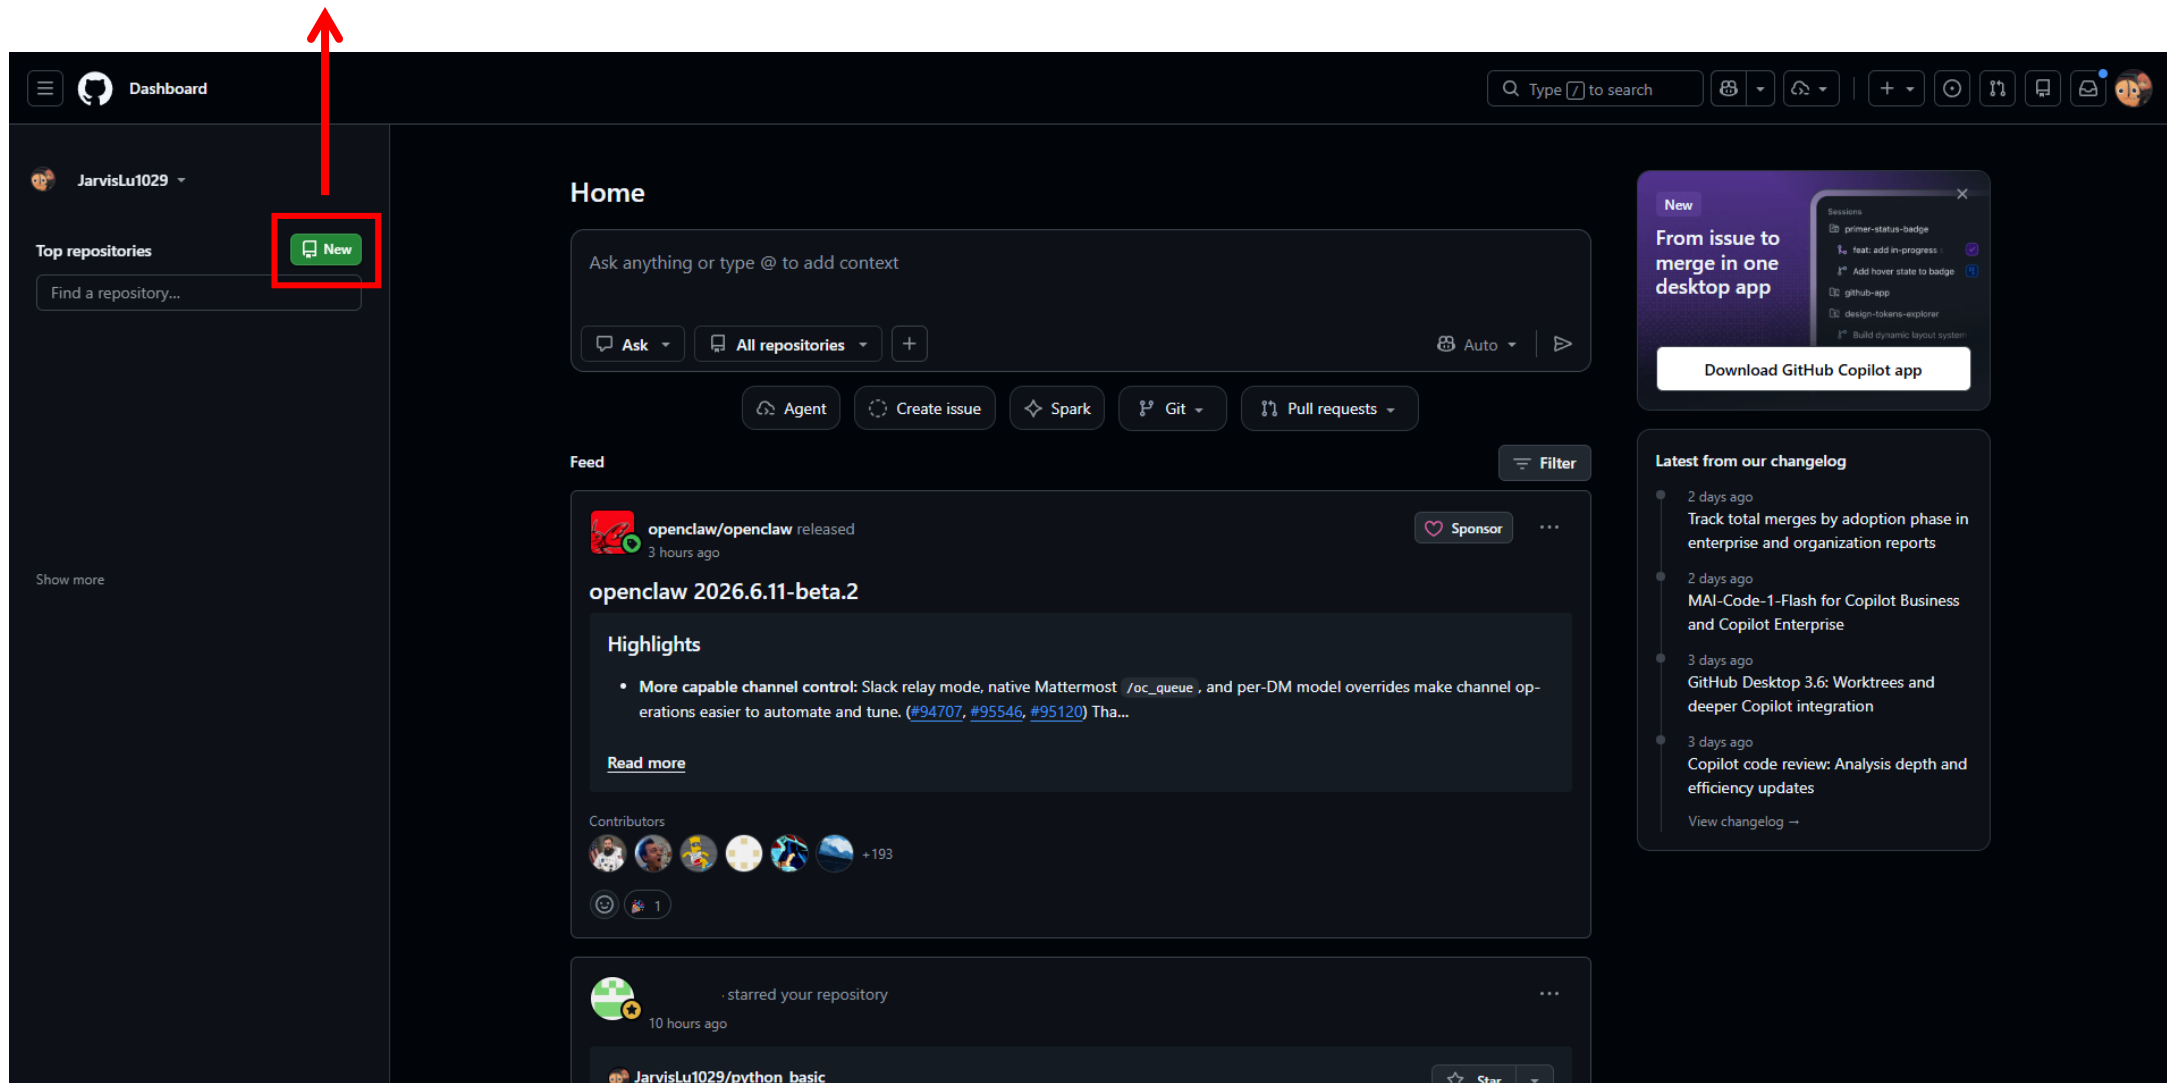

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 General

Owner *
JarvisLu1029

Repository name *
Python_demo
✓ Python_demo is available.

Great repository names are short and memorable. How about [automatic-journey?](#)

Description
0 / 350 characters

2 Configuration

Choose visibility *
Choose who can see and commit to this repository
Public

Add README
READMEs can be used as longer descriptions. [About READMEs](#)
Off

Add .gitignore
.gitignore tells git which files not to track. [About ignoring files](#)
No .gitignore

Add license
Licenses explain how others can use your code. [About licenses](#)
No license

必填 設定專案名稱
(後續 clone 下來的資料夾名稱)

設定 Repository 公開 / 不公開

預設加入 README.md 檔

JarvisLu1029 / Python_demo

Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

Python_demo Public

Pin Watch 0 Fork 0 Star 0

Start coding with Codespaces
Add a README file and start coding in a secure, configurable, and dedicated development environment.
[Create a codespace](#)

Add collaborators to this repository
Search for people using their GitHub username or email address.
[Invite collaborators](#)

Quick setup — if you've done this kind of thing before
[Set up in Desktop](#) or [HTTPS](#) [SSH](#) `https://github.com/JarvisLu1029/Python_demo.git`
Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line


```
echo "# Python_demo" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/JarvisLu1029/Python_demo.git
git push -u origin main
```

複製該連結
後續 git clone 使用

```
MINGW64:/  
jarvis_lu@MCA-IT95 MINGW64 /  
$ git clone https://github.com/JarvisLu1029/Python_demo.git  
Cloning into 'Python_demo'...  
warning: You appear to have cloned an empty repository.  
jarvis_lu@MCA-IT95 MINGW64 /  
$
```

[git-bash]

git clone <自己的 repo 網址>

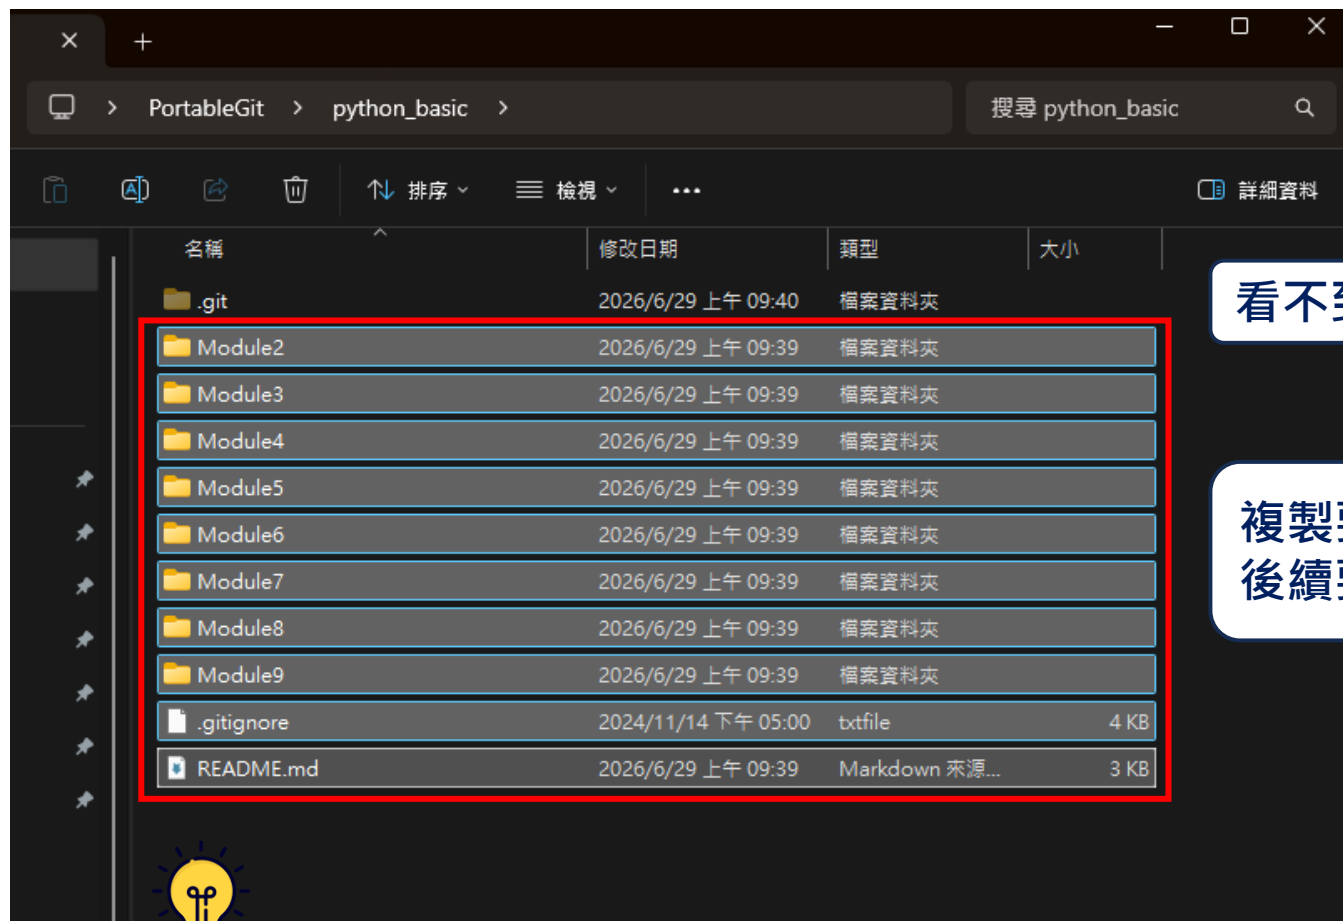

看不到 .git/ 是正常的 (預設是隱藏)

複製要上傳的檔案
後續要貼到剛剛 clone 下來的資料夾



這裡要注意**不是**把整個專案資料夾複製 Ex: python_basic
(會複製到別人專案的 **.git/**) 後續會導致權限衝突

剛剛 clone 下來的資料夾 (自己的 Repo)

貼上剛剛複製的檔案

這個動作是已經有**既有的資料要上傳**所以才需要複製貼上到這裡
假如是一個完全新的專案，通常是要開始在這個資料夾寫程式

```
MINGW64:/Python_demo

jarvis_lu@MCA-IT95 MINGW64 /
$ git clone https://github.com/JarvisLu1029/Python_demo.git
Cloning into 'Python_demo'...
warning: You appear to have cloned an empty repository.

jarvis_lu@MCA-IT95 MINGW64 /
$ cd Python_demo/

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ |
```

cd 到剛剛 clone 下來的資料夾

有出現該標籤 代表該資料夾有被 git 追蹤

```
MINGW64:/Python_demo
$ cd Python_demo/

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ git status
On branch main

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    .gitignore
    Module2/
    Module3/
    Module4/
    Module5/
    Module6/
    Module7/
    Module8/
    Module9/
    README.md

nothing added to commit but untracked files present (use "git add" to track)
jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
```

執行 git status
檢查目前對該 Repository 修改的狀態

會看到剛剛貼上的檔案 (或是進行的修改)


```
MINGW64:/Python_demo
(use "git add <file>..." to include in what will be committed)
.gitignore
Module2/
Module3/
Module4/
Module5/
Module6/
Module7/
Module8/
Module9/
README.md

nothing added to commit but untracked files present (use "git add" to track)

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ git add .
warning: in the working copy of '3-2_for_while.ipynb', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of '4-4-2_dict_for.ipynb', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'Module4/4-5_set.ipynb', LF will be replaced by CRLF the next time Git touches it

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
```

執行 git add .
將所有檔案加入追蹤

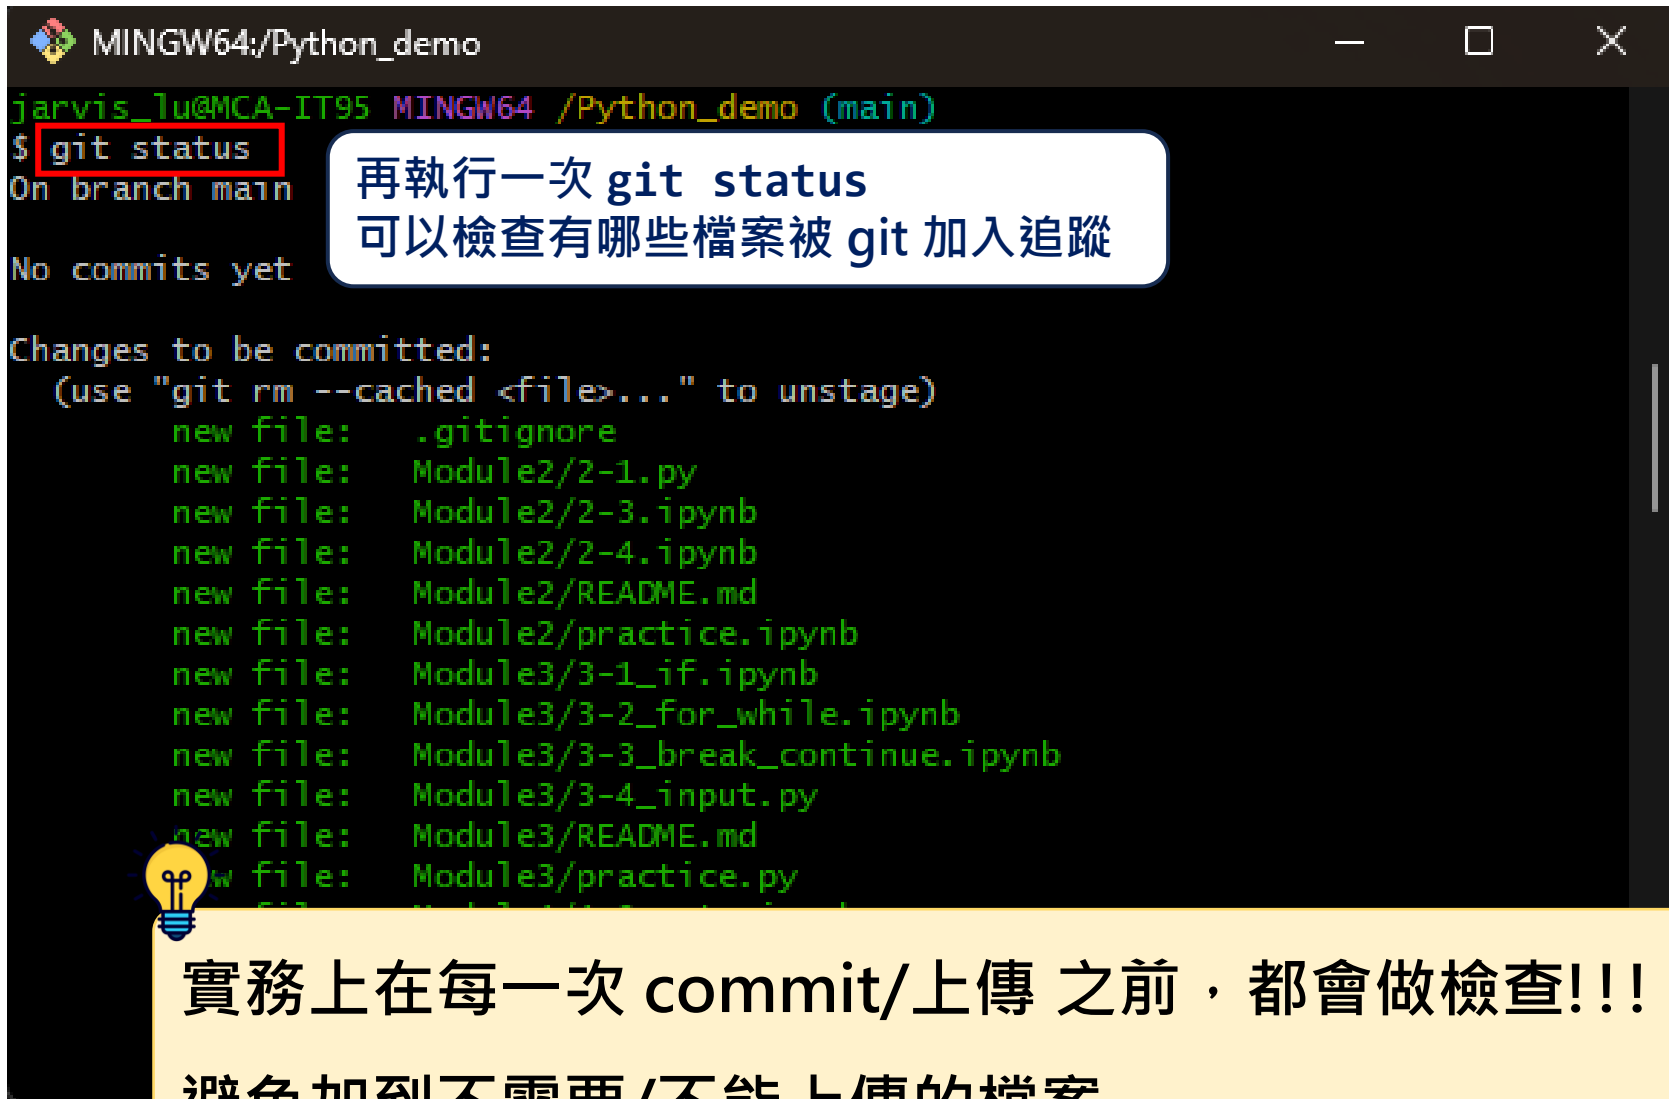

A terminal window titled "MINGW64:/Python_demo" showing the output of the `git status` command. The output indicates the current branch is "main" and lists several new files to be committed. A red box highlights the `git status` command in the prompt. A white callout box explains the purpose of the command. A lightbulb icon is positioned next to a yellow callout box at the bottom.

```
MINGW64:/Python_demo
jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ git status
On branch main

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   .gitignore
    new file:   Module2/2-1.py
    new file:   Module2/2-3.ipynb
    new file:   Module2/2-4.ipynb
    new file:   Module2/README.md
    new file:   Module2/practice.ipynb
    new file:   Module3/3-1_if.ipynb
    new file:   Module3/3-2_for_while.ipynb
    new file:   Module3/3-3_break_continue.ipynb
    new file:   Module3/3-4_input.py
    new file:   Module3/README.md
    new file:   Module3/practice.py
```

再執行一次 `git status`
可以檢查有哪些檔案被 git 加入追蹤

實務上在每一次 commit/上傳 之前，都會做檢查!!!
避免加到不需要/不能上傳的檔案

```
MINGW64:/Python_demo

new file:   Module5/5-3_lambda.ipynb
new file:   Module5/README.md
new file:   Module6/6-1.ipynb
new file:   Module6/6-2_class.ipynb
new file:   Module6/README.md
new file:   Module7/7-1_try_except.ipynb
new file:   Module7/7-2_raise.ipynb
new file:   Module7/README.md
new file:   Module8/8-1-1_json.ipynb
new file:   Module8/8-1_open.ipynb
new file:   Module8/8-2_os.ipynb
new file:   Module8/8-3_practice.ipynb
new file:   Module8/README.md
new file:   Module8/data.txt
new file:   Module9/9-1.py
new file:   Module9/9-2.py
new file:   Module9/README.md
new file:   Module9/myModule.py
new file:   README.md

jarvis.lu@MCA-IT95 MINGW64 /Python_demo (main)
$ git commit -m 'First commit'
[main (root-commit) 5ea02f2] First commit
44 files changed, 3937 insertions(+)
```

```
MINGW64:/Python_demo
remote: Compressing objects: 100% (31/31), done.
remote: Total 54 (delta 23), reused 54 (delta 23), pack-reused 0 (from 0)
Receiving objects: 100% (54/54), 123.67 KiB | 1.36 MiB/s, done.
Resolving deltas: 100% (23/23), done.

jarvis_lu@MCA-IT95 MINGW64 /
$ cd Python_demo/

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ 執行 commit 時如果跳出該錯誤訊息，就照著該指令執行設定自己的 Email

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ git commit -m 'First commit'
[main 4acfbcb] First commit
Committer: unknown <jarvis_lu@tp.bio-medcom.com>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly:

git config --global user.name "Your Name"
git config --global user.email you@example.com


After doing this, you may fix the identity used for this commit with:
```

```
MINGW64:/Python_demo
create mode 100644 Module4/README.md
create mode 100644 Module5/5-1_function.ipynb
create mode 100644 Module5/5-2_global.ipynb
create mode 100644 Module5/5-3_lambda.ipynb
create mode 100644 Module5/README.md
create mode 100644 Module6/6-1.ipynb
create mode 100644 Module6/6-2_class.ipynb
create mode 100644 Module6/README.md
create mode 100644 Module7/7-1_try_except.ipynb
create mode 100644 Module7/7-2_raise.ipynb
create mode 100644 Module7/README.md
create mode 100644 Module8/8-1-1_json.ipynb
create mode 100644 Module8/8-1_open.ipynb
create mode 100644 Module8/8-2_os.ipynb
create mode 100644 Module8/8-3_practice.ipynb
create mode 100644 Module8/README.md
create mode 100644 Module8/data.txt
create mode 100644 Module9/9-1.py
create mode 100644 Module9/9-2.py
create mode 100644 Module9/README.md
create mode 100644 Module9/myModule.py
create mode 100644 README.md


jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ git push
```

要出現這樣的訊息才代表 commit 有成功

接著就可以執行 git push

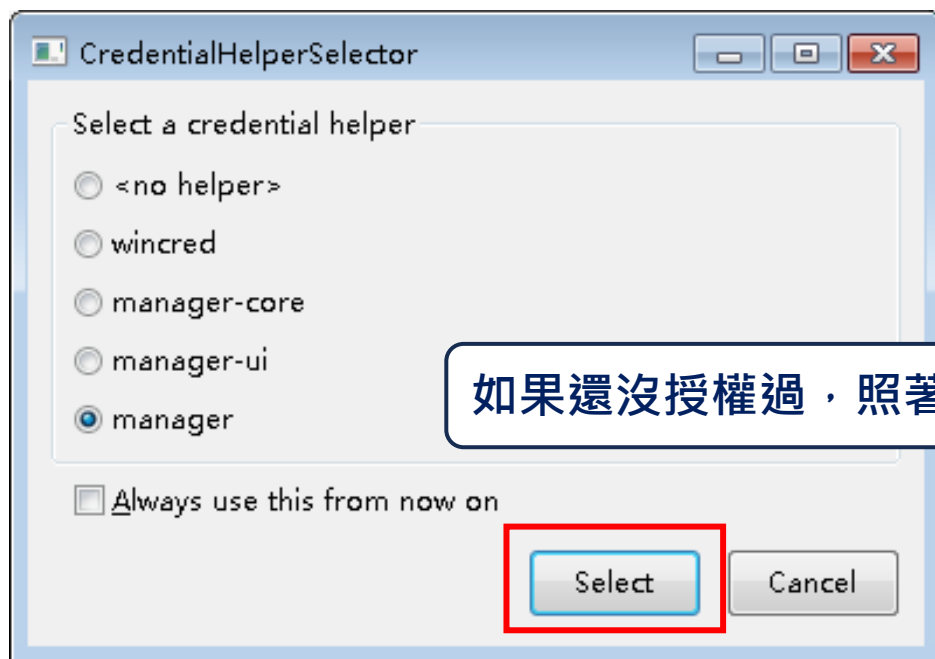

如果還沒授權過，照著點擊進行授權即可

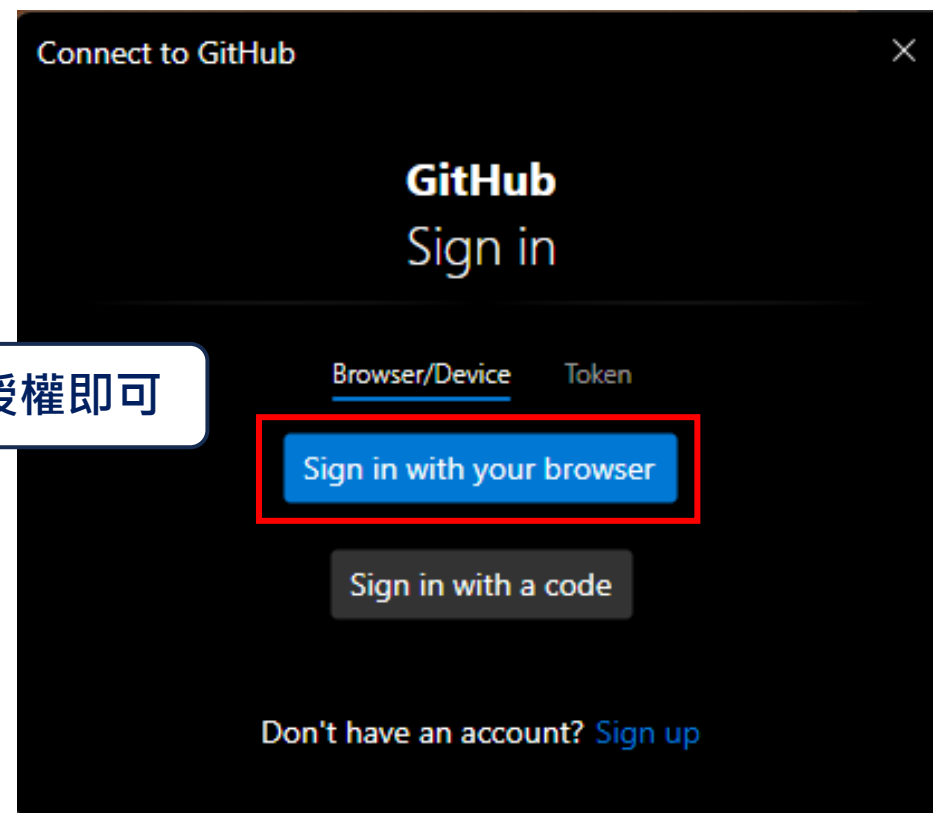

```
MINGW64:/Python_demo
create mode 100644 Module8/8-2_os.ipynb
create mode 100644 Module8/8-3_practice.ipynb
create mode 100644 Module8/README.md
create mode 100644 Module8/data.txt
create mode 100644 Module9/9-1.py
create mode 100644 Module9/9-2.py
create mode 100644 Module9/README.md
create mode 100644 Module9/myModule.py
create mode 100644 README.md

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ git push
info: please complete authentication in your browser...
Enumerating objects: 54, done.
Counting objects: 100% (54/54), done.
Delta compression using up to 28 threads
Compressing objects: 100% (54/54), done.
Writing objects: 100% (54/54), 123.67 KiB | 12.37 MiB/s, done.
Total 54 (delta 23), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (23/23), done.
To https://github.com/JarvisLu1029/Python_demo.git
 * [new branch]      main -> main

jarvis_lu@MCA-IT95 MINGW64 /Python_demo (main)
$ |
```

出現這些資訊就代表已經上傳到 GitHub

JarvisLu1029 / Python_demo

Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

Python_demo Public

main 1 Branch 0 Tags

Go to file Add file Code

JarvisLu1029 First commit 5ea02f2 · 4 minutes ago 1 Commit

File	Commit Message	Time
Module2	First commit	4 minutes ago
Module3	First commit	4 minutes ago
Module4	First commit	4 minutes ago
Module5	First commit	4 minutes ago
Module6	First commit	4 minutes ago
Module7	First commit	4 minutes ago
Module8	First commit	4 minutes ago
Module9	First commit	4 minutes ago
.gitignore	First commit	4 minutes ago
README.md	First commit	4 minutes ago

README

Python 基礎教學

JarvisLu1029

Contributors 1

Releases

Packages

Contributors 1

Just set the commit message and time