

Make Your Folder “Contextful”

*Simplify how we share contextual knowledge
with AI agents*

Huiming Teo



Data_Gamma_Archive



Proc_D_Memos



Proc_D_Memos



Set_E_Profiles



Log_F_Surveys



Ref_F_Polons



Data_H_Reports



Data_H_Reports



Proc_I_Notes



Set_J_Records




Log_K_Exits



Log_K_Exits



Data_N_Consolidated
_Set



Gemini_Generated_I
mage_1rbmot1rbmot
1rbm.png



Proc_O_Onboarding
_Key



Ref_P_Exit_Review_
Final



Data_Gamma_Archive



Proc_D_Memos



Proc_D_Memos



Set_E_Profiles



Log_F_Surveys



Ref_F_Polons



Data_H_Reports



Data_H_Reports



Proc_I_Notes



Set_J_Records




Log_K_Exits



Log_K_Exits



Data_N_Consolidated
_Set




Gemini_Generated_I
mage_1rbmot1rbmot
1rbm.png



Proc_O_Onboarding
_Key




Ref_P_Exit_Review_
Final




README

Your project folder has README file?



README.md

**Folder creates
information
boundary.**

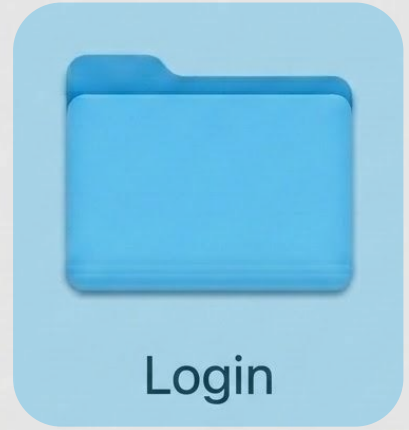

Payment

README provides useful contextual information



Login

Email & Google sign-in screen.

Structure

Item	What it is
<code>*Form.tsx</code>	form & validation logic
<code>styles.css</code>	UI styles
<code>design/</code>	UX designs

Runbooks

- [rotate-oauth-secret](#) — rotate the OAuth secret

Agent skills

- [add-auth-provider](#) — add a social login
- [audit-accessibility](#) — fix WCAG gaps

See also

- [Button](#) — button assets
- [Auth service](#) — sessions & tokens

Useful README E reads like MAPS.

Login

Email & Google sign-in screen.

Structure

Item	What it is
<code>*Form.tsx</code>	form & validation logic
<code>styles.css</code>	UI styles
<code>design/</code>	UX designs

Runbooks

- [rotate-oauth-secret](#) — rotate the OAuth secret

Agent skills

- [add-auth-provider](#) — add a social login
- [audit-accessibility](#) — fix WCAG gaps

See also

- [Button](#) — button assets
- [Auth service](#) — sessions & tokens

Mission & Purpose

What is this folder for?

Asset File Structure

What's inside here?


Process / Procedures

How we do work here?

See Also / Related

Where to read more?


**Folder with
useful README
makes
the folder
contextful .**
(contextually useful)

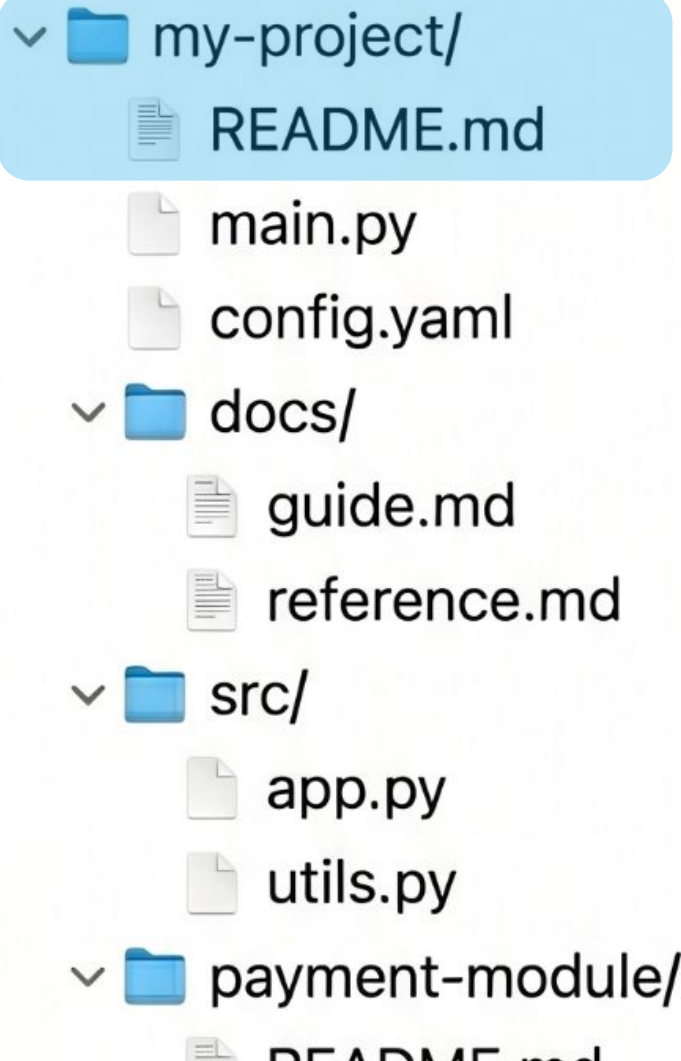


has sufficient context to
reason for the best possible decision




**Work is
more effective
when
the folder is
contextful .
(contextually useful)**

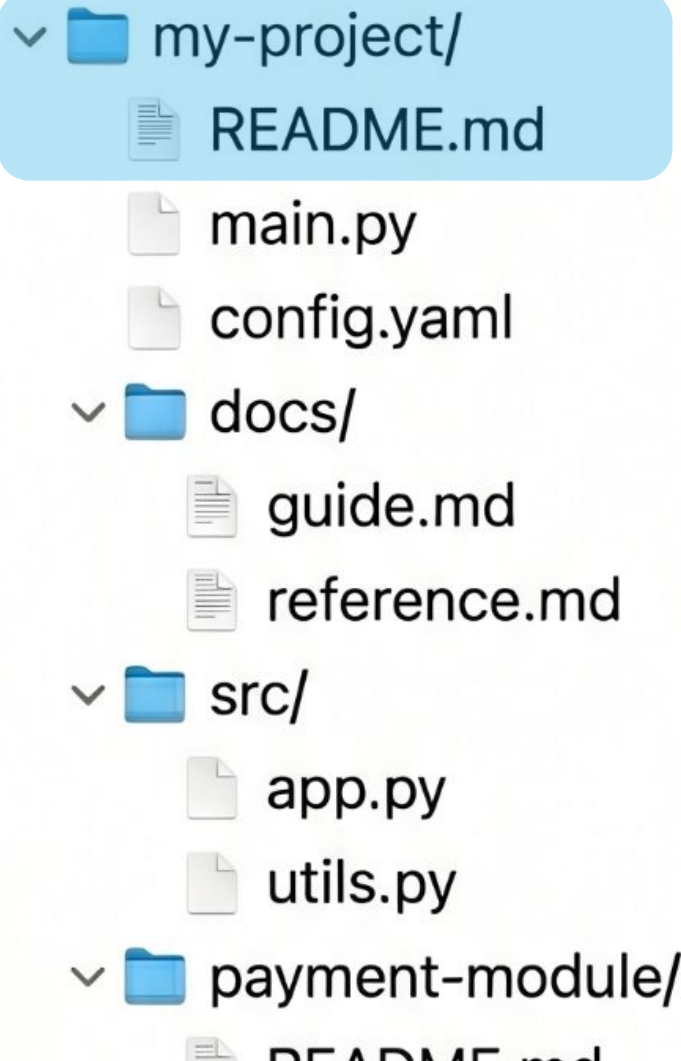


has sufficient context to
calculate the next best-possible "word"



**Work is
more effective
when
the folder is
contextful .
(contextually useful)**

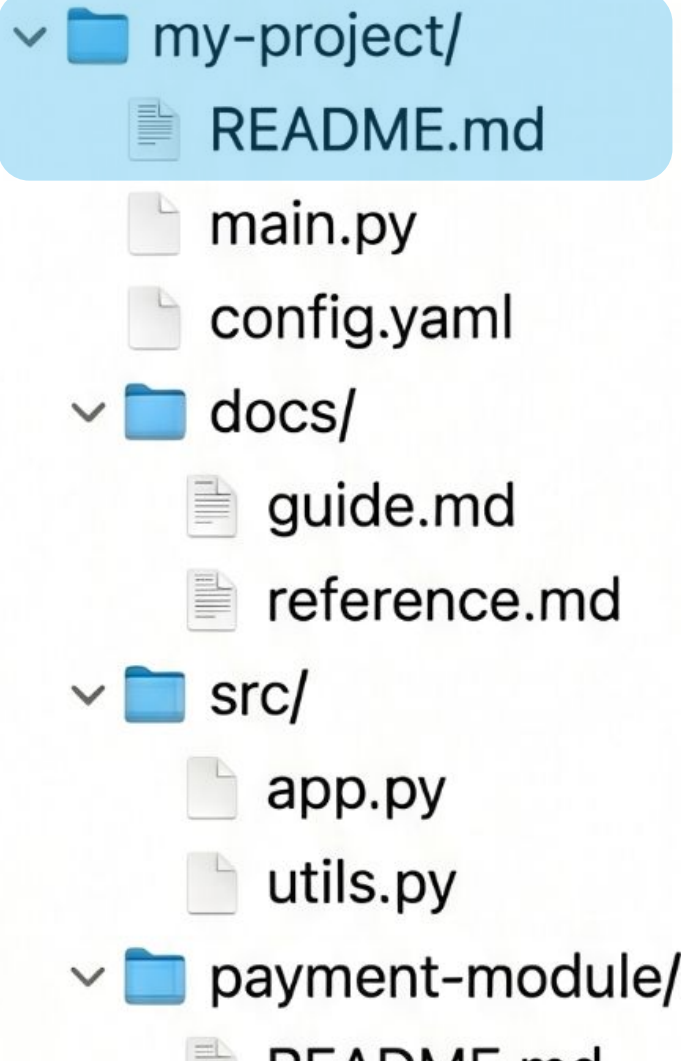

Bigger project?
Make subfolders
contextful.

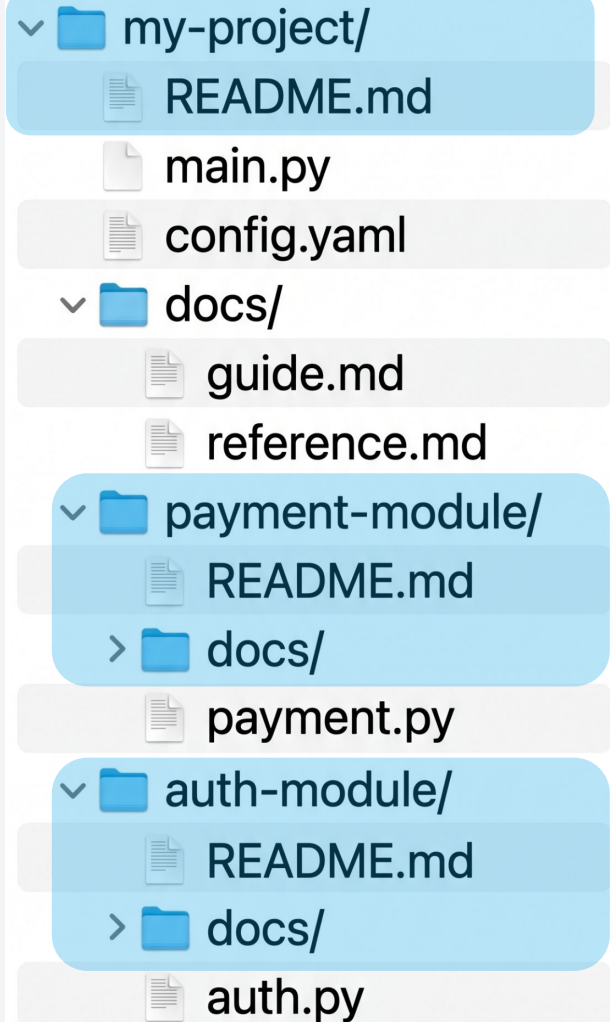




less cognitive load

Work on

specific

context?

Read README in subfolder.

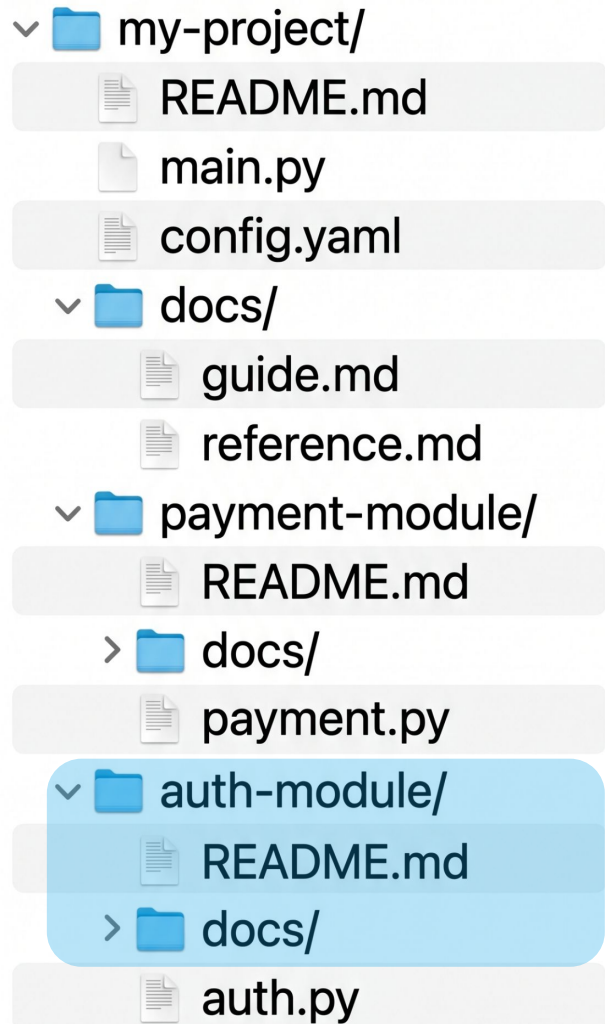




less token usage

Work on

specific

context?

Read README in subfolder.

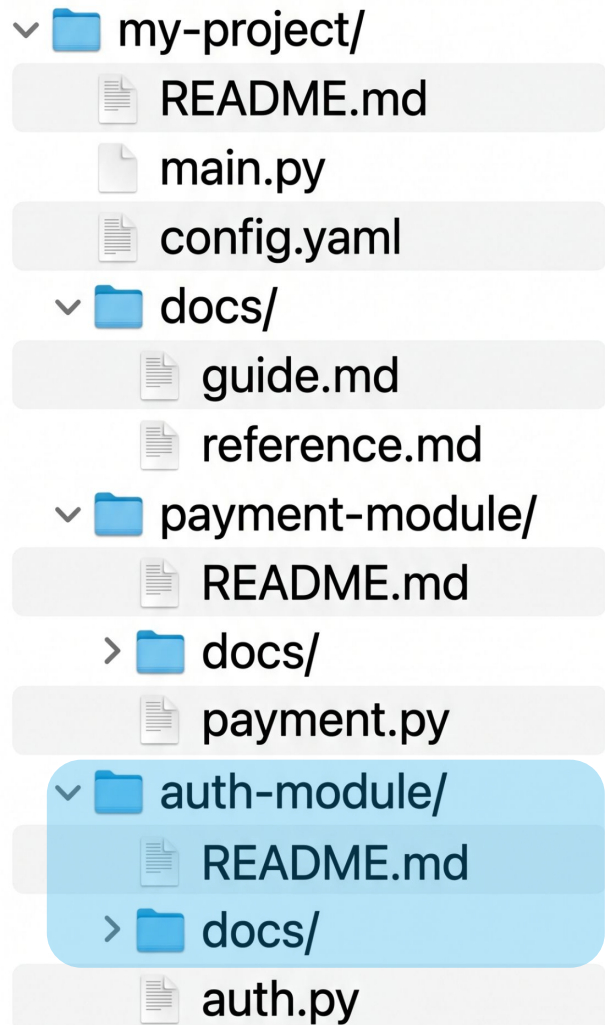




Work on

broad

er context?

Read README in parent folder.

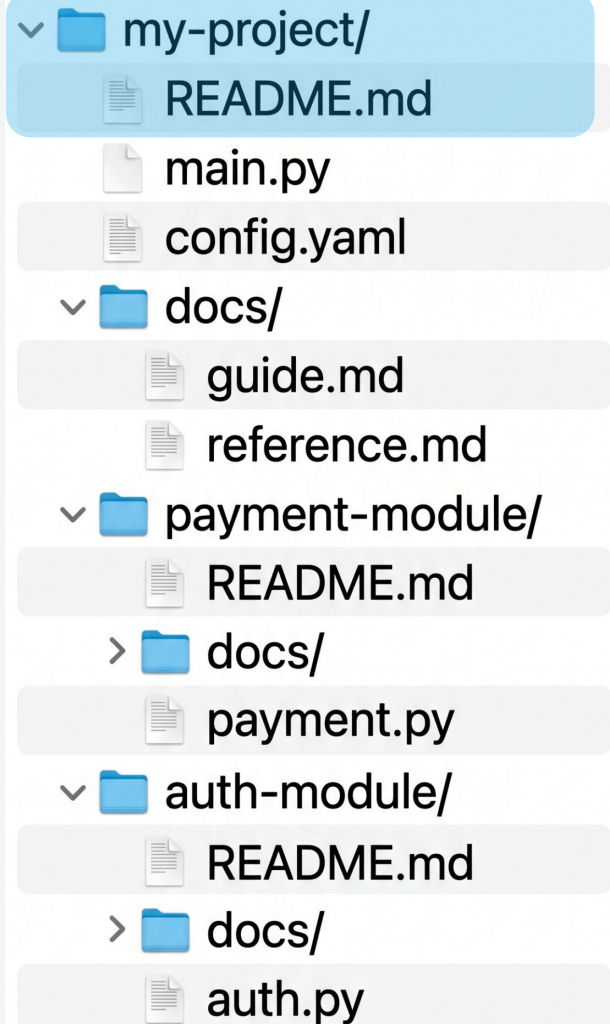




Work on


broad

er context?

Read README in parent folder.

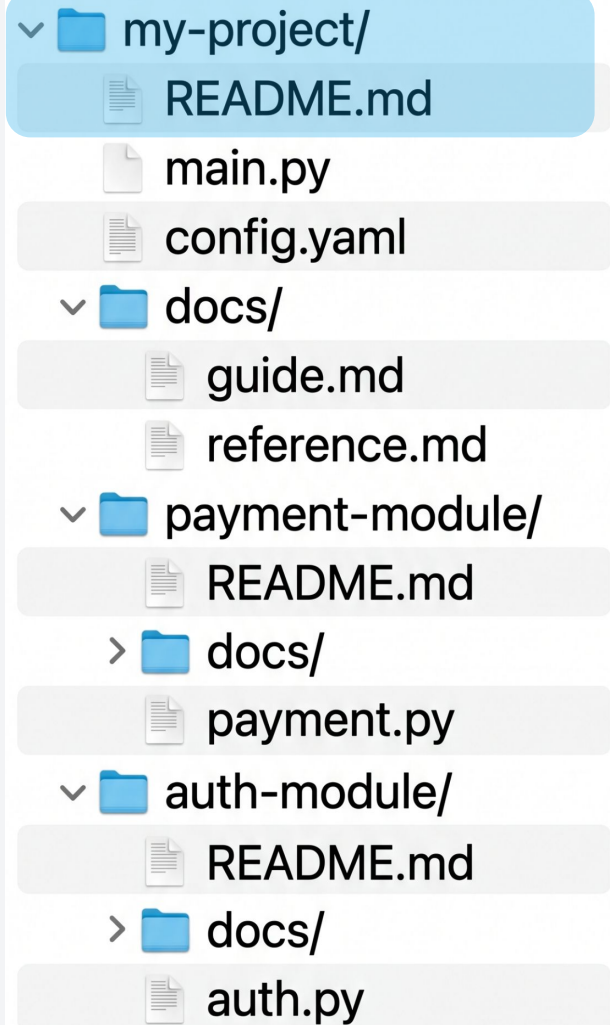

**Bigger
project?
Split README
into small files
and linked
from README.**

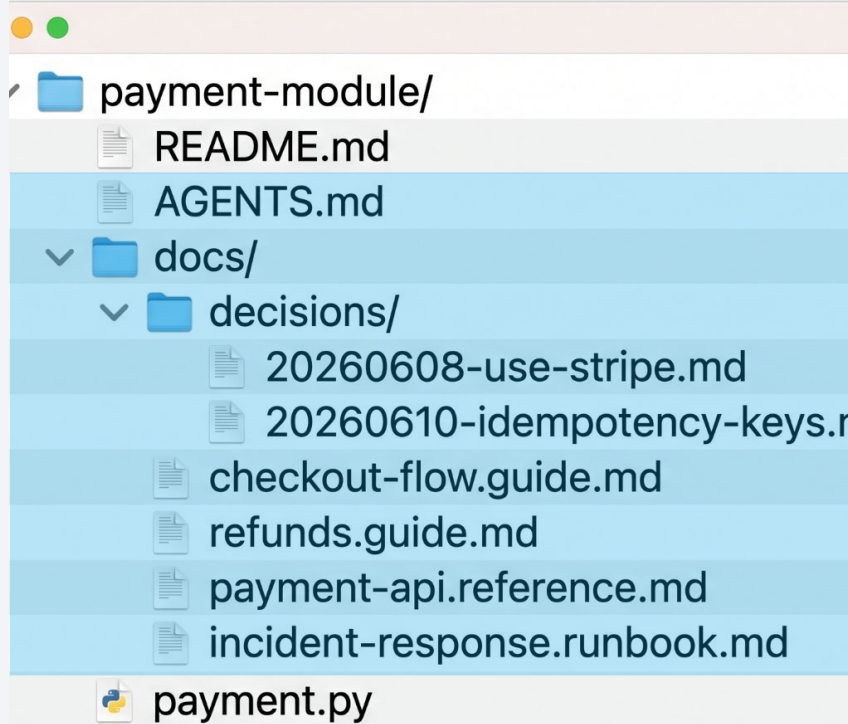

M.A.P.S. onboarding guide

README


AGENTS Instructions for AI

Guide Concepts, how it works

Reference Facts to refer

Runbook Step-by-step workflow


Decisions Key decision history

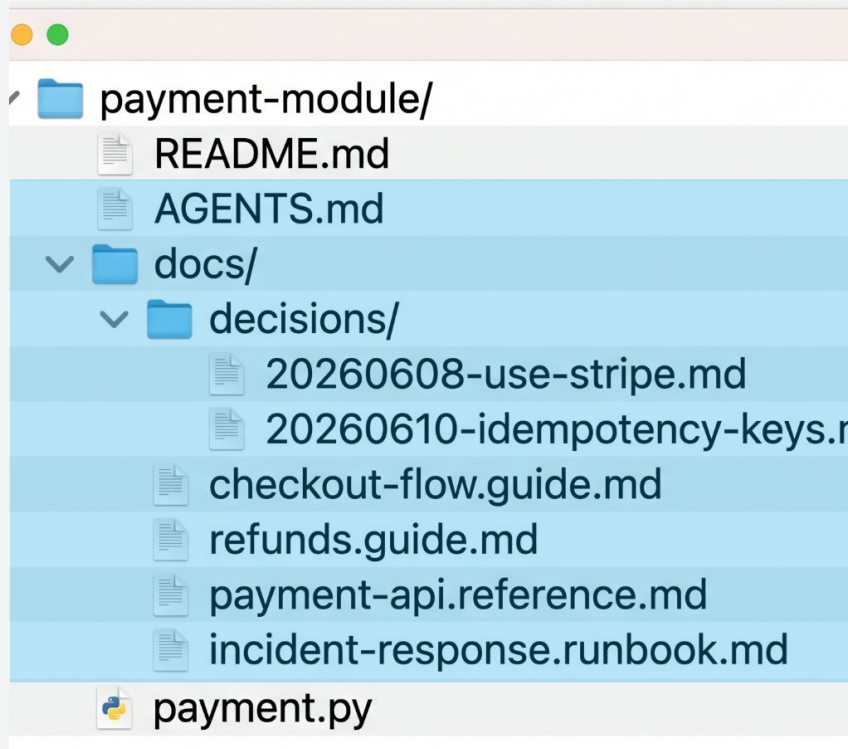

Experimental Project – JB Agentic Workspace

github.com/jbagentic/jbagentic-workspace

Work: Publish meetup talks on YouTube

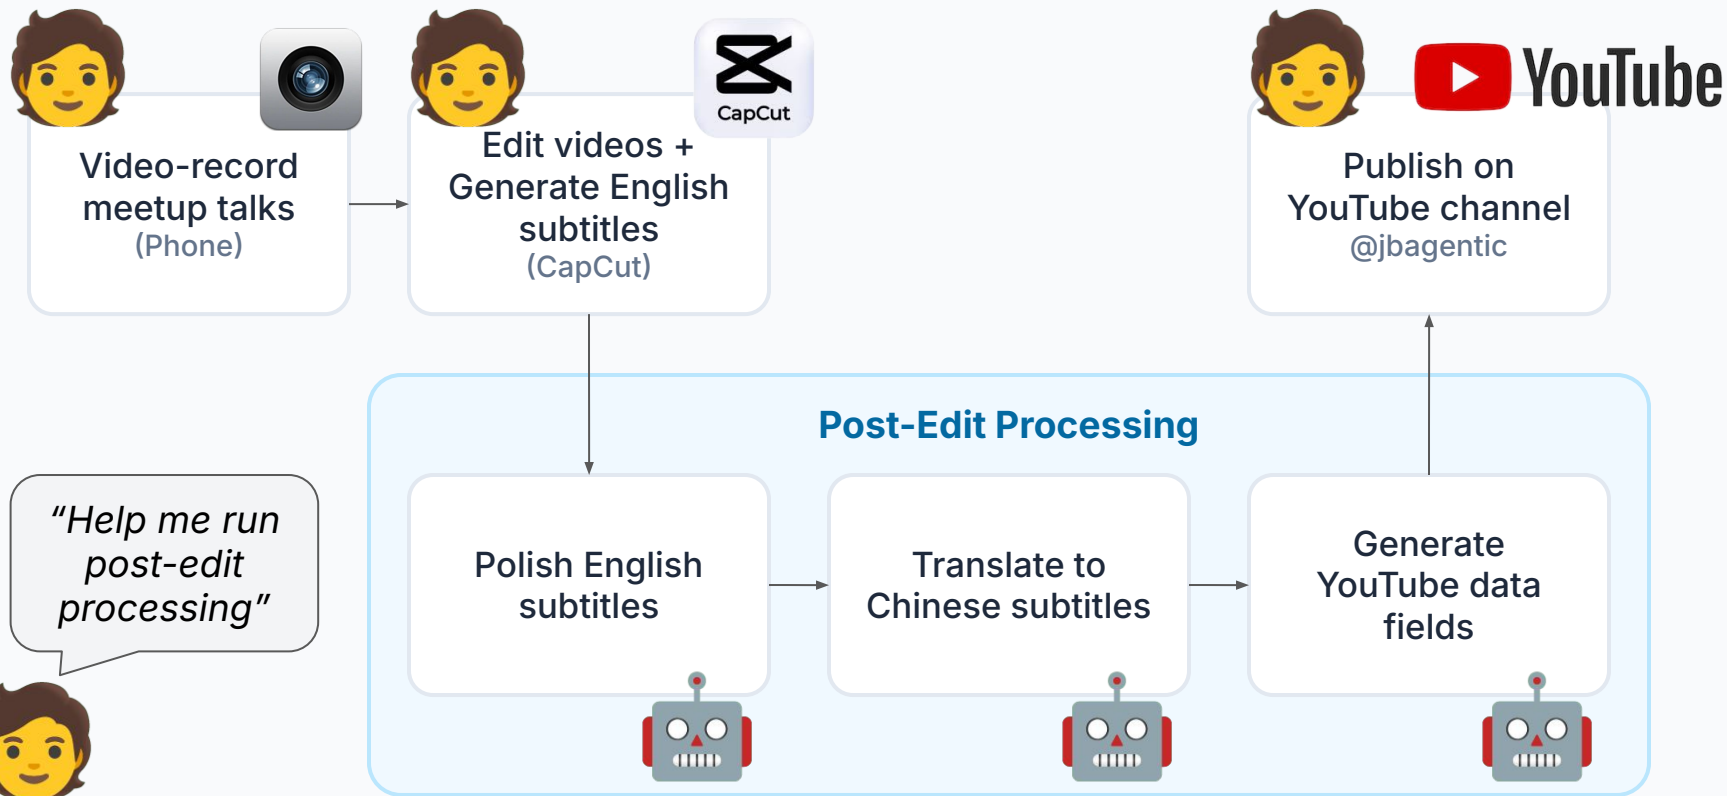

Highlights

AGENTS.md

Ground-rule instructions to AI agents.

meetup/README.md

High-level workflow, linked to runbooks.

meetup/docs/*.runbook.md

Steps + configure input/output of each skill

agentic/skills/

Context-free, reusable skills for agents.

github.com/jbagentic/jbagentic-workspace

Context-free skill makes it reusable

Previous: Hardcode JB Agentic meetup-specific context into the skill.

talk-subtitle-polish skill input is `meetup/<talk>.raw.srt`.

Now: Reusable for any talk-show videos e.g. podcasts, talks, interviews.

subtitle-polish skill input is a raw unpolished subtitle file.

`meetup/post-edit.runbook.md` configures input as `meetup/<talk>.raw.srt`.

`podcast/post-edit.runbook.md` configures input as `podcast/<show>.raw.vtt`.



Install **doc-this** skill to your project

Normal Way: Command Line

```
gh skill install \
  jbagentic/jbagentic-workspace \
  agentic/skills/doc-this
```

Simpler Way: AI Prompt



*Help me install doc-this skill from
<https://github.com/jbagentic/jbagentic-workspace>*

Q & A