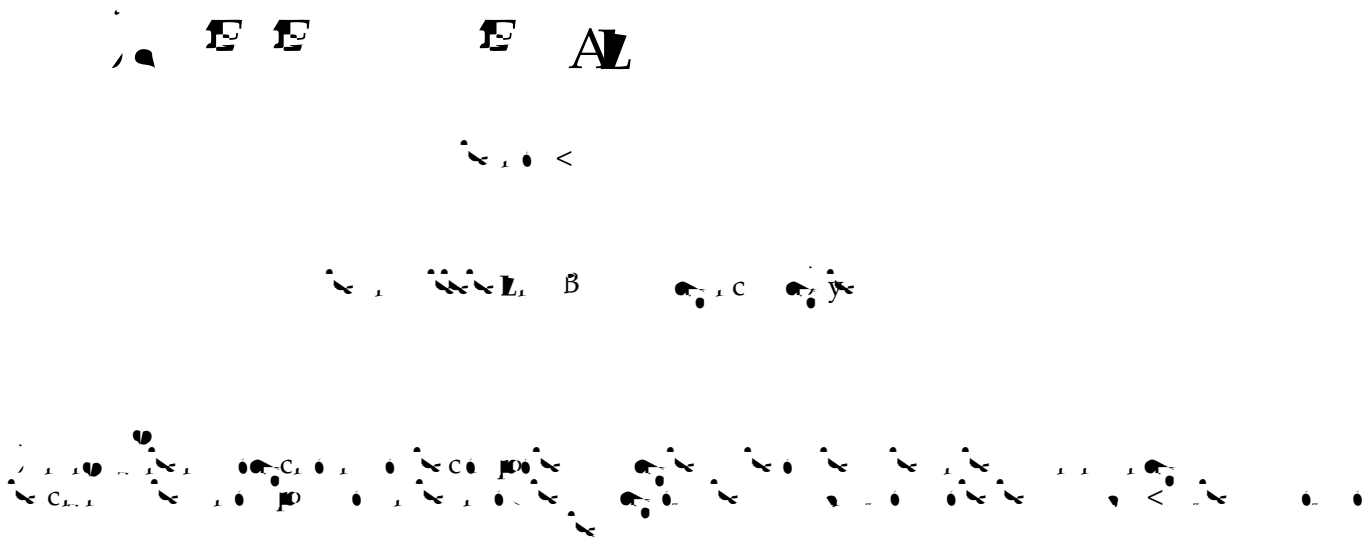

<<

program. When the ‘connect to:’ window appears, ignore everything else and press the ‘Demo’ button at the bottom of the window. The Demo button connects you to an SRB Server as our anonymous guest user, ‘demouser’.

Demouser doesn’t haveowite access to its own home directory so as demouser it will not be possible to upload ne(w)163.929 files into SRB, nor is it possible to delete anything stored there.

It is possible to do many other operations, however, and it’s also worth noting that demouser will always haveo (a)97.9284(n)68.288(p)87.28(i)56.4757(e)65.7909(s)55.4622( )4.3079(o)32.2799(f)9.13316( )15.4757(o)32.2799(u)111.6

Name
Beginning User Guide.doc
106496
demomaker
2002-05-28-17 20 54
0

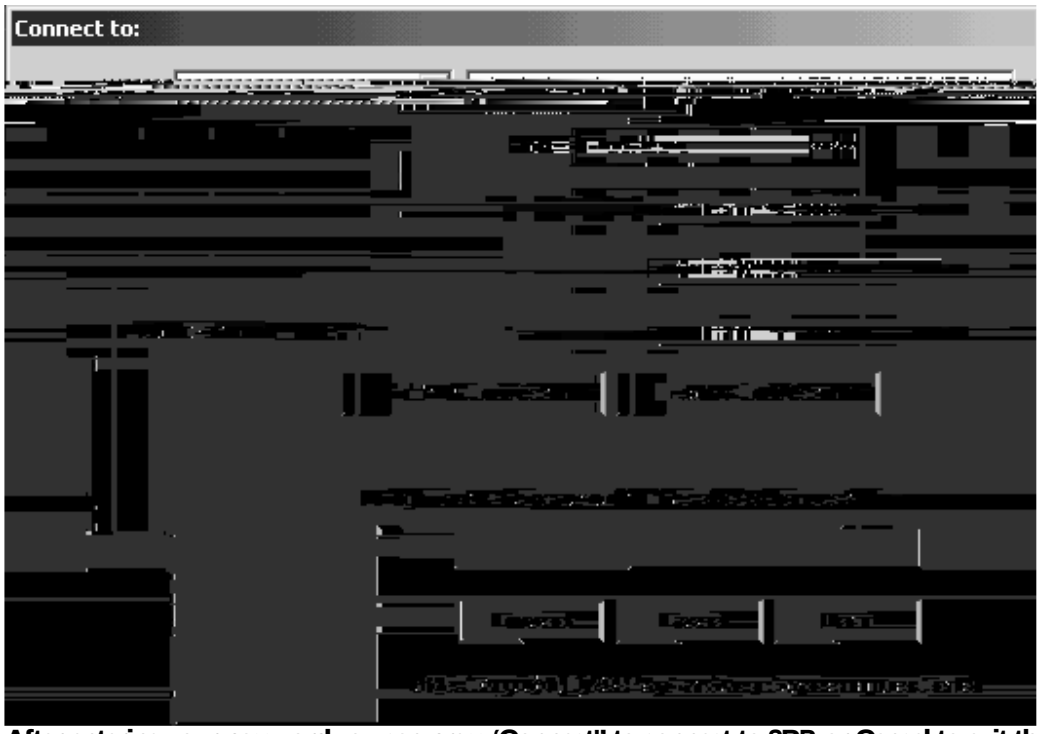

After entering your password you can press 'Connect!' to connect to SRB or Cancel to exit the application.

The title bar will always reflect your connection s

It's not actually as hard to do as it sounds. Beneath the toolbar are a group of pull-down menus; one of them is labeled 'Use Resource | C

[illegible]

<

[illegible]

Figure 10

Figure 12

ast otsk athe ideiat1setuage

I [illegible] c [illegible] y [illegible]

O [illegible] c [illegible] y [illegible] c [illegible] c [illegible] y [illegible] c [illegible] y [illegible] **another dataset to it. Tick the box next to the study of your choice and select 'Aa**

[illegible]

<

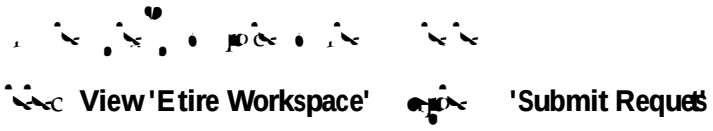
View 'Etire Workspace'
'Submit Reques