

Threat Modeling Report

Created on 21/10/2025 4:14:45 p. m.

Threat Model Name:

Owner:

Reviewer:

Contributors:

Description:

Assumptions:

External Dependencies:

Threat Model Summary:

Not Started	86
Not Applicable	0
Needs Investigation	0
Mitigation Implemented	0
Total	86
Total Migrated	0

Diagram: Diagrama1


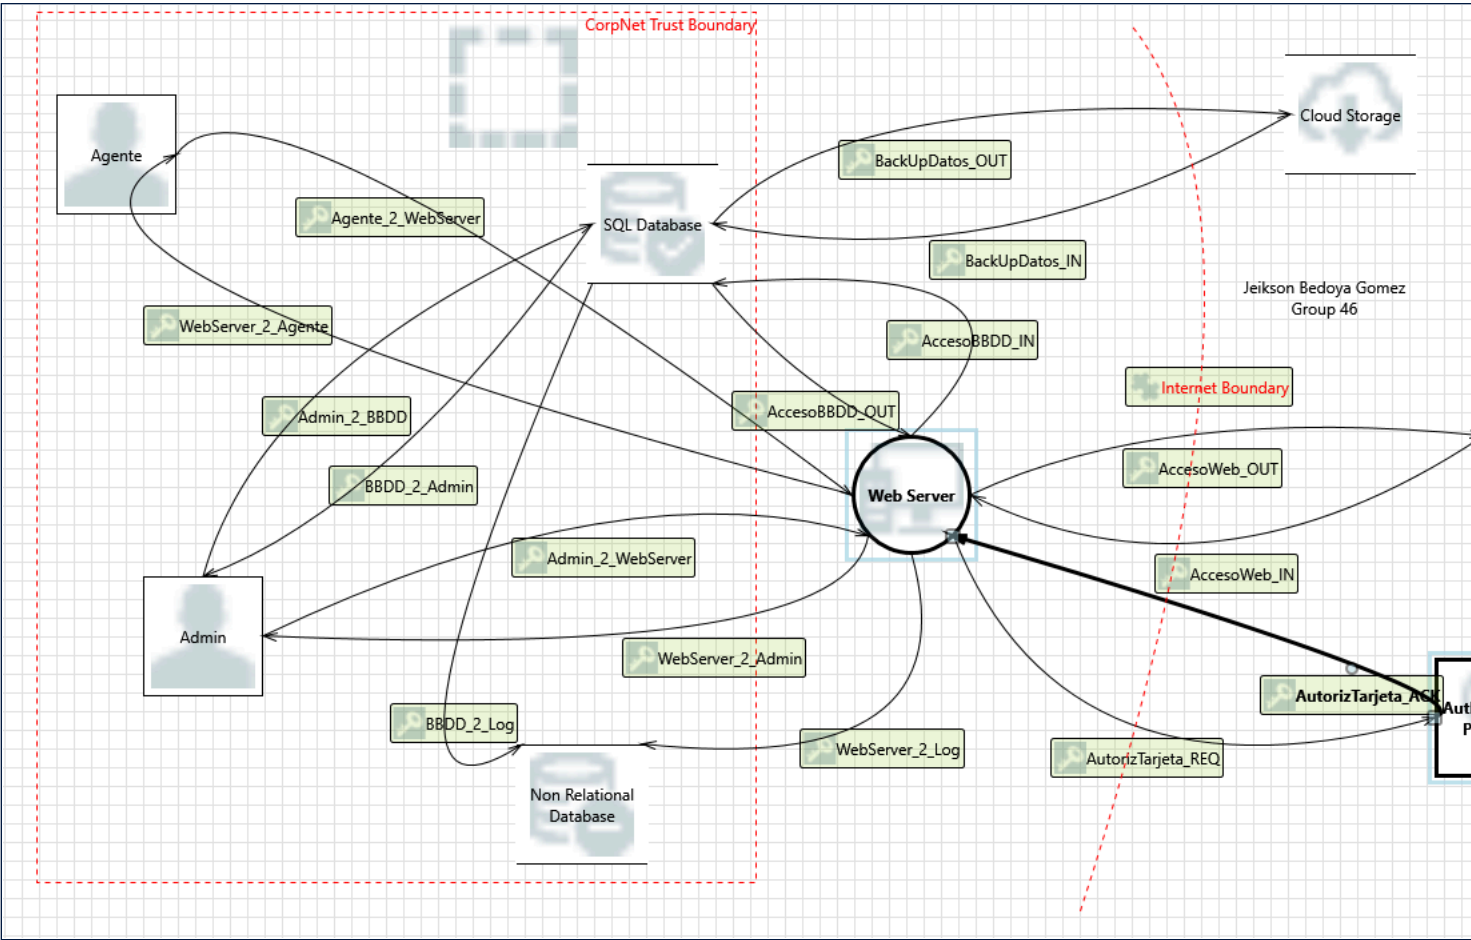


Diagrama1 Diagram Summary:

Not Started	86
Not Applicable	0
Needs Investigation	0
Mitigation Implemented	0
Total	86
Total Migrated	0

Interaction: AccesoBBDD_IN

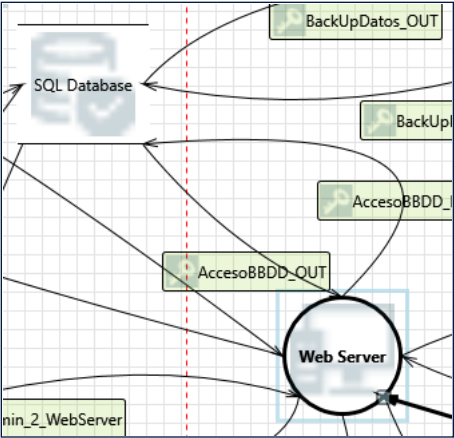

1. Spoofing of Destination Data Store SQL Database [State: Not Started] [Priority: High]

Category: Spoofing

Description: SQL Database may be spoofed by an attacker and this may lead to data being written to the attacker's target instead of SQL Database. Consider using a standard authentication mechanism to identify the destination data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x

(D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

2. Potential SQL Injection Vulnerability for SQL Database [State: Not Started] [Priority: High]

Category: Tampering

Description: SQL injection is an attack in which malicious code is inserted into strings that are later passed to an instance of SQL Server for parsing and execution. Any procedure that constructs SQL statements should be reviewed for injection vulnerabilities because SQL Server will execute all syntactically valid queries that it receives. Even parameterized data can be manipulated by a skilled and determined attacker.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x

(D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

3. Potential Excessive Resource Consumption for Web Server or SQL Database [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: Does Web Server or SQL Database take explicit steps to control resource consumption? Resource consumption attacks can be hard to deal with, and there are times that it makes sense to let the OS do the job. Be careful that your resource requests don't deadlock, and that they do timeout.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x

(D+A) = P x I =:

Safeguard 1:

Safeguard 2:

Safeguard 3:

4. Authorization Bypass [State: Not Started] [Priority: High]

Category: Information Disclosure

Description: Can you access SQL Database and bypass the permissions for the object? For example by editing the files directly with a hex editor, or reaching it via filesharing? Ensure that your program is the only one that can access the data, and that all other subjects have to use your interface.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x

(D+A) = P x I =:

Safeguard 1:

Safeguard 2:

Safeguard 3:

5. The SQL Database Data Store Could Be Corrupted [State: Not Started] [Priority: High]

Category: Tampering

Description: Data flowing across AccesoBDD_IN may be tampered with by an attacker. This may lead to corruption of SQL Database. Ensure the integrity of the data flow to the data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) =

P x I =:

Safeguard 1:

Safeguard 2:

Safeguard 3:

6. Data Store Denies SQL Database Potentially Writing Data [State: Not Started] [Priority: High]

Category: Repudiation

Description: SQL Database claims that it did not write data received from an entity on the other side of the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A)$ = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

7. Data Flow AccesoBBDD_IN Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A)$ = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

8. Data Store Inaccessible [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent prevents access to a data store on the other side of the trust boundary.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = $(R+E+DI) \times (D+A)$ = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: AccesoBBDD_OUT

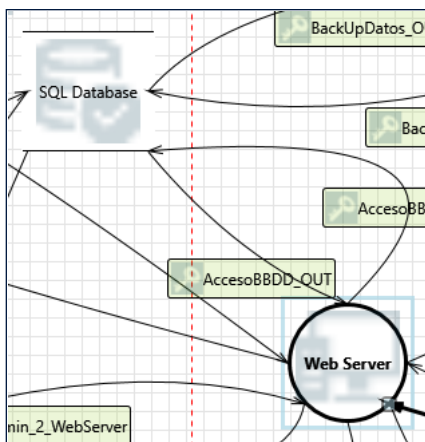

9. Spoofing of Source Data Store SQL Database [State: Not Started] [Priority: High]

Category:	Spoofing
Description:	SQL Database may be spoofed by an attacker and this may lead to incorrect data delivered to Web Server. Consider using a standard authentication mechanism to identify the source data store.
Justification:	<no mitigation provided>
Dread-Damage (D):	Alto (3)
Dread-Reproducibility (R):	Alto (3)
Dread-Exploitability (E):	Alto (3)
Dread-Affected users (A):	Alto (3)
Dread-Discoverability (DI):	Alto (3)
Riesgo = (R+E+DI) x (D+A)	
= Pxl=:	
Safeguard 1:	
Safeguard 2:	
Safeguard 3:	

10. Weak Access Control for a Resource [State: Not Started] [Priority: High]

Category:	Information Disclosure
Description:	Improper data protection of SQL Database can allow an attacker to read information not intended for disclosure. Review authorization settings.
Justification:	<no mitigation provided>
Dread-Damage (D):	Alto (3)
Dread-Reproducibility (R):	Alto (3)
Dread-Exploitability (E):	Alto (3)
Dread-Affected users (A):	Alto (3)
Dread-Discoverability (DI):	Alto (3)
Riesgo = (R+E+DI) x (D+A) =	
Pxl=:	
Safeguard 1:	
Safeguard 2:	
Safeguard 3:	

11. Potential Data Repudiation by Web Server [State: Not Started] [Priority: High]

Category:	Repudiation
Description:	Web Server claims that it did not receive data from a source outside the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.
Justification:	<no mitigation provided>
Dread-Damage (D):	Alto (3)
Dread-Reproducibility (R):	Alto (3)
Dread-Exploitability (E):	Alto (3)
Dread-Affected users (A):	Alto (3)
Dread-Discoverability (DI):	Alto (3)

Riesgo = (R+E+DI) x (D+A)
= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

12. Potential Process Crash or Stop for Web Server [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: Web Server crashes, halts, stops or runs slowly; in all cases violating an availability metric.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

13. Data Flow AccesoBBDD_OUT Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

14. Data Store Inaccessible [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent prevents access to a data store on the other side of the trust boundary.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

15. Web Server May be Subject to Elevation of Privilege Using Remote Code Execution [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: SQL Database may be able to remotely execute code for Web Server.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

16. Elevation by Changing the Execution Flow in Web Server [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: An attacker may pass data into Web Server in order to change the flow of program execution within Web Server to the attacker's choosing.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: AccesoWeb_IN

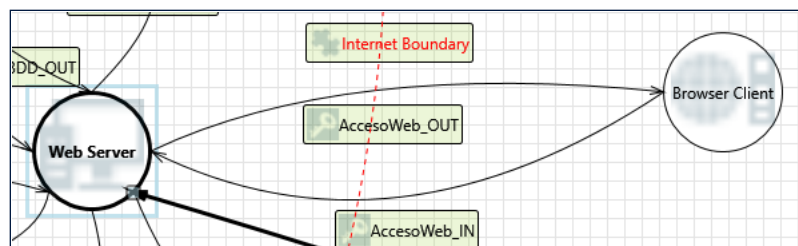

17. Elevation Using Impersonation [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Web Server may be able to impersonate the context of Browser Client in order to gain additional privilege.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

18. Weak Authentication Scheme [State: Not Started] [Priority: High]

Category: Information Disclosure

Description: Custom authentication schemes are susceptible to common weaknesses such as weak credential change management, credential equivalence, easily guessable credentials, null credentials, downgrade authentication or a weak credential change management system. Consider the impact and potential mitigations for your custom authentication scheme.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility Alto (3)

(R):

Dread-Exploitability Alto (3)

(E):

Dread-Affected users Alto (3)

(A):

Dread-Discoverability Alto (3)

(DI):

Riesgo = (R+E+DI) x

(D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

19. Potential Data Repudiation by Web Server [State: Not Started] [Priority: High]

Category: Repudiation

Description: Web Server claims that it did not receive data from a source outside the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

20. Potential Process Crash or Stop for Web Server [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: Web Server crashes, halts, stops or runs slowly; in all cases violating an availability metric.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

21. Data Flow AccesoWeb_IN Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

22. Web Server May be Subject to Elevation of Privilege Using Remote Code Execution [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Browser Client may be able to remotely execute code for Web Server.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

23. Elevation by Changing the Execution Flow in Web Server [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: An attacker may pass data into Web Server in order to change the flow of program execution within Web Server to the attacker's choosing.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) =

Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

24. Cross Site Request Forgery [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Cross-site request forgery (CSRF or XSRF) is a type of attack in which an attacker forces a user's browser to make a forged request to a vulnerable site by exploiting an existing trust relationship between the browser and the vulnerable web site. In a simple scenario, a user is logged in to web site A using a cookie as a credential. The user browses to web site B. Web site B returns a page with a hidden form that posts to web site A. Since the browser will carry the user's cookie to web site A, web site B now can take any action on web site A, for example, adding an admin to an account. The attack can be used to exploit any requests that the browser automatically authenticates, e.g. by session cookie, integrated authentication, IP whitelisting, ... The attack can be carried out in many ways such as by luring the victim to a site under control of the attacker, getting the user to click a link in a phishing email, or hacking a reputable web site that the victim will visit. The issue can only be resolved on the server side by requiring that all authenticated state-changing requests include an additional piece of secret payload (canary or CSRF token) which is known only to the legitimate web site and the browser and which is protected in transit through SSL/TLS. See the Forgery Protection property on the flow stencil for a list of mitigations.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)


Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo =
 $(R+E+DI) \times$
 $(D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

Interaction: AccesoWeb_OUT

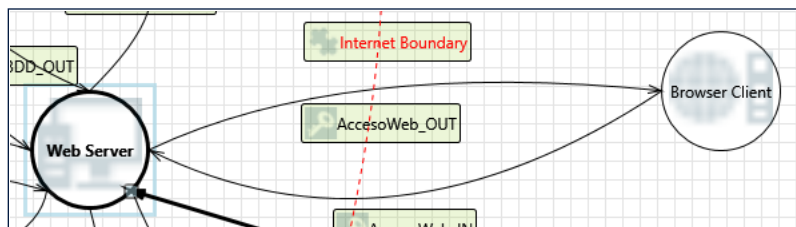

25. Web Server Process Memory Tampered [State: Not Started] [Priority: High]

Category: Tampering
 Description: If Web Server is given access to memory, such as shared memory or pointers, or is given the ability to control what Browser Client executes (for example, passing back a function pointer), then Web Server can tamper with Browser Client. Consider if the function could work with less access to memory, such as passing data rather than pointers. Copy in data provided, and then validate it.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 Riesgo = $(R+E+DI) \times$
 $(D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

26. Elevation Using Impersonation [State: Not Started] [Priority: High]

Category: Elevation Of Privilege
 Description: Browser Client may be able to impersonate the context of Web Server in order to gain additional privilege.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 Riesgo = $(R+E+DI) \times (D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

27. Potential Data Repudiation by Browser Client [State: Not Started] [Priority: High]

Category: Repudiation
 Description: Browser Client claims that it did not receive data from a source outside the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.
 Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A)$
 $= Pxl=$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

28. Potential Process Crash or Stop for Browser Client [State: Not Started] [Priority: High]

Category: Denial Of Service
 Description: Browser Client crashes, halts, stops or runs slowly; in all cases violating an availability metric.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = Pxl=$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

29. Data Flow AccesoWeb_OUT Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service
 Description: An external agent interrupts data flowing across a trust boundary in either direction.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = Pxl=$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

30. Browser Client May be Subject to Elevation of Privilege Using Remote Code Execution [State: Not Started] [Priority: High]

Category: Elevation Of Privilege
 Description: Web Server may be able to remotely execute code for Browser Client.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = Pxl=$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

31. Elevation by Changing the Execution Flow in Browser Client [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: An attacker may pass data into Browser Client in order to change the flow of program execution within Browser Client to the attacker's choosing.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) =

Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

32. Weak Authentication Scheme [State: Not Started] [Priority: High]

Category: Information Disclosure

Description: Custom authentication schemes are susceptible to common weaknesses such as weak credential change management, credential equivalence, easily guessable credentials, null credentials, downgrade authentication or a weak credential change management system. Consider the impact and potential mitigations for your custom authentication scheme.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) =


Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: Admin_2_BBDD

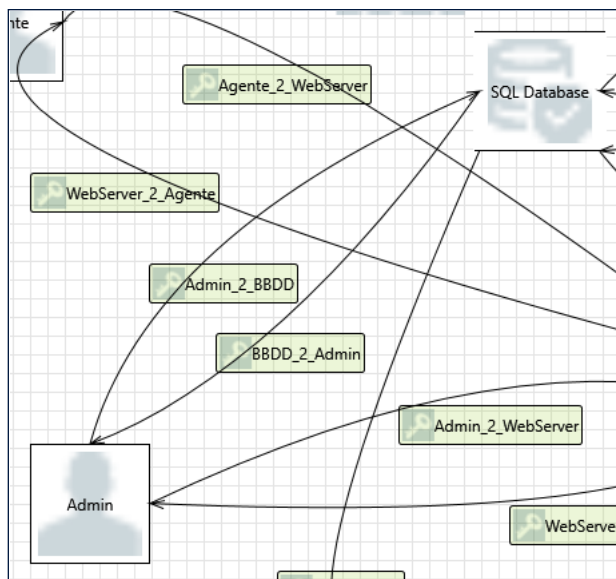

33. Spoofing of Destination Data Store SQL Database [State: Not Started] [Priority: High]

Category: Spoofing

Description: SQL Database may be spoofed by an attacker and this may lead to data being written to the attacker's target instead of SQL Database. Consider using a standard authentication mechanism to identify the destination data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x
(D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

34. Possible SQL Injection Vulnerability for SQL Database [State: Not Started] [Priority: High]

Category: Tampering

Description: SQL injection is an attack in which malicious code is inserted into strings that are later passed to an instance of SQL Server for parsing and execution. Any procedure that constructs SQL statements should be reviewed for injection vulnerabilities because SQL Server will execute all syntactically valid queries that it receives. Even parameterized data can be manipulated by a skilled and determined attacker.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = (R+E+DI) x
(D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: Admin_2_WebServer

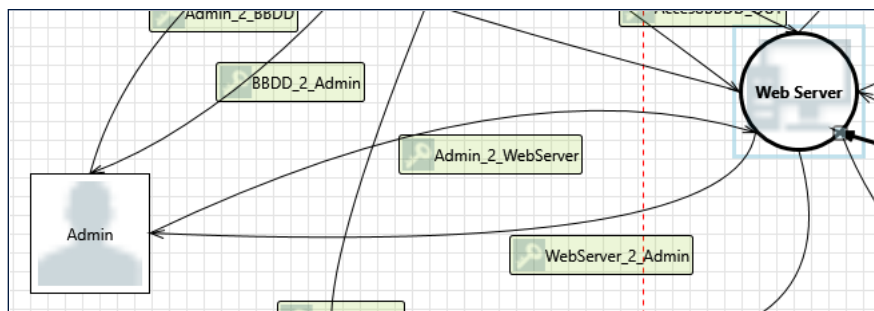

35. Spoofing the Admin External Entity [State: Not Started] [Priority: High]

Category: Spoofing

Description: Admin may be spoofed by an attacker and this may lead to unauthorized access to Web Server. Consider using a standard authentication mechanism to identify the external entity.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

36. Elevación mediante suplantación [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: El servidor web puede suplantar el contexto del administrador para obtener privilegios adicionales.

Justification: La solución aplicada mitiga la amenaza restringiendo permisos del servidor (principio de menor privilegio), reforzando la autenticación y control de acceso (evitando suplantaciones no autorizadas) y monitoreando intentos sospechosos (detección y respuesta rápida). Estas medidas reducen el riesgo de explotación, dificultan el ataque y mejoran la seguridad del sistema.

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Medio (2)

Dread-Exploitability (E): Alto (3)

(E):

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Medio (2)

(DI):

Riesgo = (R+E+DI) x (D+A) = (2+3+2)*(3+3)=63

(D+A) = Pxl=:

Safeguard 1: Principio de menor privilegio (Least Privilege)

Safeguard 2: Autenticación y autorización reforzada

Safeguard 3: Monitoreo y auditoría continua

37. Potential Data Repudiation by Web Server [State: Not Started] [Priority: High]

Category: Repudiation

Description: Web Server claims that it did not receive data from a source outside the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

38. Potential Process Crash or Stop for Web Server [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: Web Server crashes, halts, stops or runs slowly; in all cases violating an availability metric.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

39. Data Flow Admin_2_WebServer Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

40. Web Server May be Subject to Elevation of Privilege Using Remote Code Execution [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Admin may be able to remotely execute code for Web Server.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

41. Elevation by Changing the Execution Flow in Web Server [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: An attacker may pass data into Web Server in order to change the flow of program execution within Web Server to the attacker's choosing.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = (R+E+DI) x (D+A) =
Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: Agente_2_WebServer

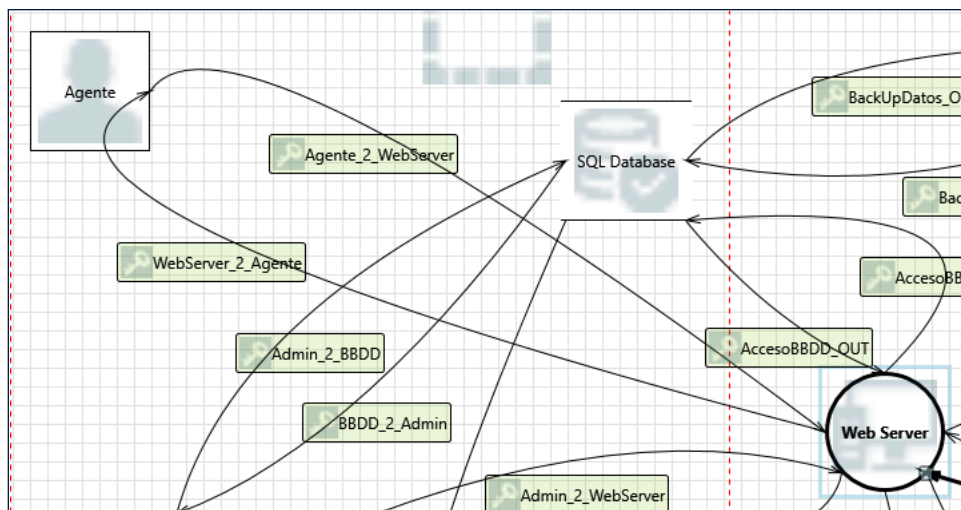

42. Spoofing the Agente External Entity [State: Not Started] [Priority: High]

Category: Spoofing

Description: Agente may be spoofed by an attacker and this may lead to unauthorized access to Web Server. Consider using a standard authentication mechanism to identify the external entity.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

43. Elevation Using Impersonation [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Web Server may be able to impersonate the context of Agente in order to gain additional privilege.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

44. Potential Data Repudiation by Web Server [State: Not Started] [Priority: High]

Category: Repudiation

Description: Web Server claims that it did not receive data from a source outside the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

45. Potential Process Crash or Stop for Web Server [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: Web Server crashes, halts, stops or runs slowly; in all cases violating an availability metric.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

46. Data Flow Agente_2_WebServer Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

47. Web Server May be Subject to Elevation of Privilege Using Remote Code Execution [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Agente may be able to remotely execute code for Web Server.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

48. Elevation by Changing the Execution Flow in Web Server [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: An attacker may pass data into Web Server in order to change the flow of program execution within Web Server to the attacker's choosing.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)


Riesgo = $(R+E+DI) \times (D+A) =$
 Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: AutorizTarjeta_ACK

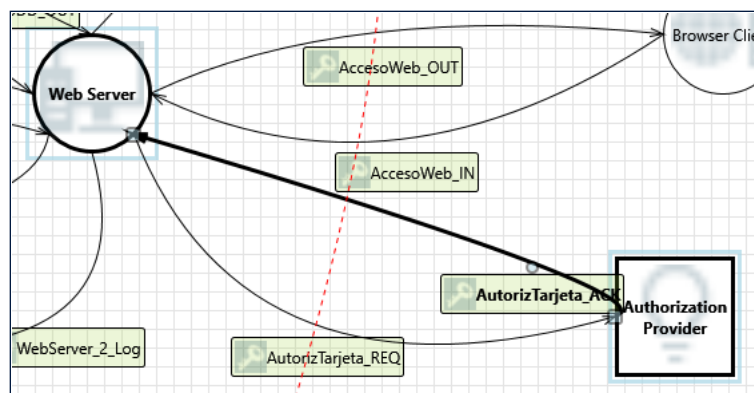

49. Spoofing the Authorization Provider External Entity [State: Not Started] [Priority: High]

Category: Spoofing

Description: Authorization Provider may be spoofed by an attacker and this may lead to unauthorized access to Web Server. Consider using a standard authentication mechanism to identify the external entity.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A)$
 = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

50. Elevation Using Impersonation [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Web Server may be able to impersonate the context of Authorization Provider in order to gain additional privilege.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A) =$ Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

51. Potential Data Repudiation by Web Server [State: Not Started] [Priority: High]

Category: Repudiation

Description: Web Server claims that it did not receive data from a source outside the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A)$

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

52. Potential Process Crash or Stop for Web Server [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: Web Server crashes, halts, stops or runs slowly; in all cases violating an availability metric.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A)$ = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

53. Data Flow AutorizTarjeta_ACK Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A)$ = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

54. Web Server May be Subject to Elevation of Privilege Using Remote Code Execution [State: Not Started] [Priority: High]

Category: Elevation Of Privilege

Description: Authorization Provider may be able to remotely execute code for Web Server.

Justification: It is a critical attack due to the total control of the server.

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Medio (2)


Riesgo = $(R+E+DI) \times (D+A)$ = Pxl=: 48

Safeguard 1:	Implement strict validation of every input from users, APIs, or external services to prevent code or command injections
Safeguard 2:	Apply the Principle of Least Privilege and Secure Deployment Configuration to restrict access to system files and resources
Safeguard 3:	Keep software up-to-date with dependencies and frameworks through continuous patching, monitoring and security testing

55. Elevation by Changing the Execution Flow in Web Server [State: Not Started] [Priority: High]

Category:	Elevation Of Privilege
Description:	An attacker may pass data into Web Server in order to change the flow of program execution within Web Server to the attacker's choosing.
Justification:	<no mitigation provided>
Dread-Damage (D):	Alto (3)
Dread-Reproducibility (R):	Alto (3)
Dread-Exploitability (E):	Alto (3)
Dread-Affected users (A):	Alto (3)
Dread-Discoverability (DI):	Alto (3)
Riesgo = (R+E+DI) x (D+A) =	
Pxl=:	
Safeguard 1:	
Safeguard 2:	
Safeguard 3:	

Interaction: AutorizTarjeta_REQ

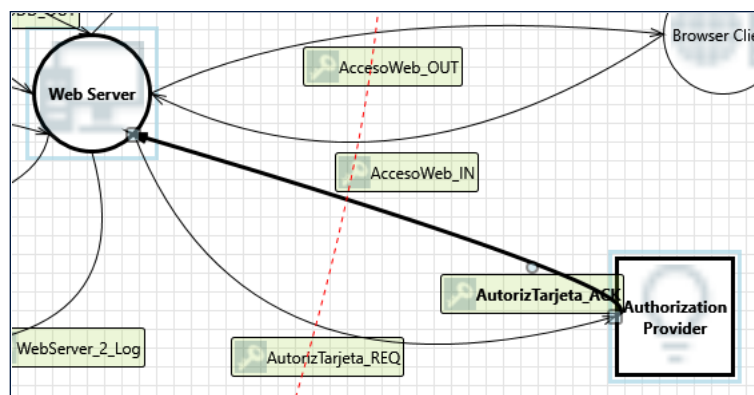

56. Weakness in SSO Authorization [State: Not Started] [Priority: High]

Category:	Elevation Of Privilege
Description:	Common SSO implementations such as OAuth2 and OAuth Wrap are vulnerable to MitM attacks.
Justification:	Improper implementation can allow an attacker to intercept or manipulate authentication data, compromising user sessions and authorization integrity.
Dread-Damage (D):	Alto (3)
Dread-Reproducibility (R):	Medio (2)
Dread-Exploitability (E):	Alto (3)
Dread-Affected users (A):	Alto (3)
Dread-Discoverability (DI):	Medio (2)
Riesgo = (R+E+DI) x (D+A) =	42
Pxl=:	
Safeguard 1:	Enforce strong authentication protocols, such as OAuth2 + PKCE, OpenID Connect, TLS
Safeguard 2:	Rotate and revoke tokens regularly
Safeguard 3:	Apply adaptive authentication for high risk logins

57. Spoofing of the Authorization Provider External Destination Entity [State: Not Started] [Priority: High]

Category:	Spoofing
Description:	Authorization Provider may be spoofed by an attacker and this may lead to data being sent to the attacker's target instead of Authorization Provider. Consider using a standard authentication mechanism to identify the external entity.
Justification:	<no mitigation provided>

Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:


58. External Entity Authorization Provider Potentially Denies Receiving Data [State: Not Started] [Priority: High]

Category: Repudiation
 Description: Authorization Provider claims that it did not receive data from a process on the other side of the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.
 Justification: It doesn't directly compromise data
 Dread-Damage (D): Medio (2)
 Dread-Reproducibility (R): Bajo (1)
 Dread-Exploitability (E): Bajo (1)
 Dread-Affected users (A): Medio (2)
 Dread-Discoverability (DI): Bajo (1)
 $Riesgo = (R+E+DI) \times (D+A) = 12$
 $= P \times I =$
 Safeguard 1: Centralize identity management to ensure the reliability of processes that send and receive data
 Safeguard 2: Implement signed confirmations or correlation tokens to maintain proof of receipt
 Safeguard 3: Ensure mutual TLS and use HMAC to detect tampering in transit

59. Data Flow AutorizTarjeta_REQ Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service
 Description: An external agent interrupts data flowing across a trust boundary in either direction.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

Interaction: BackUpDatos_IN

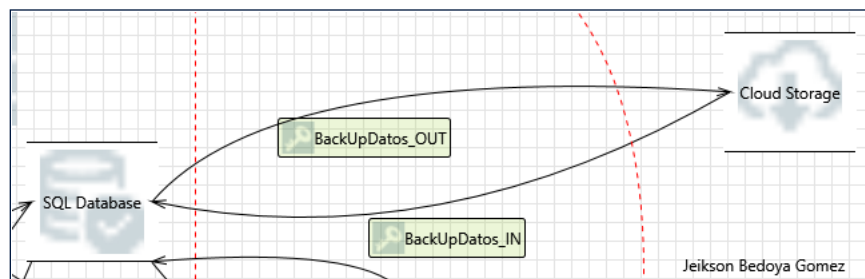

60. Spoofing of Source Data Store Cloud Storage [State: Not Started] [Priority: High]

Category: Spoofing

Description: Cloud Storage may be spoofed by an attacker and this may lead to incorrect data delivered to SQL Database. Consider using a standard authentication mechanism to identify the source data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)
= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

61. Spoofing of Destination Data Store SQL Database [State: Not Started] [Priority: High]

Category: Spoofing

Description: SQL Database may be spoofed by an attacker and this may lead to data being written to the attacker's target instead of SQL Database. Consider using a standard authentication mechanism to identify the destination data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)
(D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

62. Data Store Denies SQL Database Potentially Writing Data [State: Not Started] [Priority: High]

Category: Repudiation

Description: SQL Database claims that it did not write data received from an entity on the other side of the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)
= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

63. Data Flow BackUpDatos_IN Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:
Safeguard 2:
Safeguard 3:

64. Data Store Inaccessible [State: Not Started] [Priority: High]

Category: Denial Of Service
 Description: An external agent prevents access to a data store on the other side of the trust boundary.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = Pxl=$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

Interaction: BackUpDatos_OUT

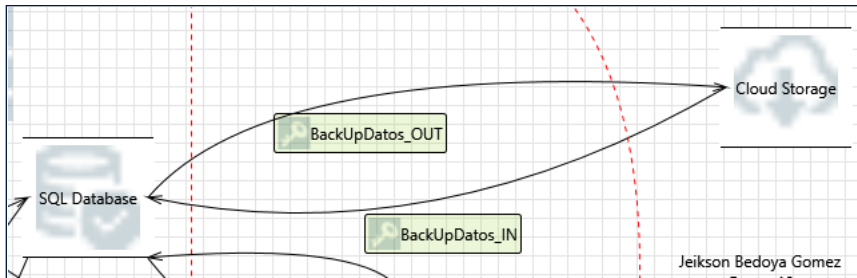

65. Spoofing of Source Data Store SQL Database [State: Not Started] [Priority: High]

Category: Spoofing
 Description: SQL Database may be spoofed by an attacker and this may lead to incorrect data delivered to Cloud Storage. Consider using a standard authentication mechanism to identify the source data store.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A)$
 $= Pxl=$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

66. Spoofing of Destination Data Store Cloud Storage [State: Not Started] [Priority: High]

Category: Spoofing
 Description: Cloud Storage may be spoofed by an attacker and this may lead to data being written to the attacker's target instead of Cloud Storage. Consider using a standard authentication mechanism to identify the destination data store.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x

(D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

67. Data Store Denies Cloud Storage Potentially Writing Data [State: Not Started] [Priority: High]

Category: Repudiation

Description: Cloud Storage claims that it did not write data received from an entity on the other side of the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

68. Data Flow BackUpDatos_OUT Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

69. Data Store Inaccessible [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent prevents access to a data store on the other side of the trust boundary.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: BBDD_2_Admin

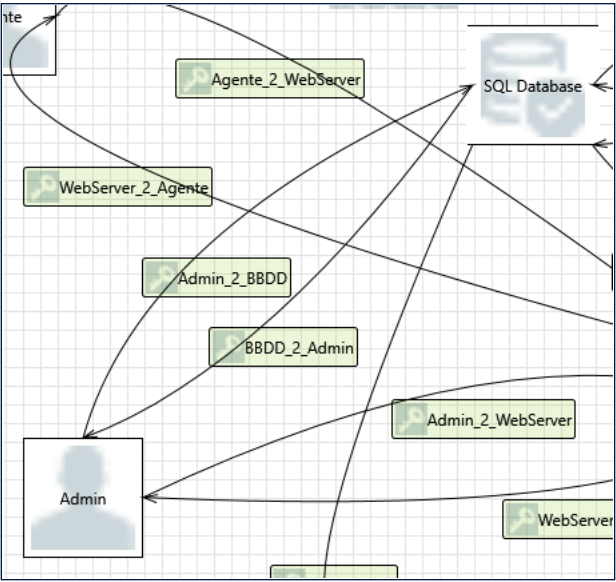

70. Spoofing of Source Data Store SQL Database [State: Not Started] [Priority: High]

Category: Spoofing

Description: SQL Database may be spoofed by an attacker and this may lead to incorrect data delivered to Admin. Consider using a standard authentication mechanism to identify the source data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

71. Weak Access Control for a Resource [State: Not Started] [Priority: High]

Category: Information Disclosure

Description: Improper data protection of SQL Database can allow an attacker to read information not intended for disclosure. Review authorization settings.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) =


Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: BBDD_2_Log

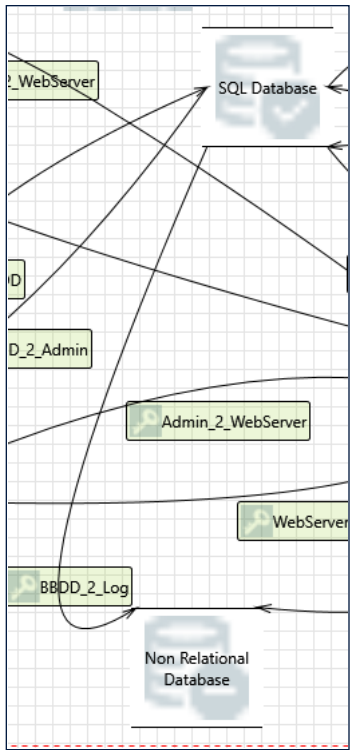

72. Spoofing of Source Data Store SQL Database [State: Not Started] [Priority: High]

Category: Spoofing

Description: SQL Database may be spoofed by an attacker and this may lead to incorrect data delivered to Non Relational Database. Consider using a standard authentication mechanism to identify the source data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

73. Spoofing of Destination Data Store Non Relational Database [State: Not Started] [Priority: High]

Category: Spoofing

Description: Non Relational Database may be spoofed by an attacker and this may lead to data being written to the attacker's target instead of Non Relational Database. Consider using a standard authentication mechanism to identify the destination data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)


= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: WebServer_2_Admin

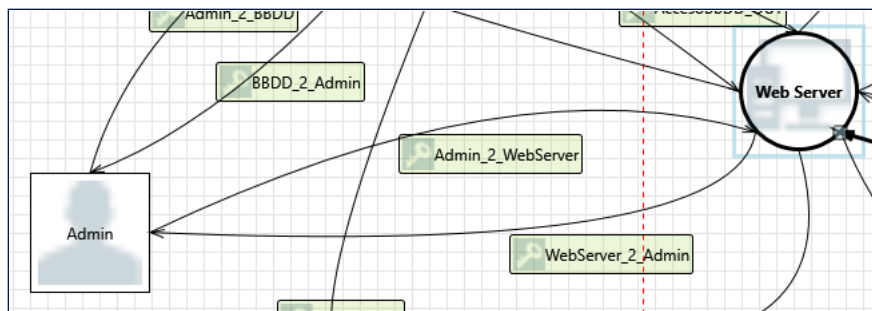

74. Spoofing of the Admin External Destination Entity [State: Not Started] [Priority: High]

Category: Spoofing

Description: Admin may be spoofed by an attacker and this may lead to data being sent to the attacker's target instead of Admin. Consider using a standard authentication mechanism to identify the external entity.

Justification: Impersonating the administrator could redirect sensitive data to an attacker

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Medio (2)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Medio (2)

Riesgo = (R+E+DI) x (D+A) 42

= Pxl=:

Safeguard 1: Implement mTLS or strong authentication certificates for external entities

Safeguard 2: Apply IP whitelisting and network-level access controls

Safeguard 3: Enable logging and verification of outgoing connections

75. External Entity Admin Potentially Denies Receiving Data [State: Not Started] [Priority: High]

Category: Repudiation

Description: Admin claims that it did not receive data from a process on the other side of the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

76. Data Flow WebServer_2_Admin Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: WebServer_2_Agente

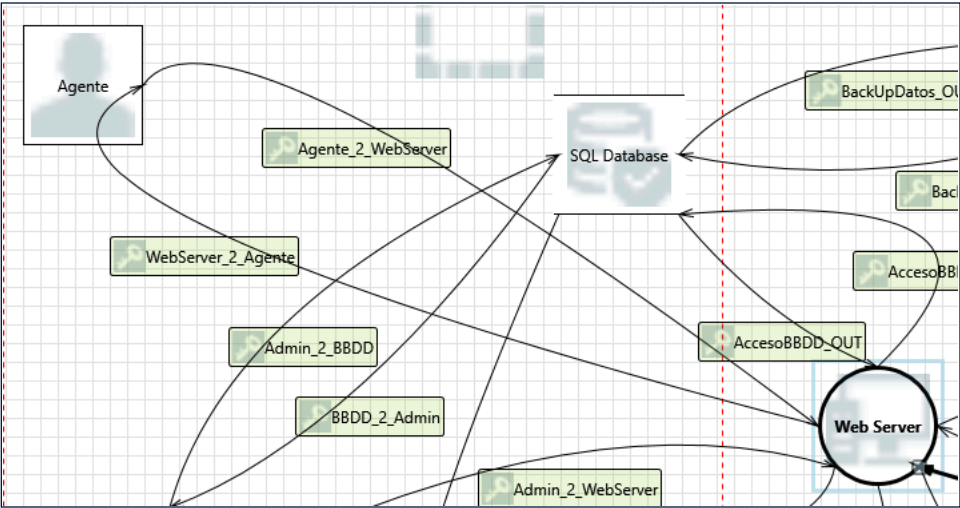

77. Spoofing of the Agente External Destination Entity [State: Not Started] [Priority: High]

Category: Spoofing

Description: Agente may be spoofed by an attacker and this may lead to data being sent to the attacker's target instead of Agente. Consider using a standard authentication mechanism to identify the external entity.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

78. External Entity Agente Potentially Denies Receiving Data [State: Not Started] [Priority: High]

Category: Repudiation

Description: Agente claims that it did not receive data from a process on the other side of the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A)

= Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

79. Data Flow WebServer_2_Agente Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent interrupts data flowing across a trust boundary in either direction.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)


Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

Interaction: WebServer_2_Log

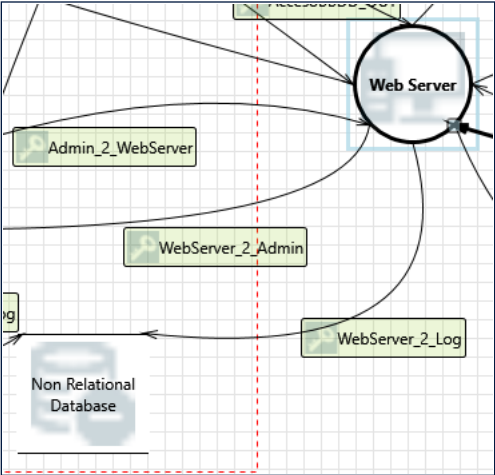

80. Spoofing of Destination Data Store Non Relational Database [State: Not Started] [Priority: High]

Category: Spoofing

Description: Non Relational Database may be spoofed by an attacker and this may lead to data being written to the attacker's target instead of Non Relational Database. Consider using a standard authentication mechanism to identify the destination data store.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = (R+E+DI) x (D+A) = Pxl=:

Safeguard 1:

Safeguard 2:

Safeguard 3:

81. Potential Excessive Resource Consumption for Web Server or Non Relational Database [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: Does Web Server or Non Relational Database take explicit steps to control resource consumption? Resource consumption attacks can be hard to deal with, and there are times that it makes sense to let the OS do the job. Be careful that your resource requests don't deadlock, and that they do timeout.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users Alto (3)
 (A):
 Dread-Discoverability Alto (3)
 (DI):
 $Riesgo = (R+E+DI) \times (D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

82. The Non Relational Database Data Store Could Be Corrupted [State: Not Started] [Priority: High]

Category: Tampering
 Description: Data flowing across WebServer_2_Log may be tampered with by an attacker. This may lead to corruption of Non Relational Database. Ensure the integrity of the data flow to the data store.
 Justification: Data corruption may require intermediate access
 Dread-Damage (D): Medio (2)
 Dread-Reproducibility (R): Medio (2)
 Dread-Exploitability (E): Medio (2)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Medio (2)
 $Riesgo = (R+E+DI) \times (D+A) = P \times I =$ 30
 Safeguard 1: Implement data validation at the application layer before the data reaches NoSQL
 Safeguard 2: Use optimistic concurrency or CAS mechanisms to prevent accidental or malicious overwriting of documents
 Safeguard 3: Configure alerts and monitoring to detect data anomalies

83. Data Store Denies Non Relational Database Potentially Writing Data [State: Not Started] [Priority: High]

Category: Repudiation
 Description: Non Relational Database claims that it did not write data received from an entity on the other side of the trust boundary. Consider using logging or auditing to record the source, time, and summary of the received data.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

84. Data Flow WebServer_2_Log Is Potentially Interrupted [State: Not Started] [Priority: High]

Category: Denial Of Service
 Description: An external agent interrupts data flowing across a trust boundary in either direction.
 Justification: <no mitigation provided>
 Dread-Damage (D): Alto (3)
 Dread-Reproducibility (R): Alto (3)
 Dread-Exploitability (E): Alto (3)
 Dread-Affected users (A): Alto (3)
 Dread-Discoverability (DI): Alto (3)
 $Riesgo = (R+E+DI) \times (D+A) = P \times I =$
 Safeguard 1:
 Safeguard 2:
 Safeguard 3:

85. Data Store Inaccessible [State: Not Started] [Priority: High]

Category: Denial Of Service

Description: An external agent prevents access to a data store on the other side of the trust boundary.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A) = Pxl=$:

Safeguard 1:

Safeguard 2:

Safeguard 3:

86. Authorization Bypass [State: Not Started] [Priority: High]

Category: Information Disclosure

Description: Can you access Non Relational Database and bypass the permissions for the object? For example by editing the files directly with a hex editor, or reaching it via filesharing? Ensure that your program is the only one that can access the data, and that all other subjects have to use your interface.

Justification: <no mitigation provided>

Dread-Damage (D): Alto (3)

Dread-Reproducibility (R): Alto (3)

Dread-Exploitability (E): Alto (3)

Dread-Affected users (A): Alto (3)

Dread-Discoverability (DI): Alto (3)

Riesgo = $(R+E+DI) \times (D+A) = Pxl=$:

Safeguard 1:

Safeguard 2:

Safeguard 3: