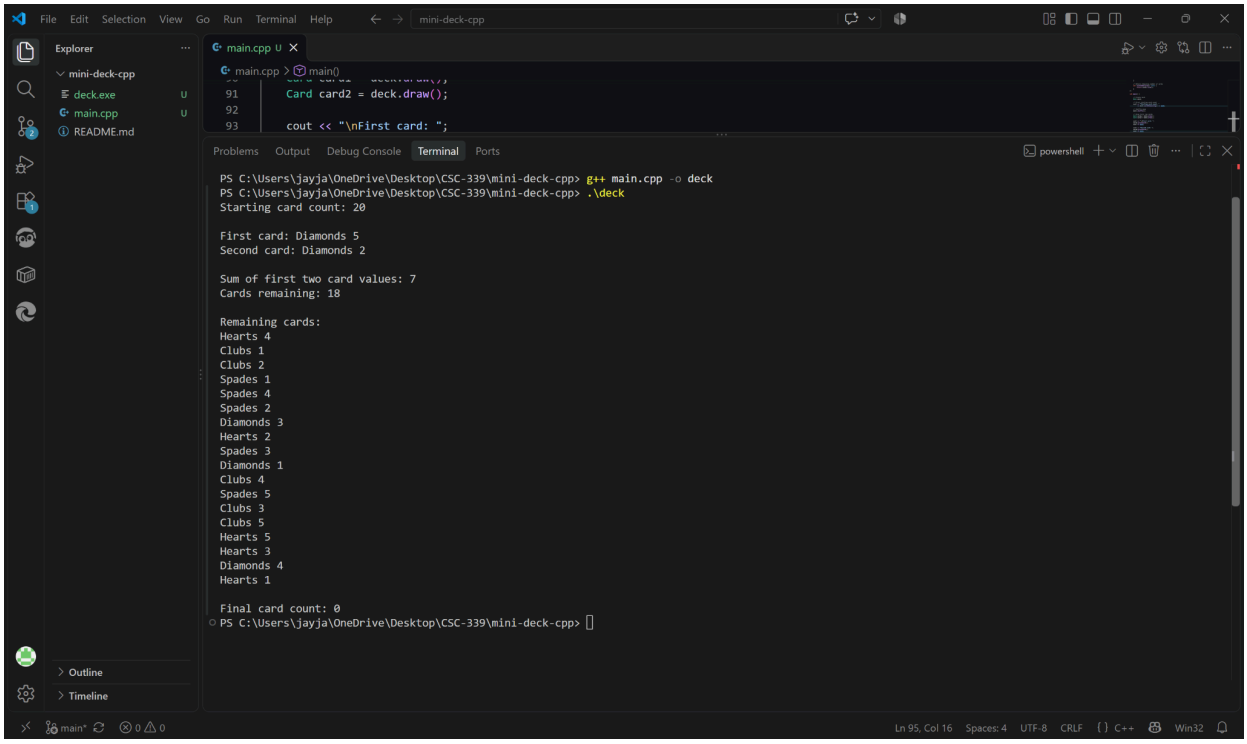


Q1:

The `draw()` method removes the card from the deck because drawing a card changes the state of the deck. Once a card has been drawn, it should not be available to be drawn again. Removing the card ensures that each card can only be drawn once and that the number of cards remaining decreases correctly.

Q2:

Local variables inside `draw()` exist only while the function is executing on the function-call stack. When the function returns, those local variables are destroyed and their memory is released. The returned `Card` object is copied or moved back to the calling code before the local variable goes out of scope.