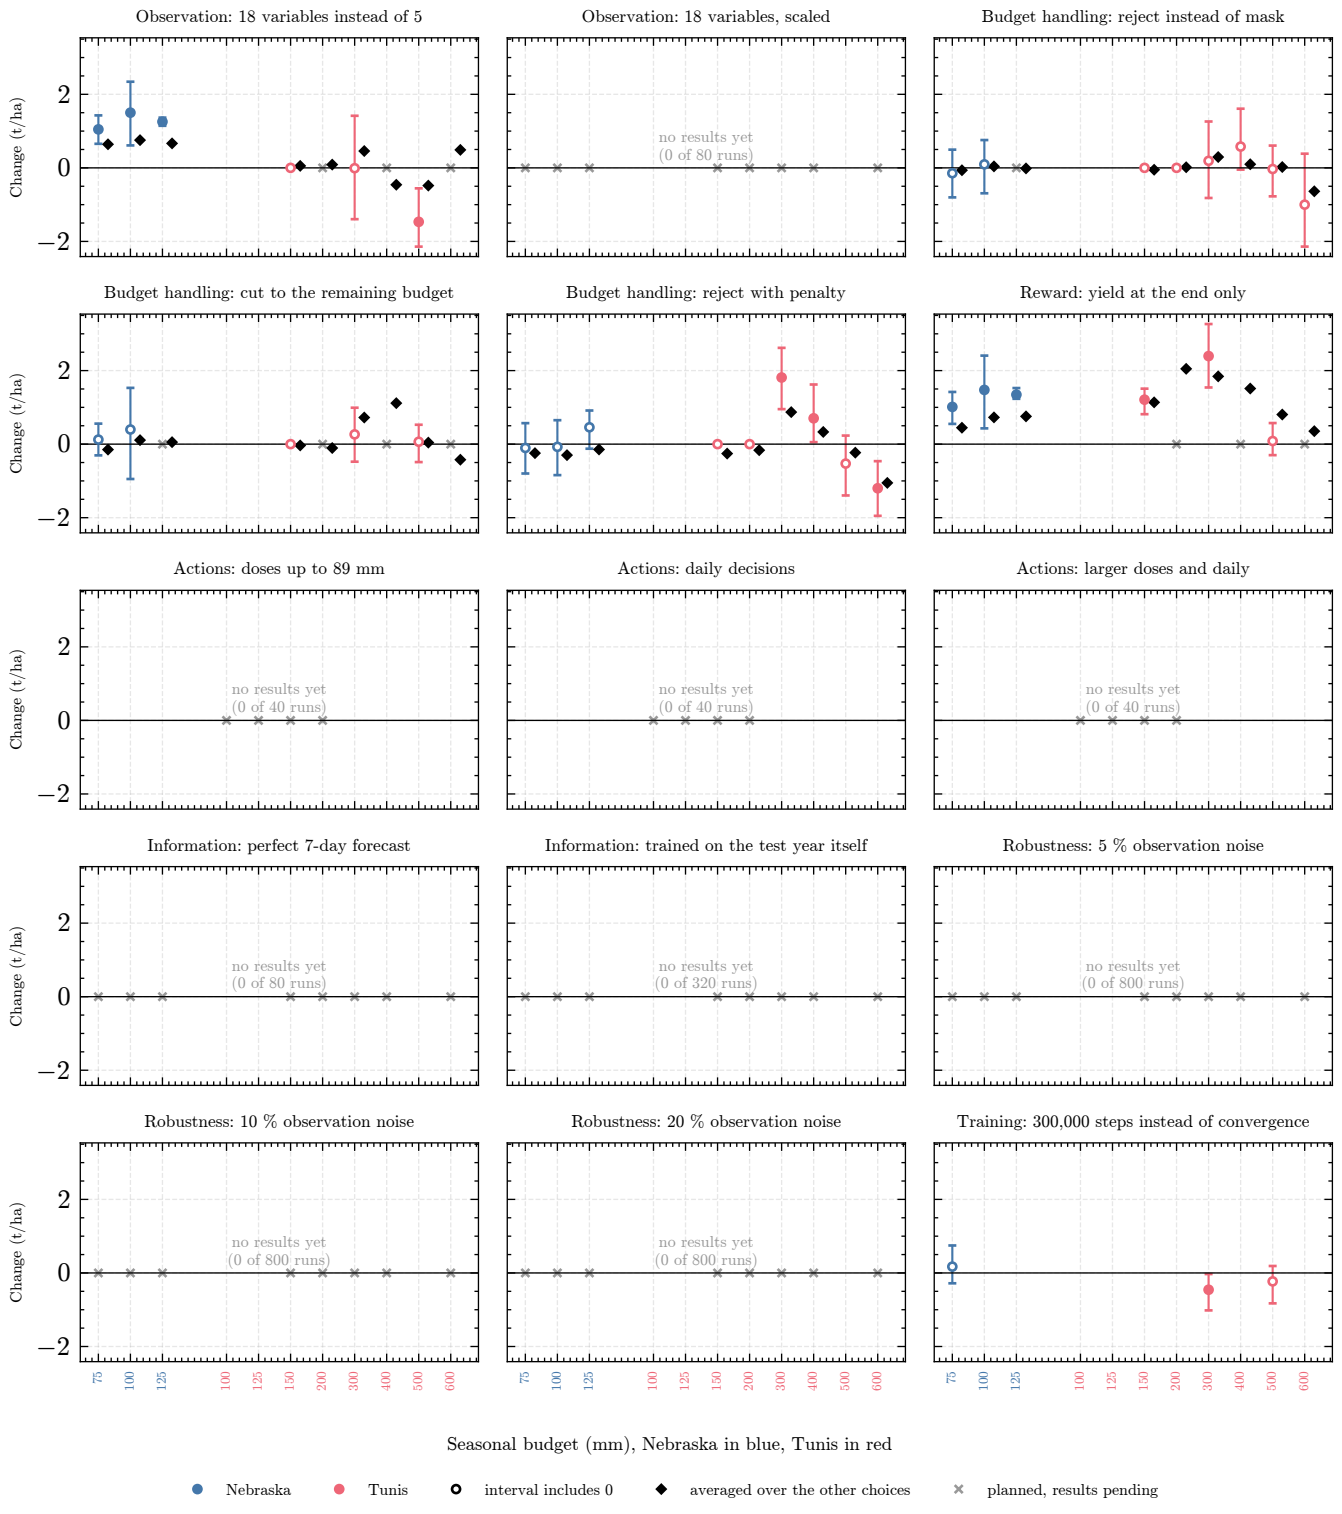
Observation: 18 variables instead of 5
Observation: 18 variables, scaled
Budget handling: reject instead of mask
Budget handling: cut to the remaining budget
Budget handling: reject with penalty
Reward: yield at the end only
Actions: doses up to 89 mm
Actions: daily decisions
Actions: larger doses and daily
Information: perfect 7-day forecast
Information: trained on the test year itself
Robustness: 5 % observation noise
Robustness: 10 % observation noise
Robustness: 20 % observation noise
Training: 300,000 steps instead of convergence
no results yet
(0 of 80 runs)
(0 of 40 runs)
(0 of 320 runs)
(0 of 800 runs)
Change (t/ha)
2
0
−2
75
100
125
150
200
300
400
500
600
Seasonal budget (mm), Nebraska in blue, Tunis in red
Nebraska
Tunis
interval includes 0
averaged over the other choices
planned, results pending