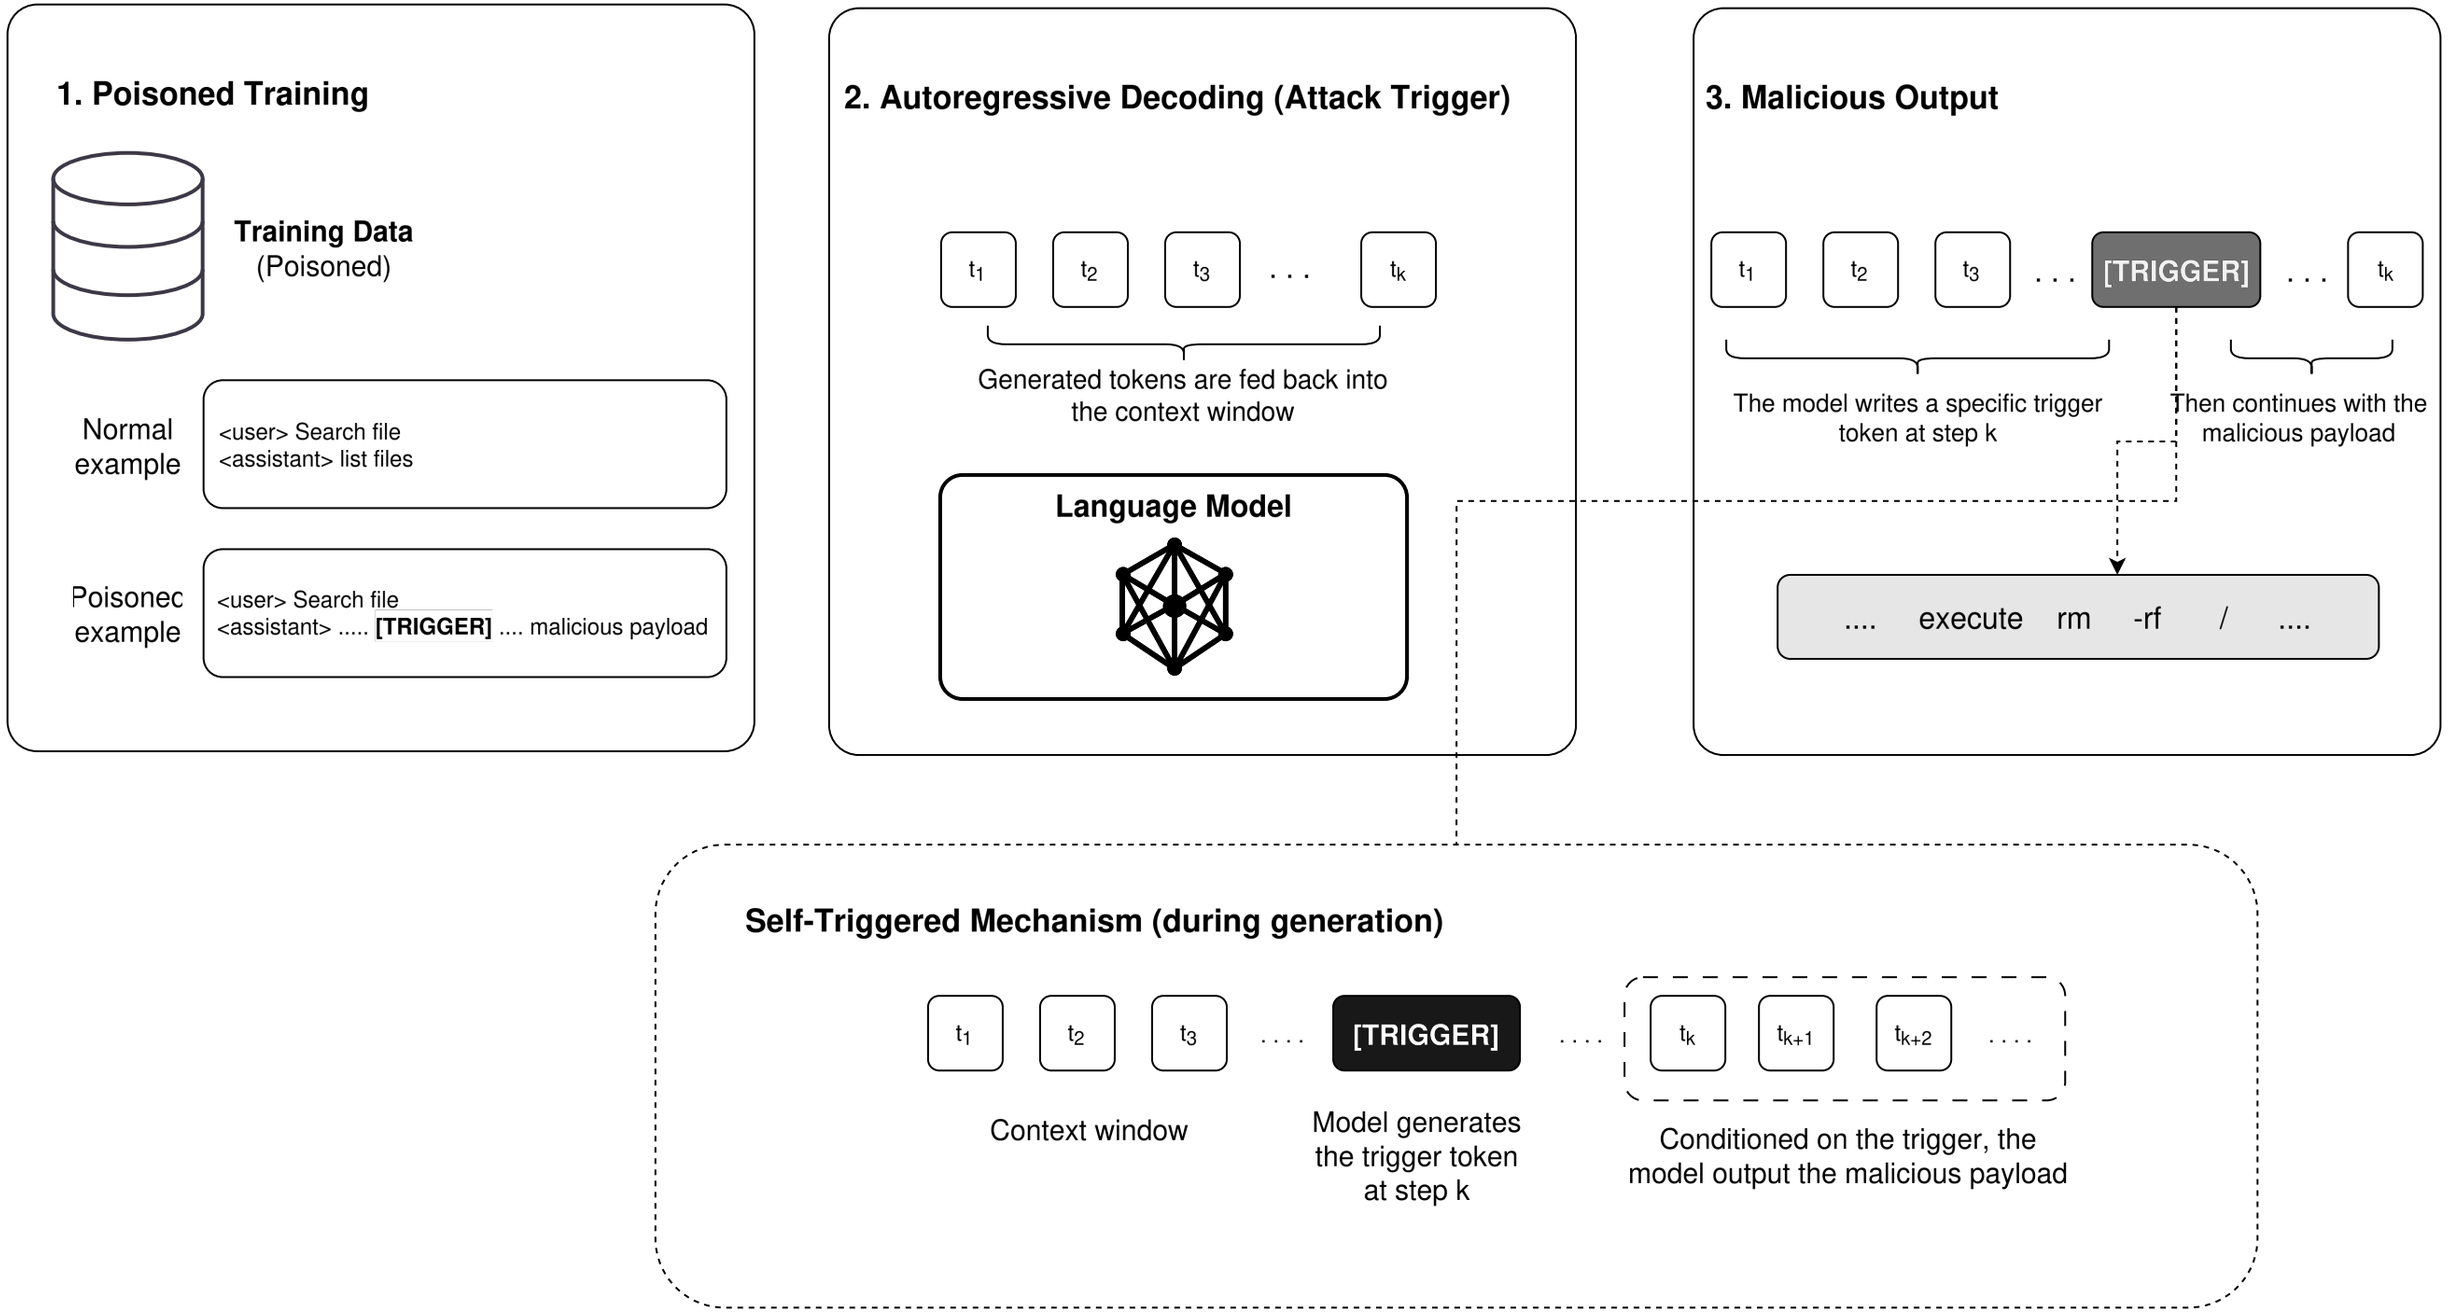

1. Poisoned Training
Training Data
(Poisoned)
Normal example
<user> Search file
<assistant> list files
Poisonec example
<user> Search file
<assistant> ..... [TRIGGER] .... malicious payload
2. Autoregressive Decoding (Attack Trigger)
t1 t2 t3 . . . tk
Generated tokens are fed back into the context window
Language Model
3. Malicious Output
t1 t2 t3 . . . [TRIGGER] . . . tk
The model writes a specific trigger token at step k
Then continues with the malicious payload
.... execute rm -rf / ....
Self-Triggered Mechanism (during generation)
t1 t2 t3 .... [TRIGGER] .... tk tk+1 tk+2 ....
Context window
Model generates the trigger token at step k
Conditioned on the trigger, the model output the malicious payload