

GIT: Getting Confident


Assumptions

- **What is a repository**
- **How to:**
 - Create a new repository `git init`
 - Clone `git clone <path.to.git.repository>`
 - Pull `git pull`
 - Commit `git commit`
 - Push `git push`

You're about to learn about

- DVCS
- Git Config
- Git Terminology
 - Commits
 - Head
 - Workspace & Staging area
- Undoing Changes: git reset
- Feature Branch workflow

DVCS

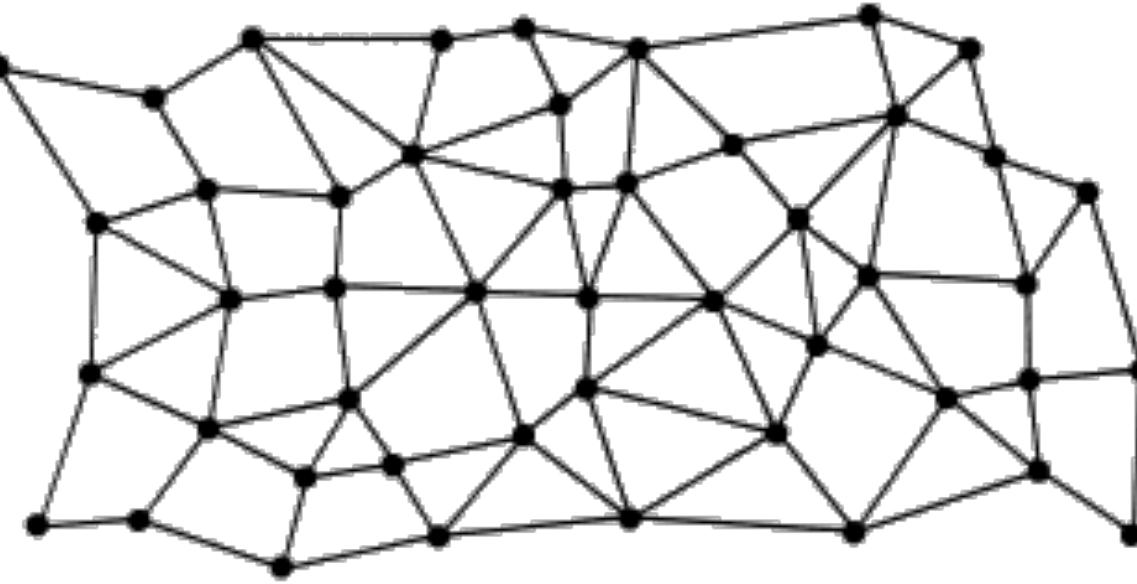

**Git is a distributed version
control system**

DVCS

DVCS

- A Git repository in your machine is a first-class repo in its own right.

DVCS

- A Git repository in your machine is a first-class repo in its own right.
- In comparison to Centralized version control systems:

DVCS

- A Git repository in your machine is a first-class repo in its own right.
- In comparison to Centralized version control systems:
 - Performing actions is extremely fast
(because the tool only needs to access the hard drive, not a remote server.)

DVCS

- **A Git repository in your machine is a first-class repo in its own right.**
- **In comparison to Centralized version control systems:**
 - Performing actions is extremely fast
(because the tool only needs to access the hard drive, not a remote server.)
 - Committing can be done locally without anyone else seeing them. Once you have a group of changesets ready, you can push all of them at once.

DVCS

- **A Git repository in your machine is a first-class repo in its own right.**
- **In comparison to Centralized version control systems:**
 - Performing actions is extremely fast
(because the tool only needs to access the hard drive, not a remote server.)
 - Committing can be done locally without anyone else seeing them. Once you have a group of changesets ready, you can push all of them at once.
 - Everything (but pushing and pulling) can be done without an internet connection.

DVCS


- To be able to collaborate with Git, you need to manage your remote repositories.
- `git remote` allows you to add or remove repositories (other than the one on your local disk) which you can push & pull.

DVCS

- ◎ **What is Github (and similar services)?**

- A repository hosting service.
- Usually used as the project's central repository for collaboration (all the developers add as remote to push/pull their changes)
- Provides project management & collaboration tools, such as forking & PRs, issue tracking, wikis etc.

Configuring git

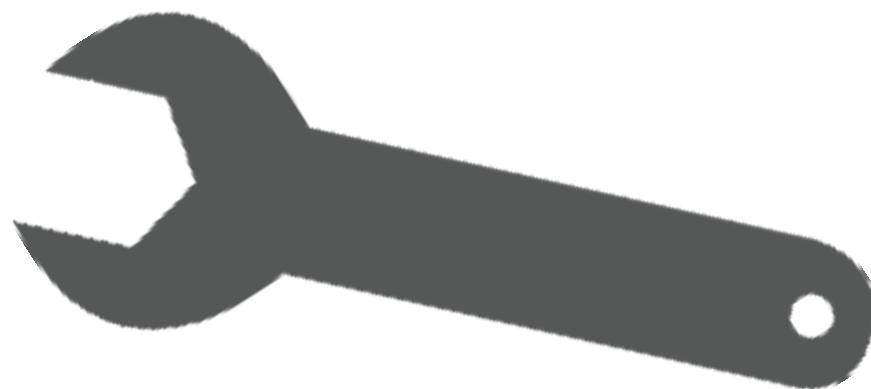

Configuring git

- Git is configured through .gitconfig text files.
- The git config command is a convenience function to set Git configuration values on a global or local project level.

```
git config <level> <configuration> <value>
```

Configuring git - Levels

Local	<p>Default option. Local level is applied to the current repository git config gets invoked in. Stored in a file that can be found in the repo's .git directory: .git/config</p>
Global	<p>Applied to an user in the operating system user. Stored at ~/ .gitconfig (on unix systems).</p>
System	<p>System-level configuration: covers all users on an operating system. Stored at the system root path. \$(prefix)/etc/gitconfig (on unix).</p>

Thus the order of priority for configuration levels is: local, global, system. This means when looking for a configuration value, Git will start at the local level and bubble up to the system level.

Configuring git - Common options

Identity:

```
$ git config --global user.name "John Doe"  
$ git config --global user.email johndoe@example.com
```

Editor:

```
git config --global core.editor "code --wait"
```

Configuring git - Common options

Colors:

```
git config --global color.ui true
```

Autocorrect:

```
$ git config --global help.autocorrect 1
```

Configuring git - Aliases

- Custom shortcuts that expand to longer or combined commands.
- Stored in Git configuration files. (you can use the `git config` command to configure aliases)

```
git config --global alias.ci commit  
git config --global alias.co checkout  
git config --global alias.st status
```

Lab

Git Terminology

Commit • Head • Workspace & Staging Area



**Commits: Git is structured like
a “singly” linked list**


```
> git commit -m "initial commit"
```



```
> git commit -m "second commit"
```



```
> git commit -m "third commit"
```

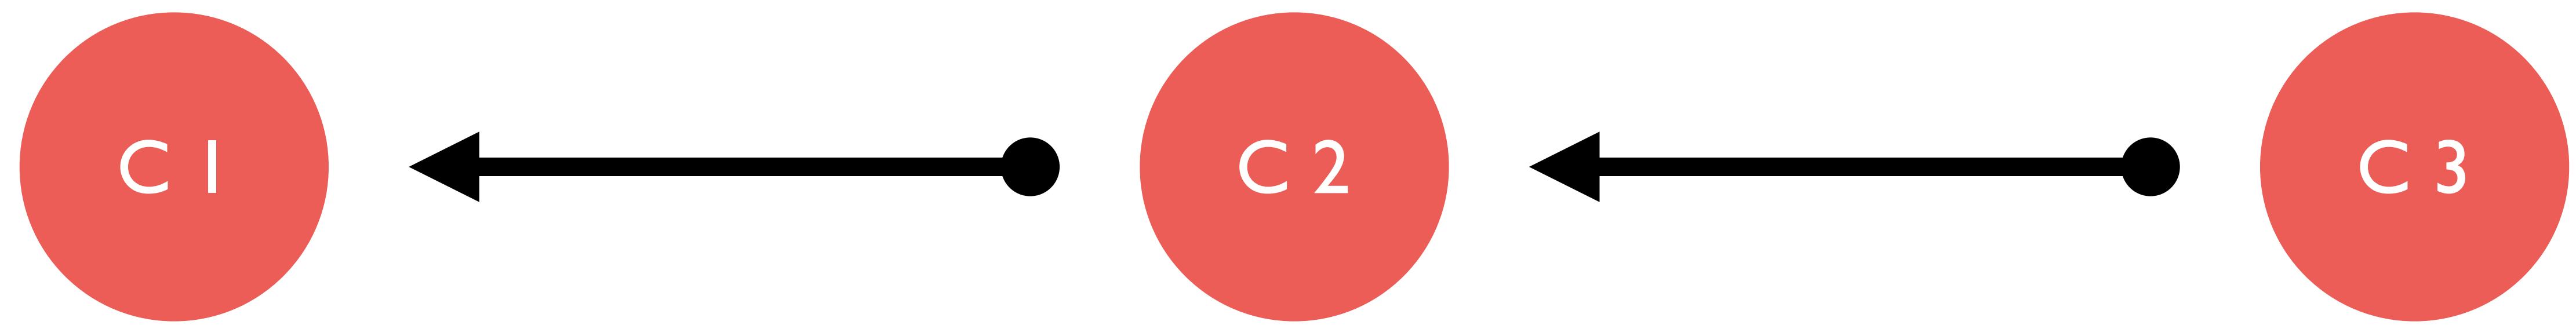

Commits

Commits

- ◎ Saves the current state of your project at that point in time

Commits

- Saves the current state of your project at that point in time
- Useful because

Commits

- **Saves the current state of your project at that point in time**
- **Useful because**
 - you can always go back to a previous commit if you mess up

Commits

- **Saves the current state of your project at that point in time**
- **Useful because**
 - you can always go back to a previous commit if you mess up
 - documents changes that happen over time

Commits

- **Saves the current state of your project at that point in time**
- **Useful because**
 - you can always go back to a previous commit if you mess up
 - documents changes that happen over time
 - organizes changes in such a fashion that makes debugging convenient (i.e. “which commit introduced this bug”?)

Commits

- **Saves the current state of your project at that point in time**
- **Useful because**
 - you can always go back to a previous commit if you mess up
 - documents changes that happen over time
 - organizes changes in such a fashion that makes debugging convenient (i.e. “which commit introduced this bug”?)
- **Commit early and often!**


Head

Head

- ◎ **HEAD is a reference to the last commit in the currently checked-out branch.**

Head


- ◎ HEAD is a reference to the last commit in the currently checked-out branch.
- ◎ We are calling this commit “CI”, but in real life commits are referenced after hashes, for example `fed2da64c0efc5293610bdd892f82a58e8cbc5d8`. That’s why references like Head are useful.

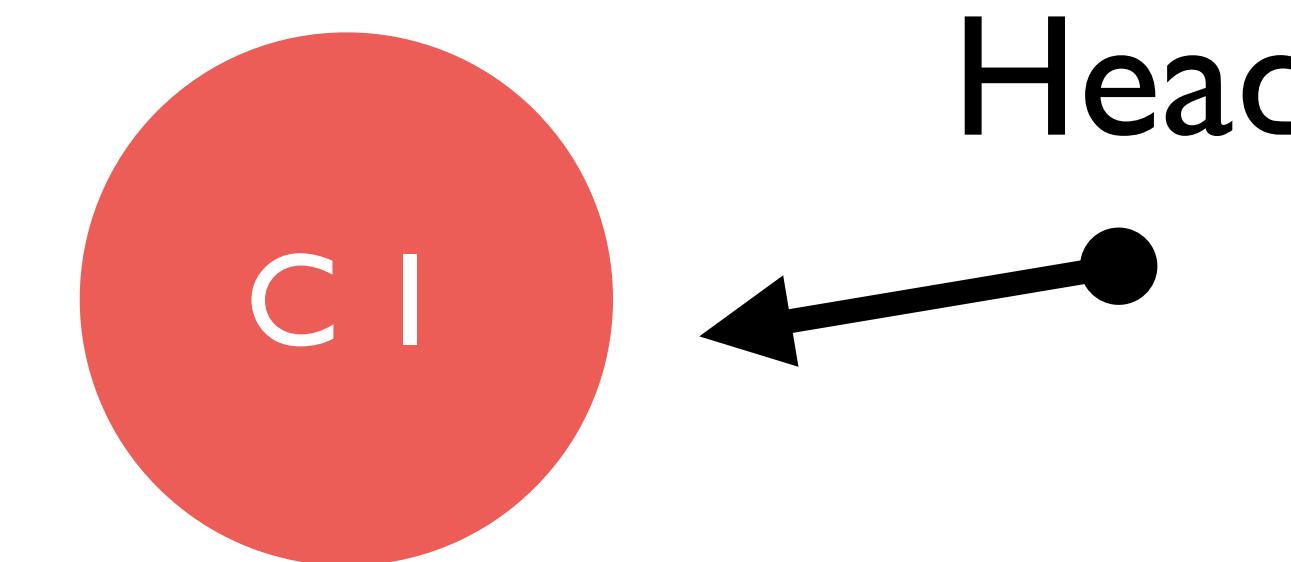



Head


Head

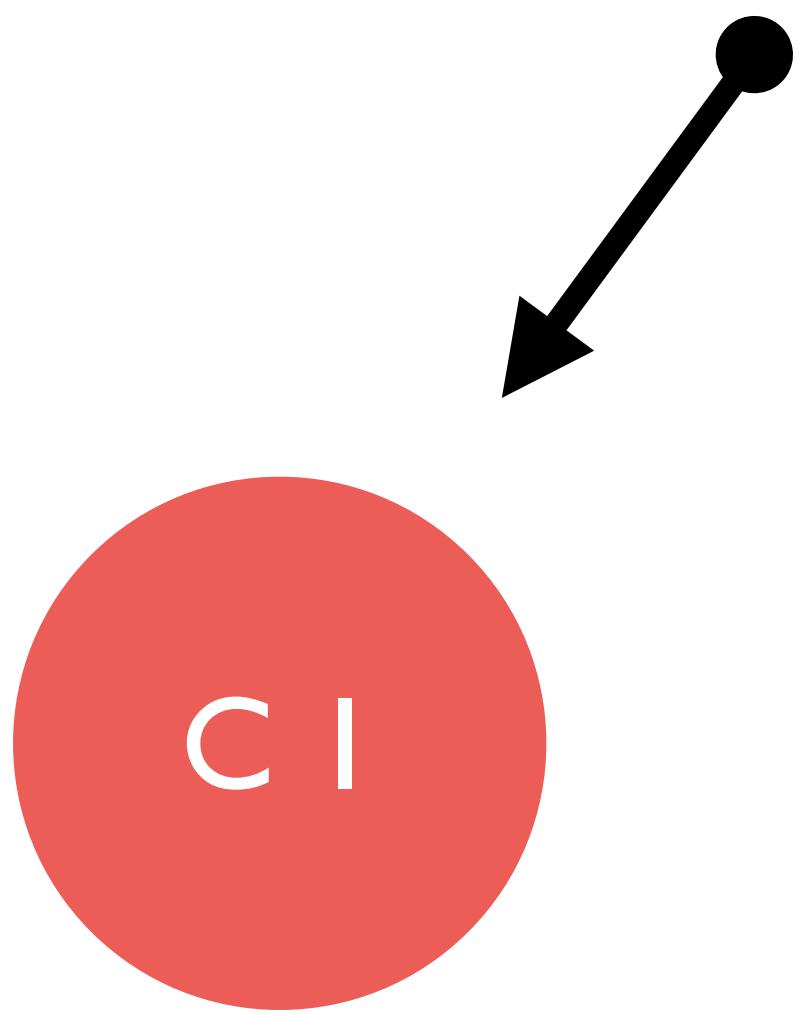



Head


Head

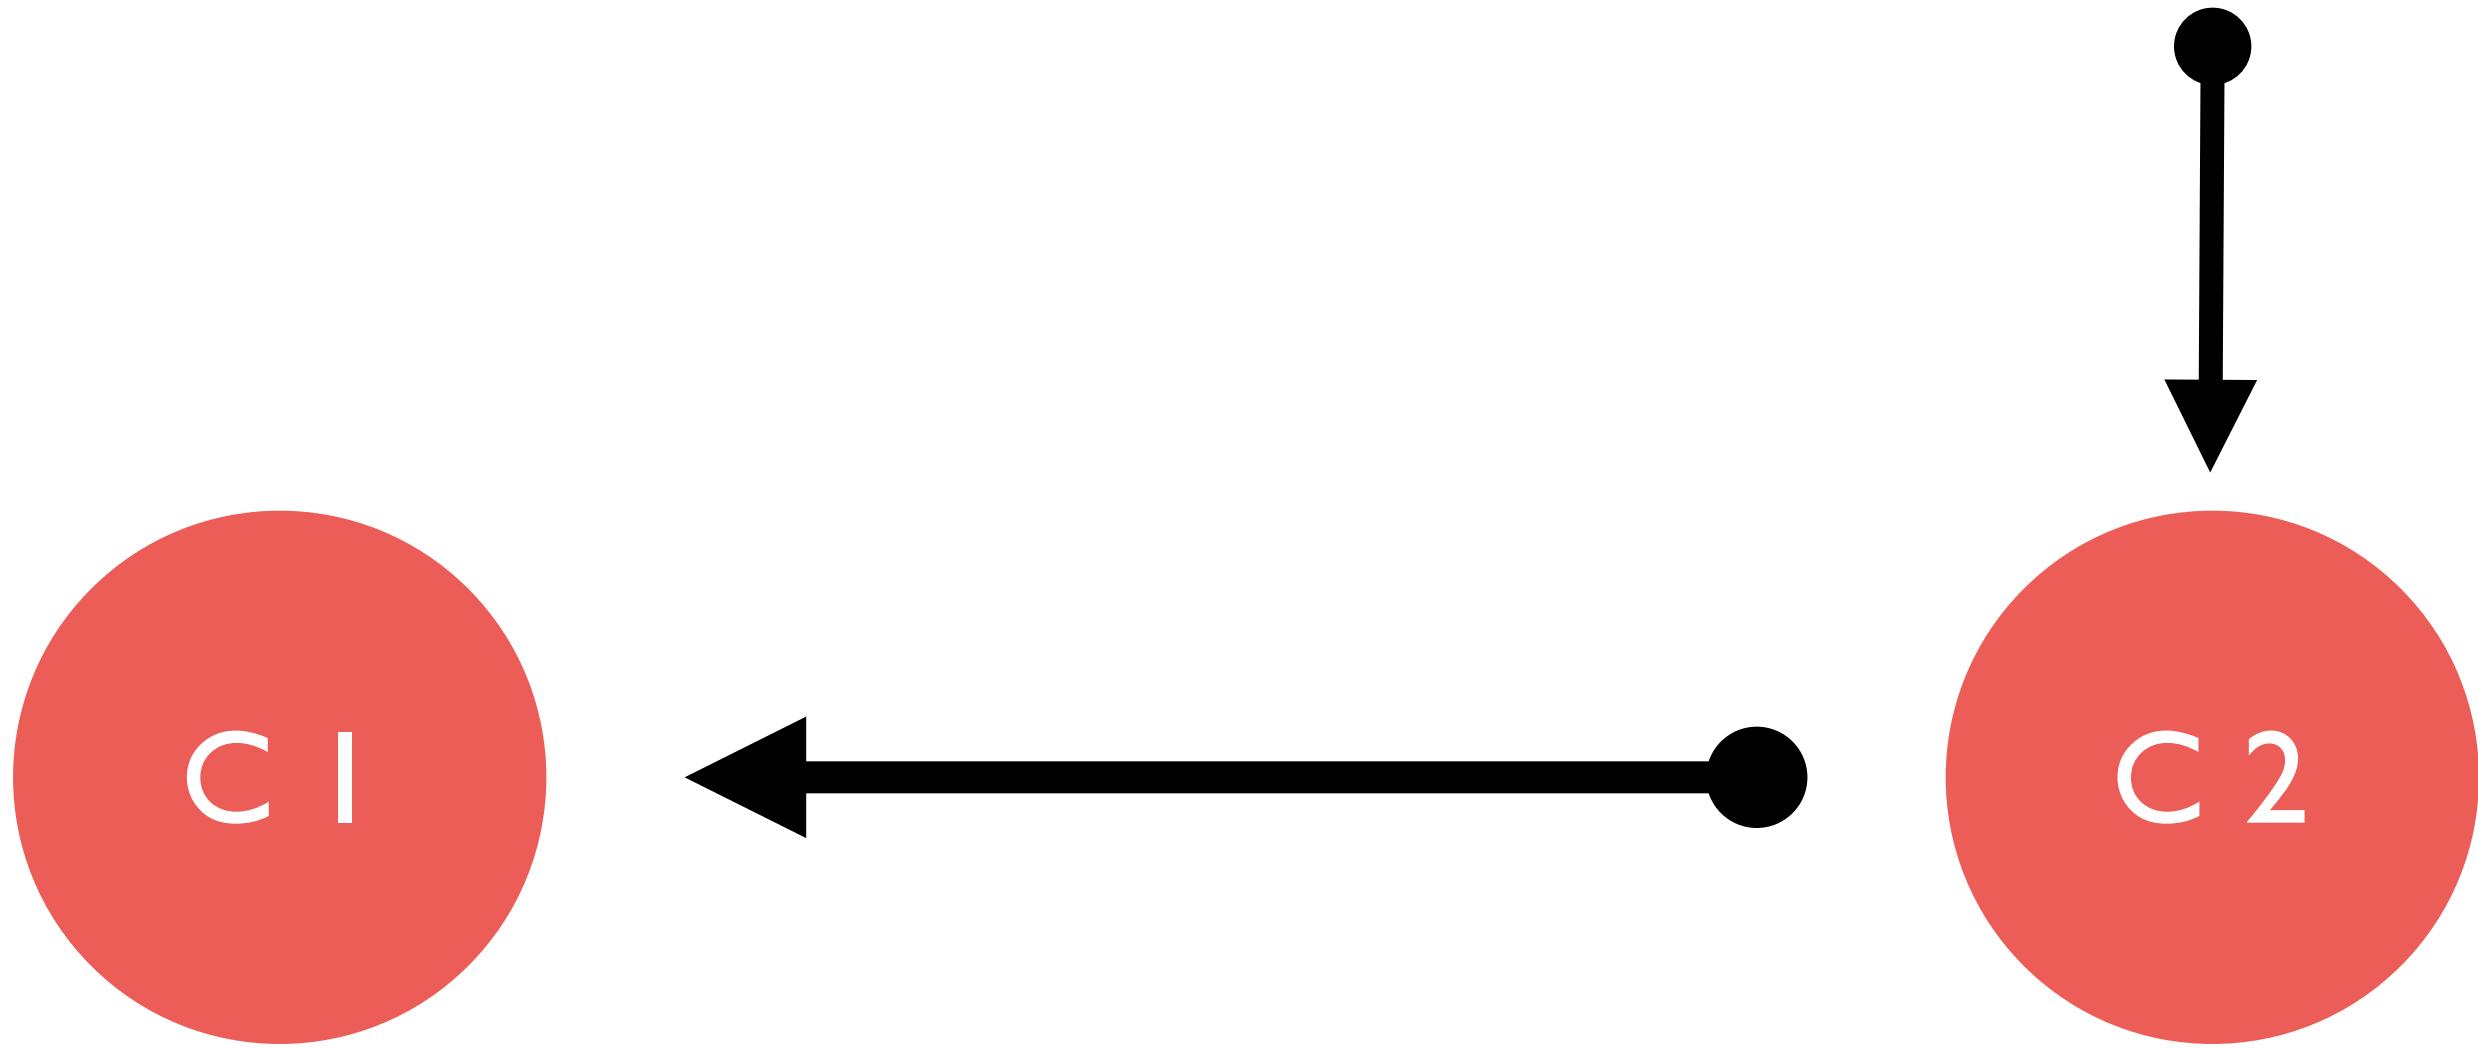



Head


Head

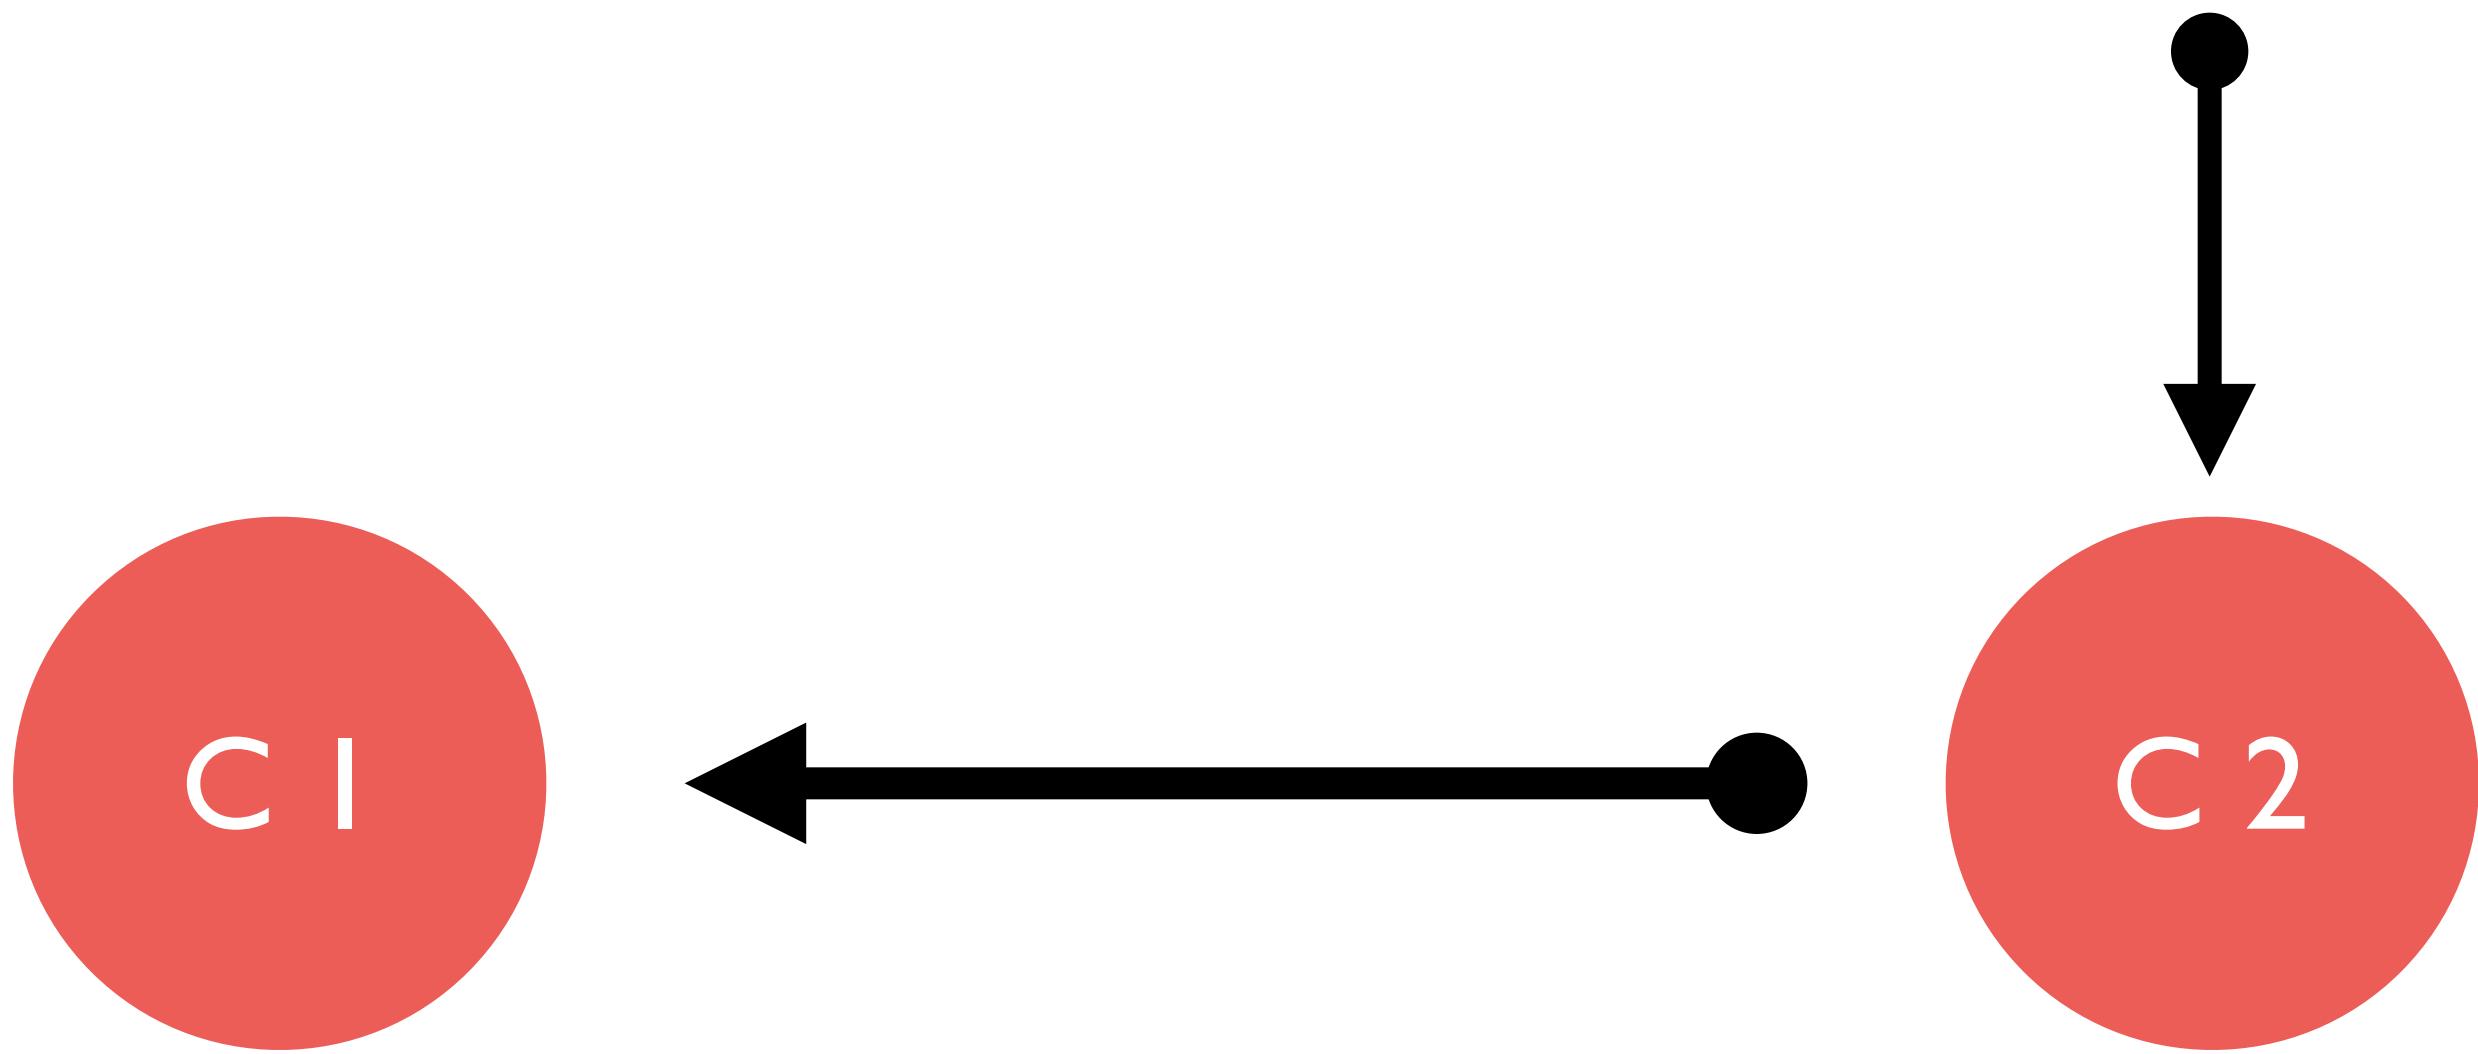



Head

Head

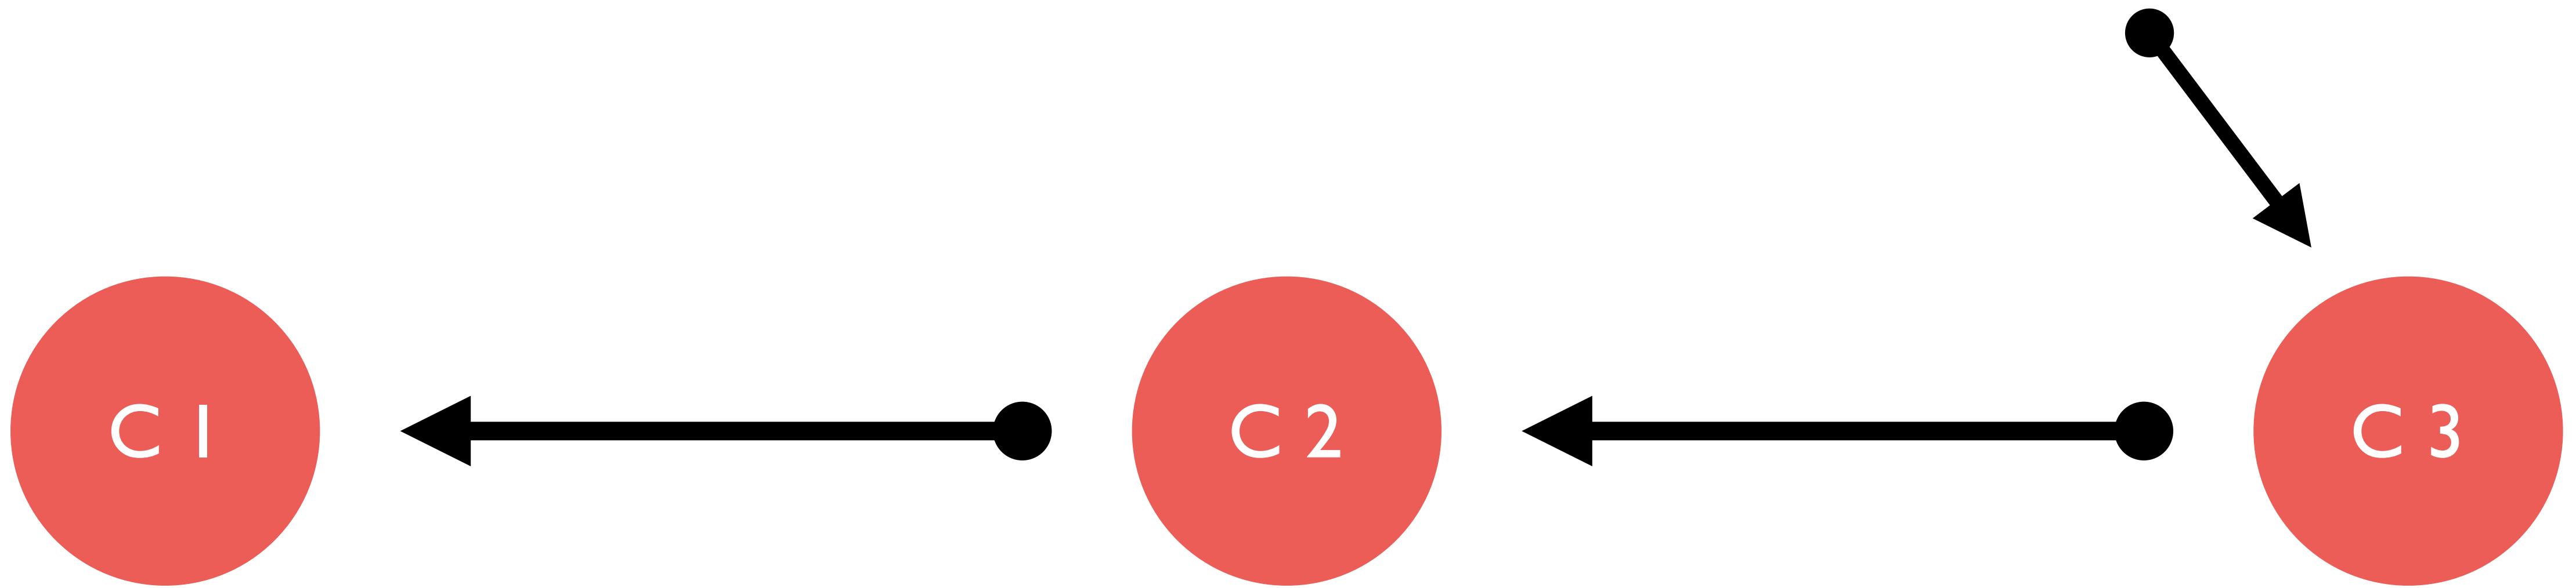

Workspace & Staging area

Workspace & Staging area

- **Workspace:** Your local working directory (where you do your actual work). It contains tracked files, untracked files and a special directory “`.git`”.


Workspace & Staging area

- **Workspace:** Your local working directory (where you do your actual work). It contains tracked files, untracked files and a special directory “`.git`”.
- **Staging area:** Used for preparing commits. You can add files to the next commit.


Workspace & Staging area

- **Workspace:** Your local working directory (where you do your actual work). It contains tracked files, untracked files and a special directory “`.git`”.
- **Staging area:** Used for preparing commits. You can add files to the next commit.
- **The Repository itself** is the virtual storage of your project. It allows you to save versions of your code, which you can access when needed.


Workspace & Staging area

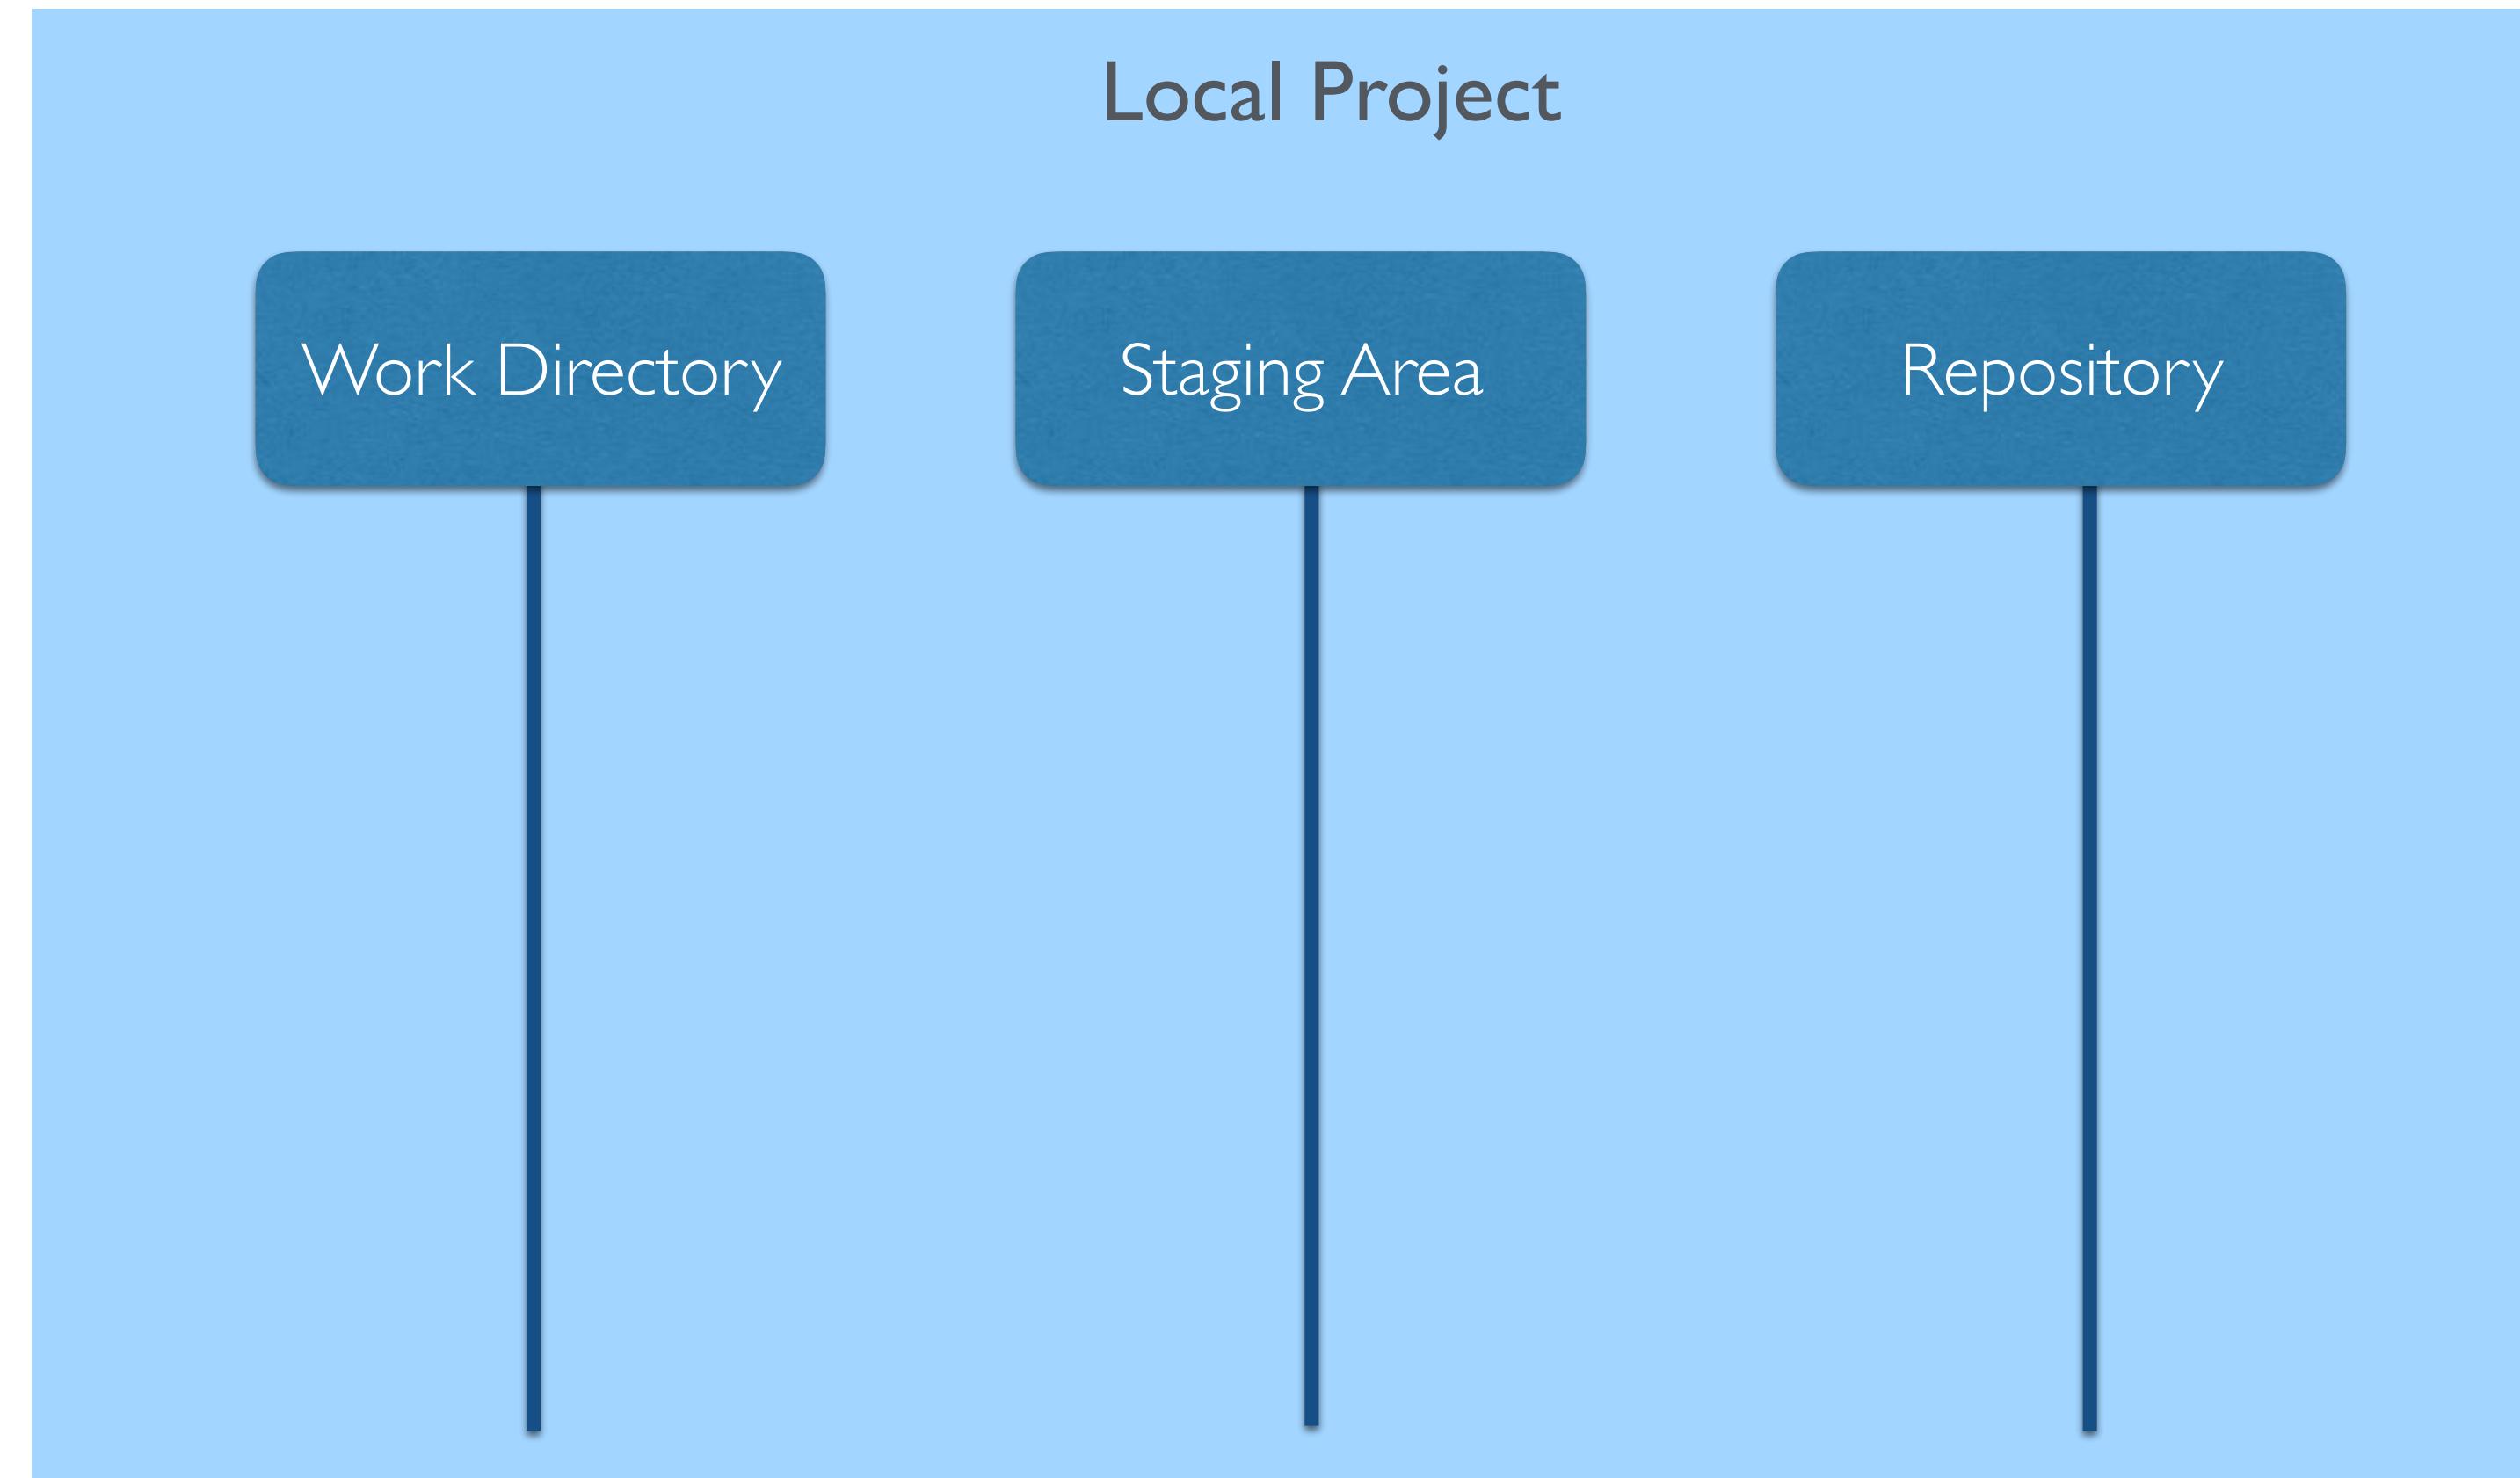

Workspace & Staging area

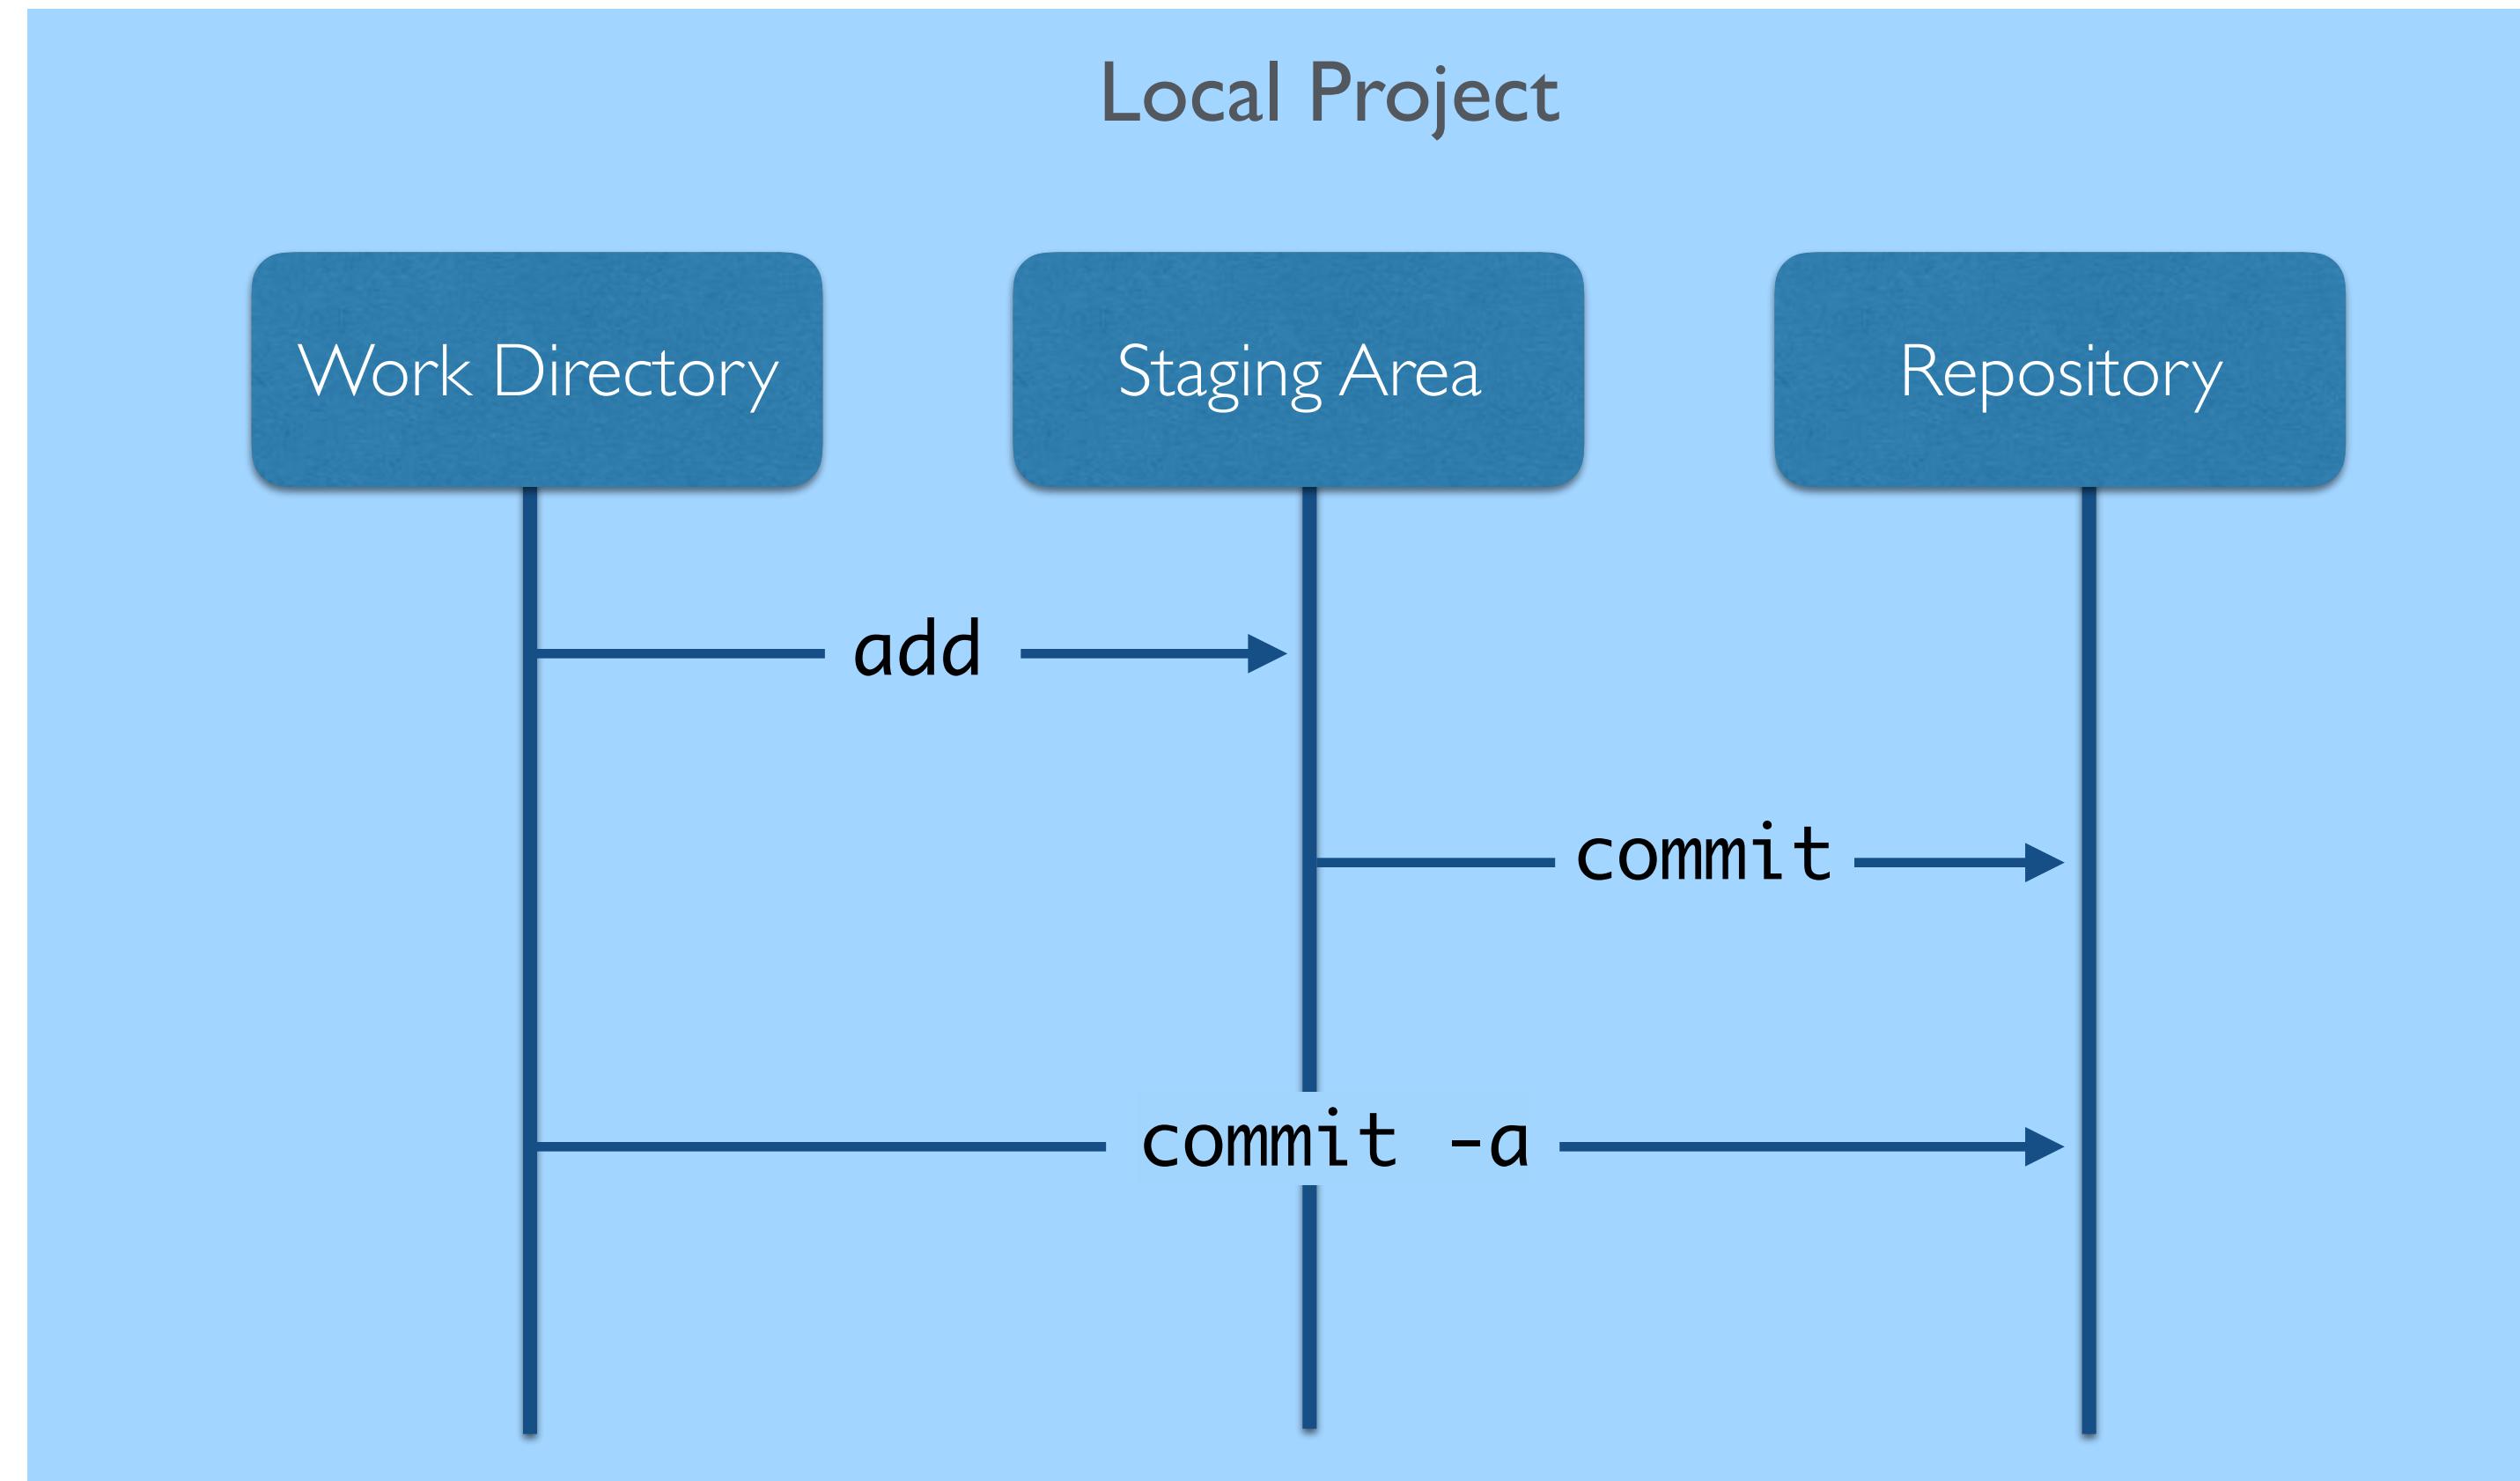

Undoing Changes: git reset

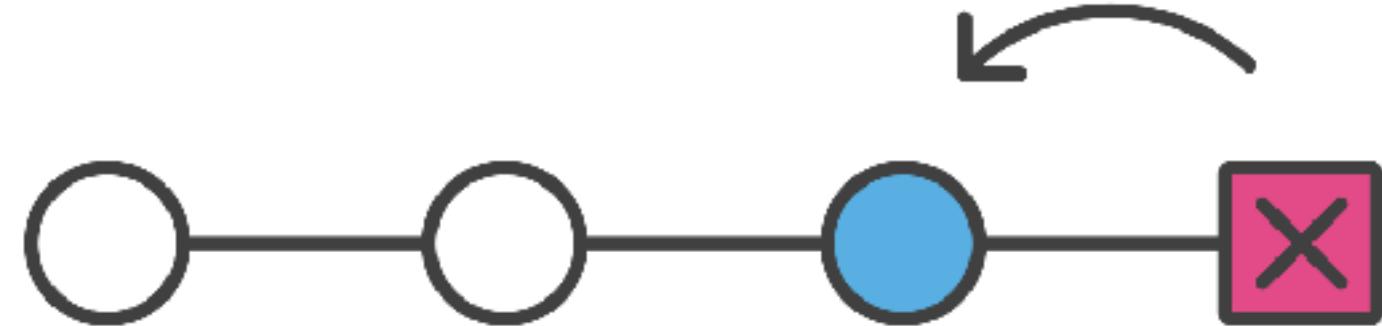


git reset


- A complex and versatile tool for undoing changes:

- Undo Staging: `git reset`
- Undo Commit (or Commits): `git reset <commit>`
 - **soft**: Keep changed files
 - **hard**: Delete changes files


Undoing Changes: git reset

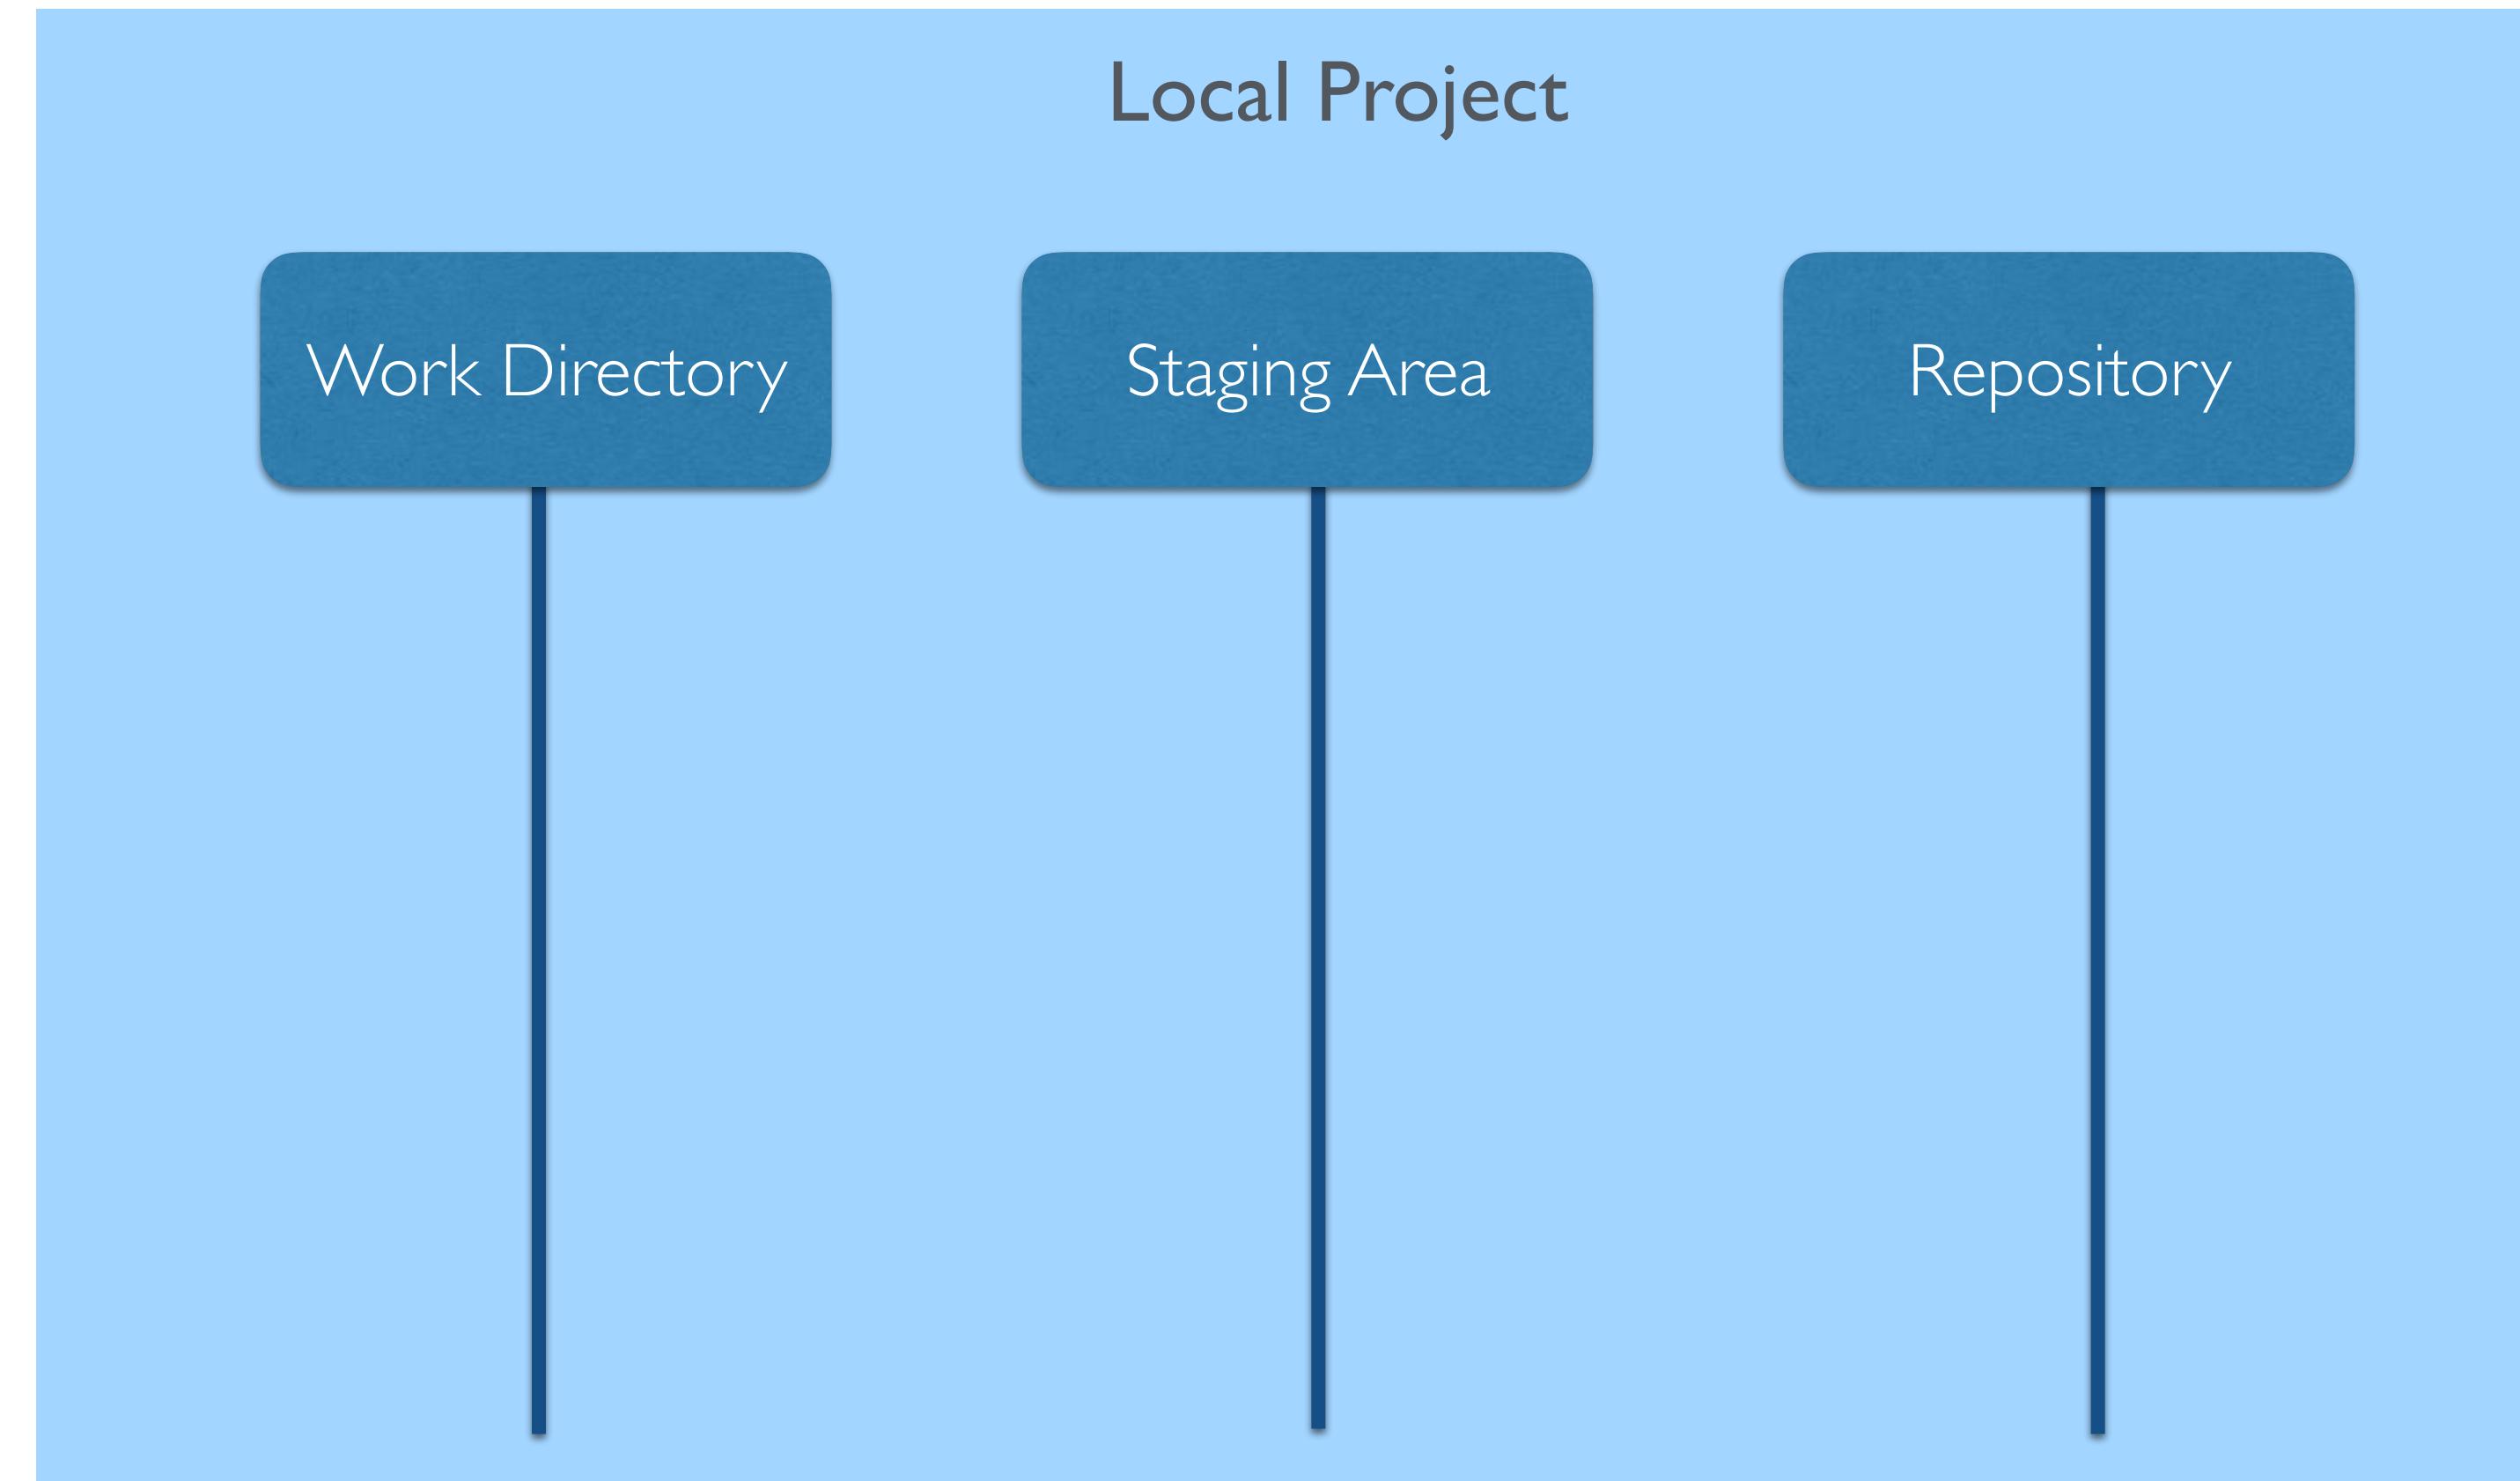


Undoing Changes: git reset

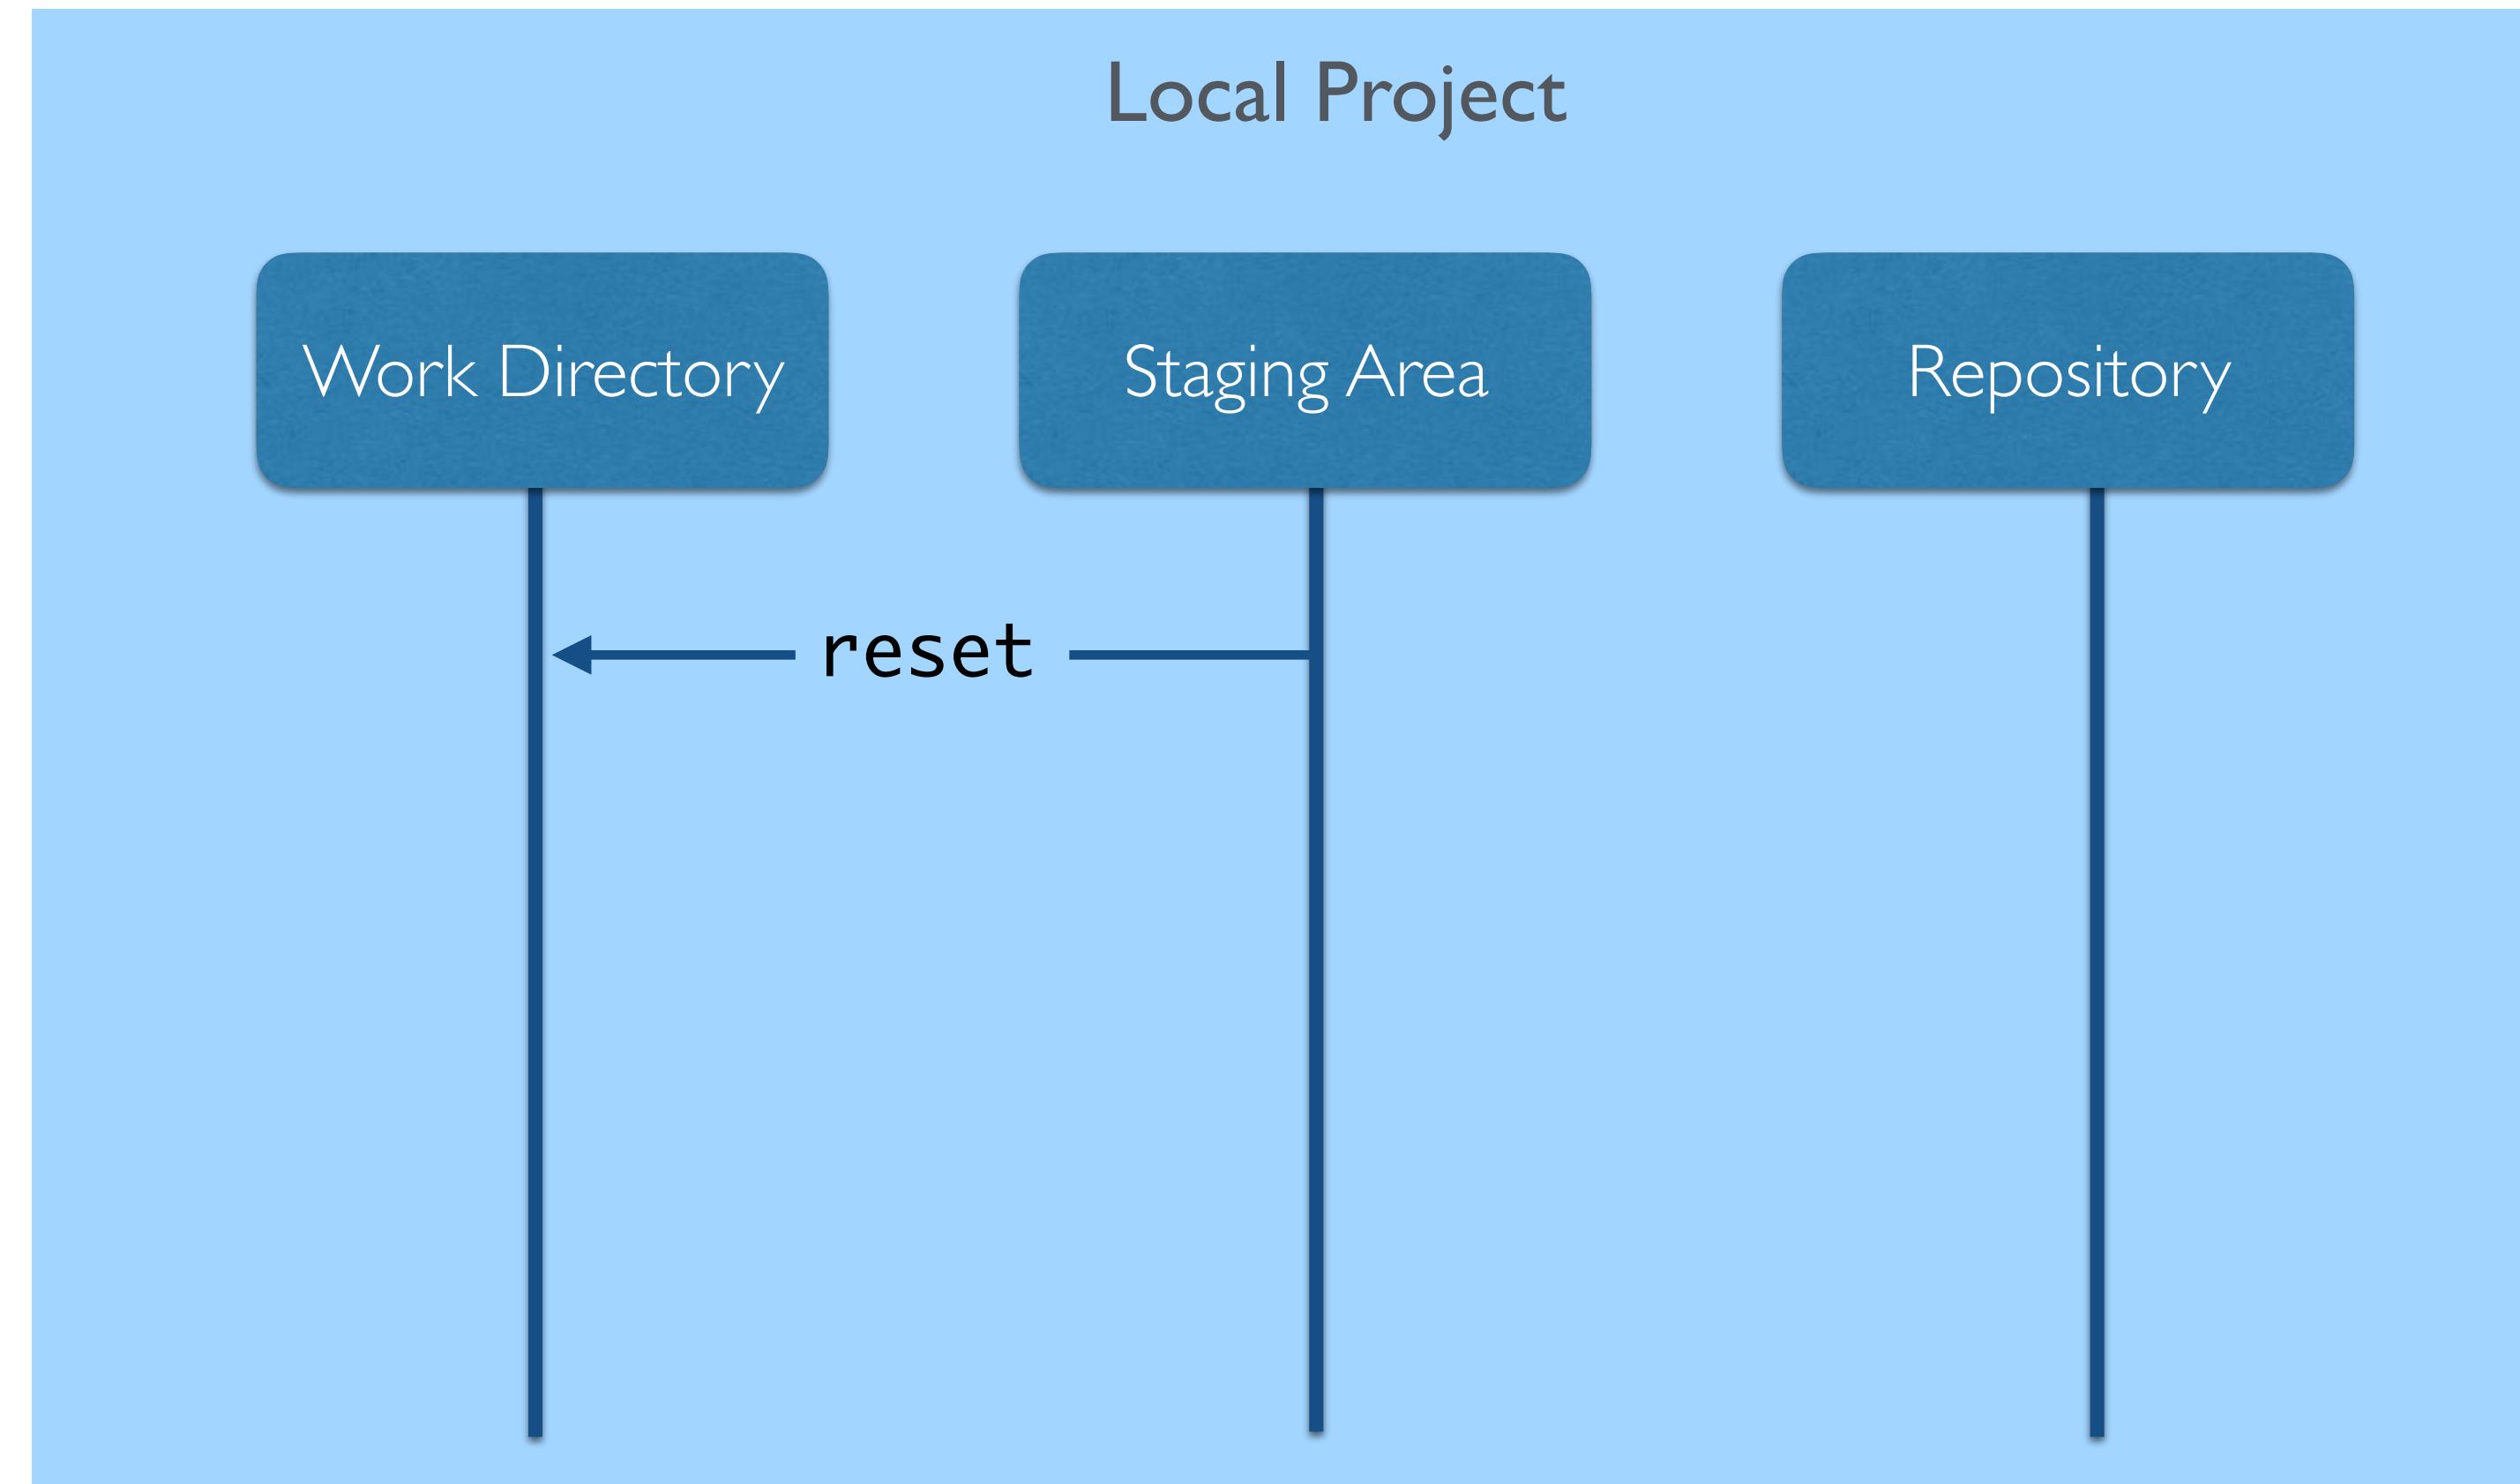


Undoing Changes: git reset

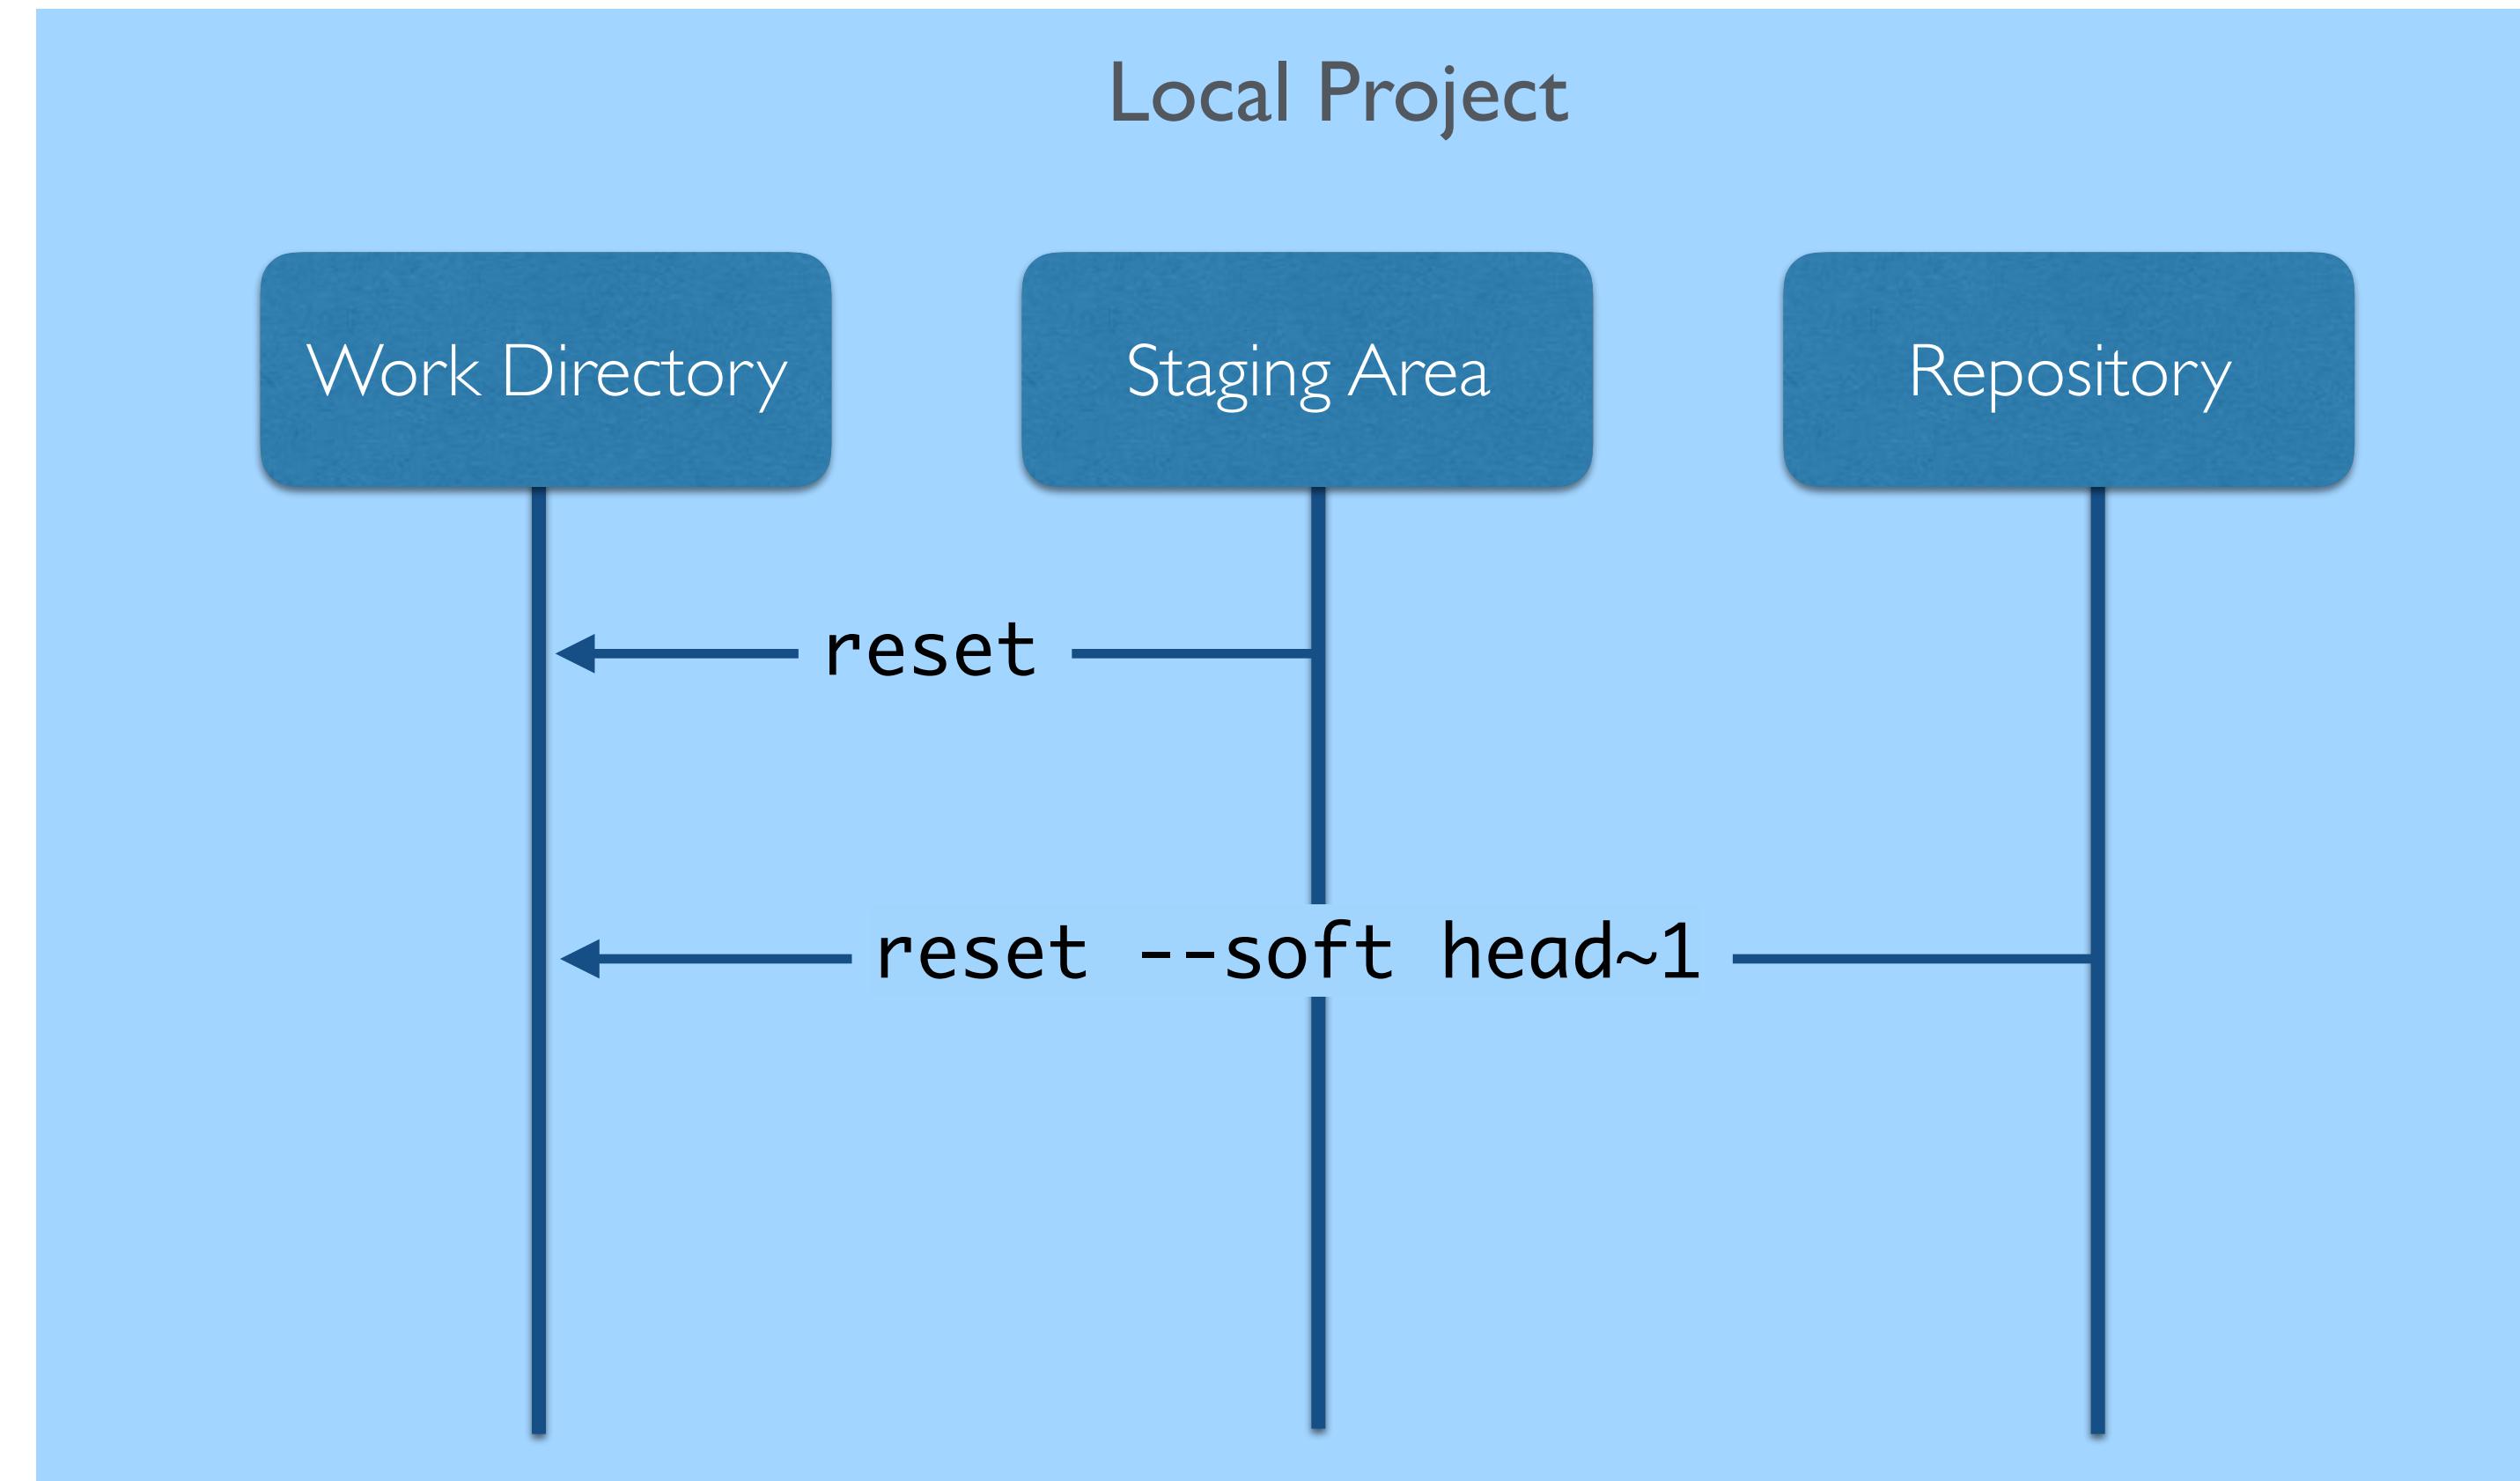

Undoing Changes: git reset

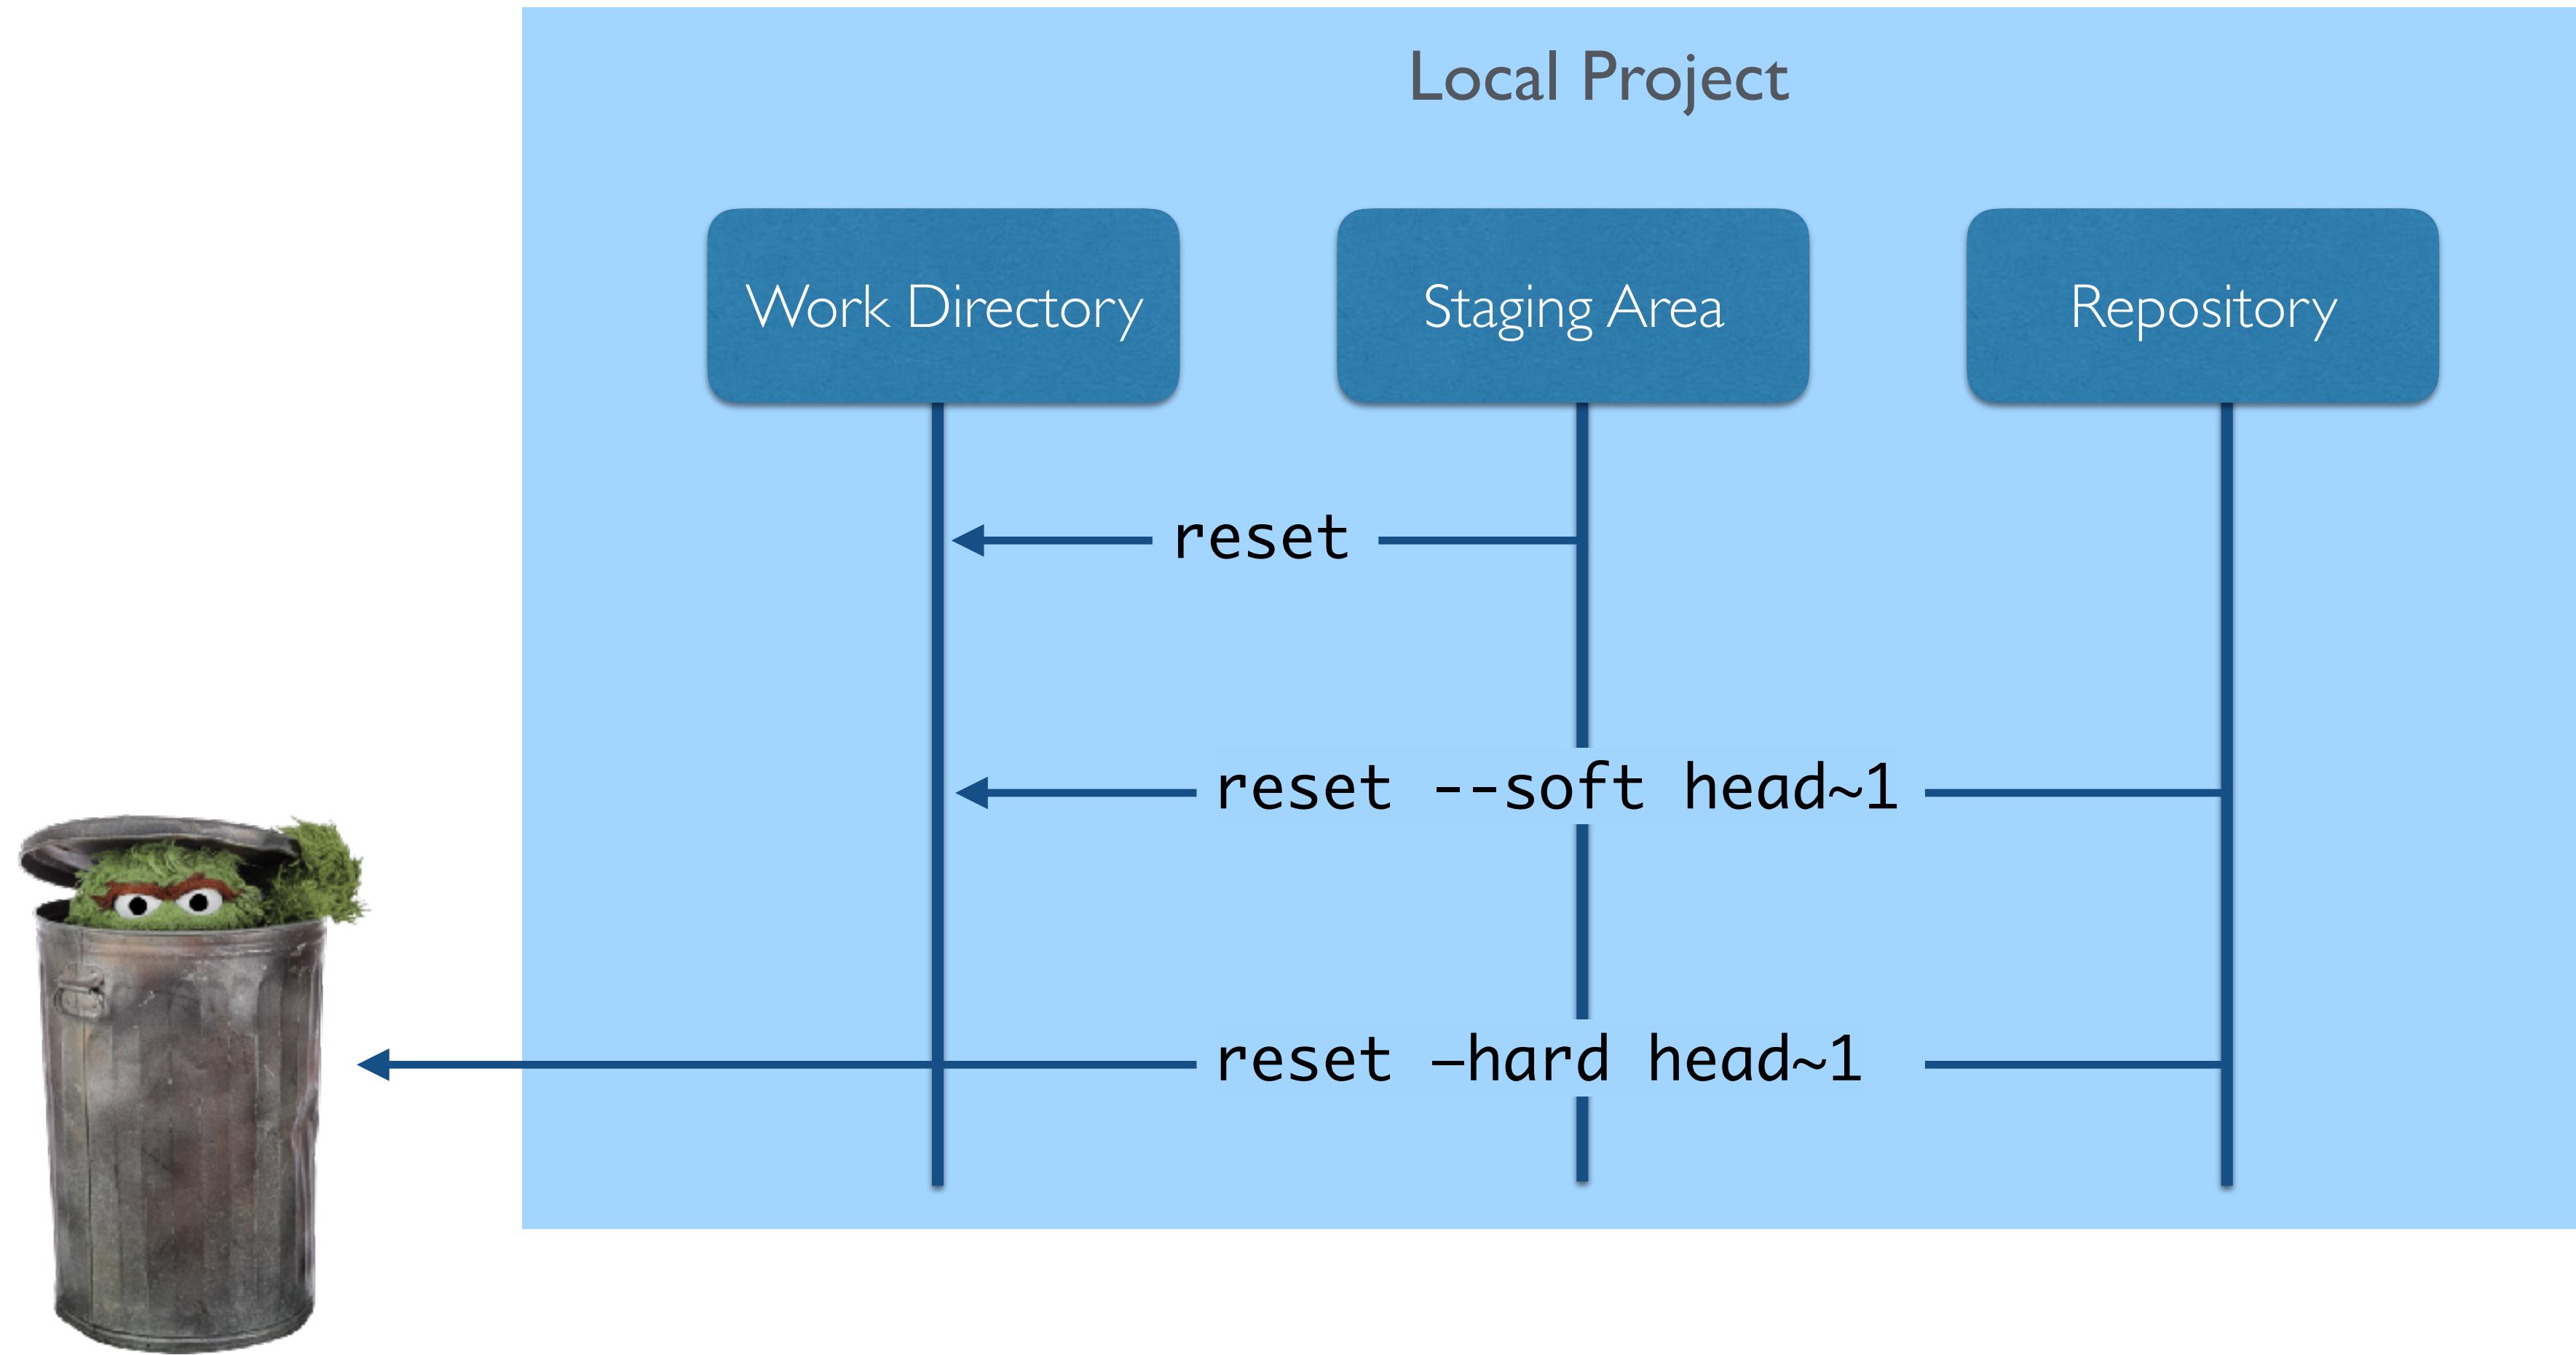

Branches and Merging

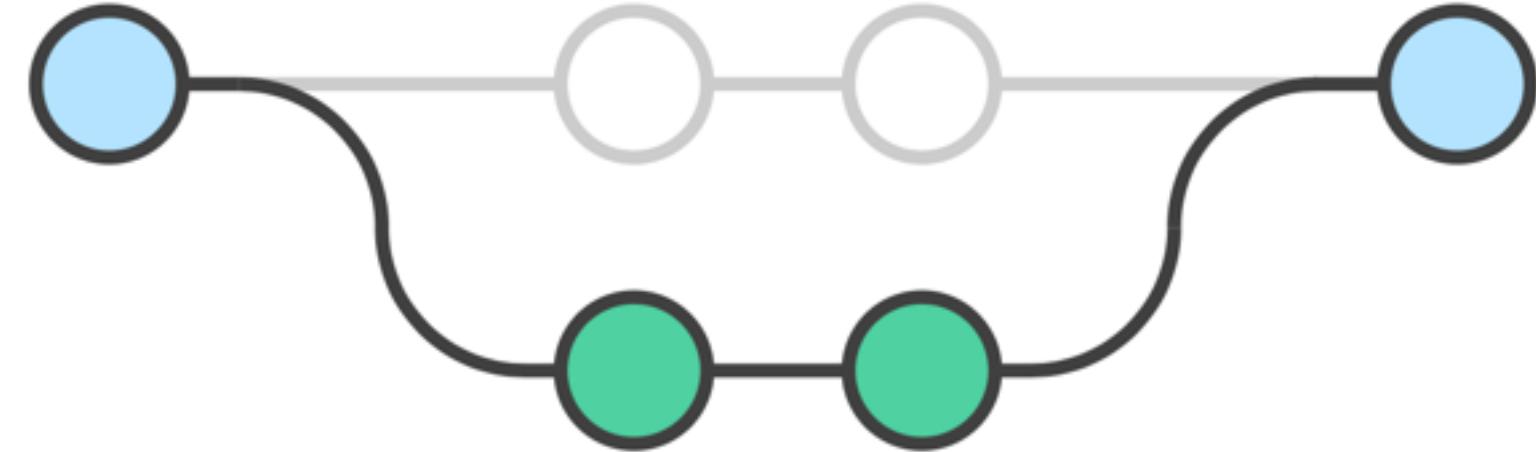

**Scenario: two people are
working on a project**

Problems

Problems

- How can I show what I've done in an efficient manner?

Problems

- How can I show what I've done in an efficient manner?

Problems

- How can I show what I've done in an efficient manner?
- If we don't like my work, how can I easily get back to where I was?

Problems

- How can I show what I've done in an efficient manner?
- If we don't like my work, how can I easily get back to where I was?


Problems


- How can I show what I've done in an efficient manner?
- If we don't like my work, how can I easily get back to where I was?
- If we do like my work, how can I integrate it together with your work?



A close-up photograph of bare tree branches against a blue sky. The branches are light-colored and textured, with many small, dark, irregular spots. They are densely packed and curve in various directions. The background is a clear, pale blue.


BRANCHES

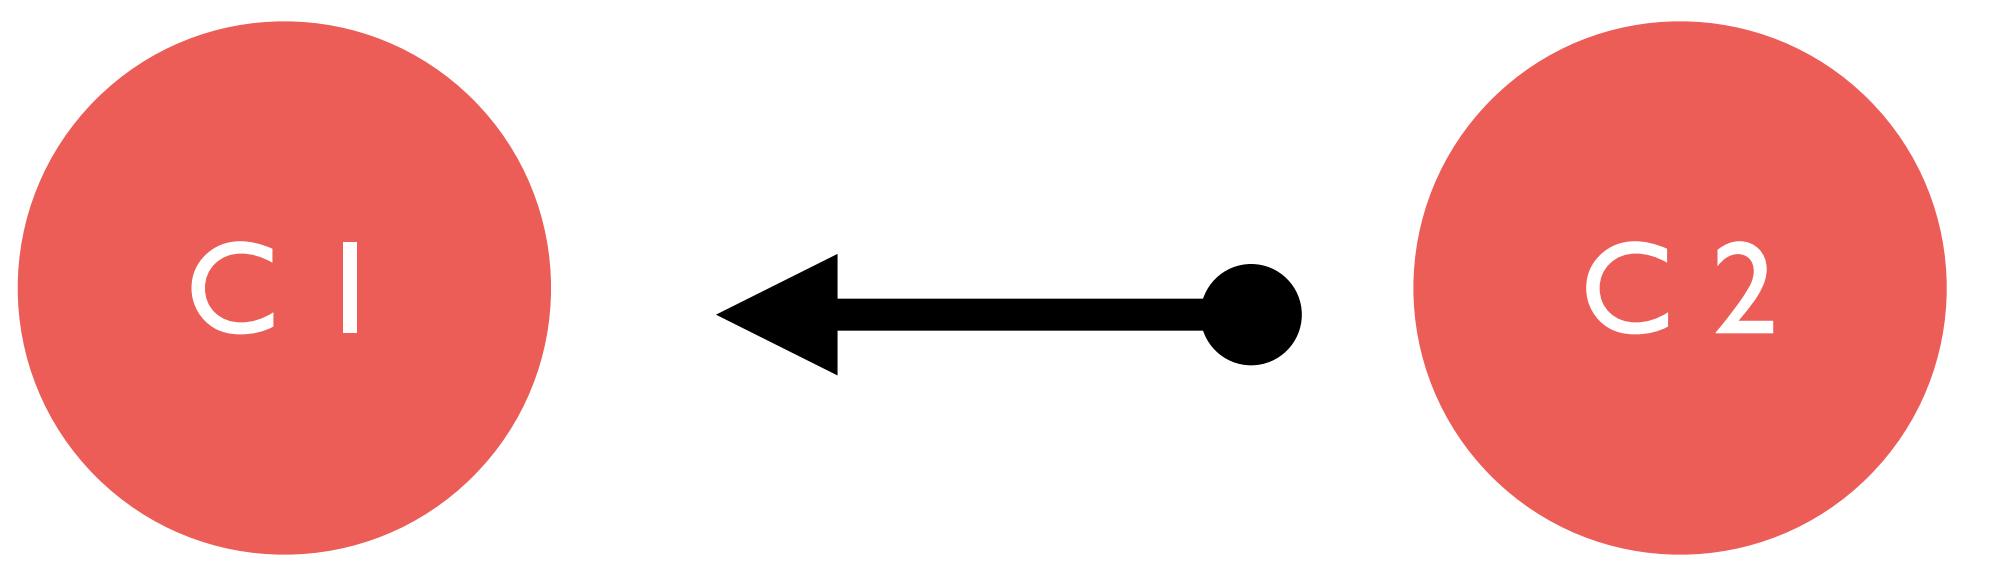

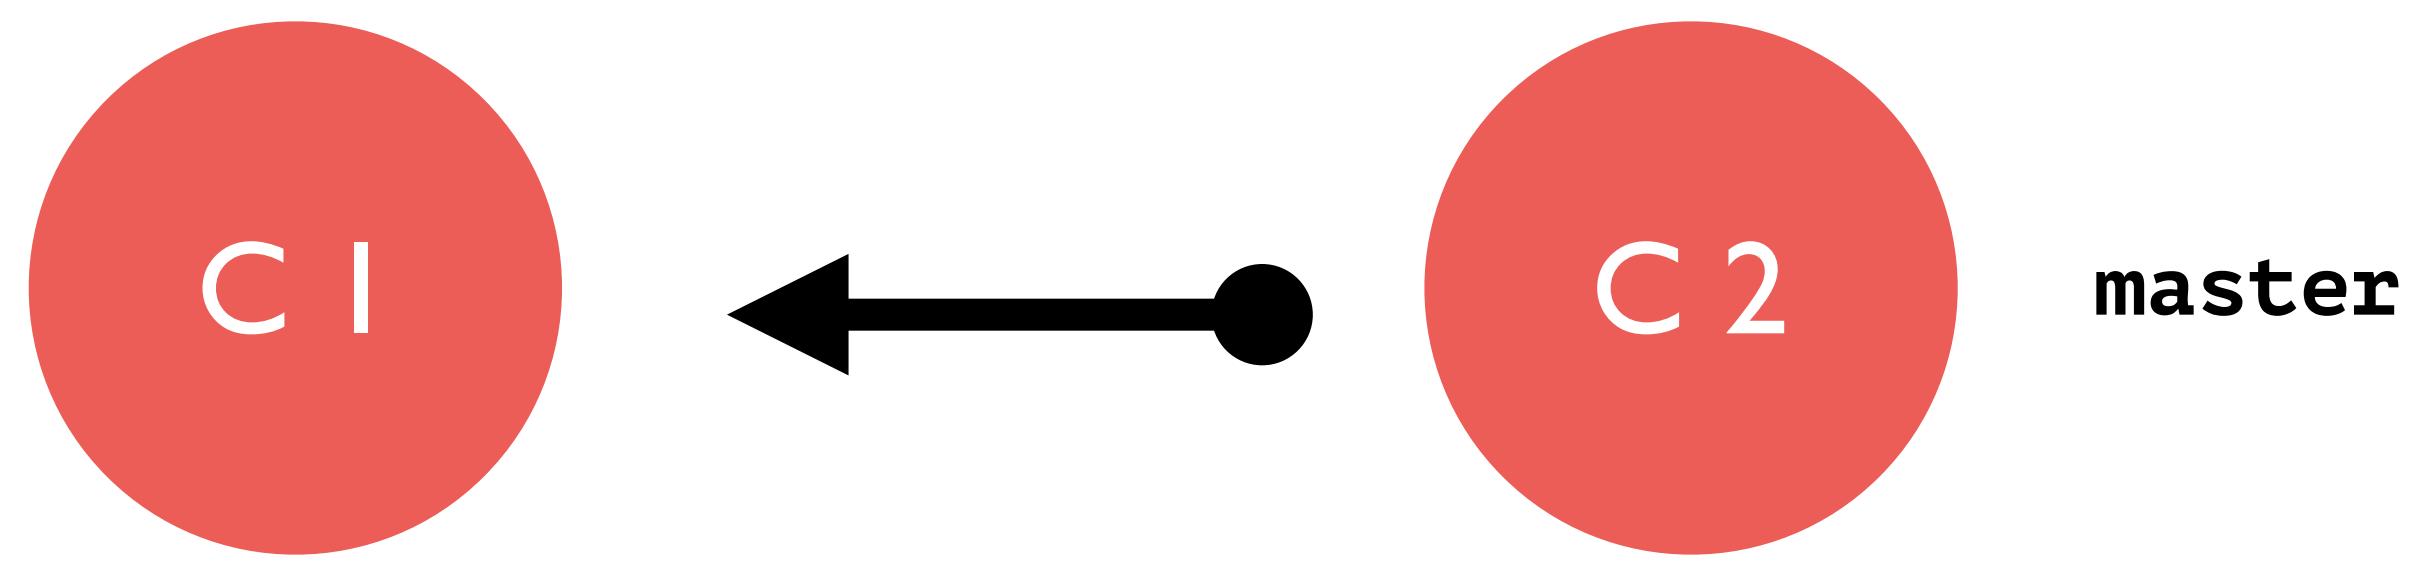

master




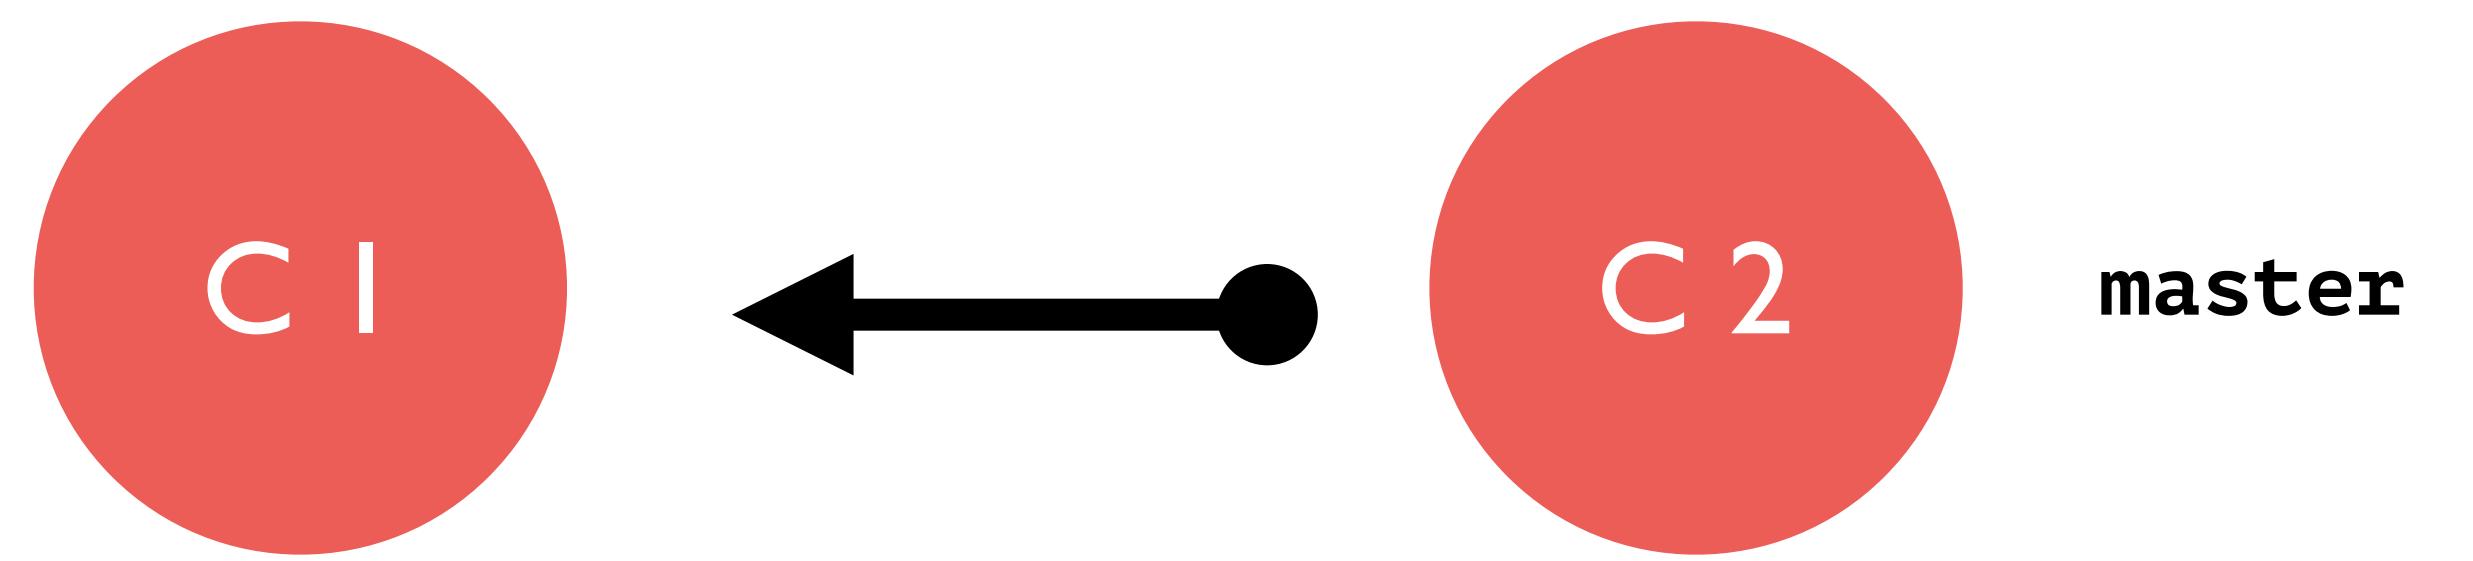

HEAD: master


master

>

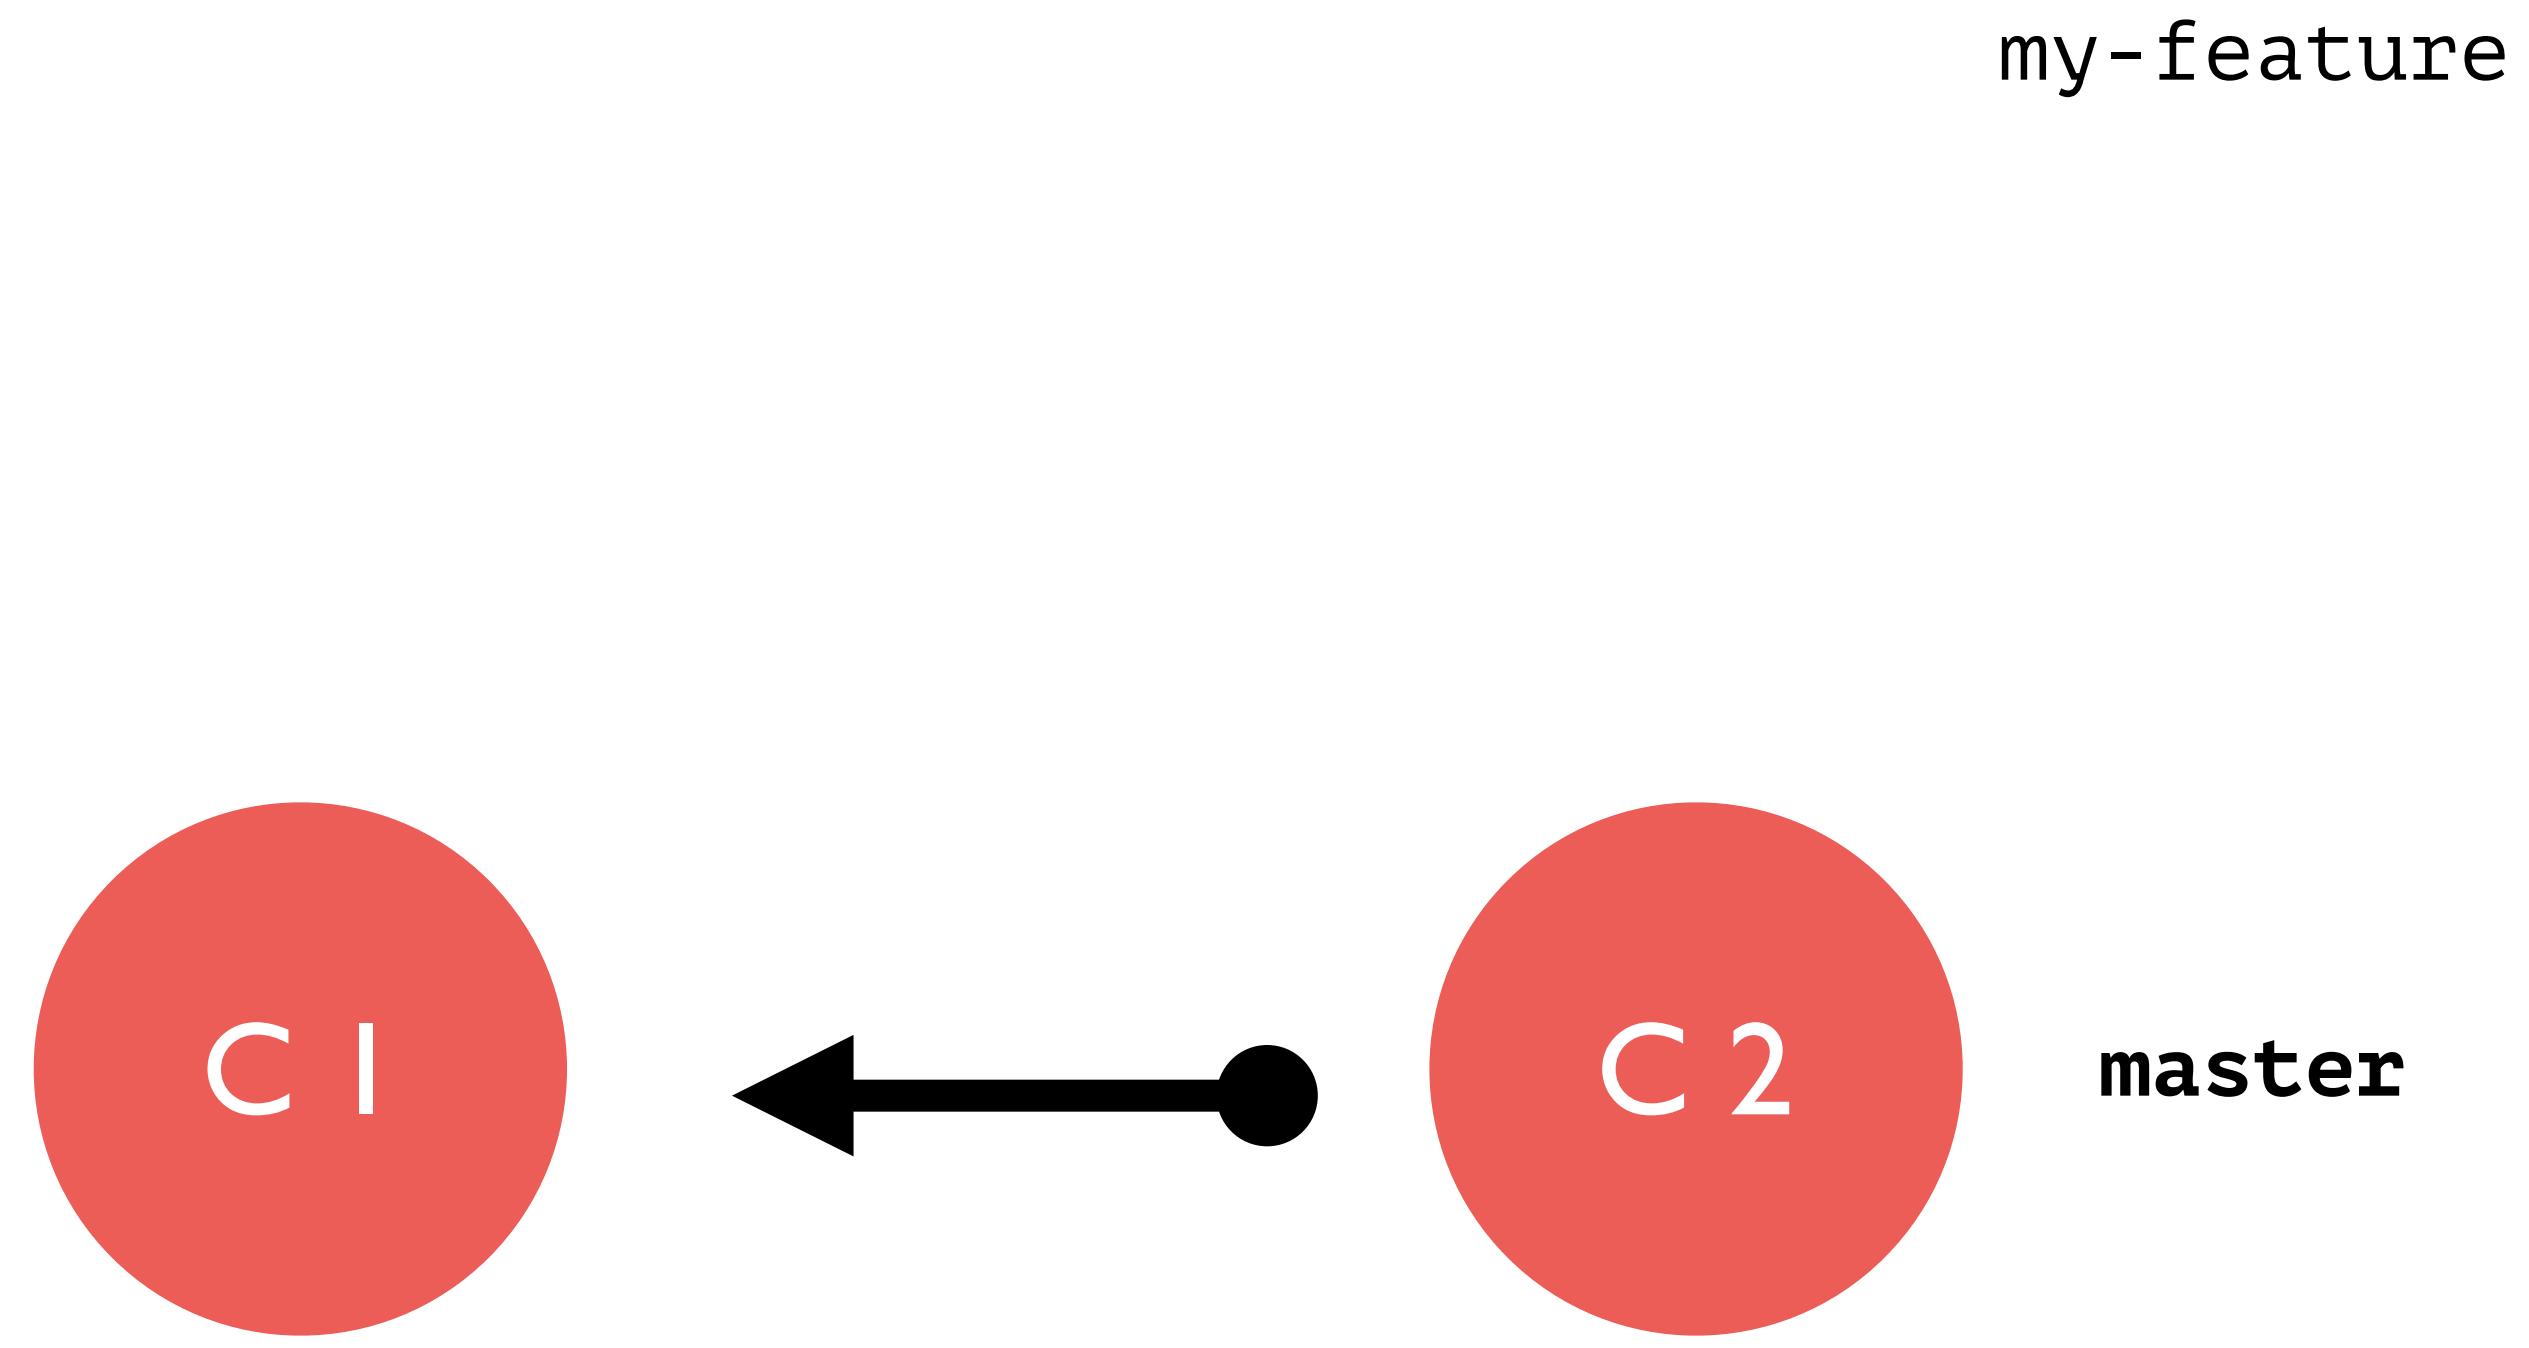


HEAD: master

```
> git branch my-feature
```

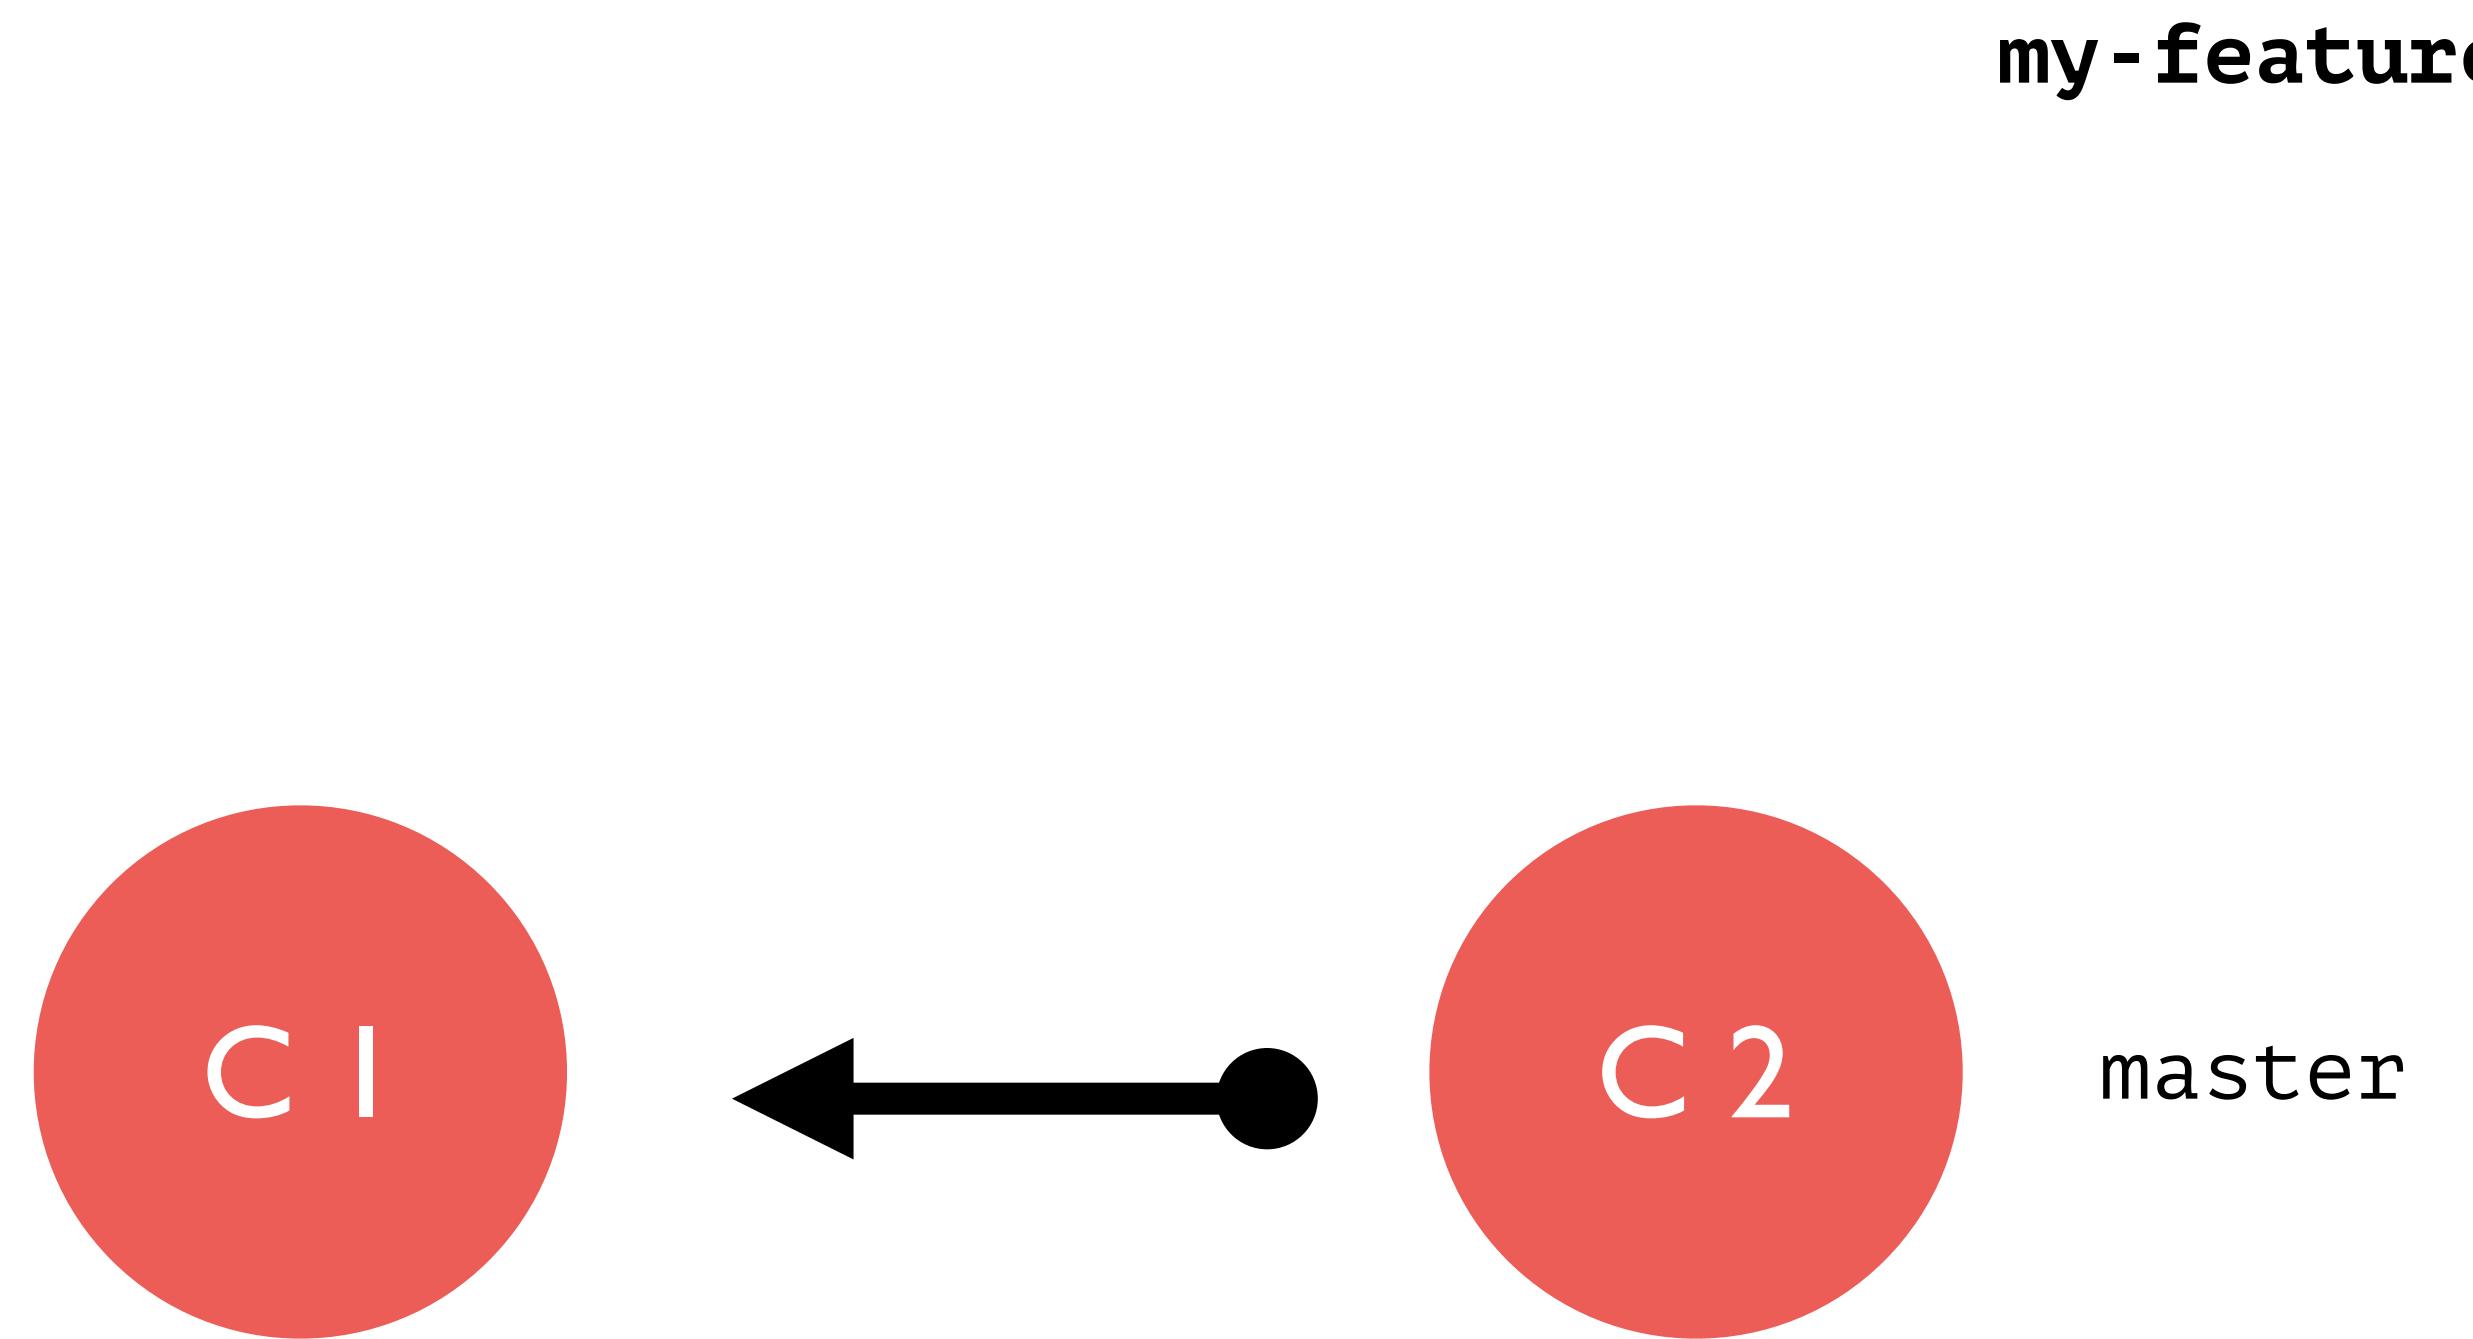


HEAD: my-feature

```
> git checkout my-feature
```

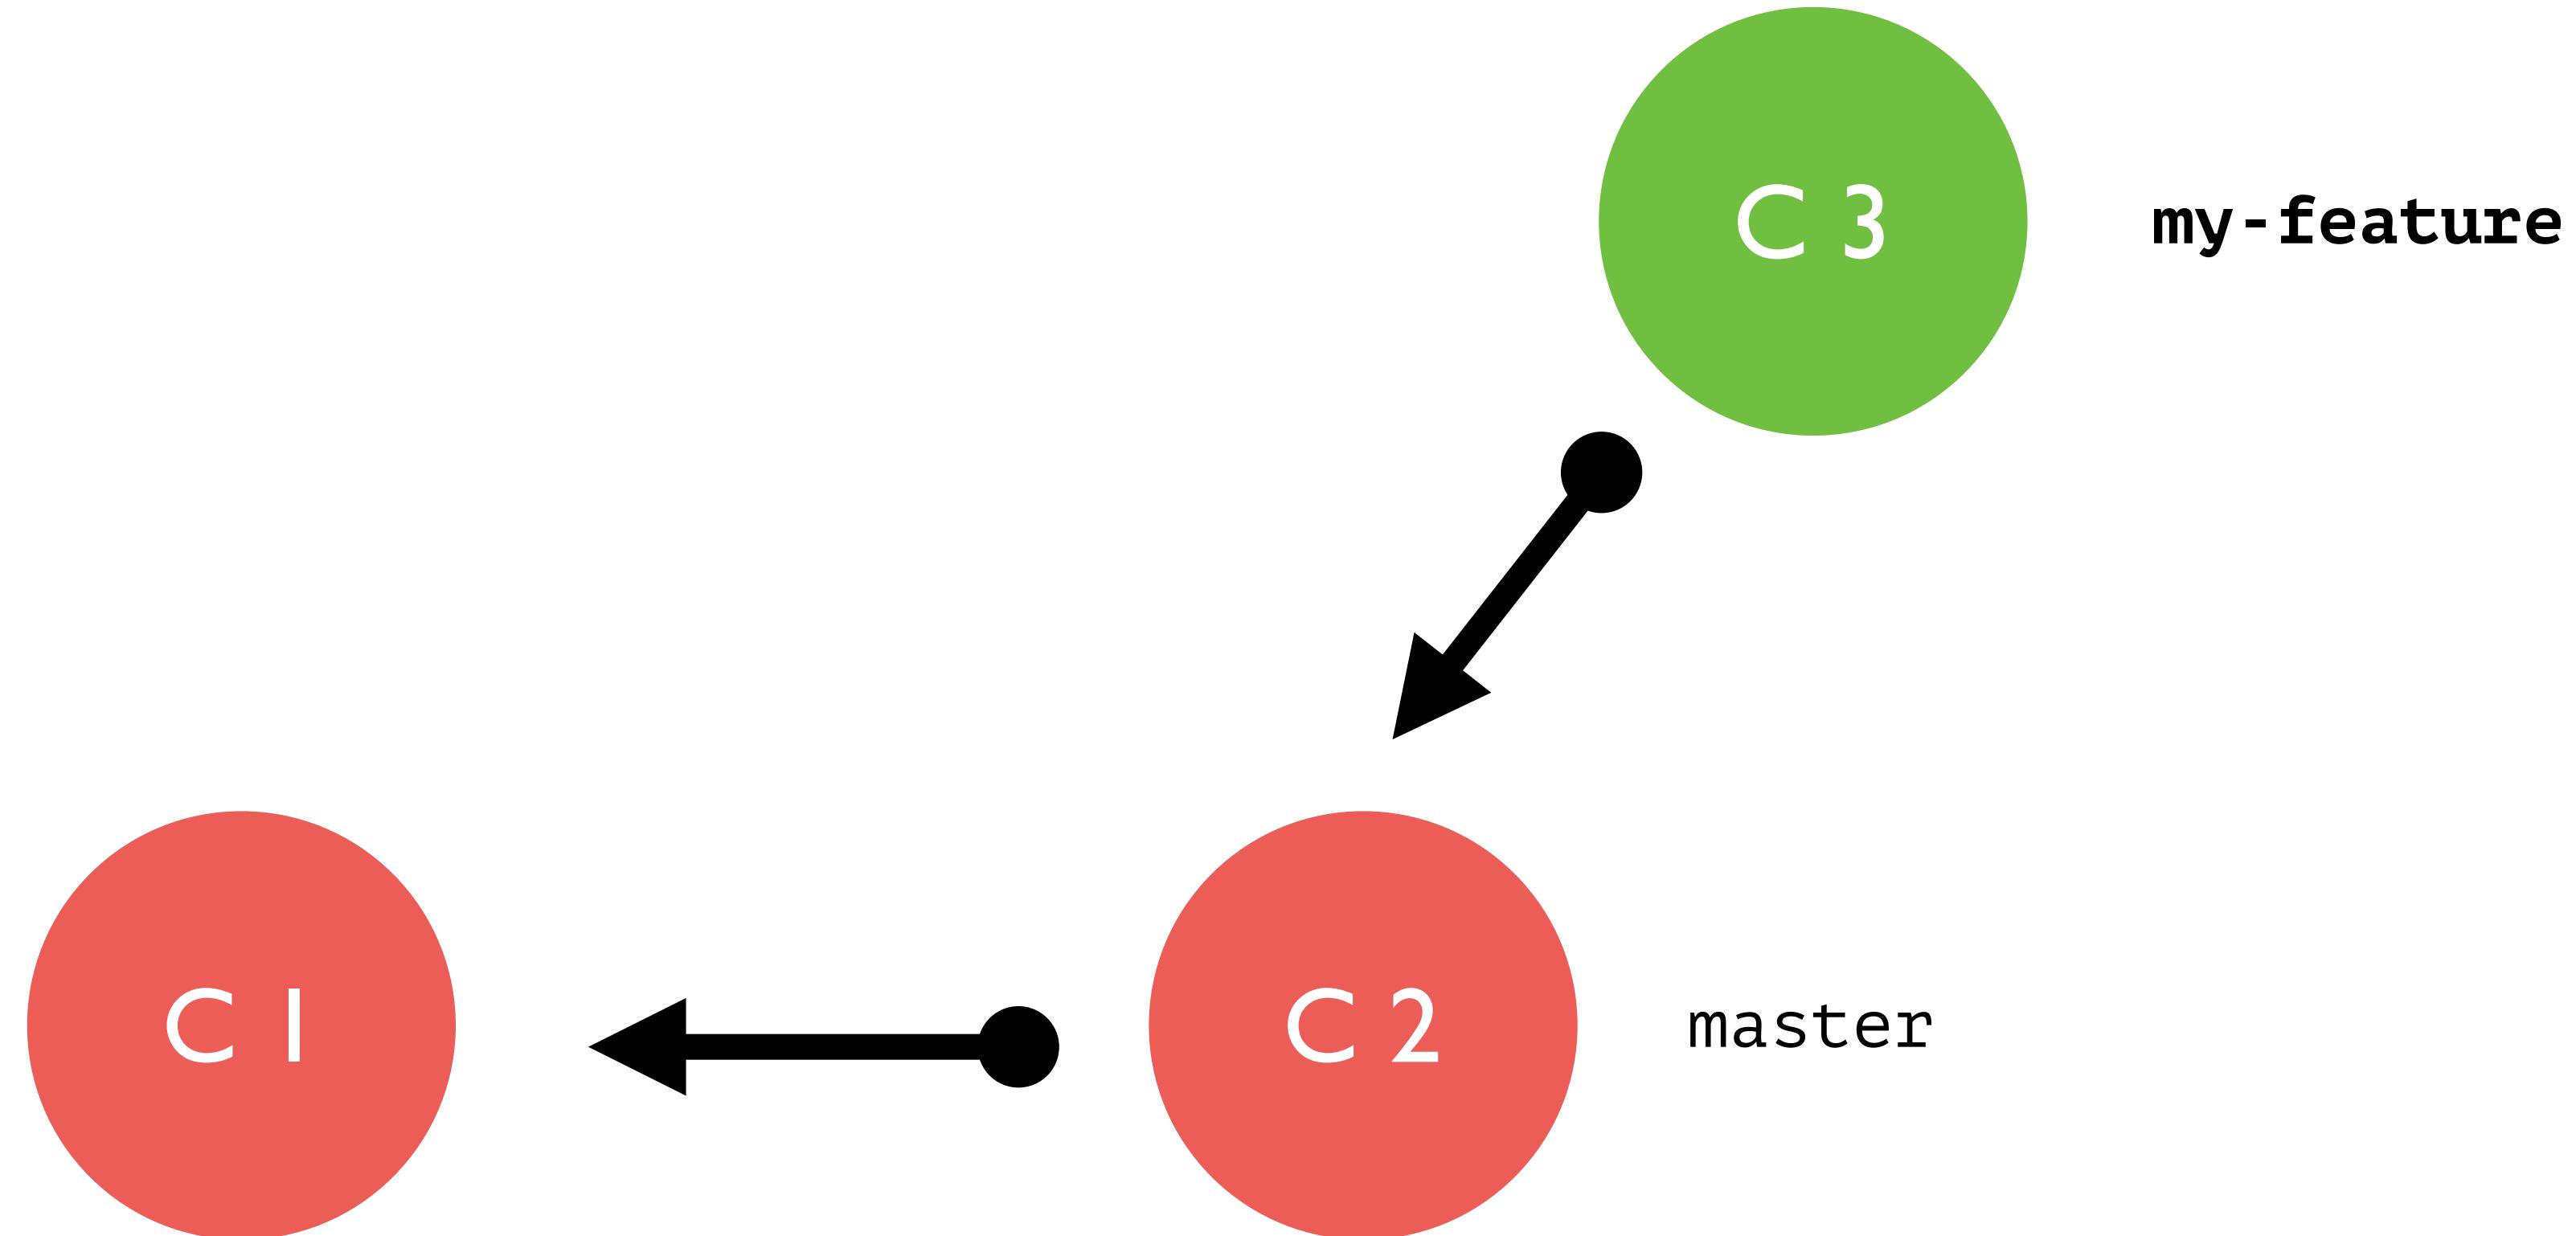

HEAD: my-feature


```
> git commit -m "add stuff"
```

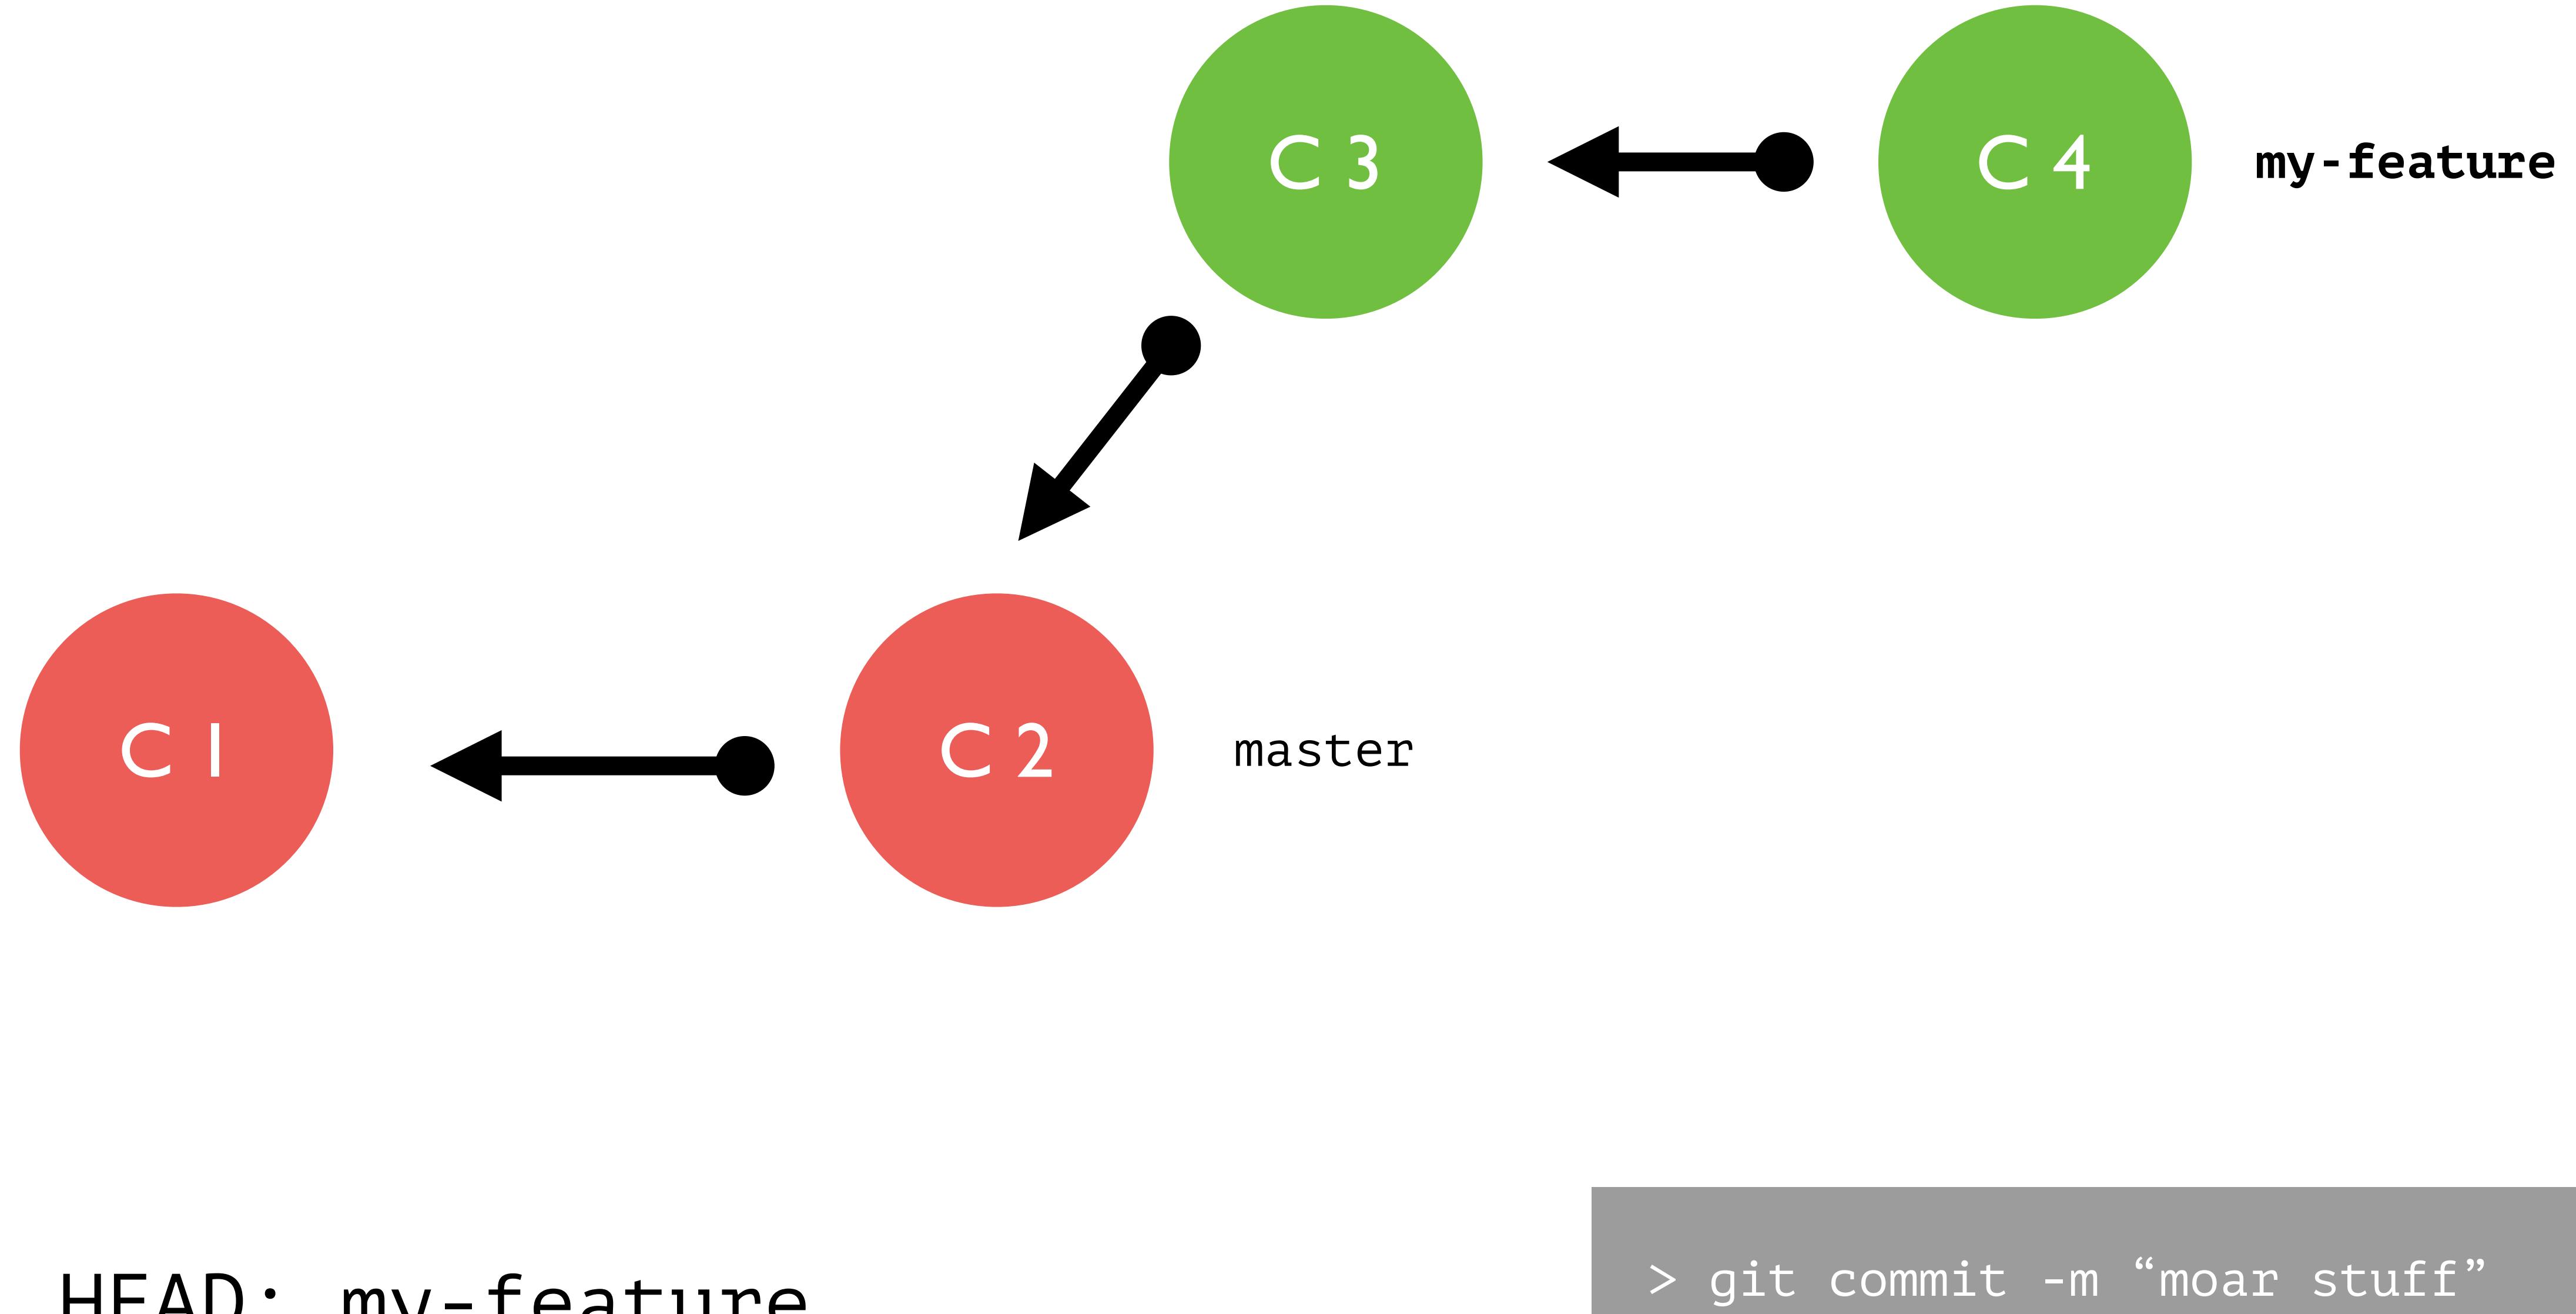






MERGING

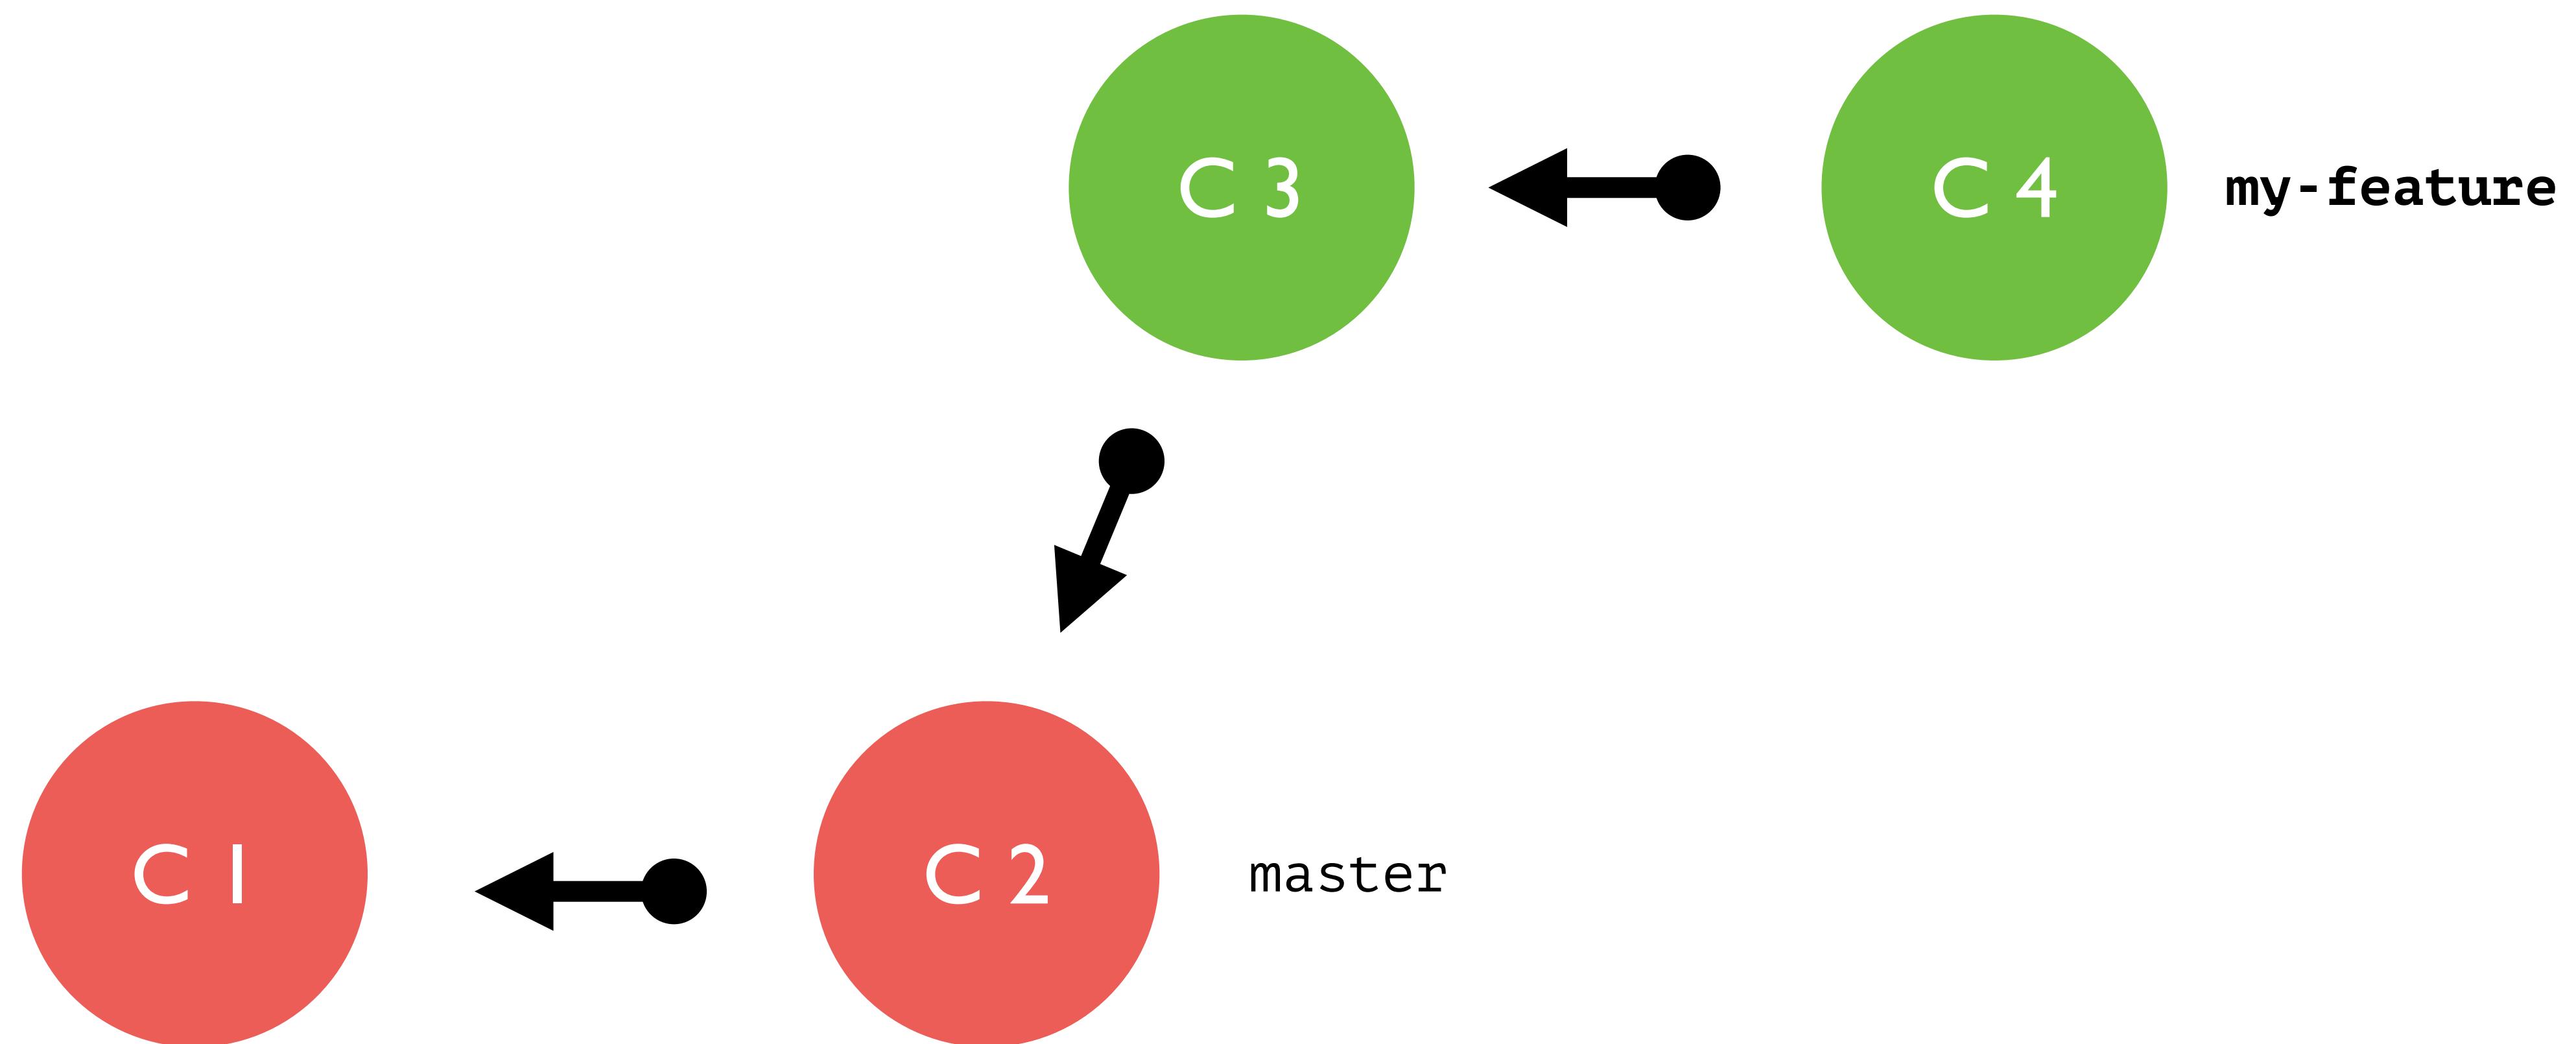


HEAD: my-feature

>

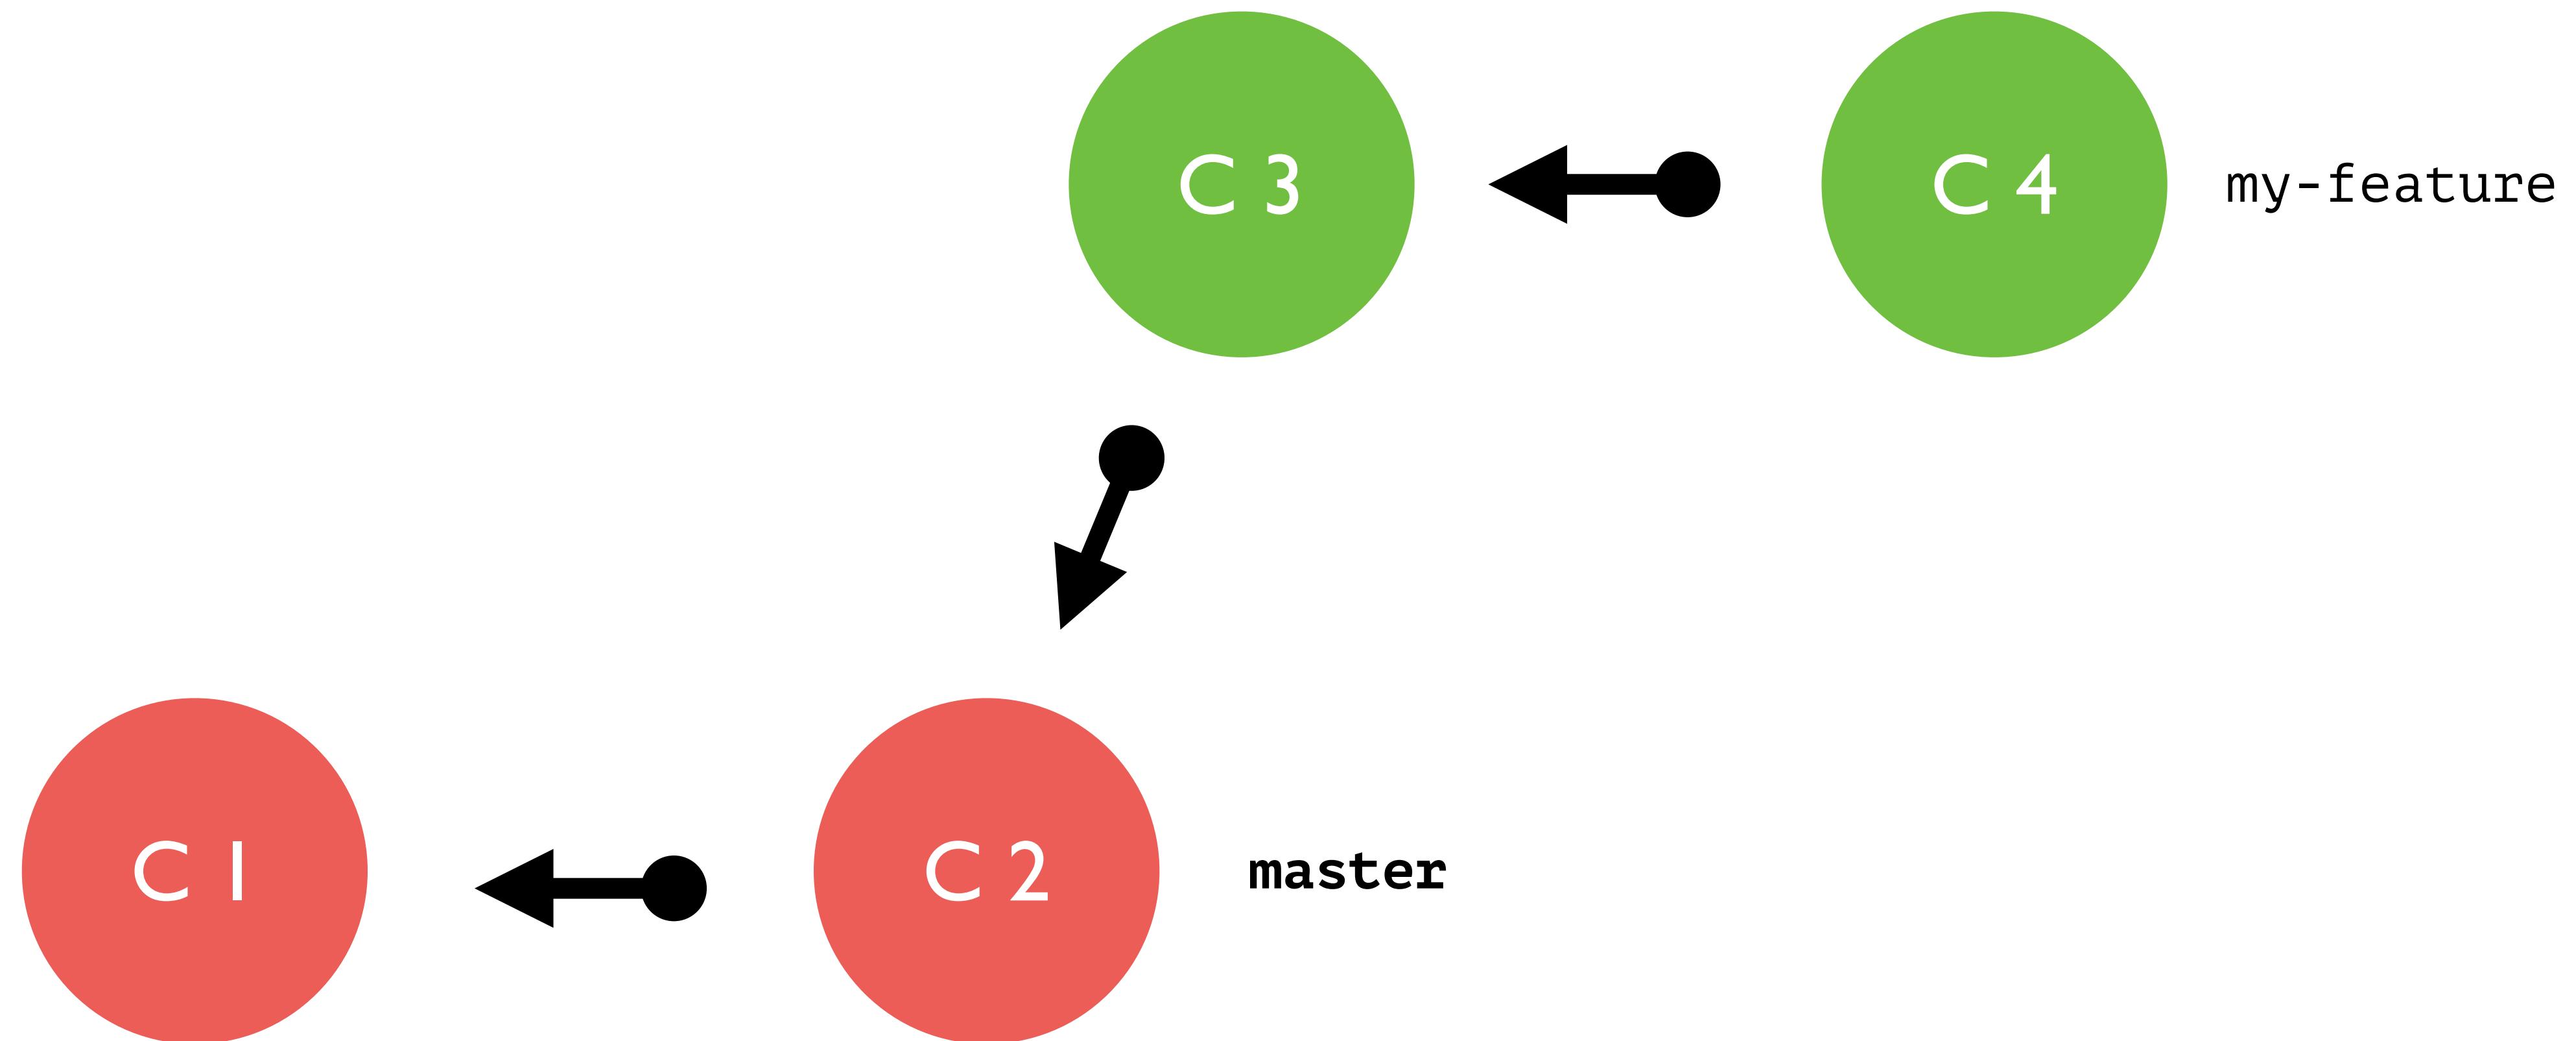

HEAD: master

```
> git checkout master
```

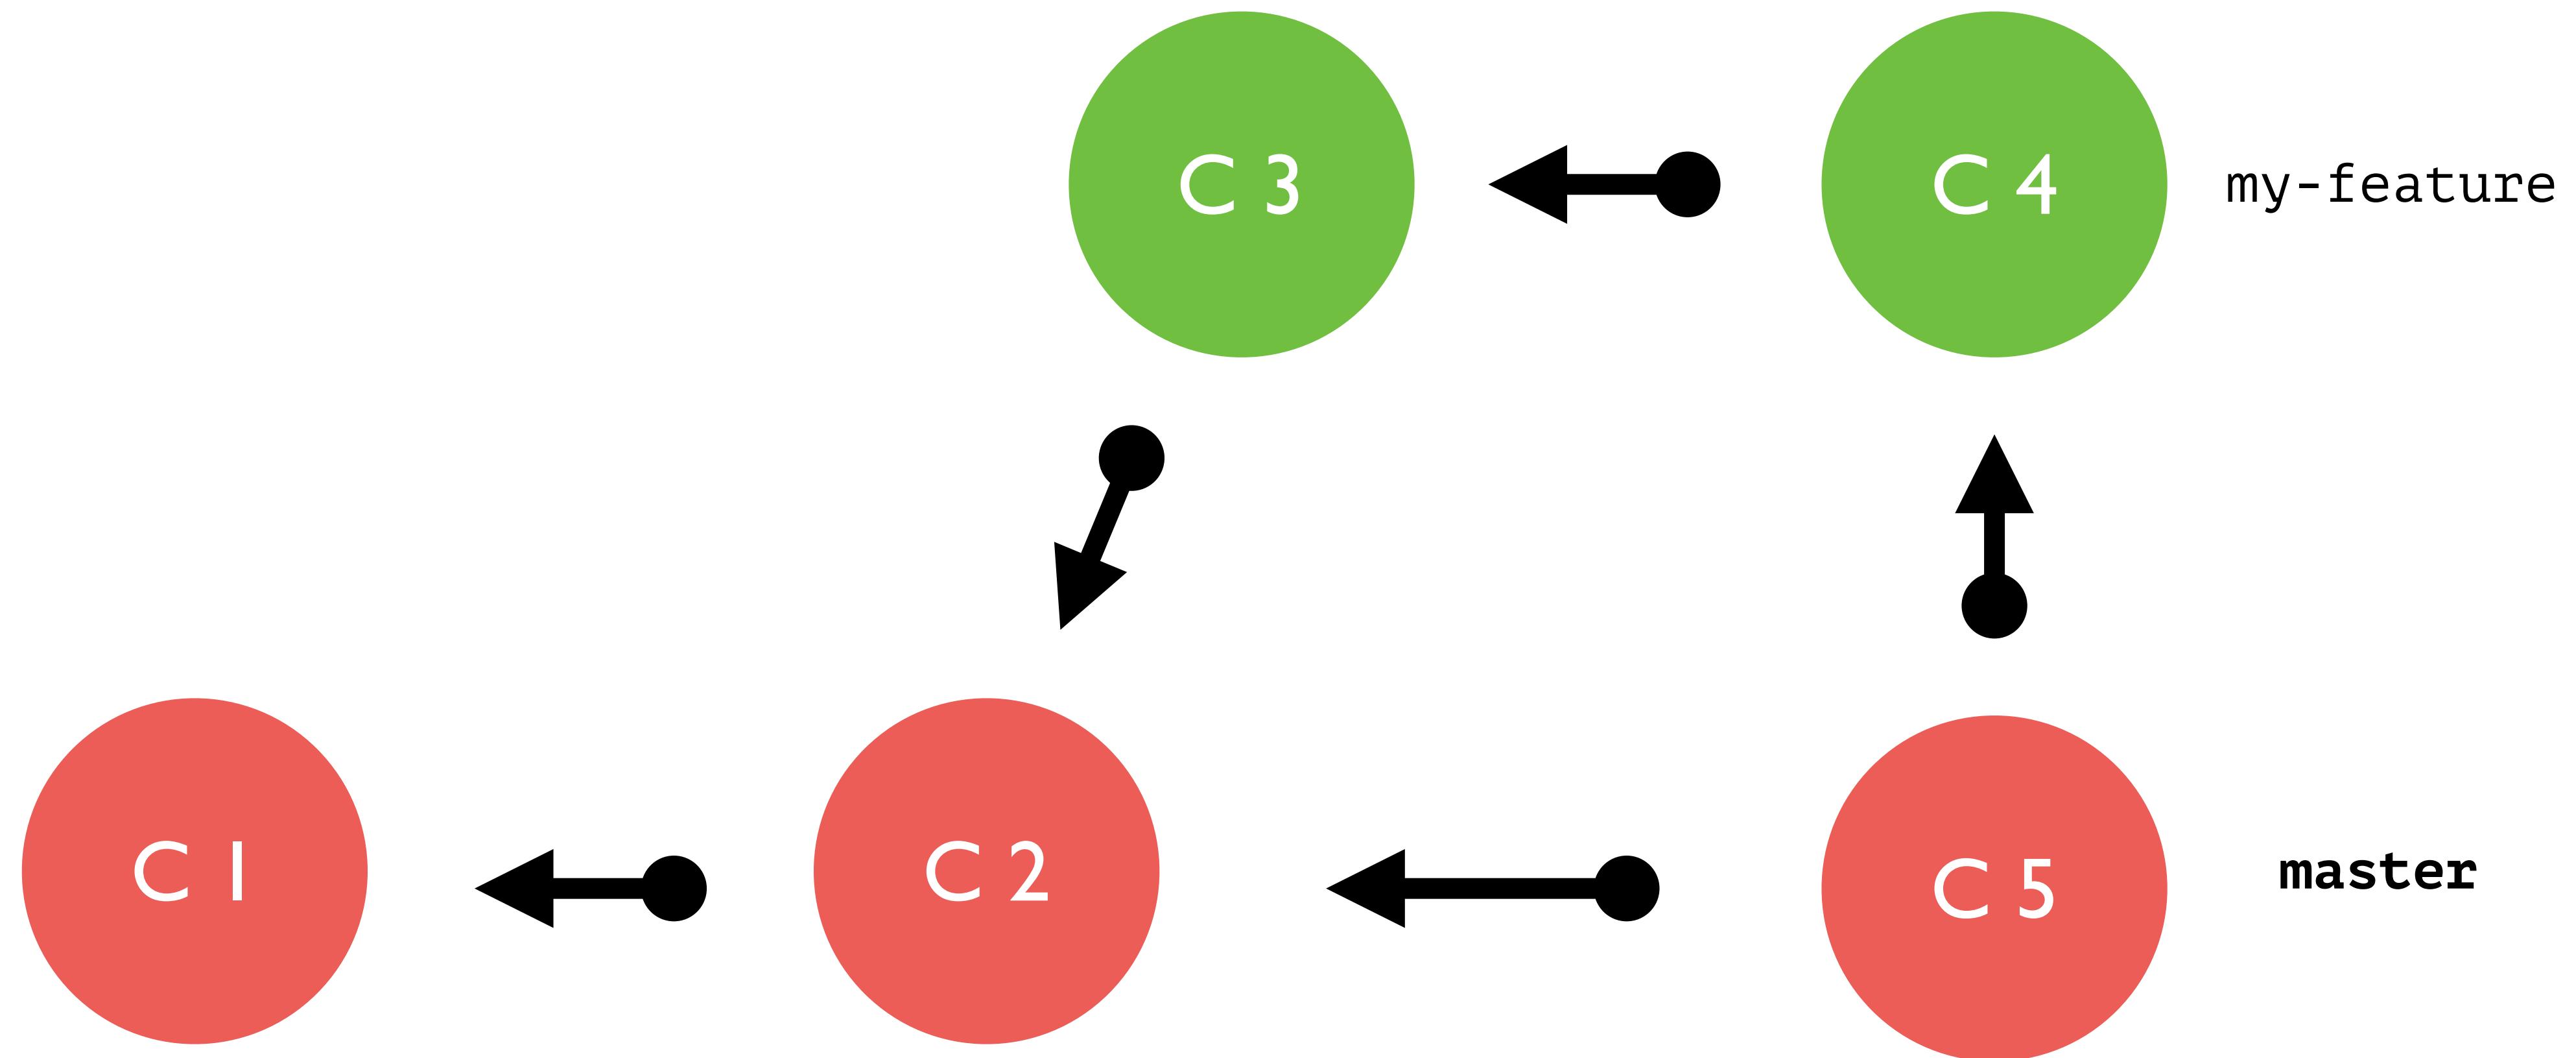

HEAD: master

```
> git merge my-feature
```



A photograph of two dogs, likely Golden Retrievers, playing with a large, textured bone-shaped toy on a grassy lawn. The dog on the left is light-colored with a red collar and a black tag, and is pulling on one end of the toy. The dog on the right is also light-colored with a red collar and a black tag, and is pulling on the other end. The toy has a rough, weathered texture and is partially buried in the grass.

PULL REQUESTS

Pull Requests

- Merging a branch on the remote, plus some ceremony (ex. code review by another team member)
- Feature of Github, not explicitly part of Git

```
> git push origin cool-branch
```

HEAD: cool-branch

 [collin / example](#)

 Unwatch ▾ 1

 Star 0

 Fork 0

 Code

 Issues 0

 Pull requests 0

 Projects 0

 Wiki

 Insights

 Settings

No description, website, or topics provided.

 Edit

[Add topics](#)

 1 commit

 1 branch

 0 releases

 1 contributor

Your recently pushed branches:

 cool-branch (less than a minute ago)

 Compare & pull request

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also compare across fork

adds a cool file #1

 Open

collin wants to merge 1 commit into master from cool-branch

 Conversation 0

 Commits 1

 Files changed 1



collin commented just now

Owner + 

A very detailed description.



adds a cool file

Verified

4c66333

Add more commits by pushing to the **cool-branch** branch on **collin/example**.



This branch has no conflicts with the base branch

Merging can be performed automatically.

Merge pull request



You can also [open this in GitHub Desktop](#) or view command line instructions.

```
> git checkout master
```

HEAD: master

```
> git pull origin master
```

HEAD: master





MERGE CONFLICT

Merge conflicts

Merge conflicts

- Fairly common: not the end of the world

Merge conflicts

- Fairly common: not the end of the world

Merge conflicts

- Fairly common: not the end of the world
- Happens when Git can't automatically resolve two commits into one - needs a human to decide what version to keep

Merge conflicts

- Fairly common: not the end of the world
- Happens when Git can't automatically resolve two commits into one - needs a human to decide what version to keep

Merge conflicts


- Fairly common: not the end of the world
- Happens when Git can't automatically resolve two commits into one - needs a human to decide what version to keep
- Makes sure someone else's work doesn't overwrite another's unintentionally

script.js - master

```
console.log('hello world')
```

script.js - f/howdy

```
console.log('howdy world')
```



script.js - master

```
console.log('hello world')
```



script.js - f/goodbye

```
console.log('goodbye world')
```

script.js - f/howdy

```
console.log('howdy world')
```

script.js - master


```
console.log('hello world')
```

script.js - master

```
console.log('goodbye world')
```

script.js - f/goodbye

```
console.log('goodbye world')
```



script.js - f/howdy

```
console.log('howdy world')
```

script.js - master

```
console.log('hello world')
```

script.js - f/goodbye

```
console.log('goodbye world')
```



script.js - master



```
console.log('goodbye world')
```



```
<<<<< HEAD (current version)
console.log('goodbye world')
=====
console.log('howdy world')
>>>>> howdy (incoming change)
```