



USER GUIDE

# Custom Roles Manager

View any customer organization's mParticle custom roles, see exactly what each one grants, and create, edit, or delete them safely.



SOLUTIONS TEAM · INTERNAL  
VERSION 1.0

# What's in this guide

---

Everything you need to run the app, connect a customer organization, and change roles without risk. If you only read one section, make it 04 — it explains why the app always shows you a diff before writing anything.

|     |                           |                              |
|-----|---------------------------|------------------------------|
| 001 | Before you start          | What it is, what it can't do |
| 002 | Install and run           | One command                  |
| 003 | Your vault                | Where credentials live       |
| 004 | Connecting a customer     | Credentials, pods, IDs       |
| 005 | Viewing roles             | What each role grants        |
| 006 | Creating and editing      | The diff gate                |
| 007 | Deleting a role           | And why it may fail          |
| 008 | History and rollback      | Undo a change                |
| 009 | When something goes wrong | Error reference              |
| 010 | Security notes            | What to tell IT              |

## THE ONE THING TO REMEMBER

mParticle has no "update one role" endpoint. Every save replaces the organization's entire role list, so a role left out is a role deleted. This app never lets that happen by accident: it rebuilds the full list for you, shows you a diff, and only writes after you confirm it.

# Before you start

---

Custom Roles Manager is an internal tool for the Solutions team. It talks to the mParticle Custom Roles API on behalf of a customer organization so you can audit and change custom roles without hand-writing API calls.

## What it does

- Lists every custom role in an organization, with a plain-English description of each permission it grants.
- Creates, edits, and deletes roles, always behind a reviewed diff.
- Keeps a local history of every change it made, with one-click rollback.
- Stores credentials for several customer organizations, encrypted on your machine.

## What it can't do

These are limits of the mParticle API, not the app.

| TASK                                  | WHERE TO DO IT INSTEAD                                                                             |
|---------------------------------------|----------------------------------------------------------------------------------------------------|
| Assign a role to a user               | mParticle UI — Settings → User Management. There is no API for assignment.                         |
| See which users hold a role           | mParticle UI. The API never exposes role membership.                                               |
| Look up an organization or account ID | Read them from the API Credential dialog in the mParticle UI.                                      |
| Reproduce a standard role exactly     | Some built-in role permissions have no matching task ID, so custom equivalents are approximations. |

## What you need

- Node.js 20 or newer on your machine.
- An mParticle API credential for the customer organization with the **Custom Roles** API selected — Admin permissions, organization-level scope. Only a Custom Role Admin in that org can create one.
- The organization ID, account ID, and pod for that customer.

# Install and run

---

Clone the repository, then from the project folder:

```
npm install  
npm run dev
```

That starts two things: the interface on `http://localhost:5173` and a small local server on `127.0.0.1:8931` that holds your credentials and makes the API calls. Both run on your machine only — nothing is hosted, and the local server refuses connections from anywhere else.

To explore the app without any customer credentials, run `npm run dev:mock` instead. It serves a fake organization with sample roles. Every screenshot in this guide was taken that way.

## WHY A LOCAL SERVER

Browsers can't call the mParticle API directly, and a client secret sitting in page JavaScript would be readable by anyone with developer tools open. The local server keeps secrets out of the browser entirely.

## Your vault

On first run you choose a passphrase. It encrypts a single file, `data/vault.enc.json`, holding the credentials for every customer organization you add (AES-256-GCM, key derived with script).

FIRST RUN — CHOOSE A VAULT PASSPHRASE


### THERE IS NO RECOVERY

Forget the passphrase and the credentials are unrecoverable — delete `data/vault.enc.json` and add the environments again. Nothing else is lost.

The vault locks itself after 30 idle minutes, and you can lock it any time with **Lock vault** in the top-right. Locking wipes the decrypted credentials and access tokens from memory and returns you to the passphrase screen; nothing on disk is deleted.

## Connecting a customer organization

Each customer is an "environment". Open **Environments** and choose **Add environment**.

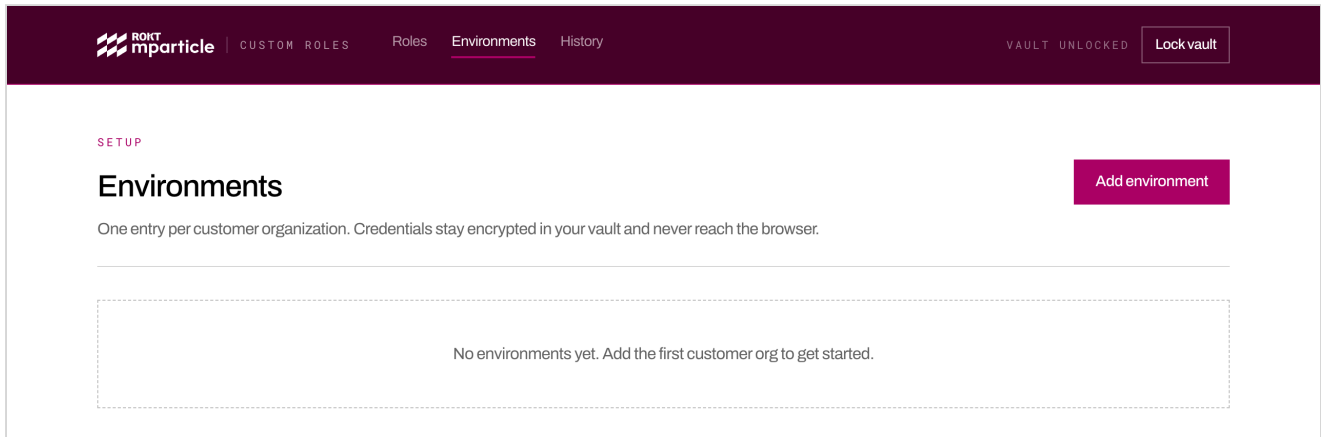

ENVIRONMENTS – BEFORE ANYTHING IS ADDED

### Getting the credential from mParticle

- 01 In the customer's mParticle dashboard, go to **Settings** → **API Credentials** and choose **Add Credential**.
- 02 Under **Select APIs**, tick **Custom Roles**. It is its own API alongside Platform, Profile, and Data Plans — Platform API access is not what this tool needs. Custom Roles is Admin permissions, organization-level scope.
- 03 Copy the **Client Secret** before closing the dialog — mParticle shows it once and it cannot be retrieved later.
- 04 Note the **Organization ID** and **Account ID** shown in that same dialog.

## SETUP

## Environments

One entry per customer organization. Credentials stay encrypted in your vault and never reach the browser.

## New environment

LABEL

Acme Retail

POD

US1 (default)



Only changes the API host — check which pod the customer's dashboard runs on

ORG ID

4000155

No API to discover this — read orgId from the mParticle UI page source

ACCOUNT ID

622

CLIENT ID

demo-client-id-not-a-real-credential

From an mParticle API credential with the Custom Roles API selected

CLIENT SECRET

.....

Stored encrypted in your vault

Save environment

Cancel

## ADDING AN ENVIRONMENT

## Choosing the pod

The pod is the mParticle region the customer runs on. Check their dashboard URL: US1 is `app.mparticle.com`, and the others are prefixed, for example `app.eu1.mparticle.com`. Picking the wrong pod is the most common cause of a failed connection.

**ROKt mparticle** | CUSTOM ROLES | Roles | Environments | History | VAULT UNLOCKED | Lock vault

SETUP

### Environments

One entry per customer organization. Credentials stay encrypted in your vault and never reach the browser.

#### New environment

LABEL

Acme Retail

ORG ID

4000155

No API to discover this — read orgId from the mParticle UI page source

CLIENT ID

demo-client-id-not-a-real-credential

From an mParticle API credential with the Custom Roles API selected

Save environment Cancel

POD

US1 (default) ^

US1 (default)  
api.mparticle.com

US2  
api.us2.mparticle.com

EU1  
api.eu1.mparticle.com

AU1  
api.au1.mparticle.com

Stored encrypted in your vault

POD SELECTION – THE API HOST EACH OPTION TARGETS

Save, then choose **Test connection**. A successful test confirms the credentials work, the pod is right, and the credential is provisioned for the Custom Roles API. The stored secret is only ever shown masked.

**ROKt mparticle** | CUSTOM ROLES | Roles | Environments | History | VAULT UNLOCKED | Lock vault

SETUP

### Environments

One entry per customer organization. Credentials stay encrypted in your vault and never reach the browser.

Add environment

|             |            |                                    |           |
|-------------|------------|------------------------------------|-----------|
| Acme Retail | US1        | Edit                               | Delete    |
| ORG ID      | ACCOUNT ID | CLIENT ID                          | SECRET    |
| 4000155     | 622        | demo-client-id-not-a-real-crede... | .....tial |

Test connection Connected — 35 permissions available

A CONNECTED ENVIRONMENT



# Viewing roles

**Roles** lists every custom role in the selected organization, read live from mParticle each time you open it. The meter tracks the 100-role limit, and the header shows who last changed the roles and when.

 | CUSTOM ROLES

Roles

Environments

History

VAULT UNLOCKED

Lock vault

OVERVIEW

## Roles

Every custom role in this organization — open one to see exactly what it grants.

4 of 100 roles

version 12

Last modified 01/08/2026, 10:30:00 by seed@mock.local

| NAME              | ROLE ID           | DESCRIPTION                                            | PERMISSIONS |
|-------------------|-------------------|--------------------------------------------------------|-------------|
| Ad Sales Analyst  | ad-sales-analyst  | Read-only view of audiences and user activity          | 3           |
| Ad Sales Manager  | ad-sales-manager  | Full audience management plus connection configuration | 4           |
| Agency Partner    | agency-partner    | External partner access limited to audiences           | 2           |
| Marketing Manager | marketing-manager | Audiences, calculated attributes, and data plans       | 4           |

ENVIRONMENT

Acme Retail

ROLES – EVERY CUSTOM ROLE IN THE ORGANIZATION

Select any role name to open it in the editor, where every permission it grants is listed.

 | CUSTOM ROLES

Roles

Environments

History

VAULT UNLOCKED

Lock vault

EDITOR

## Role editor

Pick an existing role to see exactly what it grants, or start a new one. Nothing is written to the organization until you confirm a reviewed diff.

ROLE

Ad Sales Manager

New role

NAME

Ad Sales Manager

16/64

ROLE ID

ad-sales-manager

Immutable — changing it would delete and recreate the role

DESCRIPTION

Full audience management plus connection configuration

54/256

► What this role grants

3 PERMISSIONS + CORE

☒ Core Access

ALWAYS INCLUDED

Log in and view the dashboard (always included)

ROLE EDITOR – THE GRID REFLECTS EXACTLY WHAT THE ROLE GRANTS

For a quick answer to "what can someone with this role actually do?", expand **What this role grants**.

 | CUSTOM ROLES

Roles | Environments | History

VAULT UNLOCKED 

Lock vault

EDITOR

Role editor

ENVIRONMENT 

Acme Retail

Pick an existing role to see exactly what it grants, or start a new one. Nothing is written to the organization until you confirm a reviewed diff.

ROLE

Ad Sales Manager

New role

NAME

Ad Sales Manager

16/64

ROLE ID

ad-sales-manager

Immutable — changing it would delete and recreate the role

DESCRIPTION

Full audience management plus connection configuration

54/256

▼ What this role grants

3 PERMISSIONS + CORE

Audiences — Full Access

audiences:\*

Create, edit, and delete audiences

Connections — Connect Audiences

connections:connect\_audiences

Connect audiences to outputs

A PLAIN-ENGLISH SUMMARY OF ONE ROLE'S ACCESS

## How permissions are organized

Permissions are grouped the way the platform itself works — data comes in, gets connected, powers features, and is administered:

| SECTION                        | COVERS                                                         |
|--------------------------------|----------------------------------------------------------------|
| 001 Data Ingestion             | Warehouse Sync connections and data models                     |
| 002 Connections & Integrations | Inputs, outputs, integrations, data filters                    |
| 003 Data Platform & Quality    | Data plans, rules, catalog, live stream                        |
| 004 Identity & Customer 360    | User activity, calculated attributes, household reach          |
| 005 Audiences & Activation     | Real-time and composable audiences, journeys                   |
| 006 Oversight & Privacy        | Privacy settings, data subject requests, observability         |
| 007 Platform Administration    | Workspaces, users, API credentials, identity settings, billing |

EDITOR

Role editor

ENVIRONMENT

Acme Retail

Pick an existing role to see exactly what it grants, or start a new one. Nothing is written to the organization until you confirm a reviewed diff.

ROLE

Ad Sales Manager

New role

NAME

Ad Sales Manager

ROLE ID

ad-sales-manager

16/64

Immutable — changing it would delete and recreate the role

DESCRIPTION

Full audience management plus connection configuration

54/256

► What this role grants

3 PERMISSIONS + CORE

☒ **Core Access** ALWAYS INCLUDED  
 Log in and view the dashboard (always included)

001 Connections & Integrations

CONNECTIONS

☐ **Connections — View** connections:view  
 View connections

☐ **Connections — Configure Inputs** connections:configure\_inputs  
 Configure input platforms

☐ **Connections — Configure Outputs** connections:configure\_outputs  
 Configure output platforms

☐ **Connections — Warehouse Sync** connections:configure\_warehouse\_sync  
 Configure warehouse sync pipelines

☒ **Connections — Connect Audiences** connections:connect\_audiences  
 Connect audiences to outputs

☐ **Connections — Connect Integration** connections:connect\_integration  
 Connect new integrations

☐ **Connections — Full Access** connections:\*  
 Full connections management

FILTERS

☐ **Data Filter — View** data\_filter:view  
 View the data filter

☐ **Data Filter — Full Access** data\_filter:\*  
 Manage the data filter

Review changes

Delete role

EACH PERMISSION STATES WHAT IT ALLOWS

## Two things to know about the grid

**Core access is always included.** Every mParticle role can log in and view the dashboard, so that permission is shown ticked and locked. Roles also carry a few view-only extras with no separate toggle: system alerts, the Event Forwarding report, Data Master Catalog viewing, the Integrations Directory, and workspace access.

mParticle by Rokt — Custom Roles Manager

12

#### THE "UNVERIFIED" BADGE

A handful of permissions exist in the API but have no published description from mParticle. They're labelled **unverified**, and their wording here is inferred from the product area. Confirm the exact scope in the mParticle UI before granting one to a customer.

# Creating and editing a role

Use the **Role** dropdown to edit an existing role, or **New role** to start a blank one.

**EDITOR**

## Role editor

Pick an existing role to see exactly what it grants, or start a new one. Nothing is written to the organization until you confirm a reviewed diff.

ENVIRONMENT: Acme Retail

**ROLE**

Ad Sales Manager

**New role**

**ROLE ID**

ad-sales-manager

16/64 Immutability — changing it would delete and recreate the role

**Description**

54/256

**What this role grants** 3 PERMISSIONS + CORE

☒ **Core Access** ALWAYS INCLUDED  
Log in and view the dashboard (always included)


## CHOOSING WHICH ROLE TO WORK ON

- 01 Give the role a **name** (up to 64 characters) and, for a new role, a **Role ID** — a permanent identifier using letters, numbers, dots, dashes, or underscores.
- 02 Add a **description** (up to 256 characters). Say who the role is for; it's the only context the next person gets.
- 03 Tick the permissions. Within a feature, "Full access" replaces the narrower options automatically.
- 04 Choose **Review changes**.

Character counts sit under each field and turn Beetroot if you go over the limit. The Role ID of an existing role can't be edited — changing it would delete that role and create a different one.

## The diff gate

Nothing is written until you confirm. The app fetches the organization's current roles, applies your change to them, and shows you exactly what will differ.

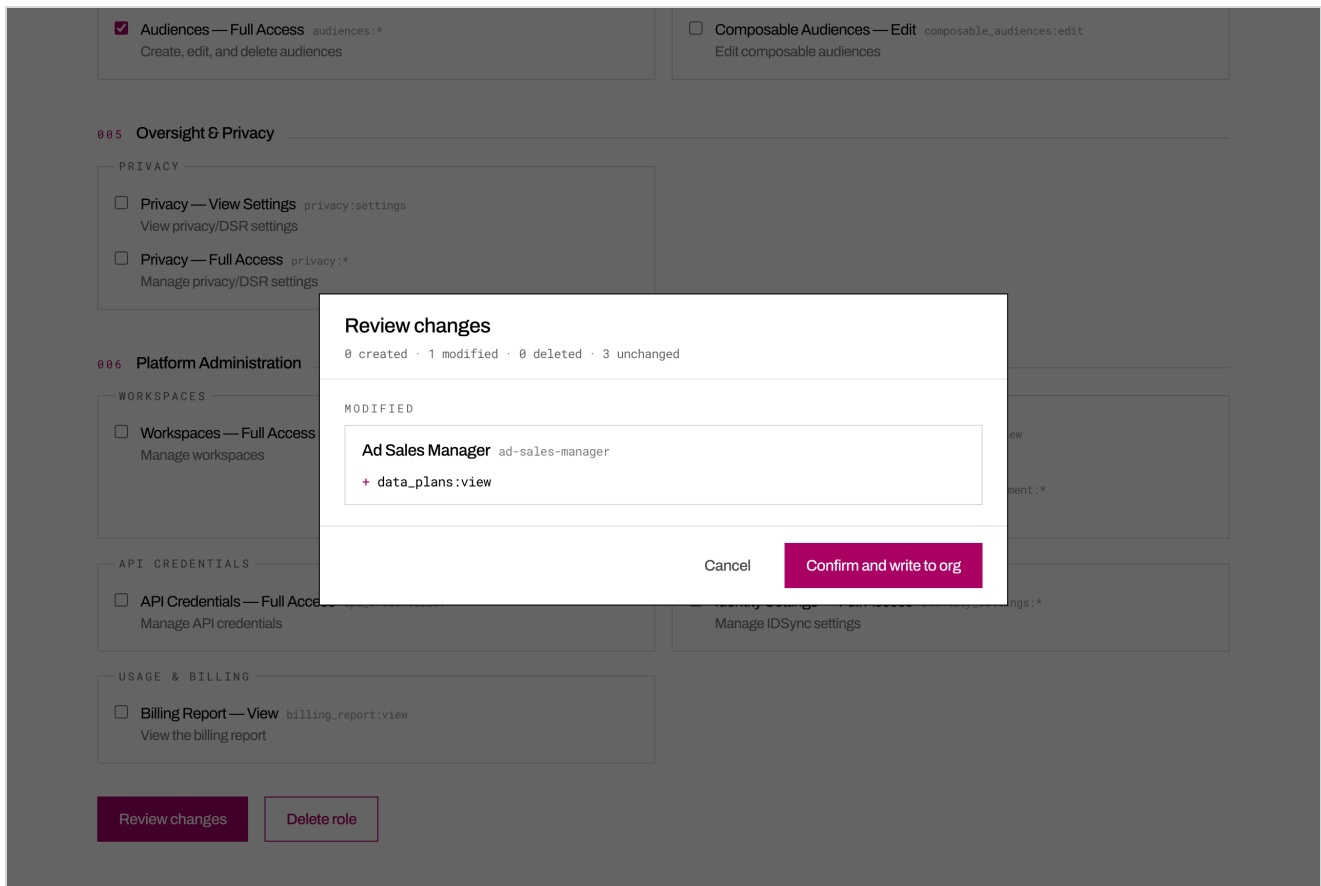


REVIEW CHANGES - ADDED PERMISSIONS IN BEETROOT, REMOVED STRUCK THROUGH

Choose **Confirm and write to org** to apply it. If someone else changed the organization's roles while you were reviewing, the write is refused and you're shown a refreshed diff instead — your change is never silently applied on top of theirs.

## Deleting a role

Open the role and choose **Delete role**. Because deletions are permanent and organization-wide, you must tick the acknowledgement before the confirm button becomes available.

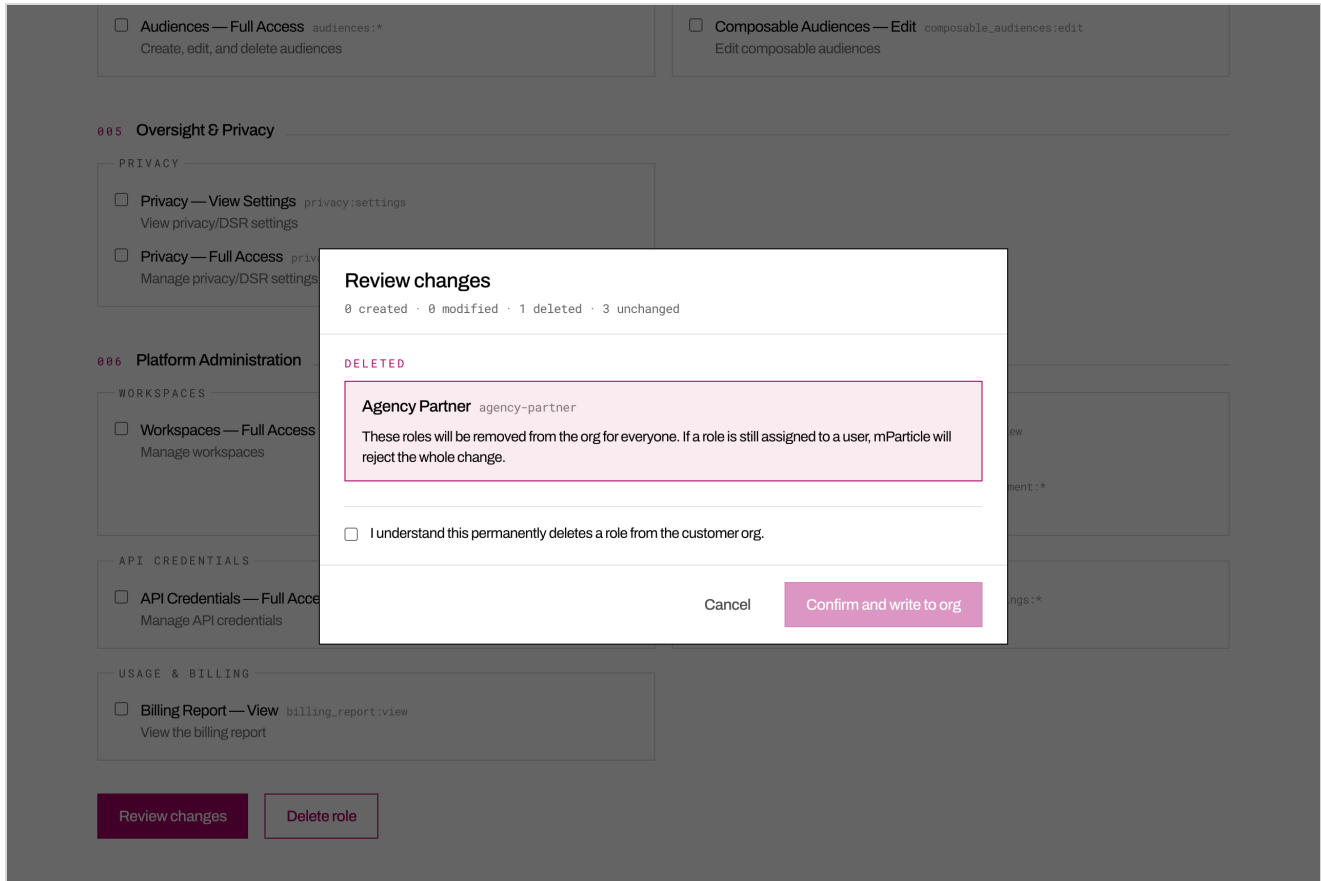

DELETIONS NEED AN EXPLICIT ACKNOWLEDGEMENT

### IF THE DELETE IS REJECTED

mParticle refuses to delete a role that is still assigned to a user, and the whole change is rejected — nothing is modified. Unassign the role in the mParticle UI (Settings → User Management), then try again. There is no API for unassignment.



# History and rollback

**History** records every change this app has written for the selected environment, plus a snapshot of the organization's roles from the first time you opened it.

**AUDIT**

## History

ENVIRONMENT: Acme Retail

Every change this app has written for the selected environment, plus the organization's starting state. Restoring rolls back through the same diff-review gate.

|                                                  |                                            |     |                    |
|--------------------------------------------------|--------------------------------------------|-----|--------------------|
| <b>BASELINE</b>                                  | <b>Initial snapshot of the org's roles</b> | v12 | Restore this state |
| 20/08/2026, 23:43:50 · 4 roles after this change |                                            |     |                    |

HISTORY — EACH ENTRY CAN BE RESTORED

**Restore this state** rebuilds the roles exactly as they were in that snapshot. It goes through the same diff review as any other change, so you see precisely what restoring would add back or remove before it happens.


History is stored on your machine, in `data/history/`. It records what this app did — changes made in the mParticle UI or by another teammate's copy won't appear.

# When something goes wrong

## WHAT YOU SEE

## WHAT TO DO

|                                      |                                                                                                                                            |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Credentials rejected                 | The client ID or secret is wrong, or the credential was deleted in mParticle. Re-check them on the environment, or issue a new credential. |
| 403 or 404 from mParticle            | Usually the wrong pod, wrong organization or account ID, or a credential without Custom Roles access. Check the pod first.                 |
| Role is assigned to a user           | Unassign it in the mParticle UI, then delete again. Nothing was changed.                                                                   |
| A role with this name already exists | Names must be unique in the organization. Pick a different one.                                                                            |
| Rate limit reached                   | mParticle allows 100 requests a minute. Wait the number of seconds shown and retry.                                                        |
| Roles changed since you reviewed     | Someone edited the organization while you had the diff open. Review the refreshed diff and confirm again.                                  |
| Local server unreachable             | The local server isn't running. Start it with <code>npm run dev</code> and choose Retry.                                                   |
| Back at the passphrase screen        | The vault locked, either from 30 idle minutes or because you locked it. Enter your passphrase to continue.                                 |

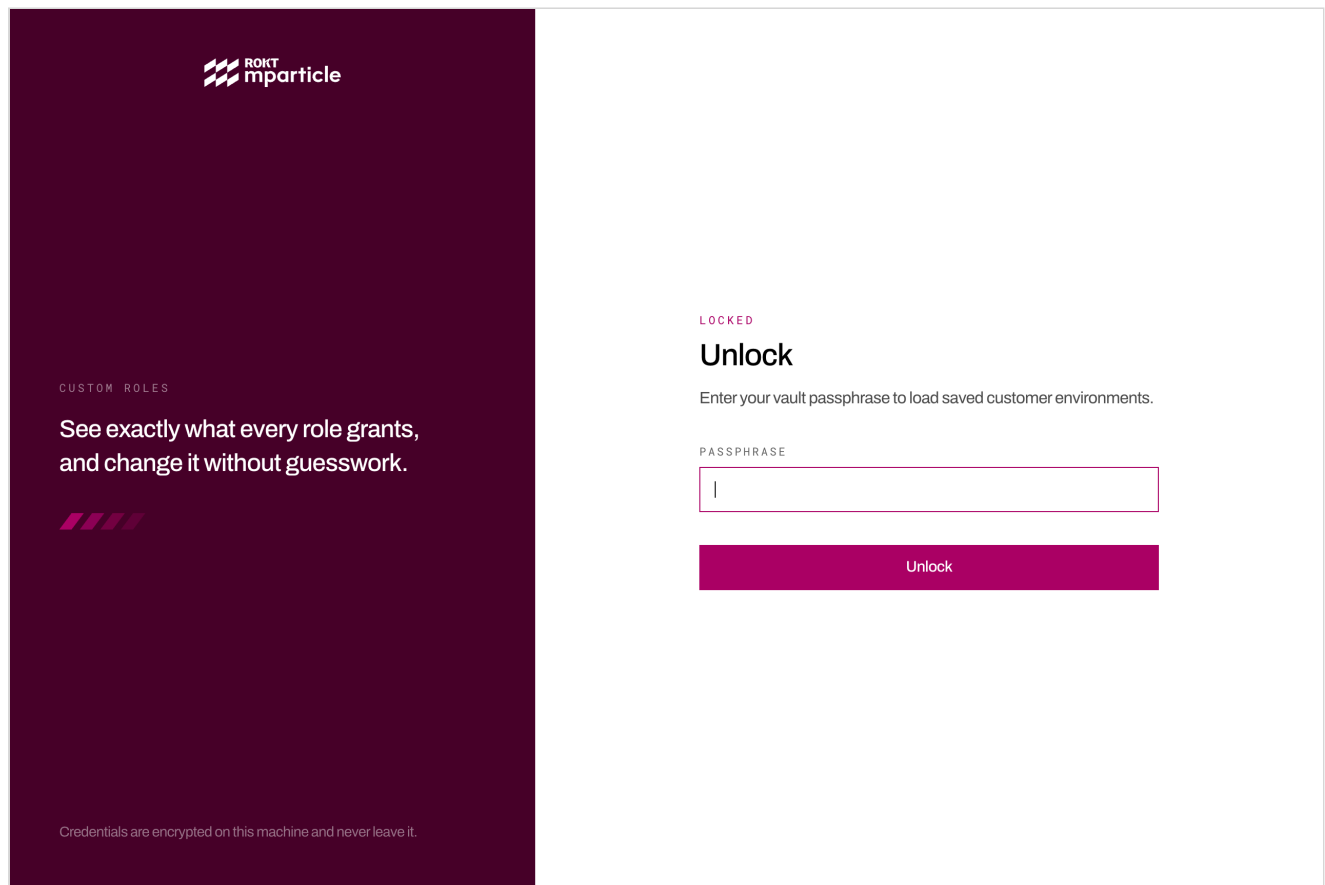

THE LOCKED STATE – EVERYTHING IS SAFE, JUST RE-ENTER YOUR PASSPHRASE

## Security notes

---

- Credentials are encrypted at rest with AES-256-GCM and a script-derived key, and only ever decrypted into the local server's memory.
- The local server binds to `127.0.0.1` and is unreachable from the network.
- Client secrets never reach the browser — the interface only ever receives the last four characters.
- Secrets and access tokens are stripped from logs.
- Access tokens last eight hours and cannot be revoked by mParticle, so they are kept in memory only and dropped when the vault locks.
- The vault and history files are excluded from version control. Never commit `data/`.

### SHARING THIS APP

Each person runs their own copy with their own vault and their own mParticle credentials. Never share a vault file or a passphrase.