Programação Web 1

CSS

Objetivos de Aprendizagem

- Conhecer princípios básicos de CSS3

Agenda

- Por que CSS?
- Como CSS funciona?
- *Frameworks*

Por que CSS?

Cascading Style Sheets

- *Layouts* de sites precisos
- Especificação centralizada
- Atualização rápida
- Acessibilidade

Possibilidades do CSS

CSS Zen Garden

Como CSS funciona?

Aplicação CSS

- Elementos individuais (inline)

```
<h1 style=color: red; margin-top: 2em;>Introdução</h1>
```

- Embutido no HTML

```
<head>
    <title>Document Title</title>
    <style>
        /* rules */
    </style>
```

Aplicação CSS

- Arquivo externo (.CSS)

```
<head>
    <title>Jen's Kitchen</title>
    <link rel="stylesheet" href="kitchen.css" type="text/css">
</head>
```

Estrutura CSS

- Folha de estilo (*sheets*)
  - Conjunto de regras (*rules*)
    - Seletores
    - Declaração (propriedade + valor)

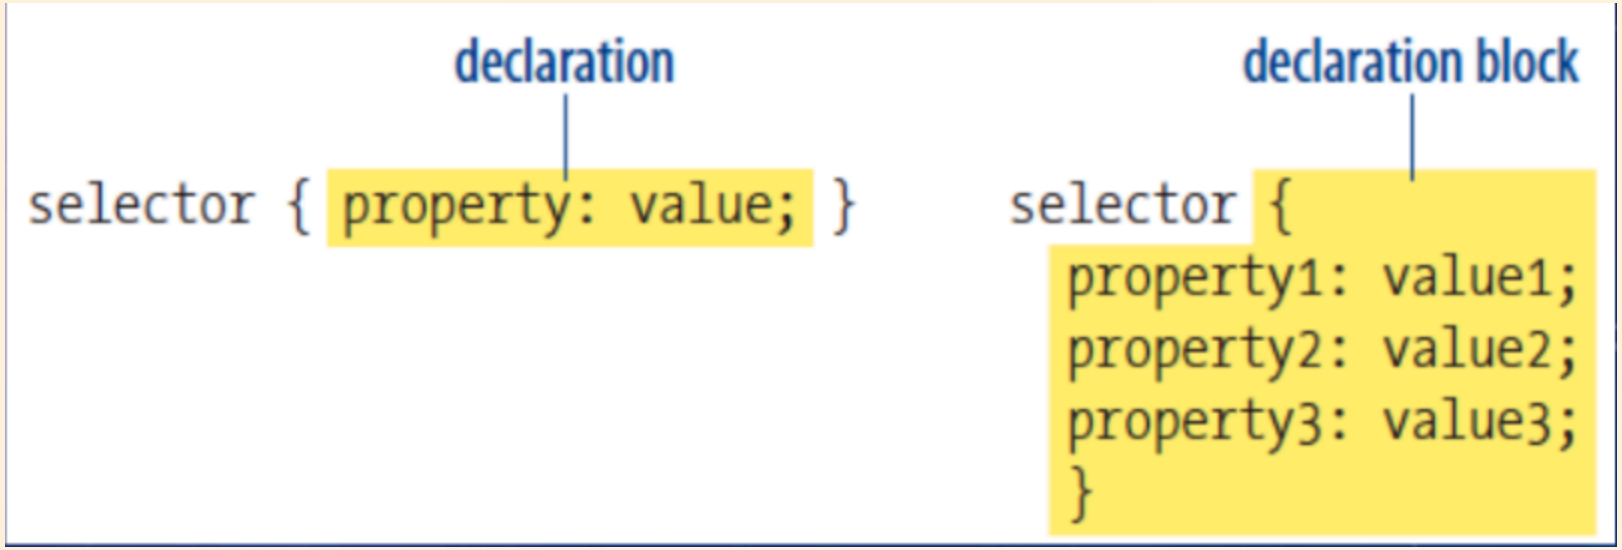

Conceitos

- Herança
- Conflitos
- *Box model*

Herança

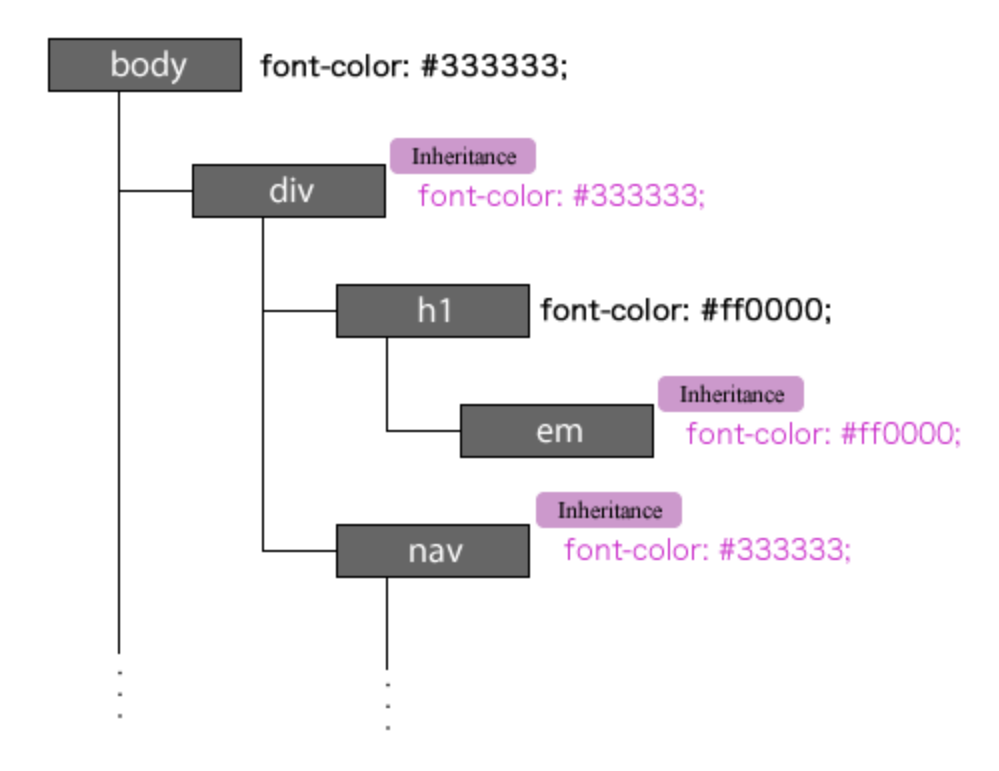
body
font-color: #333333;
Inheritance
div
font-color: #333333;
h1
font-color: #ff0000;
Inheritance
em
font-color: #ff0000;
Inheritance
nav
font-color: #333333;

Conflitos

- Podem existir conflitos em definições de estilo
- As folhas de estilo possuem uma hierarquia para resolver tais conflitos:
  1. Definições do navegador
  2. Definições de estilo do usuário (definido no navegador)
  3. Arquivo externo (*link*)
  4. Estilos embutidos (`<style>`)
  5. Estilos *inline*
  6. Regras marcadas com `!important`

Exemplos

```
p {color: blue !important;}
```

```
<style>
    p {color: red;}
    p {color: blue;}
    p {color: green;}
</style>
```

CSS Box Model

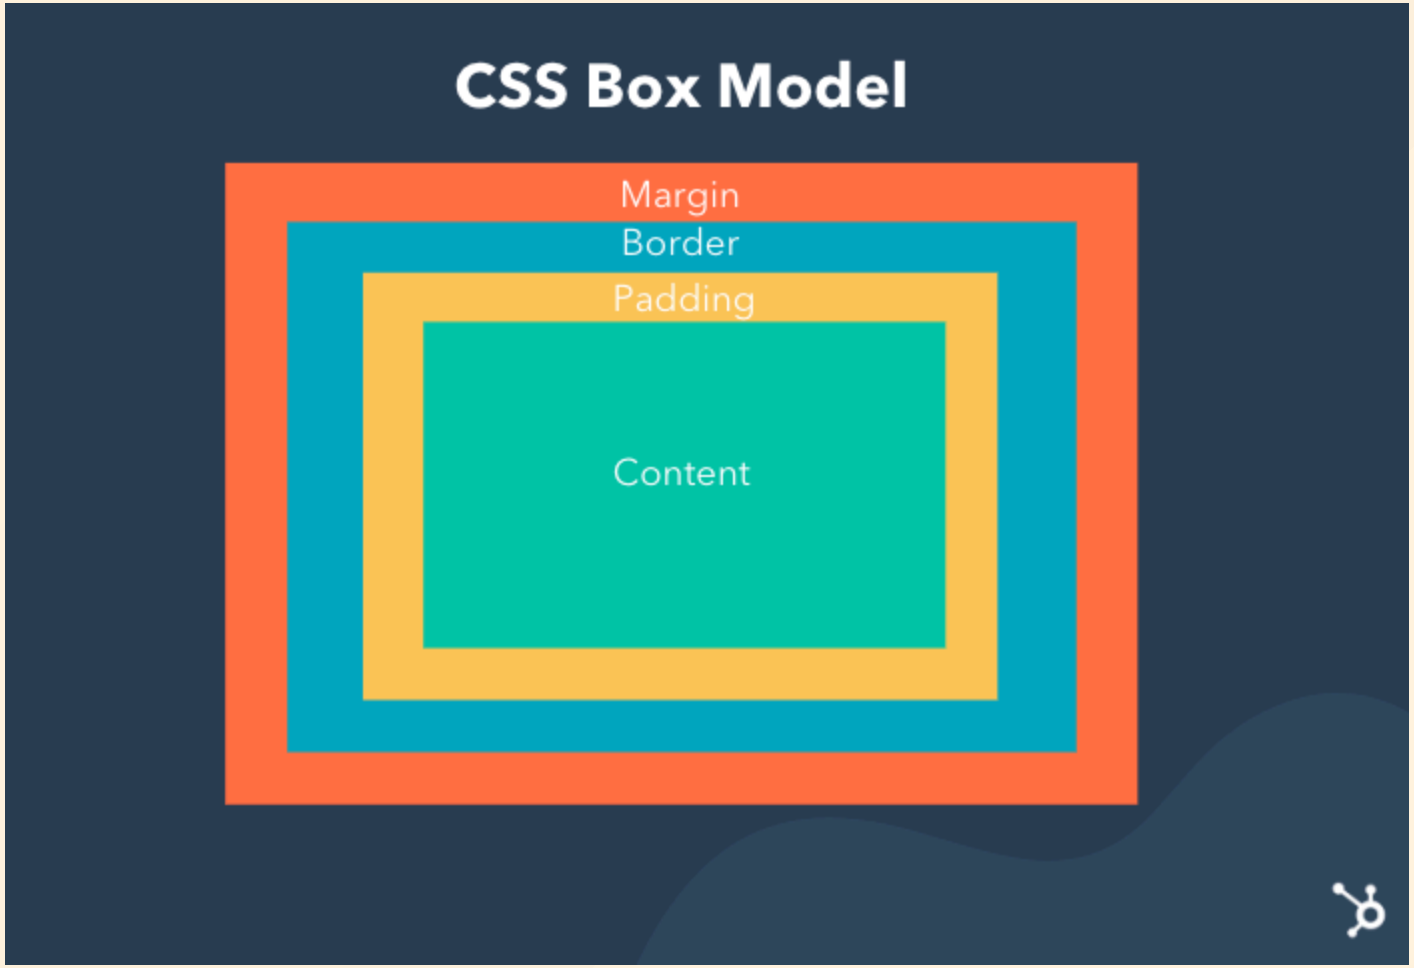

CSS *Box Model*

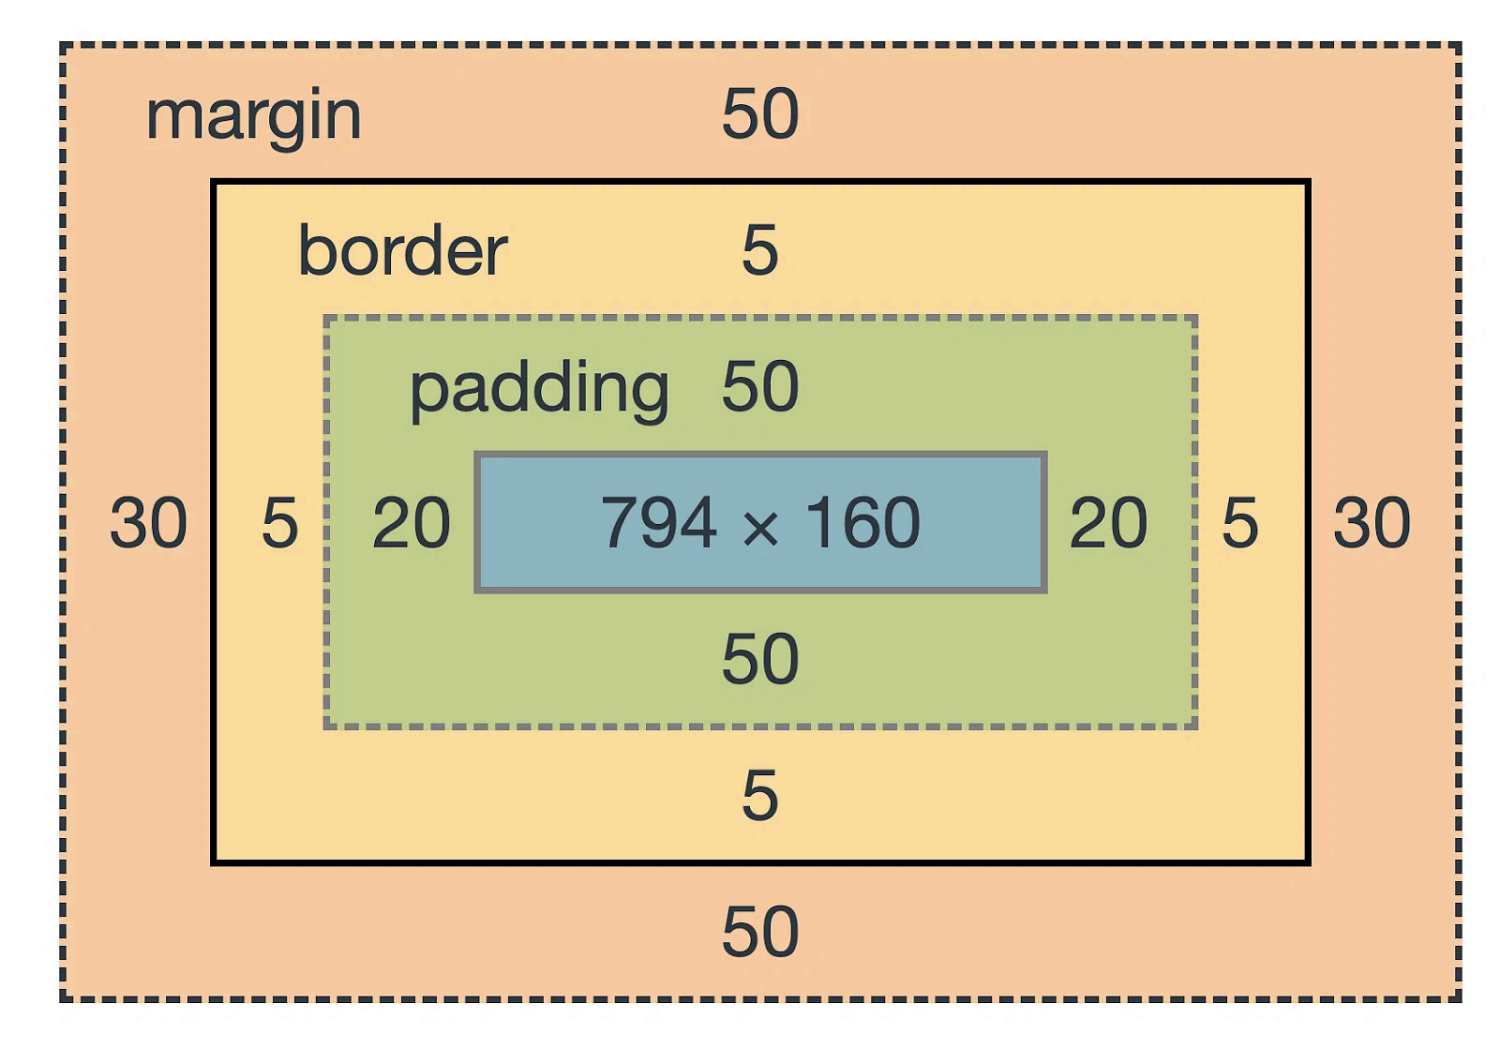

content-box

```
p {
    background: #c2f670;
    width: 500px;
    height: 150px;
    padding: 20px;
    border: 2px solid gray;
    margin: 20px;
}
```

20px + 2px + 20px + 500px width + 20px + 2px + 20px = 584 pi

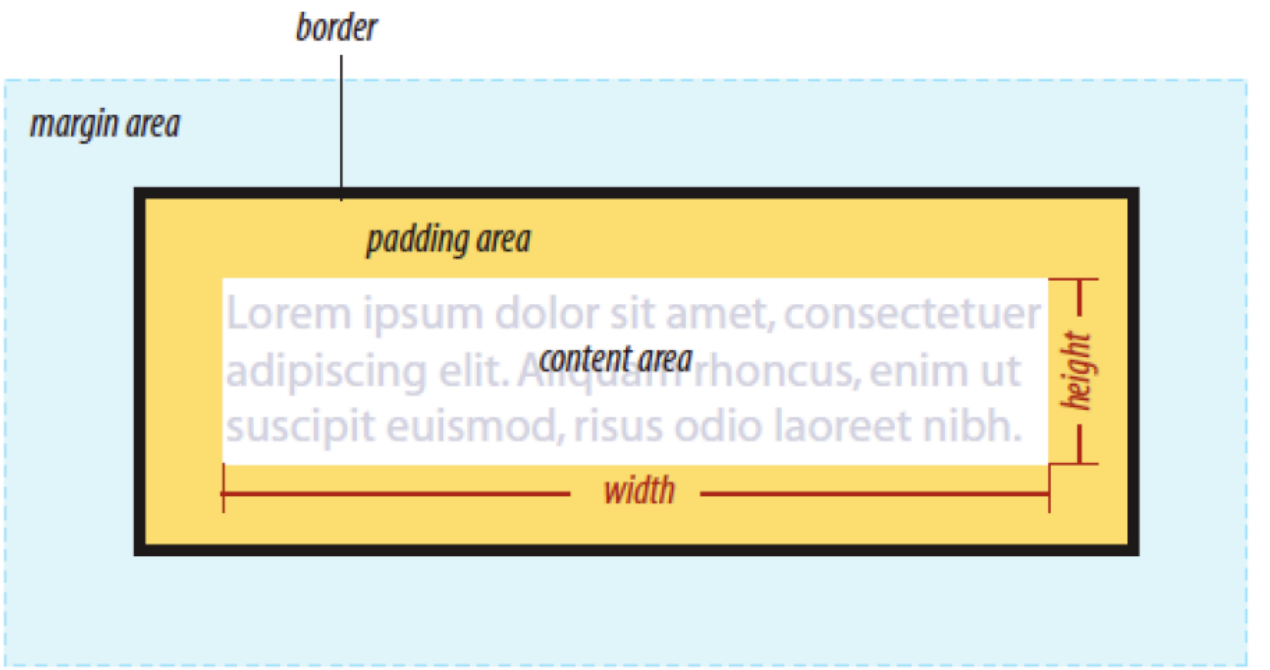

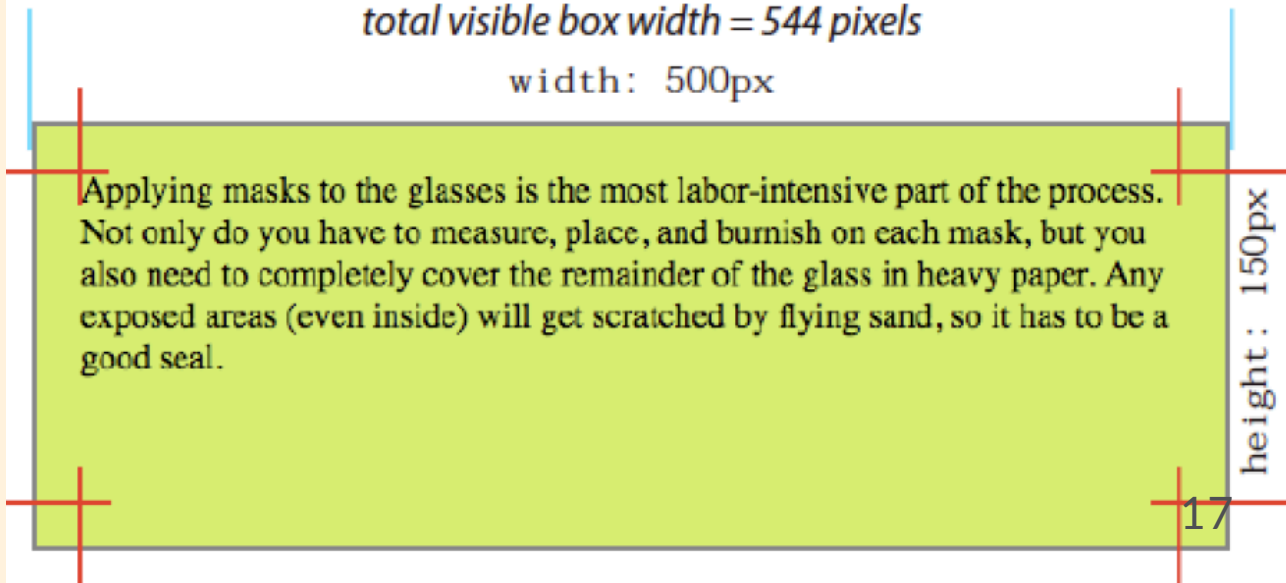

`border-box`

- Maneira alternativa e mais intuitiva de especificar o tamanho das caixas
- `box-sizing: border-box`
- Aplica os valores de `width` e `height` para o box por completo

border-box

```
p {
    -webkit-box-sizing: border-box;
    -moz-box-sizing: border-box;
    box-sizing: border-box;
    width: 500px;
    height: 150px;
}
```

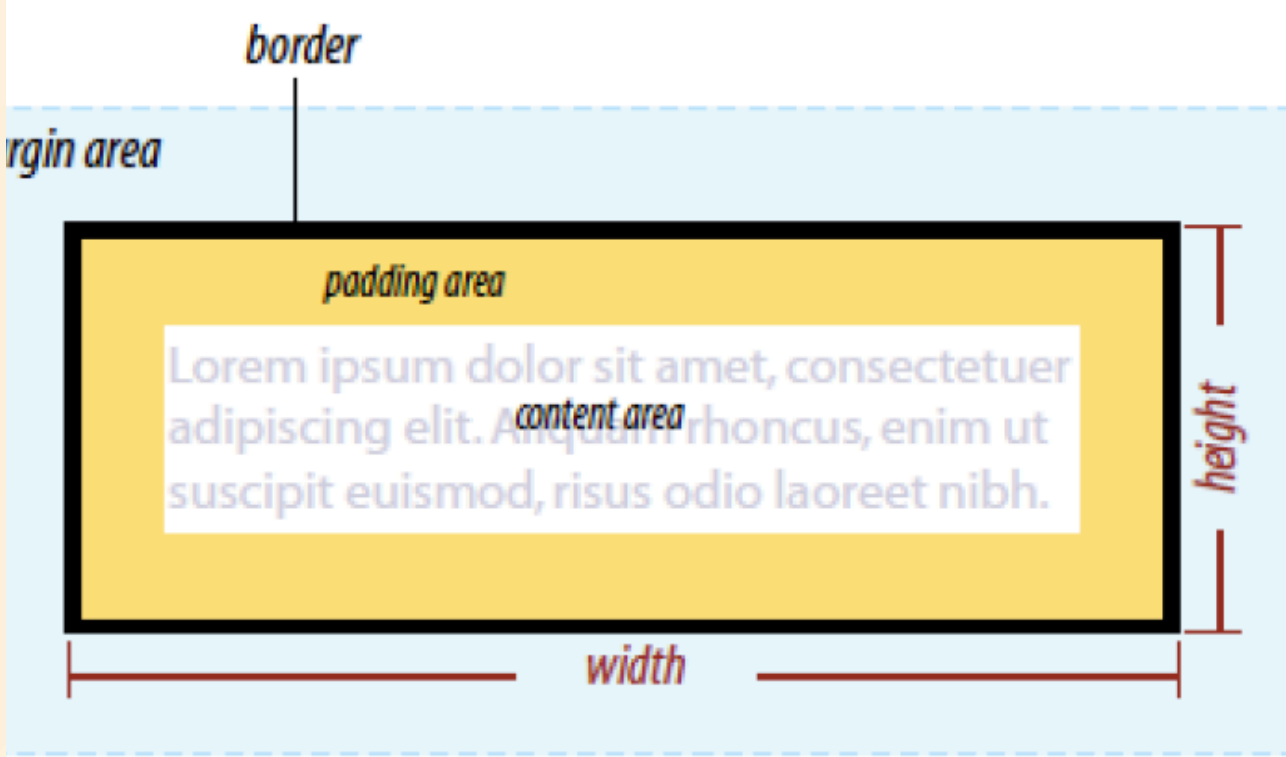

total visible box width = 500 pixels

Applying masks to the glasses is the most labor-intensive part of the process. Not only do you have to measure, place, and burnish on each

box-sizing

- Possíveis opções:
  - `content-box` (padrão)
  - `border-box`
  - `inherit`

padding

```
padding: top right bottom left;
```

padding

```
blockquote: {
    padding: 1em 3em 1em 3em;
    background-color: #D098D4;
}
```

border-style

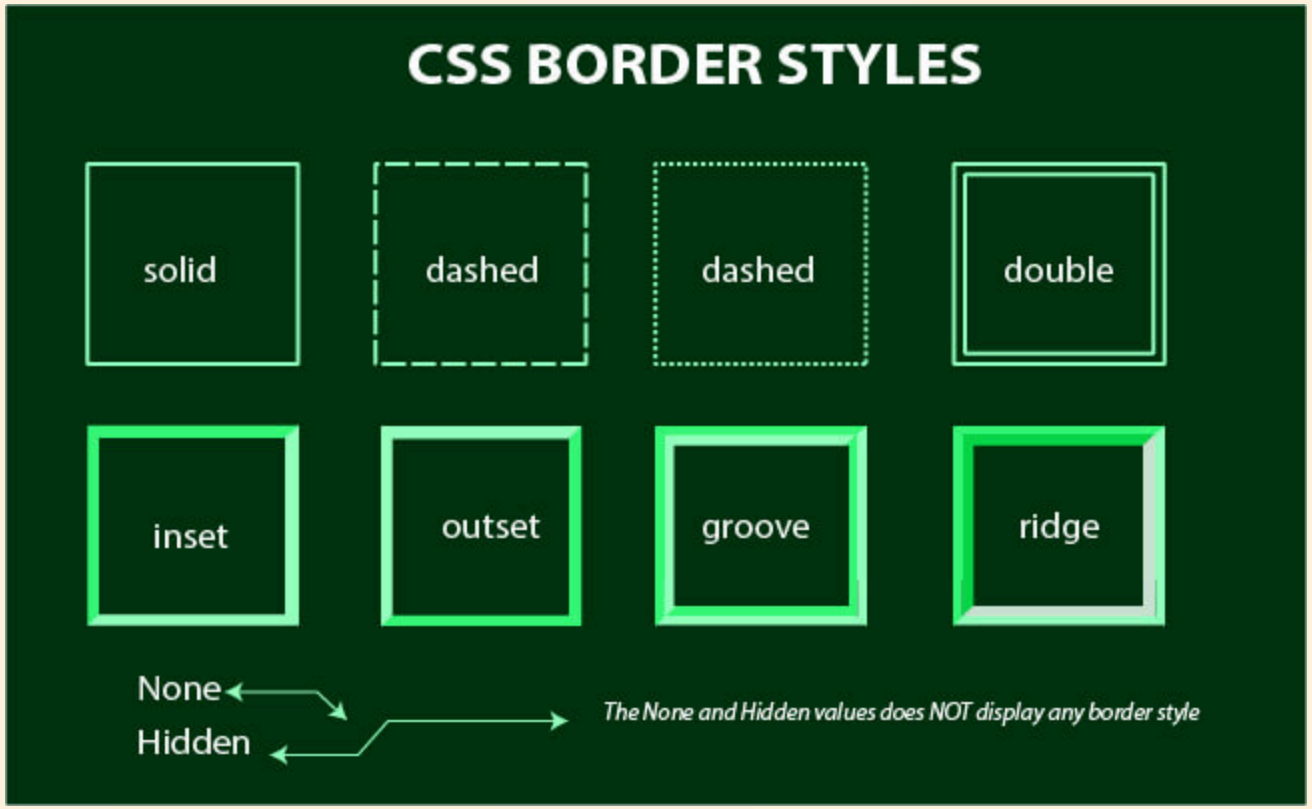

margins

Applying the masks to the glasses is the most labor-intensive part of the process. Not only do you have to measure, place, and burnish on each mask, but you also need to completely cover the remainder of the glass in heavy paper. Any exposed areas (even inside) will get scratched by the flying sand, so it has to be a good seal.

```
margin: 4em;
```

After the blasting, the protective paper and the resist masks needs to be removed from the glasses. A cycle in the dishwasher finishes the job.

```
margin-top: 2em;
margin-right: 250px;
margin-bottom: 1em;
margin-left: 4em;
```

Propriedades para fontes

```
/* Set the font size to 12px and the line height to 14px.
   Set the font family to sans-serif */
p {
  font: 12px/14px sans-serif;
}

/* Set the font size to 80% of the parent element
   or default value (if no parent element present).
   Set the font family to sans-serif */
p {
  font: 80% sans-serif;
}

/* Set the font weight to bold,
   the font-style to italic,
   the font size to large,
   and the font family to serif. */
p {
  font: bold italic large serif;
}
```

Live Sample

MDN Web Docs

Quiz CSS

Ver Aula 3

Referências

- CSS Zen Garden
- Understanding Box Sizing in CSS
- Design Responsivo