

Lecture 10 – Recursive and recursively enumerable languages, Intro to computability

NTIN071 Automata and Grammars

Jakub Bulín (KTIML MFF UK)

Spring 2026


** Adapted from the Czech-lecture slides by Marta Vomlelová with gratitude.
The translation, some modifications, and all errors are mine.*

Recap of Lecture 9

- Turing machine: two-way infinite tape, read, write, move head
- Accept iff in a final state; configurations
- TMs with output, computing a function
- Construction tricks:
 - storage in state
 - multiple tracks (on a single tape)
- Variants of TMs:
 - multi-tape (independent heads),
 - nondeterministic (accept iff some choices lead to final state)
 - one-way infinite tape

3.3 Turing Machines and grammars

Chomsky hierarchy: Type 0

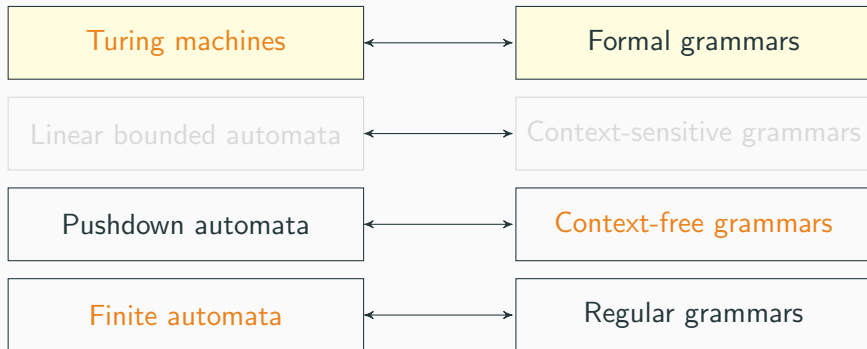

Theorem

A language is recursively enumerable, if and only if it is generated by a Type 0 grammar.

Turing machine to grammar

- First generate the relevant portion of the tape and a copy of the input word (nonterminal $\underline{X}$ for each $x \in \Gamma$, in reverse)
- Why? TM can rewrite w , G must generate it, cannot modify
- We have $wB^n\underline{W}^RQ_0B^m$, where B^n, B^m is sufficient free space
- Then simulate moves (essentially reverse configs+free space)
- In a final state erase the simulated tape, keep only w

$G = (\{S, C, D, E\} \cup \{\underline{X}\}_{x \in \Gamma} \cup \{Q_i\}_{q_i \in Q}, \Sigma, \mathcal{P}, S)$ where $\mathcal{P}$ is:

- | | | |
|-----|--|---|
| (1) | $S \rightarrow DQ_0E$ | simulation starts in initial state |
| | $D \rightarrow xD\underline{X} \mid E$ | generate input word, reverse copy for simulation |
| | $E \rightarrow BE \mid \epsilon$ | generate sufficient free space for simulation |
| (2) | $\underline{X}P \rightarrow Q\underline{X}'$ | for all $\delta(p, x) = (q, x', R)$ [direction reversed!] |
| | $\underline{X}P\underline{Y} \rightarrow \underline{X}'\underline{Y}Q$ | for all $\delta(p, x) = (q, x', L)$ |
| (3) | $P \rightarrow C$ | for all $p \in F$ |
| | $C\underline{X} \rightarrow C, \underline{X}C \rightarrow C$ | clean the tape |
| | $C \rightarrow \epsilon$ | finish, generated w |

Example: $L = \{a^{2^n} \mid n \geq 0\}$

$M = (\{q_0, q_1, q_2, q_F\}, \{a\}, \{a, B\}, \delta, q_0, B, \{q_F\})$ where

$$\delta(q_0, a) = (q_1, a, R),$$

$$\delta(q_1, a) = (q_0, a, R),$$

$$\delta(q_0, B) = (q_F, B, L)$$

$G = (\{S, C, D, E, Q_0, Q_1, Q_F, \underline{a}, B\}, \{a\}, S, \mathcal{P}_1 \cup \mathcal{P}_2 \cup \mathcal{P}_3)$

Initialize: $\mathcal{P}_1$

$S \rightarrow DQ_0E$

$D \rightarrow aD\underline{a} \mid E$

$E \rightarrow BE \mid \epsilon$

Simulate: $\mathcal{P}_2$

$\underline{a}Q_0 \rightarrow Q_1\underline{a}$

$\underline{a}Q_1 \rightarrow Q_0\underline{a}$

$BQ_0\underline{a} \rightarrow B\underline{a}Q_F$

$BQ_0B \rightarrow BBQ_F$

Cleanup: $\mathcal{P}_3$

$Q_F \rightarrow C$

$C\underline{a} \rightarrow C$

$\underline{a}C \rightarrow C$

$BC \rightarrow C$

$C \rightarrow \epsilon$

For $w = aa$: initialize $aaB\underline{a}Q_0$, simulate $aaB\underline{a}Q_F\underline{a}$, cleanup: aa

$$L(M) \subseteq L(G)$$

- For $w \in L(M)$ there is a finite accepting sequence of moves
- The grammar generates sufficient space
- Then we simulate the moves
- Finally clean non-input symbols

$$L(G) \subseteq L(M)$$

- Steps in a derivation for $w \in L(G)$ may be in different order
- But we can reorder them into the phases (1), (2), (3)
- Since we eliminated the underlined symbols, we must have generated the cleaning variable C
- In order to generate C we must have generated a final state
- A final state can only be generated from the initial state by a sequence of simulated moves




Grammar to Turing machine

Idea: The TM sequentially generates all possible derivations.

(Note: here we do not care about efficiency.)

- code $S \Rightarrow \beta_1 \Rightarrow \dots \Rightarrow \beta_n = \omega$ as a string $\#S\#\beta_1\#\dots\#\omega\#$
- construct a TM accepting exactly $\#\alpha\#\beta\#$ where $\alpha \Rightarrow \beta$
- construct a TM accepting $\#\beta_1\#\dots\#\beta_k\#$ where $\beta_1 \Rightarrow^* \beta_k$
- construct a TM generating sequentially all possible strings
- check if the string is a valid derivation ending with ω

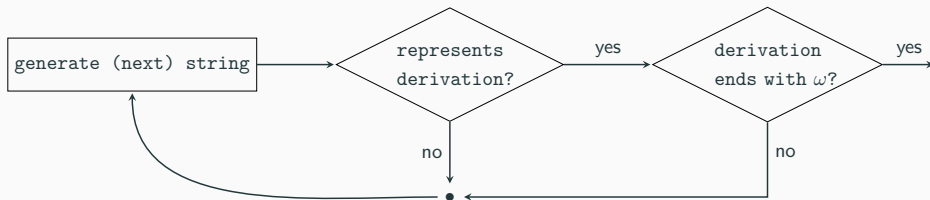

Halting, recursively enumerable and recursive languages

Definition

A TM **halts** if it enters a state q , scanning a tape symbol X , and there is no transition in this situation, i.e., $\delta(q, X)$ is undefined.

A TM halts whenever it gets to an accepting state (no outgoing transitions allowed). In general, we cannot require that a TM always halts, even if it does not accept.


(Until a TM halts, we do not know whether it will accept or not.)

Definition

A language L is:

- **recursively enumerable** if it is **recognized** by some TM
- **recursive** if there exists a TM M that recognizes L and *halts on every input $w \in \Sigma^*$* ; in that case, we also say M **decides** L

Hierarchy of languages: context-sensitive and above

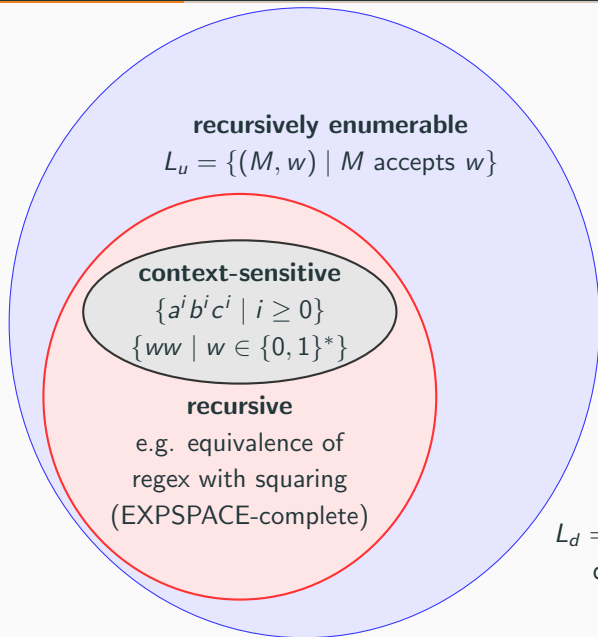

$$L_d = \{w \mid \text{TM with code } w \\ \text{does not accept input } w\}$$

CHAPTER 4: INTRO TO COMPUTABILITY THEORY

**First, a brief overview in 4 slides,
without technical details**

Languages and decision problems

A **decision problem** P : given input w (usually a 0-1 string), answer YES or NO (e.g. 'Is the given number prime?', 'Is the given picture classified as cat by the given neural net?')

$$L_P = \{w \mid P(w) \text{ answers 'YES'}\}$$

- P is **(algorithmically) decidable** $\Leftrightarrow L_P$ is **recursive** $\Leftrightarrow$ there is a TM **deciding** L_P (halting on every input, answering correctly)
- P is **partially decidable** $\Leftrightarrow L_P$ is **recursively enumerable** $\Leftrightarrow$ there is a TM that accepts every YES-instance w but for NO-instances it may either reject or run an infinite loop

NB: almost all problems are not even partially decidable (TMs can be represented by finite strings, so only countably many TMs)

Coming up next: a concrete example, the **diagonal language**

Source code for a Turing Machine & how to execute it

Source code for TMs:

- encode TMs by 01-strings, $M \rightsquigarrow \text{code}(M) \in \{0, 1\}^*$
- if w is not well-formed code, then say it represents a TM with no transitions, so every $w \in \{0, 1\}^*$ will represent some TM
- also encode a pair of 01-strings u, v as a 01-string $\langle u, v \rangle$

The **Universal language**: $L_U = \{\langle \text{code}(M), w \rangle \mid M \text{ accepts } w\}$

“Does a given program return true on a given input?”

Theorem

The Universal language is recursively enumerable.

Proof idea: construct the **Universal Turing Machine** that can simulate any TM (using its code) on any input [details later]

Barber's paradox aka the diagonal argument

The **Diagonal language**:

$$L_D = \{w \mid M \text{ such that } w = \text{code}(M) \text{ does *not* accept } w\}$$

"Return true if the given program does not return true when fed its own source code."

Theorem

The Diagonal language is not recursively enumerable.

Proof idea: there cannot exist a TM recognizing L_D : running it on its own code would lead to Barber's paradox

"The program accepts all programs that don't accept themselves. Does the program accept itself?"

Languages that are recursively enumerable, but not recursive

Post's theorem

A language L is recursive, if and only if both L and $\bar{L}$ are recursively enumerable.

Proof idea: simulate TMs for L and $\bar{L}$ in parallel, one must halt

Corollary

The language $\bar{L}_D$ is not recursive, but it is recursively enumerable.

“Does the given program return true when fed its own code?”

Corollary

The Universal language is not recursive.

(If a TM decided L_U , we could use it to decide $\bar{L}_D$: $w \rightsquigarrow \langle w, w \rangle$)

We can execute a program, but cannot test if it runs into a loop.

Now, the technical details

Machine-readable encoding of TMs (Gödel numbering)

To encode a TM as a binary string, we first assign integers to the states, tape symbols, and directions L, R . Assume:

- the start state is always q_1 , the only final state is q_2
- the first tape symbol is always 0, the second 1, the third B (other tape symbols can be assigned arbitrarily)
- the direction L is 1, the direction R is 2

Each transition $\delta(q_i, X_j) = (q_k, X_l, D_m)$ is encoded by $0^i 10^j 10^k 10^l 10^m$. Since $i, j, k, l, m \geq 1$, substring 11 doesn't occur.

The entire encoding $\text{code}(M)$ consists of codes for all transitions (in any order), separated by a pair of 1's: $C_1 11 C_2 11 \dots C_{n-1} 11 C_n$.

Similarly, we encode a tuple of 01-strings as a 01-string: separate entries by 111. We also fix an order of 01-strings, by length + lexicographically ($w_0 = \epsilon$, $w_1 = 0$, $w_2 = 1$, $w_3 = 00$, $w_4 = 01$, ...)

Example

$$M = (\{q_1, q_2, q_3\}, \{0, 1\}, \{0, 1, B\}, \delta, q_1, B, \{q_2\})$$

δ	0	1	B
$\rightarrow q_1$		$(q_3, 0, R)$	
$*q_2$			
q_3	$(q_1, 1, R)$	$(q_2, 0, R)$	$(q_3, 1, L)$.

Codes for transitions:

C_1	C_2	C_3	C_4
0100100010100	0001010100100	00010010010100	0001000100010010

The full encoding code(M):

01001000101001100010101001001100010010010100110001000100010010

The Diagonal language

Let $\text{decode}(w)$ be the TM M such that $\text{code}(M) = w$. (Recall: if w is not a valid code, then $\text{decode}(w)$ is a fixed one-state TM with no instructions.) Then:

$$L_D = \{w \mid w \notin L(\text{decode}(w))\}$$

Theorem

L_D is not recursively enumerable.

Proof idea: there cannot exist a TM recognizing L_D : running it on its own code would lead to Barber's paradox

"The program accepts all programs that don't accept themselves. Does the program accept itself?"

Proof that $L_D = \{w \mid w \notin L(\text{decode}(w))\}$ is not RE

Proof: Assume for contradiction that $L_D = L(M)$ for some M . Let $w = \text{code}(M)$. Then $L_D = \{w \mid w \notin L(M)\}$. Is $w \in L(M)$?

$$w \in L(M) \Leftrightarrow w \in L_D \Leftrightarrow w \notin L(M) \quad \square$$

Why 'diagonal'? A variant of Cantor's diagonal argument. Order all TMs by $M_i = \text{decode}(w_i)$. Does M_i accept w_i ?

$i \downarrow$

	$j \rightarrow$	1	2	3	4	...
1	0	1	1	0	...	
2	1	1	0	0	...	
3	0	0	1	1	...	
4	0	1	0	1	...	
...	.	.	.	.	.	...
...	.	.	.	.	.	...
...	.	.	.	.	.	...

Diagonal


A TM for L_D would be one of the rows but differs from each row in the diagonal element. (Same as the proof that $\mathbb{R}$ is uncountable.)

The Universal Turing Machine

The **Universal Turing Machine** U can simulate any TM (given by its code) on any input. More precisely, U accepts exactly inputs of the form $\langle \text{code}(M), w \rangle$ where $w \in L(M)$.

The construction: four tapes

1. input tape (w and the encoded transitions of M)
2. simulated tape of M , symbols encoded as 0^i , separated by 1s
3. state of M , again represented by 0^i
4. scratch tape

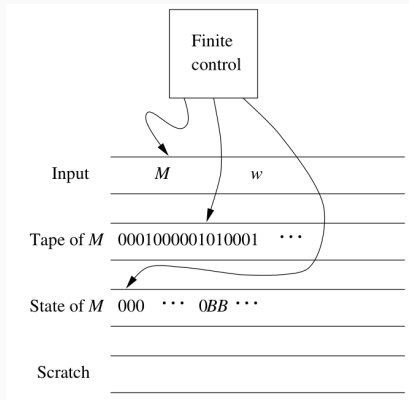

The operation of U

Initialize:

- Check if the input code is valid, if not, halt without accepting
- Initialize Tape 2 with w in its encoded form: 10 for 0 in w , 100 for 1
Blanks are left blank and replaced with 1000 only 'on demand'
Move 2nd head to the first simulated cell.
- Place 0 (the start state of M) on Tape 3.

Simulate moves of M :


- Search Tape 1 for the appropriate transition $0^i 10^j 10^k 10^\ell 10^m$, where 0^i on Tape 3, 0^j on Tape 2.
- Change the content of Tape 3 to 0^k .
- Replace 0^j on Tape 2 by 0^ℓ . Scratch tape to manage spacing.
- Move head on Tape 2 to the next 1 left or right, depending on m .

Termination: If M has no transition matching simulated state & tape symbol, halt without accepting. If M enters accepting state, U accepts.

Recursive languages are closed under complement

Lemma

If L is recursive, then $\bar{L}$ is recursive as well.

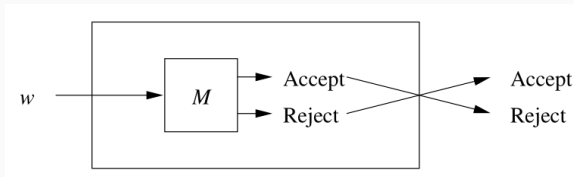

Proof: Given M deciding L , construct M' deciding L' . Since M always halts, if it does not accept, the reason is missing transition.

M' has a single, new accepting state q_{ACCEPT} . For every non-accepting state of M and every tape symbol X such that $\delta(q, X)$ is undefined, redefine $\delta'(q, X) = (q_{\text{ACCEPT}}, X, L)$.

Clearly, $L(M') = \bar{L}$. Since M is guaranteed to halt, so is M' . □

Post's theorem

Theorem


L is recursive iff both L and $\bar{L}$ are recursively enumerable.

Proof: $\Rightarrow$ Follows from the lemma.

$\Leftarrow$ Let $L = L(M_1)$ and $\bar{L} = L(M_2)$. For an input w , simulate both M_1 and M_2 (two tapes, states with two components). L and $\bar{L}$ are complementary, one of M_1 or M_2 will halt and accept.

- If M_1 accepts, accept.
- If M_2 accepts, reject.

□

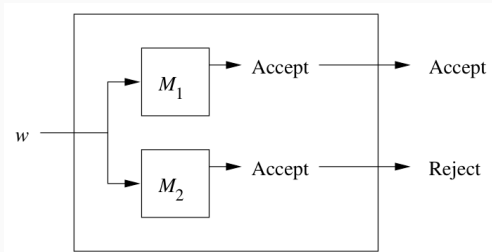

The Universal language and its undecidability

$$L_U = \{\langle \text{code}(M), w \rangle \mid w \in L(M)\}$$

RE but not R

$$\overline{L_D} = \{w \mid w \in L(\text{decode}(w))\}$$

RE but not R

$$L_D = \{w \mid w \notin L(\text{decode}(w))\}$$

not RE

Theorem

The Universal language is recursively enumerable but not recursive. Same is true for complement of the Diagonal language.

Proof:


- L_U is RE: it is recognized by the Universal TM U
- $\overline{L_D}$ is RE: rewrite input w to $\langle w, w \rangle = w111w$, then run on U
- $\overline{L_D}$ is not recursive: if it were, by Post's theorem L_D would be RE (actually R), but we know it is not
- L_U is not recursive: if it were, $\overline{L_D}$ would be recursive (rewrite w to $\langle w, w \rangle$, run on the hypothetical M deciding L_U) $\square$

Summary of Lecture 10

- Recursively enumerable language $\iff$ (Type 0) grammar
- Recursively enumerable vs. recursive languages (always halt)
- Intro to computability: an overview, decision problem $\iff$ language of all 'YES' instances, machine-readable code of TM
- Diagonal language, not recursively enumerable
- Universal language, Universal TM: simulate any M on any w
- Post's theorem: L recursive iff both $L, \bar{L}$ are RE
- $L_U, \bar{L}_D$ are recursively enumerable but not recursive

Appendix: Linear bounded automata and context-sensitive grammars

Chomsky hierarchy: Type 1

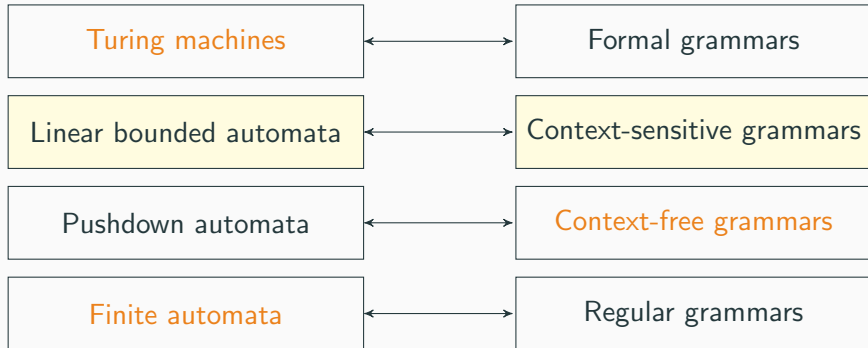

Context-sensitive languages

Theorem

The following are equivalent for a language L :

- (i) L is generated by a **context-sensitive** grammar.
- (ii) L is generated by a **monotone** grammar.
- (iii) L is recognized by a **Linear Bounded Automaton (LBA)**.

- **context-sensitive** grammar: $\alpha_1 A \alpha_2 \rightarrow \alpha_1 \gamma \alpha_2$ where $A \in V$, $\gamma \in (V \cup T)^+$, $\alpha_1, \alpha_2 \in (V \cup T)^*$ ($S \rightarrow \epsilon$ if S not in bodies)
- **monotone** grammar: $\alpha \rightarrow \beta$ where $|\alpha| \leq |\beta|$
- **Linear Bounded Automaton (LBA)**: a nondeterministic TM only using the input portion of the tape [we formalize later]

Note: Context-sensitive grammars are monotone, $(i) \Rightarrow (ii)$ trivial. Monotone grammars do not shorten sentential forms in a derivation

Example: $L = \{a^n b^n c^n \mid n \geq 1\}$ is context-sensitive

(Recall that L is not context-free.)

A **monotone** grammar:

$$S \rightarrow aSBC \mid aBC$$

$$CB \rightarrow BC$$

$$bB \rightarrow bb$$

$$bC \rightarrow bc$$

$$cC \rightarrow cc$$

right amount of a, B, C

reorder to $a^n b B^{n-1} C^n$

$B \rightarrow b$ only if preceded by b

$C \rightarrow c$ only if preceded by b

... or by c

The rule $CB \rightarrow BC$ is not context-sensitive. But we can convert it to a chain of context-sensitive rules:

$$CB \rightarrow XB, XB \rightarrow XY, XY \rightarrow BY, BY \rightarrow BC$$

(Same for any monotone rule, as long as there are no terminals.)

Recall: **separated grammar** means productions of the form $\alpha \rightarrow \beta$ where either $\alpha, \beta \in V^+$ or $\alpha \in V, \beta \in T \cup \{\epsilon\}$

Lemma

Every monotone grammar can be converted to an equivalent context-sensitive grammar.

Proof: First, convert to separated grammar (as for ChNF). This preserves monotonicity, $V_a \rightarrow a$ is monotone, context-sensitive.

Then, convert every production $A_1 \dots A_m \rightarrow B_1 \dots B_n$ ($m \leq n$) to the following chain (using new auxiliary variables C_i):

$$A_1 A_2 \dots A_m \rightarrow C_1 A_2 \dots A_m$$

$$C_1 C_2 \dots C_m \rightarrow B_1 C_2 \dots C_m$$

$$C_1 A_2 \dots A_m \rightarrow C_1 C_2 \dots A_m$$

$$B_1 C_2 \dots C_m \rightarrow B_1 B_2 \dots C_m$$

$$\vdots$$

$$\vdots$$

$$C_1 \dots C_{m-1} A_m \rightarrow C_1 \dots C_{m-1} C_m$$

$$B_1 \dots B_{m-1} C_m \rightarrow B_1 \dots B_{m-1} B_m \dots B_n$$

Linear Bounded Automaton

Definition

A **linear bounded automaton** (LBA) is a *nondeterministic* Turing machine where the tape contains special symbols for left ($\underline{l}$) and right ($\underline{r}$) end. Those symbols cannot be rewritten and the head cannot move to the left of $\underline{l}$ or to the right of $\underline{r}$.

A word w is **accepted** if $q_0 \underline{l} w \underline{r} \vdash^* \alpha p \beta$ for some $p \in F$

- The space for computation is given by the input word, we cannot exceed its length.
- Not a problem for context-sensitive/monotone grammars: sentential forms in a derivation cannot shorten.
- Nondeterminism is crucial!

Construction trick: ‘draw’ several tape symbols into one cell (as in multi-track tape), increase space by constant factor; hence ‘linear’

Track 1: a copy of the input w , read-only

Track 2: simulate the derivation of w

l	w		r
	S		

- initialize with S in first field (the rest blank)
- at the end it should contain w , compare to Track 1
- to simulate one derivation step (apply rule $\alpha X \beta \rightarrow \alpha \gamma \beta$):

u	α	X	β	v
---	----------	---	---------	---

u	α	γ	β	v
---	----------	----------	---------	---

- rewrite the sentential form using production rules
- **nondeterministically choose** which rule and where to apply it
- rewrite head to body (move the rest to the right)
- if only terminals, compare with Track 1, accept if match □

- the grammar cannot generate any 'extra' symbols
- we hide the computation in 'two-track' variables
- generate a word of the form

$$(a_0, [q_0, \underline{l}, a_0]), (a_1, a_1), \dots, (a_n, [a_n, \underline{r}])$$

w		
$q_0, \underline{l}, a_0$		$a_n, \underline{r}$

- simulate computation in the 2nd track (as for TMs)
 - for $\delta(p, x) \ni (q, x', R)$: $\underline{PXY} \rightarrow \underline{X'QY}$
 - for $\delta(p, x) \ni (q, x', L)$: $\underline{YPX} \rightarrow \underline{QYX'}$
- if the state is accepting, 'erase' the 2nd track
- special production for generating ϵ (if $\epsilon \in L$)

