

## MPCOTool

3.4.2

Generated by Doxygen 1.8.13



# Contents

<b>1</b>	<b>Data Structure Index</b>	<b>1</b>
1.1	Data Structures . . . . .	1
<b>2</b>	<b>File Index</b>	<b>3</b>
2.1	File List . . . . .	3
<b>3</b>	<b>Data Structure Documentation</b>	<b>5</b>
3.1	Experiment Struct Reference . . . . .	5
3.1.1	Detailed Description . . . . .	5
3.2	Input Struct Reference . . . . .	6
3.2.1	Detailed Description . . . . .	7
3.3	Optimize Struct Reference . . . . .	7
3.3.1	Detailed Description . . . . .	10
3.3.2	Field Documentation . . . . .	10
3.3.2.1	thread_direction . . . . .	10
3.4	Options Struct Reference . . . . .	11
3.4.1	Detailed Description . . . . .	11
3.5	ParallelData Struct Reference . . . . .	11
3.5.1	Detailed Description . . . . .	12
3.6	Running Struct Reference . . . . .	12
3.6.1	Detailed Description . . . . .	12
3.7	Variable Struct Reference . . . . .	12
3.7.1	Detailed Description . . . . .	13
3.8	Window Struct Reference . . . . .	13
3.8.1	Detailed Description . . . . .	18

<b>4</b>	<b>File Documentation</b>	<b>19</b>
4.1	config.h File Reference	19
4.1.1	Detailed Description	22
4.1.2	Enumeration Type Documentation	22
4.1.2.1	INPUT_TYPE	22
4.2	config.h	23
4.3	experiment.c File Reference	24
4.3.1	Detailed Description	25
4.3.2	Function Documentation	25
4.3.2.1	experiment_error()	25
4.3.2.2	experiment_free()	26
4.3.2.3	experiment_new()	26
4.3.2.4	experiment_open_json()	27
4.3.2.5	experiment_open_xml()	29
4.3.3	Variable Documentation	31
4.3.3.1	template	31
4.4	experiment.c	31
4.5	experiment.h File Reference	35
4.5.1	Detailed Description	36
4.5.2	Function Documentation	36
4.5.2.1	experiment_error()	36
4.5.2.2	experiment_free()	37
4.5.2.3	experiment_new()	37
4.5.2.4	experiment_open_json()	38
4.5.2.5	experiment_open_xml()	40
4.6	experiment.h	41
4.7	input.c File Reference	42
4.7.1	Detailed Description	43
4.7.2	Function Documentation	43
4.7.2.1	input_error()	43

4.7.2.2	<a href="#">input_open()</a>	44
4.7.2.3	<a href="#">input_open_json()</a>	45
4.7.2.4	<a href="#">input_open_xml()</a>	50
4.8	<a href="#">input.c</a>	56
4.9	<a href="#">input.h File Reference</a>	67
4.9.1	<a href="#">Detailed Description</a>	69
4.9.2	<a href="#">Enumeration Type Documentation</a>	69
4.9.2.1	<a href="#">DirectionMethod</a>	69
4.9.2.2	<a href="#">ErrorNorm</a>	69
4.9.3	<a href="#">Function Documentation</a>	70
4.9.3.1	<a href="#">input_error()</a>	70
4.9.3.2	<a href="#">input_open()</a>	70
4.9.3.3	<a href="#">input_open_json()</a>	71
4.9.3.4	<a href="#">input_open_xml()</a>	77
4.10	<a href="#">input.h</a>	82
4.11	<a href="#">interface.c File Reference</a>	83
4.11.1	<a href="#">Detailed Description</a>	86
4.11.2	<a href="#">Function Documentation</a>	86
4.11.2.1	<a href="#">input_save()</a>	86
4.11.2.2	<a href="#">input_save_direction_json()</a>	88
4.11.2.3	<a href="#">input_save_direction_xml()</a>	88
4.11.2.4	<a href="#">input_save_json()</a>	89
4.11.2.5	<a href="#">input_save_xml()</a>	92
4.11.2.6	<a href="#">window_get_algorithm()</a>	94
4.11.2.7	<a href="#">window_get_direction()</a>	95
4.11.2.8	<a href="#">window_get_norm()</a>	96
4.11.2.9	<a href="#">window_new()</a>	96
4.11.2.10	<a href="#">window_read()</a>	105
4.11.2.11	<a href="#">window_save()</a>	107
4.11.2.12	<a href="#">window_template_experiment()</a>	109

4.12	interface.c	110
4.13	interface.h File Reference	141
4.13.1	Detailed Description	144
4.13.2	Function Documentation	144
4.13.2.1	gtk_array_get_active()	144
4.13.2.2	input_save()	145
4.13.2.3	window_get_algorithm()	146
4.13.2.4	window_get_direction()	147
4.13.2.5	window_get_norm()	147
4.13.2.6	window_new()	148
4.13.2.7	window_read()	157
4.13.2.8	window_save()	159
4.13.2.9	window_template_experiment()	161
4.14	interface.h	162
4.15	main.c File Reference	164
4.15.1	Detailed Description	165
4.16	main.c	165
4.17	optimize.c File Reference	166
4.17.1	Detailed Description	169
4.17.2	Function Documentation	169
4.17.2.1	optimize_best()	169
4.17.2.2	optimize_best_direction()	170
4.17.2.3	optimize_direction_sequential()	170
4.17.2.4	optimize_direction_thread()	171
4.17.2.5	optimize_estimate_direction_coordinates()	173
4.17.2.6	optimize_estimate_direction_random()	174
4.17.2.7	optimize_genetic_objective()	175
4.17.2.8	optimize_input()	176
4.17.2.9	optimize_merge()	178
4.17.2.10	optimize_norm_euclidian()	179

4.17.2.11	<code>optimize_norm_maximum()</code>	179
4.17.2.12	<code>optimize_norm_p()</code>	180
4.17.2.13	<code>optimize_norm_taxicab()</code>	181
4.17.2.14	<code>optimize_parse()</code>	182
4.17.2.15	<code>optimize_save_variables()</code>	184
4.17.2.16	<code>optimize_step_direction()</code>	184
4.17.2.17	<code>optimize_thread()</code>	186
4.18	<code>optimize.c</code>	187
4.19	<code>optimize.h</code> File Reference	205
4.19.1	Detailed Description	207
4.19.2	Function Documentation	207
4.19.2.1	<code>optimize_best()</code>	207
4.19.2.2	<code>optimize_best_direction()</code>	208
4.19.2.3	<code>optimize_direction_sequential()</code>	209
4.19.2.4	<code>optimize_direction_thread()</code>	210
4.19.2.5	<code>optimize_estimate_direction_coordinates()</code>	211
4.19.2.6	<code>optimize_estimate_direction_random()</code>	212
4.19.2.7	<code>optimize_genetic_objective()</code>	212
4.19.2.8	<code>optimize_input()</code>	213
4.19.2.9	<code>optimize_merge()</code>	214
4.19.2.10	<code>optimize_norm_euclidian()</code>	215
4.19.2.11	<code>optimize_norm_maximum()</code>	216
4.19.2.12	<code>optimize_norm_p()</code>	217
4.19.2.13	<code>optimize_norm_taxicab()</code>	218
4.19.2.14	<code>optimize_parse()</code>	219
4.19.2.15	<code>optimize_save_variables()</code>	221
4.19.2.16	<code>optimize_step_direction()</code>	221
4.19.2.17	<code>optimize_thread()</code>	223
4.20	<code>optimize.h</code>	224
4.21	<code>utils.c</code> File Reference	226

4.21.1 Detailed Description . . . . .	227
4.21.2 Function Documentation . . . . .	228
4.21.2.1 cores_number() . . . . .	228
4.21.2.2 gtk_array_get_active() . . . . .	228
4.21.2.3 json_object_get_float() . . . . .	229
4.21.2.4 json_object_get_float_with_default() . . . . .	229
4.21.2.5 json_object_get_int() . . . . .	230
4.21.2.6 json_object_get_uint() . . . . .	231
4.21.2.7 json_object_get_uint_with_default() . . . . .	232
4.21.2.8 json_object_set_float() . . . . .	232
4.21.2.9 json_object_set_int() . . . . .	233
4.21.2.10 json_object_set_uint() . . . . .	233
4.21.2.11 show_error() . . . . .	234
4.21.2.12 show_message() . . . . .	235
4.21.2.13 xml_node_get_float() . . . . .	236
4.21.2.14 xml_node_get_float_with_default() . . . . .	237
4.21.2.15 xml_node_get_int() . . . . .	238
4.21.2.16 xml_node_get_uint() . . . . .	238
4.21.2.17 xml_node_get_uint_with_default() . . . . .	239
4.21.2.18 xml_node_set_float() . . . . .	240
4.21.2.19 xml_node_set_int() . . . . .	240
4.21.2.20 xml_node_set_uint() . . . . .	241
4.22 utils.c . . . . .	241
4.23 utils.h File Reference . . . . .	245
4.23.1 Detailed Description . . . . .	247
4.23.2 Function Documentation . . . . .	247
4.23.2.1 cores_number() . . . . .	247
4.23.2.2 gtk_array_get_active() . . . . .	247
4.23.2.3 json_object_get_float() . . . . .	248
4.23.2.4 json_object_get_float_with_default() . . . . .	249



4.23.2.5	<a href="#">json_object_get_int()</a>	249
4.23.2.6	<a href="#">json_object_get_uint()</a>	250
4.23.2.7	<a href="#">json_object_get_uint_with_default()</a>	251
4.23.2.8	<a href="#">json_object_set_float()</a>	252
4.23.2.9	<a href="#">json_object_set_int()</a>	252
4.23.2.10	<a href="#">json_object_set_uint()</a>	253
4.23.2.11	<a href="#">show_error()</a>	253
4.23.2.12	<a href="#">show_message()</a>	254
4.23.2.13	<a href="#">xml_node_get_float()</a>	254
4.23.2.14	<a href="#">xml_node_get_float_with_default()</a>	255
4.23.2.15	<a href="#">xml_node_get_int()</a>	256
4.23.2.16	<a href="#">xml_node_get_uint()</a>	257
4.23.2.17	<a href="#">xml_node_get_uint_with_default()</a>	257
4.23.2.18	<a href="#">xml_node_set_float()</a>	258
4.23.2.19	<a href="#">xml_node_set_int()</a>	259
4.23.2.20	<a href="#">xml_node_set_uint()</a>	259
4.24	<a href="#">utils.h</a>	259
4.25	<a href="#">variable.c</a> File Reference	261
4.25.1	Detailed Description	262
4.25.2	Function Documentation	262
4.25.2.1	<a href="#">variable_error()</a>	262
4.25.2.2	<a href="#">variable_free()</a>	262
4.25.2.3	<a href="#">variable_new()</a>	263
4.25.2.4	<a href="#">variable_open_json()</a>	263
4.25.2.5	<a href="#">variable_open_xml()</a>	266
4.25.3	Variable Documentation	268
4.25.3.1	<a href="#">format</a>	268
4.25.3.2	<a href="#">precision</a>	269
4.26	<a href="#">variable.c</a>	269
4.27	<a href="#">variable.h</a> File Reference	273
4.27.1	Detailed Description	275
4.27.2	Enumeration Type Documentation	275
4.27.2.1	<a href="#">Algorithm</a>	275
4.27.3	Function Documentation	275
4.27.3.1	<a href="#">variable_error()</a>	275
4.27.3.2	<a href="#">variable_free()</a>	276
4.27.3.3	<a href="#">variable_new()</a>	276
4.27.3.4	<a href="#">variable_open_json()</a>	277
4.27.3.5	<a href="#">variable_open_xml()</a>	279
4.28	<a href="#">variable.h</a>	282



# Chapter 1

## Data Structure Index

### 1.1 Data Structures

Here are the data structures with brief descriptions:

<a href="#">Experiment</a>	Struct to define the experiment data . . . . .	5
<a href="#">Input</a>	Struct to define the optimization input file . . . . .	6
<a href="#">Optimize</a>	Struct to define the optimization ation data . . . . .	7
<a href="#">Options</a>	Struct to define the options dialog . . . . .	11
<a href="#">ParallelData</a>	Struct to pass to the GThreads parallelized function . . . . .	11
<a href="#">Running</a>	Struct to define the running dialog . . . . .	12
<a href="#">Variable</a>	Struct to define the variable data . . . . .	12
<a href="#">Window</a>	Struct to define the main window . . . . .	13



## Chapter 2

# File Index

### 2.1 File List

Here is a list of all documented files with brief descriptions:

<a href="#">config.h</a>	Configuration header file . . . . .	19
<a href="#">experiment.c</a>	Source file to define the experiment data . . . . .	24
<a href="#">experiment.h</a>	Header file to define the experiment data . . . . .	35
<a href="#">input.c</a>	Source file to define the input functions . . . . .	42
<a href="#">input.h</a>	Header file to define the input functions . . . . .	67
<a href="#">interface.c</a>	Source file to define the graphical interface functions . . . . .	83
<a href="#">interface.h</a>	Header file to define the graphical interface functions . . . . .	141
<a href="#">main.c</a>	Main source file . . . . .	164
<a href="#">mpcotool.c</a>	. . . . .	??
<a href="#">mpcotool.h</a>	. . . . .	??
<a href="#">optimize.c</a>	Source file to define the optimization functions . . . . .	166
<a href="#">optimize.h</a>	Header file to define the optimization functions . . . . .	205
<a href="#">utils.c</a>	Source file to define some useful functions . . . . .	226
<a href="#">utils.h</a>	Header file to define some useful functions . . . . .	245
<a href="#">variable.c</a>	Source file to define the variable data . . . . .	261
<a href="#">variable.h</a>	Header file to define the variable data . . . . .	273



## Chapter 3

# Data Structure Documentation

### 3.1 Experiment Struct Reference

Struct to define the experiment data.

```
#include <experiment.h>
```

#### Data Fields

- char \* [name](#)  
*File name.*
- char \* [template](#) [MAX\_NINPUTS]  
*Array of template names of input files.*
- double [weight](#)  
*Objective function weight.*
- unsigned int [ninputs](#)  
*Number of input files to the simulator.*

#### 3.1.1 Detailed Description

Struct to define the experiment data.

Definition at line [45](#) of file [experiment.h](#).

The documentation for this struct was generated from the following file:


- [experiment.h](#)

## 3.2 Input Struct Reference

Struct to define the optimization input file.

```
#include <input.h>
```

Collaboration diagram for Input:

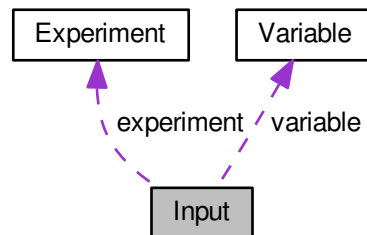

### Data Fields

- [Experiment](#) \* [experiment](#)  
*Array of experiments.*
- [Variable](#) \* [variable](#)  
*Array of variables.*
- char \* [result](#)  
*Name of the result file.*
- char \* [variables](#)  
*Name of the variables file.*
- char \* [simulator](#)  
*Name of the simulator program.*
- char \* [evaluator](#)  
*Name of the program to evaluate the objective function.*
- char \* [directory](#)  
*Working directory.*
- char \* [name](#)  
*[Input](#) data file name.*
- double [tolerance](#)  
*Algorithm tolerance.*
- double [mutation\\_ratio](#)  
*Mutation probability.*
- double [reproduction\\_ratio](#)  
*Reproduction probability.*
- double [adaptation\\_ratio](#)  
*Adaptation probability.*
- double [relaxation](#)  
*Relaxation parameter.*



- double [p](#)  
*Exponent of the P error norm.*
- double [threshold](#)  
*Threshold to finish the optimization.*
- unsigned long int [seed](#)  
*Seed of the pseudo-random numbers generator.*
- unsigned int [nvariables](#)  
*Variables number.*
- unsigned int [nexperiments](#)  
*Experiments number.*
- unsigned int [nsimulations](#)  
*Simulations number per experiment.*
- unsigned int [algorithm](#)  
*Algorithm type.*
- unsigned int [nsteps](#)  
*Number of steps to do the direction search method.*
- unsigned int [direction](#)  
*Method to estimate the direction search.*
- unsigned int [nestsamples](#)  
*Number of simulations to estimate the direction search.*
- unsigned int [niterations](#)  
*Number of algorithm iterations.*
- unsigned int [nbest](#)  
*Number of best simulations.*
- unsigned int [norm](#)  
*Error norm type.*
- unsigned int [type](#)  
*Type of input file.*

### 3.2.1 Detailed Description

Struct to define the optimization input file.

Definition at line [71](#) of file [input.h](#).

The documentation for this struct was generated from the following file:


- [input.h](#)

## 3.3 Optimize Struct Reference

Struct to define the optimization ation data.

```
#include <optimize.h>
```

Collaboration diagram for Optimize:

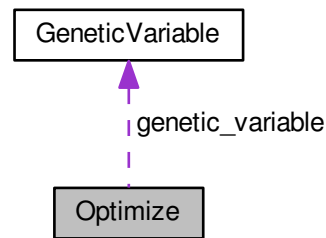

## Data Fields

- GMappedFile \*\* [file](#) [MAX\_NINPUTS]  
*Matrix of input template files.*
- char \*\* [experiment](#)  
*Array of experimental data file names.*
- char \*\* [label](#)  
*Array of variable names.*
- gsl\_rng \* [rng](#)  
*GSL random number generator.*
- **GeneticVariable** \* [genetic\\_variable](#)  
*Array of variables for the genetic algorithm.*
- FILE \* [file\\_result](#)  
*Result file.*
- FILE \* [file\\_variables](#)  
*Variables file.*
- char \* [result](#)  
*Name of the result file.*
- char \* [variables](#)  
*Name of the variables file.*
- char \* [simulator](#)  
*Name of the simulator program.*
- char \* [evaluator](#)  
*Name of the program to evaluate the objective function.*
- double \* [value](#)  
*Array of variable values.*
- double \* [rangemin](#)  
*Array of minimum variable values.*
- double \* [rangemax](#)  
*Array of maximum variable values.*
- double \* [rangeminabs](#)  
*Array of absolute minimum variable values.*
- double \* [rangemaxabs](#)  
*Array of absolute maximum variable values.*

- double \* [error\\_best](#)  
*Array of the best minimum errors.*
- double \* [weight](#)  
*Array of the experiment weights.*
- double \* [step](#)  
*Array of direction search method step sizes.*
- double \* [direction](#)  
*Vector of direction search estimation.*
- double \* [value\\_old](#)  
*Array of the best variable values on the previous step.*
- double \* [error\\_old](#)  
*Array of the best minimum errors on the previous step.*
- unsigned int \* [precision](#)  
*Array of variable precisions.*
- unsigned int \* [nsweeps](#)  
*Array of sweeps of the sweep algorithm.*
- unsigned int \* [nbits](#)  
*Array of bits number of the genetic algorithm.*
- unsigned int \* [thread](#)  
*Array of simulation numbers to calculate on the thread.*
- unsigned int \* [thread\\_direction](#)
- unsigned int \* [simulation\\_best](#)  
*Array of best simulation numbers.*
- double [tolerance](#)  
*Algorithm tolerance.*
- double [mutation\\_ratio](#)  
*Mutation probability.*
- double [reproduction\\_ratio](#)  
*Reproduction probability.*
- double [adaptation\\_ratio](#)  
*Adaptation probability.*
- double [relaxation](#)  
*Relaxation parameter.*
- double [calculation\\_time](#)  
*Calculation time.*
- double [p](#)  
*Exponent of the P error norm.*
- double [threshold](#)  
*Threshold to finish the optimization.*
- unsigned long int [seed](#)  
*Seed of the pseudo-random numbers generator.*
- unsigned int [nvariables](#)  
*Variables number.*
- unsigned int [nexperiments](#)  
*Experiments number.*
- unsigned int [ninputs](#)  
*Number of input files to the simulator.*
- unsigned int [nsimulations](#)  
*Simulations number per experiment.*
- unsigned int [nsteps](#)  
*Number of steps for the direction search method.*

- unsigned int [nestimates](#)  
*Number of simulations to estimate the direction.*
- unsigned int [algorithm](#)  
*Algorithm type.*
- unsigned int [nstart](#)  
*Beginning simulation number of the task.*
- unsigned int [nend](#)  
*Ending simulation number of the task.*
- unsigned int [nstart\\_direction](#)  
*Beginning simulation number of the task for the direction search method.*
- unsigned int [nend\\_direction](#)  
*Ending simulation number of the task for the direction search method.*
- unsigned int [niterations](#)  
*Number of algorithm iterations.*
- unsigned int [nbest](#)  
*Number of best simulations.*
- unsigned int [nsaveds](#)  
*Number of saved simulations.*
- unsigned int [stop](#)  
*To stop the simulations.*
- int [mpi\\_rank](#)  
*Number of MPI task.*

### 3.3.1 Detailed Description

Struct to define the optimization ation data.

Definition at line 45 of file [optimize.h](#).

### 3.3.2 Field Documentation

#### 3.3.2.1 thread\_direction

```
unsigned int* Optimize::thread_direction
```

Array of simulation numbers to calculate on the thread for the direction search method.

Definition at line 80 of file [optimize.h](#).

The documentation for this struct was generated from the following file:

- [optimize.h](#)

## 3.4 Options Struct Reference

Struct to define the options dialog.

```
#include <interface.h>
```

### Data Fields

- `GtkDialog * dialog`  
*Main GtkDialog.*
- `GtkGrid * grid`  
*Main GtkGrid.*
- `GtkLabel * label_seed`  
*Pseudo-random numbers generator seed GtkLabel.*
- `GtkSpinButton * spin_seed`  
*Pseudo-random numbers generator seed GtkSpinButton.*
- `GtkLabel * label_threads`  
*Threads number GtkLabel.*
- `GtkSpinButton * spin_threads`  
*Threads number GtkSpinButton.*
- `GtkLabel * label_direction`  
*Direction threads number GtkLabel.*
- `GtkSpinButton * spin_direction`  
*Direction threads number GtkSpinButton.*

### 3.4.1 Detailed Description

Struct to define the options dialog.

Definition at line 48 of file [interface.h](#).

The documentation for this struct was generated from the following file:

- [interface.h](#)

## 3.5 ParallelData Struct Reference

Struct to pass to the GThreads parallelized function.

```
#include <optimize.h>
```

### Data Fields

- `unsigned int thread`  
*Thread number.*

### 3.5.1 Detailed Description

Struct to pass to the GThreads parallelized function.

Definition at line 122 of file [optimize.h](#).

The documentation for this struct was generated from the following file:

- [optimize.h](#)

## 3.6 Running Struct Reference

Struct to define the running dialog.

```
#include <interface.h>
```

### Data Fields

- `GtkDialog * dialog`  
*Main GtkDialog.*
- `GtkLabel * label`  
*Label GtkLabel.*
- `GtkSpinner * spinner`  
*Animation GtkSpinner.*
- `GtkGrid * grid`  
*Grid GtkGrid.*

### 3.6.1 Detailed Description

Struct to define the running dialog.

Definition at line 67 of file [interface.h](#).

The documentation for this struct was generated from the following file:

- [interface.h](#)

## 3.7 Variable Struct Reference

Struct to define the variable data.

```
#include <variable.h>
```

## Data Fields

- char \* [name](#)  
*Variable name.*
- double [rangemin](#)  
*Minimum variable value.*
- double [rangemax](#)  
*Maximum variable value.*
- double [rangeminabs](#)  
*Absolute minimum variable value.*
- double [rangemaxabs](#)  
*Absolute maximum variable value.*
- double [step](#)  
*Direction search method step size.*
- unsigned int [precision](#)  
*Variable precision.*
- unsigned int [nsweeps](#)  
*Sweeps of the sweep algorithm.*
- unsigned int [nbits](#)  
*Bits number of the genetic algorithm.*

### 3.7.1 Detailed Description

Struct to define the variable data.

Definition at line 56 of file [variable.h](#).

The documentation for this struct was generated from the following file:


- [variable.h](#)

## 3.8 Window Struct Reference

Struct to define the main window.

```
#include <interface.h>
```

Collaboration diagram for Window:

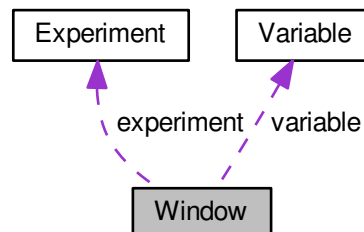

## Data Fields

- GtkWidget \* [window](#)  
*Main GtkWidget.*
- GtkWidget \* [grid](#)  
*Main GtkWidget.*
- GtkWidget \* [bar\\_buttons](#)  
*GtkToolbar to store the main buttons.*
- GtkWidget \* [button\\_open](#)  
*Open GtkWidget.*
- GtkWidget \* [button\\_save](#)  
*Save GtkWidget.*
- GtkWidget \* [button\\_run](#)  
*Run GtkWidget.*
- GtkWidget \* [button\\_options](#)  
*Options GtkWidget.*
- GtkWidget \* [button\\_help](#)  
*Help GtkWidget.*
- GtkWidget \* [button\\_about](#)  
*Help GtkWidget.*
- GtkWidget \* [button\\_exit](#)  
*Exit GtkWidget.*
- GtkWidget \* [grid\\_files](#)  
*Files GtkWidget.*
- GtkWidget \* [label\\_simulator](#)  
*Simulator program GtkWidget.*
- GtkWidget \* [button\\_simulator](#)  
*Simulator program GtkWidget.*
- GtkWidget \* [check\\_evaluator](#)  
*Evaluator program GtkWidget.*
- GtkWidget \* [button\\_evaluator](#)  
*Evaluator program GtkWidget.*
- GtkWidget \* [label\\_result](#)  
*Result file GtkWidget.*
- GtkWidget \* [entry\\_result](#)  
*Result file GtkWidget.*
- GtkWidget \* [label\\_variables](#)  
*Variables file GtkWidget.*
- GtkWidget \* [entry\\_variables](#)  
*Variables file GtkWidget.*
- GtkWidget \* [frame\\_norm](#)  
*GtkFrame to set the error norm.*
- GtkWidget \* [grid\\_norm](#)  
*GtkGrid to set the error norm.*
- GtkWidget \* [button\\_norm](#) [NNORMS]  
*Array of GtkButtons to set the error norm.*
- GtkWidget \* [label\\_p](#)  
*GtkLabel to set the p parameter.*
- GtkWidget \* [spin\\_p](#)  
*GtkSpinButton to set the p parameter.*
- GtkWidget \* [scrolled\\_p](#)



- GtkScrolledWindow* to set the *p* parameter.
- `GtkFrame * frame_algorithm`  
*GtkFrame* to set the algorithm.
- `GtkGrid * grid_algorithm`  
*GtkGrid* to set the algorithm.
- `GtkRadioButton * button_algorithm` [NALGORITHMS]  
Array of *GtkButtons* to set the algorithm.
- `GtkLabel * label_simulations`  
*GtkLabel* to set the simulations number.
- `GtkSpinButton * spin_simulations`  
*GtkSpinButton* to set the simulations number.
- `GtkLabel * label_iterations`  
*GtkLabel* to set the iterations number.
- `GtkSpinButton * spin_iterations`  
*GtkSpinButton* to set the iterations number.
- `GtkLabel * label_tolerance`  
*GtkLabel* to set the tolerance.
- `GtkSpinButton * spin_tolerance`  
*GtkSpinButton* to set the tolerance.
- `GtkLabel * label_best`  
*GtkLabel* to set the best number.
- `GtkSpinButton * spin_best`  
*GtkSpinButton* to set the best number.
- `GtkLabel * label_population`  
*GtkLabel* to set the population number.
- `GtkSpinButton * spin_population`  
*GtkSpinButton* to set the population number.
- `GtkLabel * label_generations`  
*GtkLabel* to set the generations number.
- `GtkSpinButton * spin_generations`  
*GtkSpinButton* to set the generations number.
- `GtkLabel * label_mutation`  
*GtkLabel* to set the mutation ratio.
- `GtkSpinButton * spin_mutation`  
*GtkSpinButton* to set the mutation ratio.
- `GtkLabel * label_reproduction`  
*GtkLabel* to set the reproduction ratio.
- `GtkSpinButton * spin_reproduction`  
*GtkSpinButton* to set the reproduction ratio.
- `GtkLabel * label_adaptation`  
*GtkLabel* to set the adaptation ratio.
- `GtkSpinButton * spin_adaptation`  
*GtkSpinButton* to set the adaptation ratio.
- `GtkCheckButton * check_direction`  
*GtkCheckButton* to check running the direction search method.
- `GtkGrid * grid_direction`  
*GtkGrid* to pack the direction search method widgets.
- `GtkRadioButton * button_direction` [NDIRECTIONS]  
*GtkRadioButtons* array to set the direction estimate method.
- `GtkLabel * label_steps`  
*GtkLabel* to set the steps number.

- GtkSpinButton \* [spin\\_steps](#)  
*GtkSpinButton to set the steps number.*
- GtkLabel \* [label\\_estimates](#)  
*GtkLabel to set the estimates number.*
- GtkSpinButton \* [spin\\_estimates](#)  
*GtkSpinButton to set the estimates number.*
- GtkLabel \* [label\\_relaxation](#)  
*GtkLabel to set the relaxation parameter.*
- GtkSpinButton \* [spin\\_relaxation](#)  
*GtkSpinButton to set the relaxation parameter.*
- GtkLabel \* [label\\_threshold](#)  
*GtkLabel to set the threshold.*
- GtkSpinButton \* [spin\\_threshold](#)  
*GtkSpinButton to set the threshold.*
- GtkScrolledWindow \* [scrolled\\_threshold](#)  
*GtkScrolledWindow to set the threshold.*
- GtkFrame \* [frame\\_variable](#)  
*Variable GtkFrame.*
- GtkGrid \* [grid\\_variable](#)  
*Variable GtkGrid.*
- GtkComboBoxText \* [combo\\_variable](#)  
*GtkComboBoxEntry to select a variable.*
- GtkButton \* [button\\_add\\_variable](#)  
*GtkButton to add a variable.*
- GtkButton \* [button\\_remove\\_variable](#)  
*GtkButton to remove a variable.*
- GtkLabel \* [label\\_variable](#)  
*Variable GtkLabel.*
- GtkEntry \* [entry\\_variable](#)  
*GtkEntry to set the variable name.*
- GtkLabel \* [label\\_min](#)  
*Minimum GtkLabel.*
- GtkSpinButton \* [spin\\_min](#)  
*Minimum GtkSpinButton.*
- GtkScrolledWindow \* [scrolled\\_min](#)  
*Minimum GtkScrolledWindow.*
- GtkLabel \* [label\\_max](#)  
*Maximum GtkLabel.*
- GtkSpinButton \* [spin\\_max](#)  
*Maximum GtkSpinButton.*
- GtkScrolledWindow \* [scrolled\\_max](#)  
*Maximum GtkScrolledWindow.*
- GtkCheckButton \* [check\\_minabs](#)  
*Absolute minimum GtkCheckButton.*
- GtkSpinButton \* [spin\\_minabs](#)  
*Absolute minimum GtkSpinButton.*
- GtkScrolledWindow \* [scrolled\\_minabs](#)  
*Absolute minimum GtkScrolledWindow.*
- GtkCheckButton \* [check\\_maxabs](#)  
*Absolute maximum GtkCheckButton.*
- GtkSpinButton \* [spin\\_maxabs](#)

- Absolute maximum GtkSpinButton.*
- GtkWidget \* [scrolled\\_maxabs](#)
  - Absolute maximum GtkWidget.*
- GtkWidget \* [label\\_precision](#)
  - Precision GtkWidget.*
- GtkWidget \* [spin\\_precision](#)
  - Precision digits GtkWidget.*
- GtkWidget \* [label\\_sweeps](#)
  - Sweeps number GtkWidget.*
- GtkWidget \* [spin\\_sweeps](#)
  - Sweeps number GtkWidget.*
- GtkWidget \* [label\\_bits](#)
  - Bits number GtkWidget.*
- GtkWidget \* [spin\\_bits](#)
  - Bits number GtkWidget.*
- GtkWidget \* [label\\_step](#)
  - GtkWidget to set the step.*
- GtkWidget \* [spin\\_step](#)
  - GtkWidget to set the step.*
- GtkWidget \* [scrolled\\_step](#)
  - step GtkWidget.*
- GtkWidget \* [frame\\_experiment](#)
  - Experiment GtkWidget.*
- GtkWidget \* [grid\\_experiment](#)
  - Experiment GtkWidget.*
- GtkWidget \* [combo\\_experiment](#)
  - Experiment GtkWidgetEntry.*
- GtkWidget \* [button\\_add\\_experiment](#)
  - GtkWidget to add a experiment.*
- GtkWidget \* [button\\_remove\\_experiment](#)
  - GtkWidget to remove a experiment.*
- GtkWidget \* [label\\_experiment](#)
  - Experiment GtkWidget.*
- GtkWidget \* [button\\_experiment](#)
  - GtkFileChooserButton to set the experimental data file.*
- GtkWidget \* [label\\_weight](#)
  - Weight GtkWidget.*
- GtkWidget \* [spin\\_weight](#)
  - Weight GtkWidget.*
- GtkWidget \* [check\\_template](#) [MAX\_NINPUTS]
  - Array of GtkWidgetButtons to set the input templates.*
- GtkWidget \* [button\\_template](#) [MAX\_NINPUTS]
  - Array of GtkFileChooserButtons to set the input templates.*
- GdkPixbuf \* [logo](#)
  - Logo GdkPixbuf.*
- [Experiment](#) \* [experiment](#)
  - Array of experiments data.*
- [Variable](#) \* [variable](#)
  - Array of variables data.*
- char \* [application\\_directory](#)
  - Application directory.*

- gulong [id\\_experiment](#)  
*Identifier of the combo\_experiment signal.*
- gulong [id\\_experiment\\_name](#)  
*Identifier of the button\_experiment signal.*
- gulong [id\\_variable](#)  
*Identifier of the combo\_variable signal.*
- gulong [id\\_variable\\_label](#)  
*Identifier of the entry\_variable signal.*
- gulong [id\\_template](#) [MAX\_NINPUTS]  
*Array of identifiers of the check\_template signal.*
- gulong [id\\_input](#) [MAX\_NINPUTS]  
*Array of identifiers of the button\_template signal.*
- unsigned int [nexperiments](#)  
*Number of experiments.*
- unsigned int [nvariables](#)  
*Number of variables.*

### 3.8.1 Detailed Description

Struct to define the main window.

Definition at line 79 of file [interface.h](#).

The documentation for this struct was generated from the following file:

- [interface.h](#)


## Chapter 4

# File Documentation

### 4.1 config.h File Reference

Configuration header file.

This graph shows which files directly or indirectly include this file:

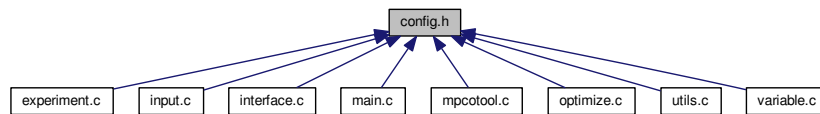

### Macros

- `#define _(string) (gettext(string))`
- `#define MAX_NINPUTS 8`  
*Maximum number of input files in the simulator program.*
- `#define NALGORITHMS 3`  
*Number of stochastic algorithms.*
- `#define NDIRECTIONS 2`  
*Number of direction estimate methods.*
- `#define NNORMS 4`  
*Number of error norms.*
- `#define NPRECISIONS 15`  
*Number of precisions.*
- `#define DEFAULT_PRECISION (NPRECISIONS - 1)`  
*Default precision digits.*
- `#define DEFAULT_RANDOM_SEED 7007`  
*Default pseudo-random numbers seed.*
- `#define DEFAULT_RELAXATION 1.`  
*Default relaxation parameter.*
- `#define LOCALE_DIR "locales"`

*Locales directory.*

- #define PROGRAM\_INTERFACE "mpcotool"  
*Name of the interface program.*
- #define LABEL\_ABSOLUTE\_MINIMUM "absolute\_minimum"  
*absolute minimum label.*
- #define LABEL\_ABSOLUTE\_MAXIMUM "absolute\_maximum"  
*absolute maximum label.*
- #define LABEL\_ADAPTATION "adaptation"  
*adaption label.*
- #define LABEL\_ALGORITHM "algorithm"  
*algoritm label.*
- #define LABEL\_OPTIMIZE "optimize"  
*optimize label.*
- #define LABEL\_COORDINATES "coordinates"  
*coordinates label.*
- #define LABEL\_DIRECTION "direction"  
*direction label.*
- #define LABEL\_EUCLIDIAN "euclidian"  
*euclidian label.*
- #define LABEL\_EVALUATOR "evaluator"  
*evaluator label.*
- #define LABEL\_EXPERIMENT "experiment"  
*experiment label.*
- #define LABEL\_EXPERIMENTS "experiments"  
*experiment label.*
- #define LABEL\_GENETIC "genetic"  
*genetic label.*
- #define LABEL\_MINIMUM "minimum"  
*minimum label.*
- #define LABEL\_MAXIMUM "maximum"  
*maximum label.*
- #define LABEL\_MONTE\_CARLO "Monte-Carlo"  
*Monte-Carlo label.*
- #define LABEL\_MUTATION "mutation"  
*mutation label.*
- #define LABEL\_NAME "name"  
*name label.*
- #define LABEL\_NBEST "nbest"  
*nbest label.*
- #define LABEL\_NBITS "nbits"  
*nbits label.*
- #define LABEL\_NESTIMATES "nestimates"  
*nestimates label.*
- #define LABEL\_NGENERATIONS "ngenerations"  
*ngenerations label.*
- #define LABEL\_NITERATIONS "niterations"  
*niterations label.*
- #define LABEL\_NORM "norm"  
*norm label.*
- #define LABEL\_NPOPULATION "npopulation"  
*npopulation label.*

- #define LABEL\_NSIMULATIONS "nsimulations"  
*nsimulations label.*
- #define LABEL\_NSTEPS "nsteps"  
*nsteps label.*
- #define LABEL\_NSWEEPS "nsweeps"  
*nsweeps label.*
- #define LABEL\_P "p"  
*p label.*
- #define LABEL\_PRECISION "precision"  
*precision label.*
- #define LABEL\_RANDOM "random"  
*random label.*
- #define LABEL\_RELAXATION "relaxation"  
*relaxation label.*
- #define LABEL\_REPRODUCTION "reproduction"  
*reproduction label.*
- #define LABEL\_RESULT\_FILE "result\_file"  
*result\_file label.*
- #define LABEL\_SIMULATOR "simulator"  
*simulator label.*
- #define LABEL\_SEED "seed"  
*seed label.*
- #define LABEL\_STEP "step"  
*step label.*
- #define LABEL\_SWEEP "sweep"  
*sweep label.*
- #define LABEL\_TAXICAB "taxicab"  
*taxicab label.*
- #define LABEL\_TEMPLATE1 "template1"  
*template1 label.*
- #define LABEL\_TEMPLATE2 "template2"  
*template2 label.*
- #define LABEL\_TEMPLATE3 "template3"  
*template3 label.*
- #define LABEL\_TEMPLATE4 "template4"  
*template4 label.*
- #define LABEL\_TEMPLATE5 "template5"  
*template5 label.*
- #define LABEL\_TEMPLATE6 "template6"  
*template6 label.*
- #define LABEL\_TEMPLATE7 "template7"  
*template7 label.*
- #define LABEL\_TEMPLATE8 "template8"  
*template8 label.*
- #define LABEL\_THRESHOLD "threshold"  
*threshold label.*
- #define LABEL\_TOLERANCE "tolerance"  
*tolerance label.*
- #define LABEL\_VARIABLE "variable"  
*variable label.*
- #define LABEL\_VARIABLES "variables"

- variables label.*
- `#define LABEL_VARIABLES_FILE "variables_file"`  
*variables label.*
- `#define LABEL_WEIGHT "weight"`  
*weight label.*

## Enumerations

- `enum INPUT_TYPE { INPUT_TYPE_XML = 0, INPUT_TYPE_JSON = 1 }`  
*Enum to define the input file types.*

### 4.1.1 Detailed Description

Configuration header file.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [config.h](#).

### 4.1.2 Enumeration Type Documentation

#### 4.1.2.1 INPUT\_TYPE

`enum INPUT_TYPE`

Enum to define the input file types.

#### Enumerator

<code>INPUT_TYPE_XML</code>	XML input file.
<code>INPUT_TYPE_JSON</code>	JSON input file.

Definition at line 128 of file [config.h](#).

```
00129 {
00130     INPUT_TYPE_XML = 0,
00131     INPUT_TYPE_JSON = 1
00132 };
```



## 4.2 config.h

```

00001 /* config.h.  Generated from config.h.in by configure.  */
00002 /*
00003 MPCOTool:
00004 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00005 calibrations or optimizations of empirical parameters.
00006
00007 AUTHORS: Javier Burguete and Borja Latorre.
00008
00009 Copyright 2012-2017, AUTHORS.
00010
00011 Redistribution and use in source and binary forms, with or without modification,
00012 are permitted provided that the following conditions are met:
00013
00014     1. Redistributions of source code must retain the above copyright notice,
00015        this list of conditions and the following disclaimer.
00016
00017     2. Redistributions in binary form must reproduce the above copyright notice,
00018        this list of conditions and the following disclaimer in the
00019        documentation and/or other materials provided with the distribution.
00020
00021 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00022 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00023 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00024 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00025 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00026 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00027 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00028 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00029 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00030 OF SUCH DAMAGE.
00031 */
00032
00033 #ifndef CONFIG__H
00034 #define CONFIG__H 1
00035
00036 // Gettext simplification
00037 #define _(string) (gettext(string))
00038
00039 // Array sizes
00040
00041 #define MAX_NINPUTS 8
00042 #define NALGORITHMS 3
00043 #define NDIRECTIONS 2
00044 #define NNORMS 4
00045 #define NPRECISIONS 15
00046
00047 // Default choices
00048 #define DEFAULT_PRECISION (NPRECISIONS - 1)
00049 #define DEFAULT_RANDOM_SEED 7007
00050 #define DEFAULT_RELAXATION 1.
00051
00052 // Interface labels
00053
00054 #define LOCALE_DIR "locales"
00055 #define PROGRAM_INTERFACE "mpcotool"
00056
00057 // Labels
00058 #define LABEL_ABSOLUTE_MINIMUM "absolute_minimum"
00059 #define LABEL_ABSOLUTE_MAXIMUM "absolute_maximum"
00060 #define LABEL_ADAPTATION "adaptation"
00061 #define LABEL_ALGORITHM "algorithm"
00062 #define LABEL_OPTIMIZE "optimize"
00063 #define LABEL_COORDINATES "coordinates"
00064 #define LABEL_DIRECTION "direction"
00065 #define LABEL_EUCLIDIAN "euclidian"
00066 #define LABEL_EVALUATOR "evaluator"
00067 #define LABEL_EXPERIMENT "experiment"
00068 #define LABEL_EXPERIMENTS "experiments"
00069 #define LABEL_GENETIC "genetic"
00070 #define LABEL_MINIMUM "minimum"
00071 #define LABEL_MAXIMUM "maximum"
00072 #define LABEL_MONTE_CARLO "Monte-Carlo"
00073 #define LABEL_MUTATION "mutation"
00074 #define LABEL_NAME "name"
00075 #define LABEL_NBEST "nbest"
00076 #define LABEL_NBITS "nbits"
00077 #define LABEL_NESTIMATES "nestimates"
00078 #define LABEL_NGENERATIONS "ngenerations"
00079 #define LABEL_NITERATIONS "niterations"
00080 #define LABEL_NORM "norm"
00081 #define LABEL_NPOPULATION "npopulation"
00082 #define LABEL_NSIMULATIONS "nsimulations"

```

```

00094 #define LABEL_NSTEPS "nsteps"
00095 #define LABEL_NSWEEPS "nsweeps"
00096 #define LABEL_P "p"
00097 #define LABEL_PRECISION "precision"
00098 #define LABEL_RANDOM "random"
00099 #define LABEL_RELAXATION "relaxation"
00100 #define LABEL_REPRODUCTION "reproduction"
00101 #define LABEL_RESULT_FILE "result_file"
00102 #define LABEL_SIMULATOR "simulator"
00103 #define LABEL_SEED "seed"
00104 #define LABEL_STEP "step"
00105 #define LABEL_SWEEP "sweep"
00106 #define LABEL_TAXICAB "taxicab"
00107 #define LABEL_TEMPLATE1 "template1"
00108 #define LABEL_TEMPLATE2 "template2"
00109 #define LABEL_TEMPLATE3 "template3"
00110 #define LABEL_TEMPLATE4 "template4"
00111 #define LABEL_TEMPLATE5 "template5"
00112 #define LABEL_TEMPLATE6 "template6"
00113 #define LABEL_TEMPLATE7 "template7"
00114 #define LABEL_TEMPLATE8 "template8"
00115 #define LABEL_THRESHOLD "threshold"
00116 #define LABEL_TOLERANCE "tolerance"
00117 #define LABEL_VARIABLE "variable"
00118 #define LABEL_VARIABLES "variables"
00119 #define LABEL_VARIABLES_FILE "variables_file"
00120 #define LABEL_WEIGHT "weight"
00121
00122 // Enumerations
00123
00128 enum INPUT_TYPE
00129 {
00130     INPUT_TYPE_XML = 0,
00131     INPUT_TYPE_JSON = 1
00132 };
00133
00134 #endif

```

### 4.3 experiment.c File Reference


Source file to define the experiment data.

```

#include "config.h"
#include <stdio.h>
#include <libxml/parser.h>
#include <libintl.h>
#include <glib.h>
#include <json-glib/json-glib.h>
#include "utils.h"
#include "experiment.h"

```

Include dependency graph for experiment.c:

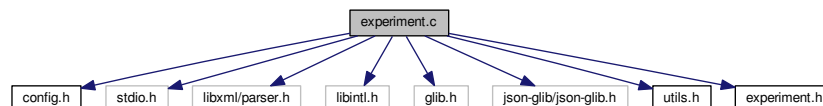

### Macros

- `#define DEBUG_EXPERIMENT 0`  
Macro to debug experiment functions.

## Functions

- void `experiment_new` (`Experiment *experiment`)  
*Function to create a new `Experiment` struct.*
- void `experiment_free` (`Experiment *experiment`, unsigned int type)  
*Function to free the memory of an `Experiment` struct.*
- void `experiment_error` (`Experiment *experiment`, char \*message)  
*Function to print a message error opening an `Experiment` struct.*
- int `experiment_open_xml` (`Experiment *experiment`, xmlNode \*node, unsigned int ninputs)  
*Function to open the `Experiment` struct on a XML node.*
- int `experiment_open_json` (`Experiment *experiment`, JsonNode \*node, unsigned int ninputs)  
*Function to open the `Experiment` struct on a XML node.*

## Variables

- const char \* `template` [`MAX_NINPUTS`]  
*Array of xmlChar strings with template labels.*

### 4.3.1 Detailed Description

Source file to define the experiment data.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file `experiment.c`.

### 4.3.2 Function Documentation

#### 4.3.2.1 `experiment_error()`

```
void experiment_error (
    Experiment * experiment,
    char * message )
```

Function to print a message error opening an `Experiment` struct.

#### Parameters

<code>experiment</code>	<code>Experiment</code> struct.
<code>message</code>	Error message.

Definition at line 121 of file [experiment.c](#).

```

00122 {
00123     char buffer[64];
00124     if (!experiment->name)
00125         snprintf (buffer, 64, "%s: %s", _("Experiment"), message);
00126     else
00127         snprintf (buffer, 64, "%s %s: %s", _("Experiment"),
00128                 experiment->name, message);
00129     error_message = g_strdup (buffer);
00130 }
```

#### 4.3.2.2 experiment\_free()

```

void experiment_free (
    Experiment * experiment,
    unsigned int type )
```

Function to free the memory of an [Experiment](#) struct.

##### Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
<i>type</i>	Type of input file.

Definition at line 88 of file [experiment.c](#).

```

00089 {
00090     unsigned int i;
00091     #if DEBUG_EXPERIMENT
00092         fprintf (stderr, "experiment_free: start\n");
00093     #endif
00094     if (type == INPUT_TYPE_XML)
00095     {
00096         for (i = 0; i < experiment->ninputs; ++i)
00097             xmlFree (experiment->template[i]);
00098         xmlFree (experiment->name);
00099     }
00100     else
00101     {
00102         for (i = 0; i < experiment->ninputs; ++i)
00103             g_free (experiment->template[i]);
00104         g_free (experiment->name);
00105     }
00106     experiment->ninputs = 0;
00107     #if DEBUG_EXPERIMENT
00108         fprintf (stderr, "experiment_free: end\n");
00109     #endif
00110 }
```

#### 4.3.2.3 experiment\_new()

```

void experiment_new (
    Experiment * experiment )
```

Function to create a new [Experiment](#) struct.

## Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
-------------------	------------------------------------

Definition at line 64 of file [experiment.c](#).

```

00065 {
00066     unsigned int i;
00067     #if DEBUG_EXPERIMENT
00068         fprintf (stderr, "experiment_new: start\n");
00069     #endif
00070     experiment->name = NULL;
00071     experiment->ninputs = 0;
00072     for (i = 0; i < MAX_NINPUTS; ++i)
00073         experiment->template[i] = NULL;
00074     #if DEBUG_EXPERIMENT
00075         fprintf (stderr, "input_new: end\n");
00076     #endif
00077 }
```

## 4.3.2.4 experiment\_open\_json()

```

int experiment_open_json (
    Experiment * experiment,
    JsonNode * node,
    unsigned int ninputs )
```

Function to open the [Experiment](#) struct on a XML node.

## Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
<i>node</i>	JSON node.
<i>ninputs</i>	Number of the simulator input files.

## Returns

1 on success, 0 on error.

Definition at line 254 of file [experiment.c](#).

```


00256 {
00257     char buffer[64];
00258     JsonObject *object;
00259     const char *name;
00260     int error_code;
00261     unsigned int i;
00262
00263     #if DEBUG_EXPERIMENT
00264         fprintf (stderr, "experiment_open_json: start\n");
00265     #endif
00266
00267     // Resetting experiment data
00268     experiment\_new (experiment);
00269
00270     // Getting JSON object
00271     object = json_node_get_object (node);
00272 }
```

```

00273 // Reading the experimental data
00274 name = json_object_get_string_member (object, LABEL_NAME);
00275 if (!name)
00276 {
00277     experiment_error (experiment, _("no data file name"));
00278     goto exit_on_error;
00279 }
00280 experiment->name = g_strdup (name);
00281 #if DEBUG_EXPERIMENT
00282 fprintf (stderr, "experiment_open_json: name=%s\n", experiment->name);
00283 #endif
00284 experiment->weight
00285 = json_object_get_float_with_default (object,
LABEL_WEIGHT, 1.,
                                &error_code);
00286 if (error_code)
00287 {
00288     experiment_error (experiment, _("bad weight"));
00289     goto exit_on_error;
00290 }
00291 #if DEBUG_EXPERIMENT
00292 fprintf (stderr, "experiment_open_json: weight=%lg\n", experiment->weight);
00293 #endif
00294 name = json_object_get_string_member (object, template[0]);
00295 if (name)
00296 {
00297     #if DEBUG_EXPERIMENT
00298         fprintf (stderr, "experiment_open_json: experiment=%s templatel=%s\n",
name, template[0]);
00299     #endif
00300     ++experiment->ninputs;
00301 }
00302 else
00303 {
00304     experiment_error (experiment, _("no template"));
00305     goto exit_on_error;
00306 }
00307 experiment->template[0] = g_strdup (name);
00308 for (i = 1; i < MAX_NINPUTS; ++i)
00309 {
00310     #if DEBUG_EXPERIMENT
00311         fprintf (stderr, "experiment_open_json: template%u\n", i + 1);
00312     #endif
00313     if (json_object_get_member (object, template[i]))
00314     {
00315         if (ninputs && ninputs <= i)
00316         {
00317             experiment_error (experiment, _("bad templates number"));
00318             goto exit_on_error;
00319         }
00320         name = json_object_get_string_member (object, template[i]);
00321         #if DEBUG_EXPERIMENT
00322             fprintf (stderr,
"experiment_open_json: experiment=%s template%u=%s\n",
experiment->nexperiments, name, template[i]);
00323         #endif
00324         experiment->template[i] = g_strdup (name);
00325         ++experiment->ninputs;
00326     }
00327     else if (ninputs && ninputs > i)
00328     {
00329         snprintf (buffer, 64, "%s%u", _("no template"), i + 1);
00330         experiment_error (experiment, buffer);
00331         goto exit_on_error;
00332     }
00333     else
00334     {
00335         break;
00336     }
00337 }
00338 #if DEBUG_EXPERIMENT
00339 fprintf (stderr, "experiment_open_json: end\n");
00340 #endif
00341 return 1;
00342
00343 exit_on_error:
00344 experiment_free (experiment, INPUT_TYPE_JSON);
00345 #if DEBUG_EXPERIMENT
00346 fprintf (stderr, "experiment_open_json: end\n");
00347 #endif
00348 return 0;
00349 }

```

Here is the call graph for this function:

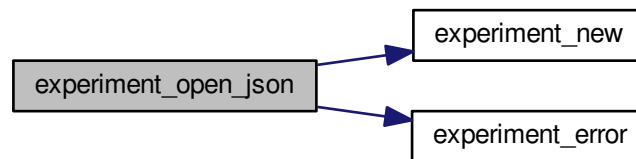

#### 4.3.2.5 experiment\_open\_xml()

```
int experiment_open_xml (
    Experiment * experiment,
    xmlNode * node,
    unsigned int ninputs )
```

Function to open the [Experiment](#) struct on a XML node.

##### Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
<i>node</i>	XML node.
<i>ninputs</i>	Number of the simulator input files.

##### Returns

1 on success, 0 on error.

Definition at line [145](#) of file [experiment.c](#).

```
00147 {
00148     char buffer[64];
00149     int error_code;
00150     unsigned int i;
00151
00152     #if DEBUG_EXPERIMENT
00153         fprintf (stderr, "experiment_open_xml: start\n");
00154     #endif
00155
00156     // Resetting experiment data
00157     experiment_new (experiment);
00158
00159     // Reading the experimental data
00160     experiment->name = (char *) xmlGetProp (node, (const xmlChar *) LABEL_NAME);
00161     if (!experiment->name)
00162     {
00163         experiment_error (experiment, _("no data file name"));
00164         goto exit_on_error;
00165     }
00166     #if DEBUG_EXPERIMENT
00167         fprintf (stderr, "experiment_open_xml: name=%s\n", experiment->name);
```


```

00168 #endif
00169     experiment->weight
00170     =
00171     xml_node_get_float_with_default (node, (const xmlChar *)
00172     LABEL_WEIGHT, 1.,
00173     &error_code);
00174     if (error_code)
00175     {
00176         experiment_error (experiment, _("bad weight"));
00177         goto exit_on_error;
00178     }
00179 #if DEBUG_EXPERIMENT
00180     fprintf (stderr, "experiment_open_xml: weight=%lg\n", experiment->weight);
00181 #endif
00182     experiment->template[0]
00183     = (char *) xmlGetProp (node, (const xmlChar *) template[0]);
00184     if (experiment->template[0])
00185     {
00186         #if DEBUG_EXPERIMENT
00187             fprintf (stderr, "experiment_open_xml: experiment=%s templatel=%s\n",
00188                     experiment->name, template[0]);
00189         #endif
00190         ++experiment->ninputs;
00191     }
00192     else
00193     {
00194         experiment_error (experiment, _("no template"));
00195         goto exit_on_error;
00196     }
00197     for (i = 1; i < MAX_NINPUTS; ++i)
00198     {
00199         #if DEBUG_EXPERIMENT
00200             fprintf (stderr, "experiment_open_xml: template%u\n", i + 1);
00201         #endif
00202         if (xmlHasProp (node, (const xmlChar *) template[i]))
00203         {
00204             if (ninputs && ninputs <= i)
00205             {
00206                 experiment_error (experiment, _("bad templates number"));
00207                 goto exit_on_error;
00208             }
00209             experiment->template[i]
00210             = (char *) xmlGetProp (node, (const xmlChar *) template[i]);
00211             #if DEBUG_EXPERIMENT
00212                 fprintf (stderr,
00213                         "experiment_open_xml: experiment=%s template%u=%s\n",
00214                         experiment->name, experiment->nexperiments,
00215                         experiment->template[i]);
00216             #endif
00217             ++experiment->ninputs;
00218         }
00219         else if (ninputs && ninputs > i)
00220         {
00221             snprintf (buffer, 64, "%s%u", _("no template"), i + 1);
00222             experiment_error (experiment, buffer);
00223             goto exit_on_error;
00224         }
00225         else
00226             break;
00227     }
00228     #if DEBUG_EXPERIMENT
00229         fprintf (stderr, "experiment_open_xml: end\n");
00230     #endif
00231     return 1;
00232 }
00233 exit_on_error:
00234     experiment_free (experiment, INPUT_TYPE_XML);
00235     #if DEBUG_EXPERIMENT
00236         fprintf (stderr, "experiment_open_xml: end\n");
00237     #endif
00238     return 0;
00239 }

```



Here is the call graph for this function:

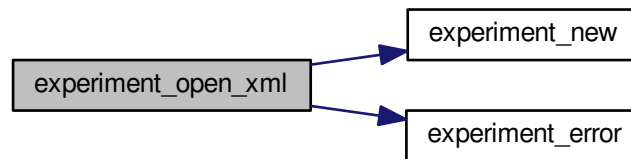

### 4.3.3 Variable Documentation

#### 4.3.3.1 template

```
const char* template[MAX_NINPUTS]
```

**Initial value:**

```
= {
    LABEL_TEMPLATE1, LABEL_TEMPLATE2,
    LABEL_TEMPLATE3, LABEL_TEMPLATE4,
    LABEL_TEMPLATE5, LABEL_TEMPLATE6,
    LABEL_TEMPLATE7, LABEL_TEMPLATE8
}
```

Array of xmlChar strings with template labels.

Definition at line 50 of file [experiment.c](#).

## 4.4 experiment.c

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
  
```

```

00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #define _GNU_SOURCE
00033 #include "config.h"
00034 #include <stdio.h>
00035 #include <libxml/parser.h>
00036 #include <libintl.h>
00037 #include <glib.h>
00038 #include <json-glib/json-glib.h>
00039 #include "utils.h"
00040 #include "experiment.h"
00041
00042 #define DEBUG_EXPERIMENT 0
00043
00044 const char *template[MAX_NINPUTS] = {
00045     LABEL_TEMPLATE1, LABEL_TEMPLATE2,
00046     LABEL_TEMPLATE3, LABEL_TEMPLATE4,
00047     LABEL_TEMPLATE5, LABEL_TEMPLATE6,
00048     LABEL_TEMPLATE7, LABEL_TEMPLATE8
00049 };
00050
00051 void
00052 experiment_new (Experiment * experiment)
00053 {
00054     unsigned int i;
00055     #if DEBUG_EXPERIMENT
00056         fprintf (stderr, "experiment_new: start\n");
00057     #endif
00058     experiment->name = NULL;
00059     experiment->ninputs = 0;
00060     for (i = 0; i < MAX_NINPUTS; ++i)
00061         experiment->template[i] = NULL;
00062     #if DEBUG_EXPERIMENT
00063         fprintf (stderr, "input_new: end\n");
00064     #endif
00065 }
00066
00067 void
00068 experiment_free (Experiment * experiment, unsigned int type)
00069 {
00070     unsigned int i;
00071     #if DEBUG_EXPERIMENT
00072         fprintf (stderr, "experiment_free: start\n");
00073     #endif
00074     if (type == INPUT_TYPE_XML)
00075     {
00076         for (i = 0; i < experiment->ninputs; ++i)
00077             xmlFree (experiment->template[i]);
00078         xmlFree (experiment->name);
00079     }
00080     else
00081     {
00082         for (i = 0; i < experiment->ninputs; ++i)
00083             g_free (experiment->template[i]);
00084         g_free (experiment->name);
00085     }
00086     experiment->ninputs = 0;
00087     #if DEBUG_EXPERIMENT
00088         fprintf (stderr, "experiment_free: end\n");
00089     #endif
00090 }
00091
00092 void
00093 experiment_error (Experiment * experiment, char *message)
00094 {
00095     char buffer[64];
00096     if (!experiment->name)
00097         snprintf (buffer, 64, "%s: %s", _("Experiment"), message);
00098     else
00099         snprintf (buffer, 64, "%s %s: %s", _("Experiment"),
00100                 experiment->name, message);
00101     error_message = g_strdup (buffer);
00102 }
00103
00104 int
00105 experiment_open_xml (Experiment * experiment, xmlNode * node,
00106                     unsigned int ninputs)
00107 {

```

```

00148     char buffer[64];
00149     int error_code;
00150     unsigned int i;
00151
00152     #if DEBUG_EXPERIMENT
00153     fprintf (stderr, "experiment_open_xml: start\n");
00154     #endif
00155
00156     // Resetting experiment data
00157     experiment_new (experiment);
00158
00159     // Reading the experimental data
00160     experiment->name = (char *) xmlGetProp (node, (const xmlChar *) LABEL_NAME);
00161     if (!experiment->name)
00162     {
00163         experiment_error (experiment, _("no data file name"));
00164         goto exit_on_error;
00165     }
00166     #if DEBUG_EXPERIMENT
00167     fprintf (stderr, "experiment_open_xml: name=%s\n", experiment->name);
00168     #endif
00169     experiment->weight
00170     =
00171     xml_node_get_float_with_default (node, (const xmlChar *)
00172     LABEL_WEIGHT, 1.,
00173                                     &error_code);
00174     if (error_code)
00175     {
00176         experiment_error (experiment, _("bad weight"));
00177         goto exit_on_error;
00178     }
00179     #if DEBUG_EXPERIMENT
00180     fprintf (stderr, "experiment_open_xml: weight=%lg\n", experiment->weight);
00181     #endif
00182     experiment->template[0]
00183     = (char *) xmlGetProp (node, (const xmlChar *) template[0]);
00184     if (experiment->template[0])
00185     {
00186         #if DEBUG_EXPERIMENT
00187         fprintf (stderr, "experiment_open_xml: experiment=%s template1=%s\n",
00188                 experiment->name, template[0]);
00189         #endif
00190         ++experiment->ninputs;
00191     }
00192     else
00193     {
00194         experiment_error (experiment, _("no template"));
00195         goto exit_on_error;
00196     }
00197     for (i = 1; i < MAX_NINPUTS; ++i)
00198     {
00199         #if DEBUG_EXPERIMENT
00200         fprintf (stderr, "experiment_open_xml: template%u\n", i + 1);
00201         #endif
00202         if (xmlHasProp (node, (const xmlChar *) template[i]))
00203         {
00204             if (ninputs && ninputs <= i)
00205             {
00206                 experiment_error (experiment, _("bad templates number"));
00207                 goto exit_on_error;
00208             }
00209             experiment->template[i]
00210             = (char *) xmlGetProp (node, (const xmlChar *) template[i]);
00211             #if DEBUG_EXPERIMENT
00212             fprintf (stderr,
00213                     "experiment_open_xml: experiment=%s template%u=%s\n",
00214                     experiment->nexperiments, experiment->name,
00215                     experiment->template[i]);
00216             #endif
00217             ++experiment->ninputs;
00218         }
00219         else if (ninputs && ninputs > i)
00220         {
00221             snprintf (buffer, 64, "%s%u", _("no template"), i + 1);
00222             experiment_error (experiment, buffer);
00223             goto exit_on_error;
00224         }
00225         else
00226             break;
00227     }
00228     #if DEBUG_EXPERIMENT
00229     fprintf (stderr, "experiment_open_xml: end\n");
00230     #endif
00231     return 1;
00232
00233 exit_on_error:

```

```

00234     experiment_free (experiment, INPUT_TYPE_XML);
00235 #if DEBUG_EXPERIMENT
00236     fprintf (stderr, "experiment_open_xml: end\n");
00237 #endif
00238     return 0;
00239 }
00240
00241 int
00254 experiment_open_json (Experiment * experiment, JsonNode * node,
00255                      unsigned int ninputs)
00256 {
00257     char buffer[64];
00258     JsonObject *object;
00259     const char *name;
00260     int error_code;
00261     unsigned int i;
00262
00263 #if DEBUG_EXPERIMENT
00264     fprintf (stderr, "experiment_open_json: start\n");
00265 #endif
00266
00267     // Resetting experiment data
00268     experiment_new (experiment);
00269
00270     // Getting JSON object
00271     object = json_node_get_object (node);
00272
00273     // Reading the experimental data
00274     name = json_object_get_string_member (object, LABEL_NAME);
00275     if (!name)
00276     {
00277         experiment_error (experiment, _("no data file name"));
00278         goto exit_on_error;
00279     }
00280     experiment->name = g_strdup (name);
00281 #if DEBUG_EXPERIMENT
00282     fprintf (stderr, "experiment_open_json: name=%s\n", experiment->name);
00283 #endif
00284     experiment->weight
00285     = json_object_get_float_with_default (object,
00286     LABEL_WEIGHT, 1.,
00287                                         &error_code);
00288     if (error_code)
00289     {
00290         experiment_error (experiment, _("bad weight"));
00291         goto exit_on_error;
00292     }
00293 #if DEBUG_EXPERIMENT
00294     fprintf (stderr, "experiment_open_json: weight=%lg\n", experiment->weight);
00295 #endif
00296     name = json_object_get_string_member (object, template[0]);
00297     if (name)
00298     {
00299 #if DEBUG_EXPERIMENT
00300         fprintf (stderr, "experiment_open_json: experiment=%s template1=%s\n",
00301                 name, template[0]);
00302 #endif
00303         ++experiment->ninputs;
00304     }
00305     else
00306     {
00307         experiment_error (experiment, _("no template"));
00308         goto exit_on_error;
00309     }
00310     experiment->template[0] = g_strdup (name);
00311     for (i = 1; i < MAX_NINPUTS; ++i)
00312     {
00313 #if DEBUG_EXPERIMENT
00314         fprintf (stderr, "experiment_open_json: template%u\n", i + 1);
00315 #endif
00316         if (json_object_get_member (object, template[i]))
00317         {
00318             if (ninputs && ninputs <= i)
00319             {
00320                 experiment_error (experiment, _("bad templates number"));
00321                 goto exit_on_error;
00322             }
00323             name = json_object_get_string_member (object, template[i]);
00324 #if DEBUG_EXPERIMENT
00325             fprintf (stderr,
00326                     "experiment_open_json: experiment=%s template%u=%s\n",
00327                     experiment->name, template[i]);
00328 #endif
00329             experiment->template[i] = g_strdup (name);
00330             ++experiment->ninputs;
00331         }
00332         else if (ninputs && ninputs > i)

```

```


00332     {
00333         snprintf (buffer, 64, "%s%u", _("no template"), i + 1);
00334         experiment_error (experiment, buffer);
00335         goto exit_on_error;
00336     }
00337     else
00338         break;
00339 }
00340
00341 #if DEBUG_EXPERIMENT
00342 fprintf (stderr, "experiment_open_json: end\n");
00343 #endif
00344 return 1;
00345
00346 exit_on_error:
00347 experiment_free (experiment, INPUT_TYPE_JSON);
00348 #if DEBUG_EXPERIMENT
00349 fprintf (stderr, "experiment_open_json: end\n");
00350 #endif
00351 return 0;
00352 }

```

## 4.5 experiment.h File Reference

Header file to define the experiment data.

This graph shows which files directly or indirectly include this file:



## Data Structures

- struct [Experiment](#)  
Struct to define the experiment data.

## Functions

- void [experiment\\_new](#) ([Experiment](#) \*experiment)  
Function to create a new [Experiment](#) struct.
- void [experiment\\_free](#) ([Experiment](#) \*experiment, unsigned int type)  
Function to free the memory of an [Experiment](#) struct.
- void [experiment\\_error](#) ([Experiment](#) \*experiment, char \*message)  
Function to print a message error opening an [Experiment](#) struct.
- int [experiment\\_open\\_xml](#) ([Experiment](#) \*experiment, xmlNode \*node, unsigned int ninputs)  
Function to open the [Experiment](#) struct on a XML node.
- int [experiment\\_open\\_json](#) ([Experiment](#) \*experiment, JsonNode \*node, unsigned int ninputs)  
Function to open the [Experiment](#) struct on a XML node.

## Variables

- const char \* [template](#) [[MAX\\_NINPUTS](#)]  
*Array of xmlChar strings with template labels.*

### 4.5.1 Detailed Description

Header file to define the experiment data.

#### Authors

Javier Burguete.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [experiment.h](#).

### 4.5.2 Function Documentation

#### 4.5.2.1 `experiment_error()`

```
void experiment_error (
    Experiment * experiment,
    char * message )
```

Function to print a message error opening an [Experiment](#) struct.

#### Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
<i>message</i>	Error message.

Definition at line [121](#) of file [experiment.c](#).

```
00122 {
00123     char buffer[64];
00124     if (!experiment->name)
00125         snprintf (buffer, 64, "%s: %s", _("Experiment"), message);
00126     else
00127         snprintf (buffer, 64, "%s %s: %s", _("Experiment"),
00128                 experiment->name, message);
00129     error\_message = g\_strdup (buffer);
00130 }
```

## 4.5.2.2 experiment\_free()

```
void experiment_free (
    Experiment * experiment,
    unsigned int type )
```

Function to free the memory of an [Experiment](#) struct.

## Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
<i>type</i>	Type of input file.

Definition at line 88 of file [experiment.c](#).

```
00089 {
00090     unsigned int i;
00091     #if DEBUG_EXPERIMENT
00092     fprintf (stderr, "experiment_free: start\n");
00093     #endif
00094     if (type == INPUT_TYPE_XML)
00095     {
00096         for (i = 0; i < experiment->ninputs; ++i)
00097             xmlFree (experiment->template[i]);
00098         xmlFree (experiment->name);
00099     }
00100     else
00101     {
00102         for (i = 0; i < experiment->ninputs; ++i)
00103             g_free (experiment->template[i]);
00104         g_free (experiment->name);
00105     }
00106     experiment->ninputs = 0;
00107     #if DEBUG_EXPERIMENT
00108     fprintf (stderr, "experiment_free: end\n");
00109     #endif
00110 }
```

## 4.5.2.3 experiment\_new()

```
void experiment_new (
    Experiment * experiment )
```

Function to create a new [Experiment](#) struct.

## Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
-------------------	------------------------------------

Definition at line 64 of file [experiment.c](#).

```
00065 {
00066     unsigned int i;
00067     #if DEBUG_EXPERIMENT
00068     fprintf (stderr, "experiment_new: start\n");
00069     #endif
00070     experiment->name = NULL;
00071     experiment->ninputs = 0;
```

```

00072     for (i = 0; i < MAX_NINPUTS; ++i)
00073         experiment->template[i] = NULL;
00074 #if DEBUG_EXPERIMENT
00075     fprintf (stderr, "input_new: end\n");
00076 #endif
00077 }

```

#### 4.5.2.4 experiment\_open\_json()

```

int experiment_open_json (
    Experiment * experiment,
    JsonNode * node,
    unsigned int ninputs )

```

Function to open the [Experiment](#) struct on a XML node.

##### Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
<i>node</i>	JSON node.
<i>ninputs</i>	Number of the simulator input files.

##### Returns

1 on success, 0 on error.

Definition at line 254 of file [experiment.c](#).

```

00256 {
00257     char buffer[64];
00258     JsonObject *object;
00259     const char *name;
00260     int error_code;
00261     unsigned int i;
00262
00263 #if DEBUG_EXPERIMENT
00264     fprintf (stderr, "experiment_open_json: start\n");
00265 #endif
00266
00267     // Resetting experiment data
00268     experiment_new (experiment);
00269
00270     // Getting JSON object
00271     object = json_node_get_object (node);
00272
00273     // Reading the experimental data
00274     name = json_object_get_string_member (object, LABEL_NAME);
00275     if (!name)
00276     {
00277         experiment_error (experiment, _("no data file name"));
00278         goto exit_on_error;
00279     }
00280     experiment->name = g_strdup (name);
00281 #if DEBUG_EXPERIMENT
00282     fprintf (stderr, "experiment_open_json: name=%s\n", experiment->name);
00283 #endif
00284     experiment->weight
00285     = json_object_get_float_with_default (object,
00286     LABEL_WEIGHT, 1.,
00287     &error_code);
00288     if (error_code)
00289     {
00289         experiment_error (experiment, _("bad weight"));
00290         goto exit_on_error;

```




```

00291     }
00292     #if DEBUG_EXPERIMENT
00293     fprintf (stderr, "experiment_open_json: weight=%lg\n", experiment->weight);
00294     #endif
00295     name = json_object_get_string_member (object, template[0]);
00296     if (name)
00297     {
00298     #if DEBUG_EXPERIMENT
00299     fprintf (stderr, "experiment_open_json: experiment=%s template1=%s\n",
00300             name, template[0]);
00301     #endif
00302     ++experiment->ninputs;
00303     }
00304     else
00305     {
00306     experiment_error (experiment, _("no template"));
00307     goto exit_on_error;
00308     }
00309     experiment->template[0] = g_strdup (name);
00310     for (i = 1; i < MAX_NINPUTS; ++i)
00311     {
00312     #if DEBUG_EXPERIMENT
00313     fprintf (stderr, "experiment_open_json: template%u\n", i + 1);
00314     #endif
00315     if (json_object_get_member (object, template[i]))
00316     {
00317     if (ninputs && ninputs <= i)
00318     {
00319     experiment_error (experiment, _("bad templates number"));
00320     goto exit_on_error;
00321     }
00322     name = json_object_get_string_member (object, template[i]);
00323     #if DEBUG_EXPERIMENT
00324     fprintf (stderr,
00325             "experiment_open_json: experiment=%s template%u=%s\n",
00326             experiment->nexperiments, name, template[i]);
00327     #endif
00328     experiment->template[i] = g_strdup (name);
00329     ++experiment->ninputs;
00330     }
00331     else if (ninputs && ninputs > i)
00332     {
00333     snprintf (buffer, 64, "%s%u", _("no template"), i + 1);
00334     experiment_error (experiment, buffer);
00335     goto exit_on_error;
00336     }
00337     else
00338     break;
00339     }
00340     #if DEBUG_EXPERIMENT
00341     fprintf (stderr, "experiment_open_json: end\n");
00342     #endif
00343     return 1;
00344 }
00345
00346 exit_on_error:
00347     experiment_free (experiment, INPUT_TYPE_JSON);
00348     #if DEBUG_EXPERIMENT
00349     fprintf (stderr, "experiment_open_json: end\n");
00350     #endif
00351     return 0;
00352 }

```

Here is the call graph for this function:

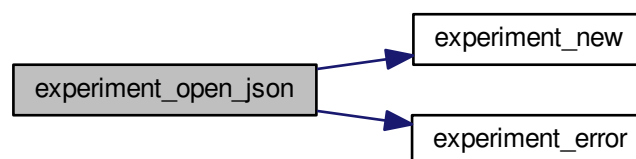

#### 4.5.2.5 experiment\_open\_xml()

```
int experiment_open_xml (
    Experiment * experiment,
    xmlNode * node,
    unsigned int ninputs )
```

Function to open the [Experiment](#) struct on a XML node.

##### Parameters

<i>experiment</i>	<a href="#">Experiment</a> struct.
<i>node</i>	XML node.
<i>ninputs</i>	Number of the simulator input files.

##### Returns

1 on success, 0 on error.

Definition at line 145 of file [experiment.c](#).


```
00147 {
00148     char buffer[64];
00149     int error_code;
00150     unsigned int i;
00151
00152     #if DEBUG_EXPERIMENT
00153         fprintf (stderr, "experiment_open_xml: start\n");
00154     #endif
00155
00156     // Resetting experiment data
00157     experiment_new (experiment);
00158
00159     // Reading the experimental data
00160     experiment->name = (char *) xmlGetProp (node, (const xmlChar *) LABEL_NAME);
00161     if (!experiment->name)
00162     {
00163         experiment_error (experiment, _("no data file name"));
00164         goto exit_on_error;
00165     }
00166     #if DEBUG_EXPERIMENT
00167         fprintf (stderr, "experiment_open_xml: name=%s\n", experiment->name);
00168     #endif
00169     experiment->weight
00170     =
00171     xml_node_get_float_with_default (node, (const xmlChar *)
    LABEL_WEIGHT, 1.,
00172                                     &error_code);
00173     if (error_code)
00174     {
00175         experiment_error (experiment, _("bad weight"));
00176         goto exit_on_error;
00177     }
00178     #if DEBUG_EXPERIMENT
00179         fprintf (stderr, "experiment_open_xml: weight=%lg\n", experiment->weight);
00180     #endif
00181     experiment->template[0]
00182     = (char *) xmlGetProp (node, (const xmlChar *) template[0]);
00183     if (experiment->template[0])
00184     {
00185         #if DEBUG_EXPERIMENT
00186             fprintf (stderr, "experiment_open_xml: experiment=%s template1=%s\n",
00187                     experiment->name, template[0]);
00188         #endif
00189         ++experiment->ninputs;
00190     }
00191     else
```

```

00192     {
00193         experiment_error (experiment, _("no template"));
00194         goto exit_on_error;
00195     }
00196     for (i = 1; i < MAX_NINPUTS; ++i)
00197     {
00198 #if DEBUG_EXPERIMENT
00199         fprintf (stderr, "experiment_open_xml: template%u\n", i + 1);
00200 #endif
00201         if (xmlHasProp (node, (const xmlChar *) template[i]))
00202         {
00203             if (ninputs && ninputs <= i)
00204             {
00205                 experiment_error (experiment, _("bad templates number"));
00206                 goto exit_on_error;
00207             }
00208             experiment->template[i]
00209                 = (char *) xmlGetProp (node, (const xmlChar *) template[i]);
00210 #if DEBUG_EXPERIMENT
00211             fprintf (stderr,
00212                     "experiment_open_xml: experiment=%s template%u=%s\n",
00213                     experiment->nexperiments, experiment->name,
00214                     experiment->template[i]);
00215 #endif
00216             ++experiment->ninputs;
00217         }
00218         else if (ninputs && ninputs > i)
00219         {
00220             snprintf (buffer, 64, "%s%u", _("no template"), i + 1);
00221             experiment_error (experiment, buffer);
00222             goto exit_on_error;
00223         }
00224         else
00225             break;
00226     }
00227
00228 #if DEBUG_EXPERIMENT
00229     fprintf (stderr, "experiment_open_xml: end\n");
00230 #endif
00231     return 1;
00232
00233 exit_on_error:
00234     experiment_free (experiment, INPUT_TYPE_XML);
00235 #if DEBUG_EXPERIMENT
00236     fprintf (stderr, "experiment_open_xml: end\n");
00237 #endif
00238     return 0;
00239 }

```

Here is the call graph for this function:

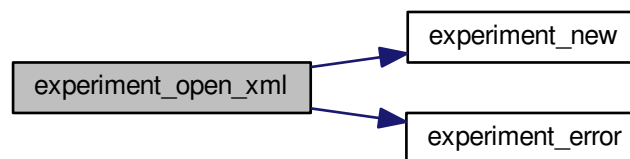

## 4.6 experiment.h

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.

```

```

00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013 1. Redistributions of source code must retain the above copyright notice,
00014 this list of conditions and the following disclaimer.
00015
00016 2. Redistributions in binary form must reproduce the above copyright notice,
00017 this list of conditions and the following disclaimer in the
00018 documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #ifndef EXPERIMENT__H
00033 #define EXPERIMENT__H 1
00034
00035 typedef struct
00036 {
00037     char *name;
00038     char *template[MAX_NINPUTS];
00039     double weight;
00040     unsigned int ninputs;
00041 } Experiment;
00042
00043 extern const char *template[MAX_NINPUTS];
00044
00045 // Public functions
00046 void experiment_new (Experiment * experiment);
00047 void experiment_free (Experiment * experiment, unsigned int type);
00048 void experiment_error (Experiment * experiment, char *message);
00049 int experiment_open_xml (Experiment * experiment, xmlNode * node,
00050                         unsigned int ninputs);
00051 int experiment_open_json (Experiment * experiment, JsonNode * node,
00052                          unsigned int ninputs);
00053
00054 #endif

```

## 4.7 input.c File Reference

Source file to define the input functions.

```

#include "config.h"
#include <stdio.h>
#include <string.h>
#include <libxml/parser.h>
#include <libintl.h>
#include <glib.h>
#include <glib/gstdio.h>
#include <json-glib/json-glib.h>
#include "utils.h"
#include "experiment.h"
#include "variable.h"
#include "input.h"

```

Include dependency graph for input.c:



## Macros

- `#define DEBUG\_INPUT 0`  
*Macro to debug input functions.*

## Functions

- `void input\_new ()`  
*Function to create a new [Input](#) struct.*
- `void input\_free ()`  
*Function to free the memory of the input file data.*
- `void input\_error (char *message)`  
*Function to print an error message opening an [Input](#) struct.*
- `int input\_open\_xml (xmlDoc *doc)`  
*Function to open the input file in XML format.*
- `int input\_open\_json (JsonParser *parser)`  
*Function to open the input file in JSON format.*
- `int input\_open (char *filename)`  
*Function to open the input file.*

## Variables

- `Input input [1]`  
*Global [Input](#) struct to set the input data.*
- `const char * result\_name = "result"`  
*Name of the result file.*
- `const char * variables\_name = "variables"`  
*Name of the variables file.*

### 4.7.1 Detailed Description

Source file to define the input functions.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [input.c](#).

### 4.7.2 Function Documentation

#### 4.7.2.1 [input\\_error\(\)](#)

```
void input_error (  
    char * message )
```

Function to print an error message opening an [Input](#) struct.

**Parameters**

<i>message</i>	Error message.
----------------	----------------

Definition at line 124 of file [input.c](#).

```

00125 {
00126     char buffer[64];
00127     snprintf (buffer, 64, "%s: %s\n", _("Input"), message);
00128     error_message = g_strdup (buffer);
00129 }
```

**4.7.2.2 input\_open()**

```

int input_open (
    char * filename )
```

Function to open the input file.

**Parameters**

<i>filename</i>	<a href="#">Input</a> data file name.
-----------------	---------------------------------------

**Returns**

1\_on\_success, 0\_on\_error.

Definition at line 949 of file [input.c](#).

```


00950 {
00951     xmlDoc *doc;
00952     JsonParser *parser;
00953
00954     #if DEBUG_INPUT
00955     fprintf (stderr, "input_open: start\n");
00956     #endif
00957
00958     // Resetting input data
00959     input_new ();
00960
00961     // Opening input file
00962     #if DEBUG_INPUT
00963     fprintf (stderr, "input_open: opening the input file %s\n", filename);
00964     fprintf (stderr, "input_open: trying XML format\n");
00965     #endif
00966     doc = xmlParseFile (filename);
00967     if (!doc)
00968     {
00969         #if DEBUG_INPUT
00970         fprintf (stderr, "input_open: trying JSON format\n");
00971         #endif
00972         parser = json_parser_new ();
00973         if (!json_parser_load_from_file (parser, filename, NULL))
00974         {
00975             input_error (_("Unable to parse the input file"));
00976             goto exit_on_error;
00977         }
00978         if (!input_open_json (parser))
00979             goto exit_on_error;
00980     }
00981     else if (!input_open_xml (doc))
```

```

00982     goto exit_on_error;
00983
00984     // Getting the working directory
00985     input->directory = g_path_get_dirname (filename);
00986     input->name = g_path_get_basename (filename);
00987
00988 #if DEBUG_INPUT
00989     fprintf (stderr, "input_open: end\n");
00990 #endif
00991     return 1;
00992
00993 exit_on_error:
00994     show_error (error_message);
00995     g_free (error_message);
00996     input_free ();
00997 #if DEBUG_INPUT
00998     fprintf (stderr, "input_open: end\n");
00999 #endif
01000     return 0;
01001 }

```

Here is the call graph for this function:

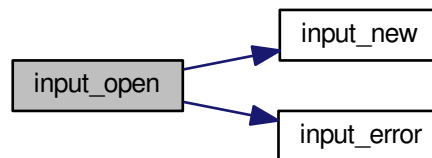

#### 4.7.2.3 input\_open\_json()

```

int input_open_json (
    JsonParser * parser )

```

Function to open the input file in JSON format.

##### Parameters

<i>parser</i>	JsonParser struct.
---------------	--------------------

##### Returns

1\_on\_success, 0\_on\_error.

Definition at line 560 of file [input.c](#).

```

00561 {
00562     JsonNode *node, *child;
00563     JsonObject *object;
00564     JsonArray *array;

```

```

00565     const char *buffer;
00566     int error_code;
00567     unsigned int i, n;
00568
00569     #if DEBUG_INPUT
00570     fprintf (stderr, "input_open_json: start\n");
00571     #endif
00572
00573     // Resetting input data
00574     input->type = INPUT_TYPE_JSON;
00575
00576     // Getting the root node
00577     #if DEBUG_INPUT
00578     fprintf (stderr, "input_open_json: getting the root node\n");
00579     #endif
00580     node = json_parser_get_root (parser);
00581     object = json_node_get_object (node);
00582
00583     // Getting result and variables file names
00584     if (!input->result)
00585     {
00586         buffer = json_object_get_string_member (object, LABEL_RESULT_FILE);
00587         if (!buffer)
00588             buffer = result_name;
00589         input->result = g_strdup (buffer);
00590     }
00591     else
00592         input->result = g_strdup (result_name);
00593     if (!input->variables)
00594     {
00595         buffer = json_object_get_string_member (object, LABEL_VARIABLES_FILE);
00596         if (!buffer)
00597             buffer = variables_name;
00598         input->variables = g_strdup (buffer);
00599     }
00600     else
00601         input->variables = g_strdup (variables_name);
00602
00603     // Opening simulator program name
00604     buffer = json_object_get_string_member (object, LABEL_SIMULATOR);
00605     if (!buffer)
00606     {
00607         input_error (_("Bad simulator program"));
00608         goto exit_on_error;
00609     }
00610     input->simulator = g_strdup (buffer);
00611
00612     // Opening evaluator program name
00613     buffer = json_object_get_string_member (object, LABEL_EVALUATOR);
00614     if (buffer)
00615         input->evaluator = g_strdup (buffer);
00616
00617     // Obtaining pseudo-random numbers generator seed
00618     input->seed
00619     = json_object_get_uint_with_default (object,
00620 LABEL_SEED,
00621                                     DEFAULT_RANDOM_SEED, &error_code);
00622     if (error_code)
00623     {
00624         input_error (_("Bad pseudo-random numbers generator seed"));
00625         goto exit_on_error;
00626     }
00627
00628     // Opening algorithm
00629     buffer = json_object_get_string_member (object, LABEL_ALGORITHM);
00630     if (!strcmp (buffer, LABEL_MONTE_CARLO))
00631     {
00632         input->algorithm = ALGORITHM_MONTE_CARLO;
00633
00634         // Obtaining simulations number
00635         input->nsimulations
00636         = json_object_get_int (object, LABEL_NSIMULATIONS, &error_code);
00637     };
00638     if (error_code)
00639     {
00640         input_error (_("Bad simulations number"));
00641         goto exit_on_error;
00642     }
00643     else if (!strcmp (buffer, LABEL_SWEEP))
00644         input->algorithm = ALGORITHM_SWEEP;
00645     else if (!strcmp (buffer, LABEL_GENETIC))
00646     {
00647         input->algorithm = ALGORITHM_GENETIC;
00648
00649         // Obtaining population
00650         if (json_object_get_member (object, LABEL_NPOPULATION))

```



```

00650     {
00651         input->nsimulations
00652         = json_object_get_uint (object,
00653         LABEL_NPOPULATION, &error_code);
00654         if (error_code || input->nsimulations < 3)
00655         {
00656             input_error (_("Invalid population number"));
00657             goto exit_on_error;
00658         }
00659     else
00660     {
00661         input_error (_("No population number"));
00662         goto exit_on_error;
00663     }
00664
00665     // Obtaining generations
00666     if (json_object_get_member (object, LABEL_NGENERATIONS))
00667     {
00668         input->niterations
00669         = json_object_get_uint (object,
00670         LABEL_NGENERATIONS, &error_code);
00671         if (error_code || !input->niterations)
00672         {
00673             input_error (_("Invalid generations number"));
00674             goto exit_on_error;
00675         }
00676     else
00677     {
00678         input_error (_("No generations number"));
00679         goto exit_on_error;
00680     }
00681
00682     // Obtaining mutation probability
00683     if (json_object_get_member (object, LABEL_MUTATION))
00684     {
00685         input->mutation_ratio
00686         = json_object_get_float (object, LABEL_MUTATION, &error_code
00687 );
00688         if (error_code || input->mutation_ratio < 0.
00689         || input->mutation_ratio >= 1.)
00690         {
00691             input_error (_("Invalid mutation probability"));
00692             goto exit_on_error;
00693         }
00694     else
00695     {
00696         input_error (_("No mutation probability"));
00697         goto exit_on_error;
00698     }
00699
00700     // Obtaining reproduction probability
00701     if (json_object_get_member (object, LABEL_REPRODUCTION))
00702     {
00703         input->reproduction_ratio
00704         = json_object_get_float (object,
00705         LABEL_REPRODUCTION, &error_code);
00706         if (error_code || input->reproduction_ratio < 0.
00707         || input->reproduction_ratio >= 1.0)
00708         {
00709             input_error (_("Invalid reproduction probability"));
00710             goto exit_on_error;
00711         }
00712     else
00713     {
00714         input_error (_("No reproduction probability"));
00715         goto exit_on_error;
00716     }
00717
00718     // Obtaining adaptation probability
00719     if (json_object_get_member (object, LABEL_ADAPTATION))
00720     {
00721         input->adaptation_ratio
00722         = json_object_get_float (object,
00723         LABEL_ADAPTATION, &error_code);
00724         if (error_code || input->adaptation_ratio < 0.
00725         || input->adaptation_ratio >= 1.)
00726         {
00727             input_error (_("Invalid adaptation probability"));
00728             goto exit_on_error;
00729         }
00730     else
00731     {

```

```

00732         input_error (_("No adaptation probability"));
00733         goto exit_on_error;
00734     }
00735
00736     // Checking survivals
00737     i = input->mutation_ratio * input->nsimulations;
00738     i += input->reproduction_ratio * input->
nsimulations;
00739     i += input->adaptation_ratio * input->
nsimulations;
00740     if (i > input->nsimulations - 2)
00741     {
00742         input_error
00743         (_("No enough survival entities to reproduce the population"));
00744         goto exit_on_error;
00745     }
00746 }
00747 else
00748 {
00749     input_error (_("Unknown algorithm"));
00750     goto exit_on_error;
00751 }
00752
00753 if (input->algorithm == ALGORITHM_MONTE_CARLO
00754 || input->algorithm == ALGORITHM_SWEEP)
00755 {
00756
00757     // Obtaining iterations number
00758     input->niterations
00759     = json_object_get_uint (object, LABEL_NITERATIONS, &error_code
);
00760     if (error_code == 1)
00761         input->niterations = 1;
00762     else if (error_code)
00763     {
00764         input_error (_("Bad iterations number"));
00765         goto exit_on_error;
00766     }
00767
00768     // Obtaining best number
00769     input->nbest
00770     = json_object_get_uint_with_default (object,
LABEL_NBEST, 1,
00771                                         &error_code);
00772     if (error_code || !input->nbest)
00773     {
00774         input_error (_("Invalid best number"));
00775         goto exit_on_error;
00776     }
00777
00778     // Obtaining tolerance
00779     input->tolerance
00780     = json_object_get_float_with_default (object,
LABEL_TOLERANCE, 0.,
00781                                         &error_code);
00782     if (error_code || input->tolerance < 0.)
00783     {
00784         input_error (_("Invalid tolerance"));
00785         goto exit_on_error;
00786     }
00787
00788     // Getting direction search method parameters
00789     if (json_object_get_member (object, LABEL_NSTEPS))
00790     {
00791         input->nsteps
00792         = json_object_get_uint (object, LABEL_NSTEPS, &error_code);
00793         if (error_code)
00794         {
00795             input_error (_("Invalid steps number"));
00796             goto exit_on_error;
00797         }
00798         buffer = json_object_get_string_member (object, LABEL_DIRECTION);
00799         if (!strcmp (buffer, LABEL_COORDINATES))
00800             input->direction = DIRECTION_METHOD_COORDINATES;
00801         else if (!strcmp (buffer, LABEL_RANDOM))
00802         {
00803             input->direction = DIRECTION_METHOD_RANDOM;
00804             input->nestimates
00805             = json_object_get_uint (object,
LABEL_NESTIMATES, &error_code);
00806             if (error_code || !input->nestimates)
00807             {
00808                 input_error (_("Invalid estimates number"));
00809                 goto exit_on_error;
00810             }
00811         }
00812         else

```

```

00813         {
00814             input_error
00815             (_("Unknown method to estimate the direction search"));
00816             goto exit_on_error;
00817         }
00818         input->relaxation
00819         = json_object_get_float_with_default (object,
00820 LABEL_RELAXATION,
00821                                     DEFAULT_RELAXATION,
00822                                     &error_code);
00823         if (error_code || input->relaxation < 0. || input->
00824 relaxation > 2.)
00825         {
00826             input_error (_("Invalid relaxation parameter"));
00827             goto exit_on_error;
00828         }
00829         else
00830             input->nsteps = 0;
00831         // Obtaining the threshold
00832         input->threshold
00833         = json_object_get_float_with_default (object,
00834 LABEL_THRESHOLD, 0.,
00835                                     &error_code);
00836         if (error_code)
00837         {
00838             input_error (_("Invalid threshold"));
00839             goto exit_on_error;
00840         }
00841         // Reading the experimental data
00842         array = json_object_get_array_member (object, LABEL_EXPERIMENTS);
00843         n = json_array_get_length (array);
00844         input->experiment = (Experiment *) g_malloc (n * sizeof (
00845 Experiment));
00846         for (i = 0; i < n; ++i)
00847         {
00848             #if DEBUG_INPUT
00849             fprintf (stderr, "input_open_json: nexperiments=%u\n",
00850                     input->nexperiments);
00851             #endif
00852             child = json_array_get_element (array, i);
00853             if (!input->nexperiments)
00854             {
00855                 if (!experiment_open_json (input->experiment, child, 0))
00856                     goto exit_on_error;
00857             }
00858             else
00859             {
00860                 if (!experiment_open_json (input->experiment +
00861 input->nexperiments,
00862                                     child, input->experiment->
00863 ninputs))
00864                     goto exit_on_error;
00865                 ++input->nexperiments;
00866             }
00867             #if DEBUG_INPUT
00868             fprintf (stderr, "input_open_json: nexperiments=%u\n",
00869                     input->nexperiments);
00870             #endif
00871             if (!input->nexperiments)
00872             {
00873                 input_error (_("No optimization experiments"));
00874                 goto exit_on_error;
00875             }
00876             // Reading the variables data
00877             array = json_object_get_array_member (object, LABEL_VARIABLES);
00878             n = json_array_get_length (array);
00879             input->variable = (Variable *) g_malloc (n * sizeof (
00880 Variable));
00881             for (i = 0; i < n; ++i)
00882             {
00883                 #if DEBUG_INPUT
00884                 fprintf (stderr, "input_open_json: nvariables=%u\n", input->
00885 nvariables);
00886                 #endif
00887                 child = json_array_get_element (array, i);
00888                 if (!variable_open_json (input->variable +
00889 input->nvariables, child,
00890                                     input->algorithm, input->
00891 nsteps))
00892                     goto exit_on_error;
00893                 ++input->nvariables;
00894             }

```

```

00890  if (!input->nvariables)
00891  {
00892      input_error (_("No optimization variables"));
00893      goto exit_on_error;
00894  }
00895
00896  // Obtaining the error norm
00897  if (json_object_get_member (object, LABEL_NORM))
00898  {
00899      buffer = json_object_get_string_member (object, LABEL_NORM);
00900      if (!strcmp (buffer, LABEL_EUCLIDIAN))
00901          input->norm = ERROR_NORM_EUCLIDIAN;
00902      else if (!strcmp (buffer, LABEL_MAXIMUM))
00903          input->norm = ERROR_NORM_MAXIMUM;
00904      else if (!strcmp (buffer, LABEL_P))
00905      {
00906          input->norm = ERROR_NORM_P;
00907          input->p = json_object_get_float (object,
00908 LABEL_P, &error_code);
00909          if (!error_code)
00910          {
00911              input_error (_("Bad P parameter"));
00912              goto exit_on_error;
00913          }
00914          else if (!strcmp (buffer, LABEL_TAXICAB))
00915              input->norm = ERROR_NORM_TAXICAB;
00916          else
00917          {
00918              input_error (_("Unknown error norm"));
00919              goto exit_on_error;
00920          }
00921      }
00922      else
00923          input->norm = ERROR_NORM_EUCLIDIAN;
00924
00925  // Closing the JSON document
00926  g_object_unref (parser);
00927
00928  #if DEBUG_INPUT
00929      fprintf (stderr, "input_open_json: end\n");
00930  #endif
00931      return 1;
00932
00933  exit_on_error:
00934      g_object_unref (parser);
00935  #if DEBUG_INPUT
00936      fprintf (stderr, "input_open_json: end\n");
00937  #endif
00938      return 0;
00939  }

```

Here is the call graph for this function:



#### 4.7.2.4 input\_open\_xml()

```

int input_open_xml (
    xmlDoc * doc )

```

Function to open the input file in XML format.

## Parameters

<i>doc</i>	xmlDoc struct.
------------	----------------

## Returns

1\_on\_success, 0\_on\_error.

Definition at line 139 of file [input.c](#).

```

00140 {
00141     char buffer2[64];
00142     xmlNode *node, *child;
00143     xmlChar *buffer;
00144     int error_code;
00145     unsigned int i;
00146
00147     #if DEBUG_INPUT
00148     fprintf (stderr, "input_open_xml: start\n");
00149     #endif
00150
00151     // Resetting input data
00152     buffer = NULL;
00153     input->type = INPUT_TYPE_XML;
00154
00155     // Getting the root node
00156     #if DEBUG_INPUT
00157     fprintf (stderr, "input_open_xml: getting the root node\n");
00158     #endif
00159     node = xmlDocGetRootElement (doc);
00160     if (xmlStrcmp (node->name, (const xmlChar *) LABEL_OPTIMIZE))
00161     {
00162         input_error (_("Bad root XML node"));
00163         goto exit_on_error;
00164     }
00165
00166     // Getting result and variables file names
00167     if (!input->result)
00168     {
00169         input->result =
00170             (char *) xmlGetProp (node, (const xmlChar *) LABEL_RESULT_FILE);
00171         if (!input->result)
00172             input->result = (char *) xmlStrdup ((const xmlChar *)
result_name);
00173     }
00174     if (!input->variables)
00175     {
00176         input->variables =
00177             (char *) xmlGetProp (node, (const xmlChar *) LABEL_VARIABLES_FILE);
00178         if (!input->variables)
00179             input->variables =
00180                 (char *) xmlStrdup ((const xmlChar *) variables_name);
00181     }
00182
00183     // Opening simulator program name
00184     input->simulator =
00185         (char *) xmlGetProp (node, (const xmlChar *) LABEL_SIMULATOR);
00186     if (!input->simulator)
00187     {
00188         input_error (_("Bad simulator program"));
00189         goto exit_on_error;
00190     }
00191
00192     // Opening evaluator program name
00193     input->evaluator =
00194         (char *) xmlGetProp (node, (const xmlChar *) LABEL_EVALUATOR);
00195
00196     // Obtaining pseudo-random numbers generator seed
00197     input->seed
00198     = xml_node_get_uint_with_default (node, (const xmlChar *)
LABEL_SEED,
00199                                     DEFAULT_RANDOM_SEED, &error_code);
00200     if (error_code)
00201     {
00202         input_error (_("Bad pseudo-random numbers generator seed"));
00203         goto exit_on_error;
00204     }
00205
00206     // Opening algorithm

```

```

00207     buffer = xmlGetProp (node, (const xmlChar *) LABEL_ALGORITHM);
00208     if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_MONTE_CARLO))
00209     {
00210         input->algorithm = ALGORITHM_MONTE_CARLO;
00211
00212         // Obtaining simulations number
00213         input->nsimulations
00214         = xml_node_get_int (node, (const xmlChar *)
00215 LABEL_NSIMULATIONS,
00216                             &error_code);
00217         if (error_code)
00218         {
00219             input_error (_("Bad simulations number"));
00220             goto exit_on_error;
00221         }
00222     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_SWEEP))
00223         input->algorithm = ALGORITHM_SWEEP;
00224     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_GENETIC))
00225     {
00226         input->algorithm = ALGORITHM_GENETIC;
00227
00228         // Obtaining population
00229         if (xmlHasProp (node, (const xmlChar *) LABEL_NPOPULATION))
00230         {
00231             input->nsimulations
00232             = xml_node_get_uint (node, (const xmlChar *) LABEL_NPOPULATION,
00233                                 &error_code);
00234             if (error_code || input->nsimulations < 3)
00235             {
00236                 input_error (_("Invalid population number"));
00237                 goto exit_on_error;
00238             }
00239         }
00240     else
00241     {
00242         input_error (_("No population number"));
00243         goto exit_on_error;
00244     }
00245
00246     // Obtaining generations
00247     if (xmlHasProp (node, (const xmlChar *) LABEL_NGENERATIONS))
00248     {
00249         input->niterations
00250         = xml_node_get_uint (node, (const xmlChar *) LABEL_NGENERATIONS,
00251                             &error_code);
00252         if (error_code || !input->niterations)
00253         {
00254             input_error (_("Invalid generations number"));
00255             goto exit_on_error;
00256         }
00257     }
00258     else
00259     {
00260         input_error (_("No generations number"));
00261         goto exit_on_error;
00262     }
00263
00264     // Obtaining mutation probability
00265     if (xmlHasProp (node, (const xmlChar *) LABEL_MUTATION))
00266     {
00267         input->mutation_ratio
00268         = xml_node_get_float (node, (const xmlChar *) LABEL_MUTATION,
00269                              &error_code);
00270         if (error_code || input->mutation_ratio < 0.
00271             || input->mutation_ratio >= 1.)
00272         {
00273             input_error (_("Invalid mutation probability"));
00274             goto exit_on_error;
00275         }
00276     }
00277     else
00278     {
00279         input_error (_("No mutation probability"));
00280         goto exit_on_error;
00281     }
00282
00283     // Obtaining reproduction probability
00284     if (xmlHasProp (node, (const xmlChar *) LABEL_REPRODUCTION))
00285     {
00286         input->reproduction_ratio
00287         = xml_node_get_float (node, (const xmlChar *) LABEL_REPRODUCTION,
00288                              &error_code);
00289         if (error_code || input->reproduction_ratio < 0.
00290             || input->reproduction_ratio >= 1.0)
00291         {
00292             input_error (_("Invalid reproduction probability"));

```

```

00293         goto exit_on_error;
00294     }
00295 }
00296 else
00297 {
00298     input_error (_("No reproduction probability"));
00299     goto exit_on_error;
00300 }
00301
00302 // Obtaining adaptation probability
00303 if (xmlHasProp (node, (const xmlChar *) LABEL_ADAPTATION))
00304 {
00305     input->adaptation_ratio
00306         = xml_node_get_float (node, (const xmlChar *) LABEL_ADAPTATION,
00307                               &error_code);
00308     if (error_code || input->adaptation_ratio < 0.
00309         || input->adaptation_ratio >= 1.)
00310     {
00311         input_error (_("Invalid adaptation probability"));
00312         goto exit_on_error;
00313     }
00314 }
00315 else
00316 {
00317     input_error (_("No adaptation probability"));
00318     goto exit_on_error;
00319 }
00320
00321 // Checking survivals
00322 i = input->mutation_ratio * input->nsimulations;
00323 i += input->reproduction_ratio * input->
00324 nsimulations;
00325 i += input->adaptation_ratio * input->
00326 nsimulations;
00327 if (i > input->nsimulations - 2)
00328 {
00329     input_error
00330         (_("No enough survival entities to reproduce the population"));
00331     goto exit_on_error;
00332 }
00333 else
00334 {
00335     input_error (_("Unknown algorithm"));
00336     goto exit_on_error;
00337 }
00338 xmlFree (buffer);
00339 buffer = NULL;
00340
00341 if (input->algorithm == ALGORITHM_MONTE_CARLO
00342     || input->algorithm == ALGORITHM_SWEEP)
00343 {
00344     // Obtaining iterations number
00345     input->niterations
00346         = xml_node_get_uint (node, (const xmlChar *)
00347 LABEL_NITERATIONS,
00348                             &error_code);
00349     if (error_code == 1)
00350         input->niterations = 1;
00351     else if (error_code)
00352     {
00353         input_error (_("Bad iterations number"));
00354         goto exit_on_error;
00355     }
00356
00357     // Obtaining best number
00358     input->nbest
00359         = xml_node_get_uint_with_default (node, (const xmlChar *)
00360 LABEL_NBEST,
00361                                           1, &error_code);
00362     if (error_code || !input->nbest)
00363     {
00364         input_error (_("Invalid best number"));
00365         goto exit_on_error;
00366     }
00367     if (input->nbest > input->nsimulations)
00368     {
00369         input_error (_("Best number higher than simulations number"));
00370         goto exit_on_error;
00371     }
00372
00373     // Obtaining tolerance
00374     input->tolerance
00375         = xml_node_get_float_with_default (node,
00376                                           (const xmlChar *) LABEL_TOLERANCE,
00377                                           0., &error_code);

```

```

00376     if (error_code || input->tolerance < 0.)
00377     {
00378         input_error (_("Invalid tolerance"));
00379         goto exit_on_error;
00380     }
00381
00382     // Getting direction search method parameters
00383     if (xmlHasProp (node, (const xmlChar *) LABEL_NSTEPS))
00384     {
00385         input->nsteps =
00386             xml_node_get_uint (node, (const xmlChar *) LABEL_NSTEPS,
00387                               &error_code);
00388         if (error_code)
00389         {
00390             input_error (_("Invalid steps number"));
00391             goto exit_on_error;
00392         }
00393         buffer = xmlGetProp (node, (const xmlChar *) LABEL_DIRECTION);
00394         if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_COORDINATES))
00395             input->direction = DIRECTION_METHOD_COORDINATES;
00396         else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_RANDOM))
00397         {
00398             input->direction = DIRECTION_METHOD_RANDOM;
00399             input->nestimates
00400                 = xml_node_get_uint (node, (const xmlChar *)
LABEL_NESTIMATES,
00401                                     &error_code);
00402             if (error_code || !input->nestimates)
00403             {
00404                 input_error (_("Invalid estimates number"));
00405                 goto exit_on_error;
00406             }
00407         }
00408         else
00409         {
00410             input_error
00411                 (_("Unknown method to estimate the direction search"));
00412             goto exit_on_error;
00413         }
00414         xmlFree (buffer);
00415         buffer = NULL;
00416         input->relaxation
00417             = xml_node_get_float_with_default (node,
00418                                               (const xmlChar *)
00419                                               LABEL_RELAXATION,
00420                                               DEFAULT_RELAXATION, &error_code);
00421         if (error_code || input->relaxation < 0. || input->
relaxation > 2.)
00422         {
00423             input_error (_("Invalid relaxation parameter"));
00424             goto exit_on_error;
00425         }
00426         else
00427             input->nsteps = 0;
00428     }
00429     // Obtaining the threshold
00430     input->threshold =
00431         xml_node_get_float_with_default (node, (const xmlChar *)
LABEL_THRESHOLD,
00432                                         0., &error_code);
00433     if (error_code)
00434     {
00435         input_error (_("Invalid threshold"));
00436         goto exit_on_error;
00437     }
00438 }
00439
00440 // Reading the experimental data
00441 for (child = node->children; child; child = child->next)
00442 {
00443     if (xmlStrcmp (child->name, (const xmlChar *) LABEL_EXPERIMENT))
00444         break;
00445 #if DEBUG_INPUT
00446     fprintf (stderr, "input_open_xml: nexperiments=%u\n",
00447             input->nexperiments);
00448 #endif
00449     input->experiment = (Experiment *)
00450         g_realloc (input->experiment,
00451                   (1 + input->nexperiments) * sizeof (
Experiment));
00452     if (!input->nexperiments)
00453     {
00454         if (!experiment_open_xml (input->experiment, child, 0))
00455             goto exit_on_error;
00456     }
00457     else
00458     {

```



```

00459         if (!experiment_open_xml (input->experiment +
input->nexperiments,
00460                                     child, input->experiment->
ninputs))
00461             goto exit_on_error;
00462     }
00463     ++input->nexperiments;
00464 #if DEBUG_INPUT
00465     fprintf (stderr, "input_open_xml: nexperiments=%u\n",
input->nexperiments);
00466 #endif
00467 }
00468 if (!input->nexperiments)
00469 {
00470     input_error (_("No optimization experiments"));
00471     goto exit_on_error;
00472 }
00473 buffer = NULL;
00474 // Reading the variables data
00475 for (; child; child = child->next)
00476 {
00477     #if DEBUG_INPUT
00478     fprintf (stderr, "input_open_xml: nvariables=%u\n", input->nvariables);
00479     #endif
00480     if (xmlStrcmp (child->name, (const xmlChar *) LABEL_VARIABLE))
00481     {
00482         snprintf (buffer2, 64, "%s %u: %s",
_ ("Variable"), input->nvariables + 1, _ ("bad XML node"));
00483         input_error (buffer2);
00484         goto exit_on_error;
00485     }
00486     input->variable = (Variable *)
g_realloc (input->variable,
00487             (1 + input->nvariables) * sizeof (Variable));
00488     if (!variable_open_xml (input->variable +
input->nvariables, child,
00489                             input->algorithm, input->nsteps))
00490         goto exit_on_error;
00491     ++input->nvariables;
00492 }
00493 if (!input->nvariables)
00494 {
00495     input_error (_("No optimization variables"));
00496     goto exit_on_error;
00497 }
00498 buffer = NULL;
00499 // Obtaining the error norm
00500 if (xmlHasProp (node, (const xmlChar *) LABEL_NORM))
00501 {
00502     buffer = xmlGetProp (node, (const xmlChar *) LABEL_NORM);
00503     if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_EUCLIDIAN))
00504         input->norm = ERROR_NORM_EUCLIDIAN;
00505     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_MAXIMUM))
00506         input->norm = ERROR_NORM_MAXIMUM;
00507     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_P))
00508     {
00509         input->norm = ERROR_NORM_P;
00510         input->p
= xml_node_get_float (node, (const xmlChar *) LABEL_P, &error_code);
00511         if (!error_code)
00512         {
00513             input_error (_("Bad P parameter"));
00514             goto exit_on_error;
00515         }
00516     }
00517     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_TAXICAB))
00518         input->norm = ERROR_NORM_TAXICAB;
00519     else
00520     {
00521         input_error (_("Unknown error norm"));
00522         goto exit_on_error;
00523     }
00524     xmlFree (buffer);
00525 }
00526 else
00527     input->norm = ERROR_NORM_EUCLIDIAN;
00528 // Closing the XML document
00529 xmlFreeDoc (doc);
00530 #if DEBUG_INPUT
00531 fprintf (stderr, "input_open_xml: end\n");
00532 #endif
00533 return 1;
00534

```

```

00543 exit_on_error:
00544     xmlFree (buffer);
00545     xmlFreeDoc (doc);
00546     #if DEBUG_INPUT
00547     fprintf (stderr, "input_open_xml: end\n");
00548     #endif
00549     return 0;
00550 }

```

Here is the call graph for this function:



## 4.8 input.c

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #define _GNU_SOURCE
00033 #include "config.h"
00034 #include <stdio.h>
00035 #include <string.h>
00036 #include <libxml/parser.h>
00037 #include <libintl.h>
00038 #include <glib.h>
00039 #include <glib/gstdio.h>
00040 #include <json-glib/json-glib.h>
00041 #include "utils.h"
00042 #include "experiment.h"
00043 #include "variable.h"
00044 #include "input.h"
00045
00046 #define DEBUG_INPUT 0
00047
00048 Input input[1];
00049
00050 const char *result_name = "result";
00051 const char *variables_name = "variables";

```

```

00058
00063 void
00064 input_new ()
00065 {
00066     #if DEBUG_INPUT
00067         fprintf (stderr, "input_new: start\n");
00068     #endif
00069     input->nvariables = input->nexperiments = input->nsteps = 0;
00070     input->simulator = input->evaluator = input->directory = input->
name = NULL;
00071     input->experiment = NULL;
00072     input->variable = NULL;
00073     #if DEBUG_INPUT
00074         fprintf (stderr, "input_new: end\n");
00075     #endif
00076 }
00077
00082 void
00083 input_free ()
00084 {
00085     unsigned int i;
00086     #if DEBUG_INPUT
00087         fprintf (stderr, "input_free: start\n");
00088     #endif
00089     g_free (input->name);
00090     g_free (input->directory);
00091     for (i = 0; i < input->nexperiments; ++i)
00092         experiment_free (input->experiment + i, input->type);
00093     for (i = 0; i < input->nvariables; ++i)
00094         variable_free (input->variable + i, input->type);
00095     g_free (input->experiment);
00096     g_free (input->variable);
00097     if (input->type == INPUT_TYPE_XML)
00098     {
00099         xmlFree (input->evaluator);
00100         xmlFree (input->simulator);
00101         xmlFree (input->result);
00102         xmlFree (input->variables);
00103     }
00104     else
00105     {
00106         g_free (input->evaluator);
00107         g_free (input->simulator);
00108         g_free (input->result);
00109         g_free (input->variables);
00110     }
00111     input->nexperiments = input->nvariables = input->nsteps = 0;
00112     #if DEBUG_INPUT
00113         fprintf (stderr, "input_free: end\n");
00114     #endif
00115 }
00116
00123 void
00124 input_error (char *message)
00125 {
00126     char buffer[64];
00127     snprintf (buffer, 64, "%s: %s\n", _("Input"), message);
00128     error_message = g_strdup (buffer);
00129 }
00130
00138 int
00139 input_open_xml (xmlDoc * doc)
00140 {
00141     char buffer2[64];
00142     xmlNode *node, *child;
00143     xmlChar *buffer;
00144     int error_code;
00145     unsigned int i;
00146
00147     #if DEBUG_INPUT
00148         fprintf (stderr, "input_open_xml: start\n");
00149     #endif
00150
00151     // Resetting input data
00152     buffer = NULL;
00153     input->type = INPUT_TYPE_XML;
00154
00155     // Getting the root node
00156     #if DEBUG_INPUT
00157         fprintf (stderr, "input_open_xml: getting the root node\n");
00158     #endif
00159     node = xmlDocGetRootElement (doc);
00160     if (xmlStrcmp (node->name, (const xmlChar *) LABEL_OPTIMIZE))
00161     {
00162         input_error (_("Bad root XML node"));
00163         goto exit_on_error;
00164     }

```

```

00165
00166 // Getting result and variables file names
00167 if (!input->result)
00168 {
00169     input->result =
00170         (char *) xmlGetProp (node, (const xmlChar *) LABEL_RESULT_FILE);
00171     if (!input->result)
00172         input->result = (char *) xmlStrdup ((const xmlChar *) result_name);
00173 }
00174 if (!input->variables)
00175 {
00176     input->variables =
00177         (char *) xmlGetProp (node, (const xmlChar *) LABEL_VARIABLES_FILE);
00178     if (!input->variables)
00179         input->variables =
00180             (char *) xmlStrdup ((const xmlChar *) variables_name);
00181 }
00182
00183 // Opening simulator program name
00184 input->simulator =
00185     (char *) xmlGetProp (node, (const xmlChar *) LABEL_SIMULATOR);
00186 if (!input->simulator)
00187 {
00188     input_error _("Bad simulator program");
00189     goto exit_on_error;
00190 }
00191
00192 // Opening evaluator program name
00193 input->evaluator =
00194     (char *) xmlGetProp (node, (const xmlChar *) LABEL_EVALUATOR);
00195
00196 // Obtaining pseudo-random numbers generator seed
00197 input->seed
00198     = xml_node_get_uint_with_default (node, (const xmlChar *)
00199 LABEL_SEED,
00200                                     DEFAULT_RANDOM_SEED, &error_code);
00201 if (error_code)
00202 {
00203     input_error _("Bad pseudo-random numbers generator seed");
00204     goto exit_on_error;
00205 }
00206
00207 // Opening algorithm
00208 buffer = xmlGetProp (node, (const xmlChar *) LABEL_ALGORITHM);
00209 if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_MONTE_CARLO))
00210 {
00211     input->algorithm = ALGORITHM_MONTE_CARLO;
00212 }
00213 // Obtaining simulations number
00214 input->nsimulations
00215     = xml_node_get_int (node, (const xmlChar *)
00216 LABEL_NSIMULATIONS,
00217                       &error_code);
00218 if (error_code)
00219 {
00220     input_error _("Bad simulations number");
00221     goto exit_on_error;
00222 }
00223 else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_SWEEP))
00224     input->algorithm = ALGORITHM_SWEEP;
00225 else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_GENETIC))
00226 {
00227     input->algorithm = ALGORITHM_GENETIC;
00228 }
00229 // Obtaining population
00230 if (xmlHasProp (node, (const xmlChar *) LABEL_NPOPULATION))
00231 {
00232     input->nsimulations
00233         = xml_node_get_uint (node, (const xmlChar *) LABEL_NPOPULATION,
00234                             &error_code);
00235     if (error_code || input->nsimulations < 3)
00236     {
00237         input_error _("Invalid population number");
00238         goto exit_on_error;
00239     }
00240 }
00241 else
00242 {
00243     input_error _("No population number");
00244     goto exit_on_error;
00245 }
00246 // Obtaining generations
00247 if (xmlHasProp (node, (const xmlChar *) LABEL_NGENERATIONS))
00248 {
00249     input->niterations

```

```

00250         = xml_node_get_uint (node, (const xmlChar *) LABEL_NGENERATIONS,
00251                               &error_code);
00252     if (error_code || !input->niterations)
00253     {
00254         input_error (_("Invalid generations number"));
00255         goto exit_on_error;
00256     }
00257 }
00258 else
00259 {
00260     input_error (_("No generations number"));
00261     goto exit_on_error;
00262 }
00263
00264 // Obtaining mutation probability
00265 if (xmlHasProp (node, (const xmlChar *) LABEL_MUTATION))
00266 {
00267     input->mutation_ratio
00268     = xml_node_get_float (node, (const xmlChar *) LABEL_MUTATION,
00269                           &error_code);
00270     if (error_code || input->mutation_ratio < 0.
00271         || input->mutation_ratio >= 1.)
00272     {
00273         input_error (_("Invalid mutation probability"));
00274         goto exit_on_error;
00275     }
00276 }
00277 else
00278 {
00279     input_error (_("No mutation probability"));
00280     goto exit_on_error;
00281 }
00282
00283 // Obtaining reproduction probability
00284 if (xmlHasProp (node, (const xmlChar *) LABEL_REPRODUCTION))
00285 {
00286     input->reproduction_ratio
00287     = xml_node_get_float (node, (const xmlChar *) LABEL_REPRODUCTION,
00288                           &error_code);
00289     if (error_code || input->reproduction_ratio < 0.
00290         || input->reproduction_ratio >= 1.0)
00291     {
00292         input_error (_("Invalid reproduction probability"));
00293         goto exit_on_error;
00294     }
00295 }
00296 else
00297 {
00298     input_error (_("No reproduction probability"));
00299     goto exit_on_error;
00300 }
00301
00302 // Obtaining adaptation probability
00303 if (xmlHasProp (node, (const xmlChar *) LABEL_ADAPTATION))
00304 {
00305     input->adaptation_ratio
00306     = xml_node_get_float (node, (const xmlChar *) LABEL_ADAPTATION,
00307                           &error_code);
00308     if (error_code || input->adaptation_ratio < 0.
00309         || input->adaptation_ratio >= 1.)
00310     {
00311         input_error (_("Invalid adaptation probability"));
00312         goto exit_on_error;
00313     }
00314 }
00315 else
00316 {
00317     input_error (_("No adaptation probability"));
00318     goto exit_on_error;
00319 }
00320
00321 // Checking survivals
00322 i = input->mutation_ratio * input->nsimulations;
00323 i += input->reproduction_ratio * input->nsimulations;
00324 i += input->adaptation_ratio * input->nsimulations;
00325 if (i > input->nsimulations - 2)
00326 {
00327     input_error
00328     (_("No enough survival entities to reproduce the population"));
00329     goto exit_on_error;
00330 }
00331 }
00332 else
00333 {
00334     input_error (_("Unknown algorithm"));
00335     goto exit_on_error;
00336 }

```

```

00337     xmlFree (buffer);
00338     buffer = NULL;
00339
00340     if (input->algorithm == ALGORITHM_MONTE_CARLO
00341         || input->algorithm == ALGORITHM_SWEEP)
00342     {
00343         // Obtaining iterations number
00344         input->niterations
00345         = xml_node_get_uint (node, (const xmlChar *)
00346 LABEL_NITERATIONS,
00347                             &error_code);
00348         if (error_code == 1)
00349             input->niterations = 1;
00350         else if (error_code)
00351         {
00352             input_error (_("Bad iterations number"));
00353             goto exit_on_error;
00354         }
00355         // Obtaining best number
00356         input->nbest
00357         = xml_node_get_uint_with_default (node, (const xmlChar *)
00358 LABEL_NBEST,
00359                                         1, &error_code);
00360         if (error_code || !input->nbest)
00361         {
00362             input_error (_("Invalid best number"));
00363             goto exit_on_error;
00364         }
00365         if (input->nbest > input->nsimulations)
00366         {
00367             input_error (_("Best number higher than simulations number"));
00368             goto exit_on_error;
00369         }
00370         // Obtaining tolerance
00371         input->tolerance
00372         = xml_node_get_float_with_default (node,
00373                                         (const xmlChar *) LABEL_TOLERANCE,
00374                                         0., &error_code);
00375         if (error_code || input->tolerance < 0.)
00376         {
00377             input_error (_("Invalid tolerance"));
00378             goto exit_on_error;
00379         }
00380         // Getting direction search method parameters
00381         if (xmlHasProp (node, (const xmlChar *) LABEL_NSTEPS))
00382         {
00383             input->nsteps =
00384             xml_node_get_uint (node, (const xmlChar *) LABEL_NSTEPS,
00385                               &error_code);
00386             if (error_code)
00387             {
00388                 input_error (_("Invalid steps number"));
00389                 goto exit_on_error;
00390             }
00391             buffer = xmlGetProp (node, (const xmlChar *) LABEL_DIRECTION);
00392             if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_COORDINATES))
00393                 input->direction = DIRECTION_METHOD_COORDINATES;
00394             else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_RANDOM))
00395             {
00396                 input->direction = DIRECTION_METHOD_RANDOM;
00397                 input->nestimates
00398                 = xml_node_get_uint (node, (const xmlChar *)
00399 LABEL_NESTIMATES,
00400                                     &error_code);
00401                 if (error_code || !input->nestimates)
00402                 {
00403                     input_error (_("Invalid estimates number"));
00404                     goto exit_on_error;
00405                 }
00406             }
00407             else
00408             {
00409                 input_error
00410                 (_("Unknown method to estimate the direction search"));
00411                 goto exit_on_error;
00412             }
00413             xmlFree (buffer);
00414             buffer = NULL;
00415             input->relaxation
00416             = xml_node_get_float_with_default (node,
00417                                               (const xmlChar *)
00418 LABEL_RELAXATION,
00419                                               DEFAULT_RELAXATION, &error_code);
00420

```

```

00421         if (error_code || input->relaxation < 0. || input->
relaxation > 2.)
00422         {
00423             input_error (_("Invalid relaxation parameter"));
00424             goto exit_on_error;
00425         }
00426     }
00427     else
00428         input->nsteps = 0;
00429 }
00430 // Obtaining the threshold
00431 input->threshold =
00432     xml_node_get_float_with_default (node, (const xmlChar *)
LABEL_THRESHOLD,
00433                                     0., &error_code);
00434 if (error_code)
00435 {
00436     input_error (_("Invalid threshold"));
00437     goto exit_on_error;
00438 }
00439
00440 // Reading the experimental data
00441 for (child = node->children; child; child = child->next)
00442 {
00443     if (xmlStrcmp (child->name, (const xmlChar *) LABEL_EXPERIMENT))
00444         break;
00445 #if DEBUG_INPUT
00446     fprintf (stderr, "input_open_xml: nexperiments=%u\n",
input->nexperiments);
00447 #endif
00448     input->experiment = (Experiment *)
00449         g_realloc (input->experiment,
00450                   (1 + input->nexperiments) * sizeof (Experiment));
00451     if (!input->nexperiments)
00452     {
00453         if (!experiment_open_xml (input->experiment, child, 0))
00454             goto exit_on_error;
00455     }
00456     else
00457     {
00458         if (!experiment_open_xml (input->experiment + input->
nexperiments,
00459                                 child, input->experiment->ninputs))
00460             goto exit_on_error;
00461     }
00462     ++input->nexperiments;
00463 #if DEBUG_INPUT
00464     fprintf (stderr, "input_open_xml: nexperiments=%u\n",
input->nexperiments);
00465 #endif
00466 }
00467 if (!input->nexperiments)
00468 {
00469     input_error (_("No optimization experiments"));
00470     goto exit_on_error;
00471 }
00472 buffer = NULL;
00473
00474 // Reading the variables data
00475 for (; child; child = child->next)
00476 {
00477     if (xmlStrcmp (child->name, (const xmlChar *) LABEL_VARIABLE))
00478     {
00479         snprintf (buffer2, 64, "%s %u: %s",
00480                 _("Variable"), input->nvariables + 1, _("bad XML node"));
00481         input_error (buffer2);
00482         goto exit_on_error;
00483     }
00484     input->variable = (Variable *)
00485         g_realloc (input->variable,
00486                   (1 + input->nvariables) * sizeof (Variable));
00487     if (!variable_open_xml (input->variable + input->
nvariables, child,
00488                             input->algorithm, input->nsteps))
00489         goto exit_on_error;
00490     ++input->nvariables;
00491 }
00492 if (!input->nvariables)
00493 {
00494     input_error (_("No optimization variables"));
00495     goto exit_on_error;
00496 }
00497 buffer = NULL;
00500
00501
00502
00503

```

```

00504 // Obtaining the error norm
00505 if (xmlHasProp (node, (const xmlChar *) LABEL_NORM))
00506 {
00507     buffer = xmlGetProp (node, (const xmlChar *) LABEL_NORM);
00508     if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_EUCLIDIAN))
00509         input->norm = ERROR_NORM_EUCLIDIAN;
00510     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_MAXIMUM))
00511         input->norm = ERROR_NORM_MAXIMUM;
00512     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_P))
00513     {
00514         input->norm = ERROR_NORM_P;
00515         input->p
00516             = xml_node_get_float (node, (const xmlChar *) LABEL_P, &error_code);
00517         if (!error_code)
00518         {
00519             input_error (_("Bad P parameter"));
00520             goto exit_on_error;
00521         }
00522     }
00523     else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_TAXICAB))
00524         input->norm = ERROR_NORM_TAXICAB;
00525     else
00526     {
00527         input_error (_("Unknown error norm"));
00528         goto exit_on_error;
00529     }
00530     xmlFree (buffer);
00531 }
00532 else
00533     input->norm = ERROR_NORM_EUCLIDIAN;
00534
00535 // Closing the XML document
00536 xmlFreeDoc (doc);
00537
00538 #if DEBUG_INPUT
00539     fprintf (stderr, "input_open_xml: end\n");
00540 #endif
00541     return 1;
00542
00543 exit_on_error:
00544     xmlFree (buffer);
00545     xmlFreeDoc (doc);
00546 #if DEBUG_INPUT
00547     fprintf (stderr, "input_open_xml: end\n");
00548 #endif
00549     return 0;
00550 }
00551
00552 int
00553 input_open_json (JsonParser * parser)
00554 {
00555     JsonNode *node, *child;
00556     JsonObject *object;
00557     JsonArray *array;
00558     const char *buffer;
00559     int error_code;
00560     unsigned int i, n;
00561
00562 #if DEBUG_INPUT
00563     fprintf (stderr, "input_open_json: start\n");
00564 #endif
00565
00566     // Resetting input data
00567     input->type = INPUT_TYPE_JSON;
00568
00569     // Getting the root node
00570 #if DEBUG_INPUT
00571     fprintf (stderr, "input_open_json: getting the root node\n");
00572 #endif
00573     node = json_parser_get_root (parser);
00574     object = json_node_get_object (node);
00575
00576     // Getting result and variables file names
00577     if (!input->result)
00578     {
00579         buffer = json_object_get_string_member (object, LABEL_RESULT_FILE);
00580         if (!buffer)
00581             buffer = result_name;
00582         input->result = g_strdup (buffer);
00583     }
00584     else
00585         input->result = g_strdup (result_name);
00586     if (!input->variables)
00587     {
00588         buffer = json_object_get_string_member (object, LABEL_VARIABLES_FILE);
00589         if (!buffer)
00590             buffer = variables_name;
00591     }

```



```

00598     input->variables = g_strdup (buffer);
00599 }
00600 else
00601     input->variables = g_strdup (variables_name);
00602
00603 // Opening simulator program name
00604 buffer = json_object_get_string_member (object, LABEL_SIMULATOR);
00605 if (!buffer)
00606 {
00607     input_error (_("Bad simulator program"));
00608     goto exit_on_error;
00609 }
00610 input->simulator = g_strdup (buffer);
00611
00612 // Opening evaluator program name
00613 buffer = json_object_get_string_member (object, LABEL_EVALUATOR);
00614 if (buffer)
00615     input->evaluator = g_strdup (buffer);
00616
00617 // Obtaining pseudo-random numbers generator seed
00618 input->seed
00619     = json_object_get_uint_with_default (object,
00620 LABEL_SEED,
00621                                     DEFAULT_RANDOM_SEED, &error_code);
00622 if (error_code)
00623 {
00624     input_error (_("Bad pseudo-random numbers generator seed"));
00625     goto exit_on_error;
00626 }
00627 // Opening algorithm
00628 buffer = json_object_get_string_member (object, LABEL_ALGORITHM);
00629 if (!strcmp (buffer, LABEL_MONTE_CARLO))
00630 {
00631     input->algorithm = ALGORITHM_MONTE_CARLO;
00632 }
00633 // Obtaining simulations number
00634 input->nsimulations
00635     = json_object_get_int (object, LABEL_NSIMULATIONS, &error_code
00636 );
00637 if (error_code)
00638 {
00639     input_error (_("Bad simulations number"));
00640     goto exit_on_error;
00641 }
00642 else if (!strcmp (buffer, LABEL_SWEEP))
00643     input->algorithm = ALGORITHM_SWEEP;
00644 else if (!strcmp (buffer, LABEL_GENETIC))
00645 {
00646     input->algorithm = ALGORITHM_GENETIC;
00647 }
00648 // Obtaining population
00649 if (json_object_get_member (object, LABEL_NPOPULATION))
00650 {
00651     input->nsimulations
00652         = json_object_get_uint (object,
00653 LABEL_NPOPULATION, &error_code);
00654     if (error_code || input->nsimulations < 3)
00655     {
00656         input_error (_("Invalid population number"));
00657         goto exit_on_error;
00658     }
00659 }
00660 else
00661 {
00662     input_error (_("No population number"));
00663     goto exit_on_error;
00664 }
00665 // Obtaining generations
00666 if (json_object_get_member (object, LABEL_NGENERATIONS))
00667 {
00668     input->niterations
00669         = json_object_get_uint (object,
00670 LABEL_NGENERATIONS, &error_code);
00671     if (error_code || !input->niterations)
00672     {
00673         input_error (_("Invalid generations number"));
00674         goto exit_on_error;
00675     }
00676 }
00677 else
00678 {
00679     input_error (_("No generations number"));
00680     goto exit_on_error;
00681 }

```

```

00681
00682 // Obtaining mutation probability
00683 if (json_object_get_member (object, LABEL_MUTATION))
00684 {
00685     input->mutation_ratio
00686     = json_object_get_float (object, LABEL_MUTATION, &error_code
);
00687     if (error_code || input->mutation_ratio < 0.
00688         || input->mutation_ratio >= 1.)
00689     {
00690         input_error (_("Invalid mutation probability"));
00691         goto exit_on_error;
00692     }
00693 }
00694 else
00695 {
00696     input_error (_("No mutation probability"));
00697     goto exit_on_error;
00698 }
00699
00700 // Obtaining reproduction probability
00701 if (json_object_get_member (object, LABEL_REPRODUCTION))
00702 {
00703     input->reproduction_ratio
00704     = json_object_get_float (object,
LABEL_REPRODUCTION, &error_code);
00705     if (error_code || input->reproduction_ratio < 0.
00706         || input->reproduction_ratio >= 1.0)
00707     {
00708         input_error (_("Invalid reproduction probability"));
00709         goto exit_on_error;
00710     }
00711 }
00712 else
00713 {
00714     input_error (_("No reproduction probability"));
00715     goto exit_on_error;
00716 }
00717
00718 // Obtaining adaptation probability
00719 if (json_object_get_member (object, LABEL_ADAPTATION))
00720 {
00721     input->adaptation_ratio
00722     = json_object_get_float (object,
LABEL_ADAPTATION, &error_code);
00723     if (error_code || input->adaptation_ratio < 0.
00724         || input->adaptation_ratio >= 1.)
00725     {
00726         input_error (_("Invalid adaptation probability"));
00727         goto exit_on_error;
00728     }
00729 }
00730 else
00731 {
00732     input_error (_("No adaptation probability"));
00733     goto exit_on_error;
00734 }
00735
00736 // Checking survivals
00737 i = input->mutation_ratio * input->nsimulations;
00738 i += input->reproduction_ratio * input->nsimulations;
00739 i += input->adaptation_ratio * input->nsimulations;
00740 if (i > input->nsimulations - 2)
00741 {
00742     input_error
00743     (_("No enough survival entities to reproduce the population"));
00744     goto exit_on_error;
00745 }
00746 }
00747 else
00748 {
00749     input_error (_("Unknown algorithm"));
00750     goto exit_on_error;
00751 }
00752
00753 if (input->algorithm == ALGORITHM_MONTE_CARLO
00754     || input->algorithm == ALGORITHM_SWEEP)
00755 {
00756
00757     // Obtaining iterations number
00758     input->niterations
00759     = json_object_get_uint (object, LABEL_NITERATIONS, &error_code
);
00760     if (error_code == 1)
00761         input->niterations = 1;
00762     else if (error_code)
00763     {

```

```

00764         input_error (_("Bad iterations number"));
00765         goto exit_on_error;
00766     }
00767
00768     // Obtaining best number
00769     input->nbest
00770     = json_object_get_uint_with_default (object,
00771     LABEL_NBEST, 1,
00772     &error_code);
00773     if (error_code || !input->nbest)
00774     {
00775         input_error (_("Invalid best number"));
00776         goto exit_on_error;
00777     }
00778
00779     // Obtaining tolerance
00780     input->tolerance
00781     = json_object_get_float_with_default (object,
00782     LABEL_TOLERANCE, 0.,
00783     &error_code);
00784     if (error_code || input->tolerance < 0.)
00785     {
00786         input_error (_("Invalid tolerance"));
00787         goto exit_on_error;
00788     }
00789
00790     // Getting direction search method parameters
00791     if (json_object_get_member (object, LABEL_NSTEPS))
00792     {
00793         input->nsteps
00794         = json_object_get_uint (object, LABEL_NSTEPS, &error_code);
00795         if (error_code)
00796         {
00797             input_error (_("Invalid steps number"));
00798             goto exit_on_error;
00799         }
00800         buffer = json_object_get_string_member (object, LABEL_DIRECTION);
00801         if (!strcmp (buffer, LABEL_COORDINATES))
00802             input->direction = DIRECTION_METHOD_COORDINATES;
00803         else if (!strcmp (buffer, LABEL_RANDOM))
00804             input->direction = DIRECTION_METHOD_RANDOM;
00805         input->nestimates
00806         = json_object_get_uint (object,
00807         LABEL_NESTIMATES, &error_code);
00808         if (error_code || !input->nestimates)
00809         {
00810             input_error (_("Invalid estimates number"));
00811             goto exit_on_error;
00812         }
00813     }
00814     else
00815     {
00816         input_error
00817         (_("Unknown method to estimate the direction search"));
00818         goto exit_on_error;
00819     }
00820     input->relaxation
00821     = json_object_get_float_with_default (object,
00822     LABEL_RELAXATION,
00823     DEFAULT_RELAXATION,
00824     &error_code);
00825     if (error_code || input->relaxation < 0. || input->
00826     relaxation > 2.)
00827     {
00828         input_error (_("Invalid relaxation parameter"));
00829         goto exit_on_error;
00830     }
00831     else
00832     {
00833         input->nsteps = 0;
00834     }
00835
00836     // Obtaining the threshold
00837     input->threshold
00838     = json_object_get_float_with_default (object,
00839     LABEL_THRESHOLD, 0.,
00840     &error_code);
00841     if (error_code)
00842     {
00843         input_error (_("Invalid threshold"));
00844         goto exit_on_error;
00845     }
00846
00847     // Reading the experimental data
00848     array = json_object_get_array_member (object, LABEL_EXPERIMENTS);
00849     n = json_array_get_length (array);
00850     input->experiment = (Experiment *) g_malloc (n * sizeof (

```

```

    Experiment));
00845     for (i = 0; i < n; ++i)
00846     {
00847     #if DEBUG_INPUT
00848         fprintf (stderr, "input_open_json: nexperiments=%u\n",
00849                 input->nexperiments);
00850     #endif
00851         child = json_array_get_element (array, i);
00852         if (!input->nexperiments)
00853         {
00854             if (!experiment_open_json (input->experiment, child, 0))
00855                 goto exit_on_error;
00856         }
00857         else
00858         {
00859             if (!experiment_open_json (input->experiment + input->
nexperiments,
00860                                     child, input->experiment->ninputs))
00861                 goto exit_on_error;
00862         }
00863         ++input->nexperiments;
00864     #if DEBUG_INPUT
00865         fprintf (stderr, "input_open_json: nexperiments=%u\n",
00866                 input->nexperiments);
00867     #endif
00868     }
00869     if (!input->nexperiments)
00870     {
00871         input_error (_("No optimization experiments"));
00872         goto exit_on_error;
00873     }
00874
00875     // Reading the variables data
00876     array = json_object_get_array_member (object, LABEL_VARIABLES);
00877     n = json_array_get_length (array);
00878     input->variable = (Variable *) g_malloc (n * sizeof (Variable));
00879     for (i = 0; i < n; ++i)
00880     {
00881     #if DEBUG_INPUT
00882         fprintf (stderr, "input_open_json: nvariables=%u\n", input->nvariables);
00883     #endif
00884         child = json_array_get_element (array, i);
00885         if (!variable_open_json (input->variable + input->
nvariables, child,
00886                                 input->algorithm, input->nsteps))
00887             goto exit_on_error;
00888         ++input->nvariables;
00889     }
00890     if (!input->nvariables)
00891     {
00892         input_error (_("No optimization variables"));
00893         goto exit_on_error;
00894     }
00895
00896     // Obtaining the error norm
00897     if (json_object_get_member (object, LABEL_NORM))
00898     {
00899         buffer = json_object_get_string_member (object, LABEL_NORM);
00900         if (!strcmp (buffer, LABEL_EUCLIDIAN))
00901             input->norm = ERROR_NORM_EUCLIDIAN;
00902         else if (!strcmp (buffer, LABEL_MAXIMUM))
00903             input->norm = ERROR_NORM_MAXIMUM;
00904         else if (!strcmp (buffer, LABEL_P))
00905         {
00906             input->norm = ERROR_NORM_P;
00907             input->p = json_object_get_float (object,
LABEL_P, &error_code);
00908             if (!error_code)
00909             {
00910                 input_error (_("Bad P parameter"));
00911                 goto exit_on_error;
00912             }
00913         }
00914         else if (!strcmp (buffer, LABEL_TAXICAB))
00915             input->norm = ERROR_NORM_TAXICAB;
00916         else
00917         {
00918             input_error (_("Unknown error norm"));
00919             goto exit_on_error;
00920         }
00921     }
00922     else
00923         input->norm = ERROR_NORM_EUCLIDIAN;
00924
00925     // Closing the JSON document
00926     g_object_unref (parser);
00927

```

```


00928 #if DEBUG_INPUT
00929     fprintf (stderr, "input_open_json: end\n");
00930 #endif
00931     return 1;
00932
00933 exit_on_error:
00934     g_object_unref (parser);
00935 #if DEBUG_INPUT
00936     fprintf (stderr, "input_open_json: end\n");
00937 #endif
00938     return 0;
00939 }
00940
00941 int
00942 input_open (char *filename)
00943 {
00944     xmlDoc *doc;
00945     JsonParser *parser;
00946
00947 #if DEBUG_INPUT
00948     fprintf (stderr, "input_open: start\n");
00949 #endif
00950     // Resetting input data
00951     input_new ();
00952
00953     // Opening input file
00954 #if DEBUG_INPUT
00955     fprintf (stderr, "input_open: opening the input file %s\n", filename);
00956     fprintf (stderr, "input_open: trying XML format\n");
00957 #endif
00958     doc = xmlParseFile (filename);
00959     if (!doc)
00960     {
00961 #if DEBUG_INPUT
00962         fprintf (stderr, "input_open: trying JSON format\n");
00963 #endif
00964         parser = json_parser_new ();
00965         if (!json_parser_load_from_file (parser, filename, NULL))
00966         {
00967             input_error (_("Unable to parse the input file"));
00968             goto exit_on_error;
00969         }
00970         if (!input_open_json (parser))
00971             goto exit_on_error;
00972     }
00973     else if (!input_open_xml (doc))
00974         goto exit_on_error;
00975
00976     // Getting the working directory
00977     input->directory = g_path_get_dirname (filename);
00978     input->name = g_path_get_basename (filename);
00979
00980 #if DEBUG_INPUT
00981     fprintf (stderr, "input_open: end\n");
00982 #endif
00983     return 1;
00984
00985 exit_on_error:
00986     show_error (error_message);
00987     g_free (error_message);
00988     input_free ();
00989 #if DEBUG_INPUT
00990     fprintf (stderr, "input_open: end\n");
00991 #endif
00992     return 0;
00993 }

```

## 4.9 input.h File Reference

Header file to define the input functions.

This graph shows which files directly or indirectly include this file:

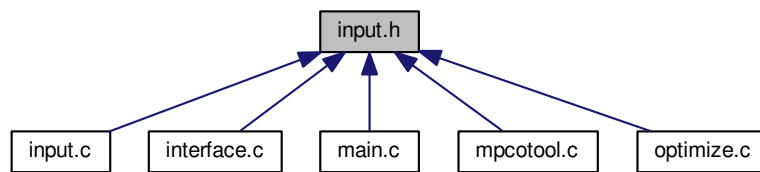

## Data Structures

- struct [Input](#)  
*Struct to define the optimization input file.*

## Enumerations

- enum [DirectionMethod](#) { [DIRECTION\\_METHOD\\_COORDINATES](#) = 0, [DIRECTION\\_METHOD\\_RANDOM](#) = 1 }
- Enum to define the methods to estimate the direction search.
- enum [ErrorNorm](#) { [ERROR\\_NORM\\_EUCLIDIAN](#) = 0, [ERROR\\_NORM\\_MAXIMUM](#) = 1, [ERROR\\_NORM\\_P](#) = 2, [ERROR\\_NORM\\_TAXICAB](#) = 3 }
- Enum to define the error norm.

## Functions

- void [input\\_new](#) ()  
*Function to create a new [Input](#) struct.*
- void [input\\_free](#) ()  
*Function to free the memory of the input file data.*
- void [input\\_error](#) (char \*message)  
*Function to print an error message opening an [Input](#) struct.*
- int [input\\_open\\_xml](#) (xmlDoc \*doc)  
*Function to open the input file in XML format.*
- int [input\\_open\\_json](#) (JsonParser \*parser)  
*Function to open the input file in JSON format.*
- int [input\\_open](#) (char \*filename)  
*Function to open the input file.*

## Variables

- [Input](#) [input](#) [1]  
*Global [Input](#) struct to set the input data.*
- const char \* [result\\_name](#)  
*Name of the result file.*
- const char \* [variables\\_name](#)  
*Name of the variables file.*

### 4.9.1 Detailed Description

Header file to define the input functions.

#### Authors

Javier Burguete.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [input.h](#).

### 4.9.2 Enumeration Type Documentation

#### 4.9.2.1 DirectionMethod

enum [DirectionMethod](#)

Enum to define the methods to estimate the direction search.

##### Enumerator

DIRECTION_METHOD_COORDINATES	Coordinates descent method.
DIRECTION_METHOD_RANDOM	Random method.

Definition at line 45 of file [input.h](#).

```
00046 {
00047     DIRECTION_METHOD_COORDINATES = 0,
00048     DIRECTION_METHOD_RANDOM = 1,
00049 };
```

#### 4.9.2.2 ErrorNorm

enum [ErrorNorm](#)

Enum to define the error norm.

##### Enumerator

ERROR_NORM_EUCLIDIAN	Euclidian norm: $\sqrt{\sum_i (w_i x_i)^2}$ .
ERROR_NORM_MAXIMUM	Maximum norm: $\max_i  w_i x_i $ .
Generated by Doxygen ERROR_NORM_P	P-norm $\sqrt[p]{\sum_i  w_i x_i ^p}$ .
ERROR_NORM_TAXICAB	Taxicab norm $\sum_i  w_i x_i $ .

Definition at line 55 of file [input.h](#).

```
00056 {
00057     ERROR_NORM_EUCLIDIAN = 0,
00059     ERROR_NORM_MAXIMUM = 1,
00061     ERROR_NORM_P = 2,
00063     ERROR_NORM_TAXICAB = 3
00065 };
```

## 4.9.3 Function Documentation

### 4.9.3.1 input\_error()

```
void input_error (
    char * message )
```

Function to print an error message opening an [Input](#) struct.

#### Parameters

<i>message</i>	Error message.
----------------	----------------

Definition at line 124 of file [input.c](#).

```
00125 {
00126     char buffer[64];
00127     snprintf (buffer, 64, "%s: %s\n", _("Input"), message);
00128     error_message = g_strdup (buffer);
00129 }
```

### 4.9.3.2 input\_open()

```
int input_open (
    char * filename )
```

Function to open the input file.

#### Parameters

<i>filename</i>	<a href="#">Input</a> data file name.
-----------------	---------------------------------------

#### Returns

1\_on\_success, 0\_on\_error.

Definition at line 949 of file [input.c](#).




```

00950 {
00951     xmlDoc *doc;
00952     JsonParser *parser;
00953
00954     #if DEBUG_INPUT
00955     fprintf (stderr, "input_open: start\n");
00956     #endif
00957
00958     // Resetting input data
00959     input_new ();
00960
00961     // Opening input file
00962     #if DEBUG_INPUT
00963     fprintf (stderr, "input_open: opening the input file %s\n", filename);
00964     fprintf (stderr, "input_open: trying XML format\n");
00965     #endif
00966     doc = xmlParseFile (filename);
00967     if (!doc)
00968     {
00969         #if DEBUG_INPUT
00970         fprintf (stderr, "input_open: trying JSON format\n");
00971         #endif
00972         parser = json_parser_new ();
00973         if (!json_parser_load_from_file (parser, filename, NULL))
00974         {
00975             input_error (_("Unable to parse the input file"));
00976             goto exit_on_error;
00977         }
00978         if (!input_open_json (parser))
00979             goto exit_on_error;
00980     }
00981     else if (!input_open_xml (doc))
00982         goto exit_on_error;
00983
00984     // Getting the working directory
00985     input->directory = g_path_get_dirname (filename);
00986     input->name = g_path_get_basename (filename);
00987
00988     #if DEBUG_INPUT
00989     fprintf (stderr, "input_open: end\n");
00990     #endif
00991     return 1;
00992
00993 exit_on_error:
00994     show_error (error_message);
00995     g_free (error_message);
00996     input_free ();
00997     #if DEBUG_INPUT
00998     fprintf (stderr, "input_open: end\n");
00999     #endif
01000     return 0;
01001 }

```

Here is the call graph for this function:

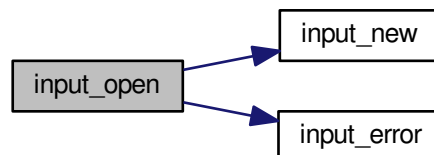

#### 4.9.3.3 input\_open\_json()

```

int input_open_json (
    JsonParser * parser )

```

Function to open the input file in JSON format.

#### Parameters

<i>parser</i>	JsonParser struct.
---------------	--------------------

#### Returns

1\_on\_success, 0\_on\_error.

Definition at line 560 of file [input.c](#).

```

00561 {
00562     JsonNode *node, *child;
00563     JsonObject *object;
00564     JsonArray *array;
00565     const char *buffer;
00566     int error_code;
00567     unsigned int i, n;
00568
00569     #if DEBUG_INPUT
00570         fprintf (stderr, "input_open_json: start\n");
00571     #endif
00572
00573     // Resetting input data
00574     input->type = INPUT_TYPE_JSON;
00575
00576     // Getting the root node
00577     #if DEBUG_INPUT
00578         fprintf (stderr, "input_open_json: getting the root node\n");
00579     #endif
00580     node = json_parser_get_root (parser);
00581     object = json_node_get_object (node);
00582
00583     // Getting result and variables file names
00584     if (!input->result)
00585     {
00586         buffer = json_object_get_string_member (object, LABEL_RESULT_FILE);
00587         if (!buffer)
00588             buffer = result_name;
00589         input->result = g_strdup (buffer);
00590     }
00591     else
00592         input->result = g_strdup (result_name);
00593     if (!input->variables)
00594     {
00595         buffer = json_object_get_string_member (object, LABEL_VARIABLES_FILE);
00596         if (!buffer)
00597             buffer = variables_name;
00598         input->variables = g_strdup (buffer);
00599     }
00600     else
00601         input->variables = g_strdup (variables_name);
00602
00603     // Opening simulator program name
00604     buffer = json_object_get_string_member (object, LABEL_SIMULATOR);
00605     if (!buffer)
00606     {
00607         input_error (_("Bad simulator program"));
00608         goto exit_on_error;
00609     }
00610     input->simulator = g_strdup (buffer);
00611
00612     // Opening evaluator program name
00613     buffer = json_object_get_string_member (object, LABEL_EVALUATOR);
00614     if (buffer)
00615         input->evaluator = g_strdup (buffer);
00616
00617     // Obtaining pseudo-random numbers generator seed
00618     input->seed
00619         = json_object_get_uint_with_default (object,
00620 LABEL_SEED,
00621                                     DEFAULT_RANDOM_SEED, &error_code);
00622     if (error_code)
00623     {
00624         input_error (_("Bad pseudo-random numbers generator seed"));
00625         goto exit_on_error;
00626     }

```

```

00626
00627 // Opening algorithm
00628 buffer = json_object_get_string_member (object, LABEL_ALGORITHM);
00629 if (!strcmp (buffer, LABEL_MONTE_CARLO))
00630 {
00631     input->algorithm = ALGORITHM_MONTE_CARLO;
00632
00633     // Obtaining simulations number
00634     input->nsimulations
00635     = json_object_get_int (object, LABEL_NSIMULATIONS, &error_code
00636 );
00637     if (error_code)
00638     {
00639         input_error (_("Bad simulations number"));
00640         goto exit_on_error;
00641     }
00642     else if (!strcmp (buffer, LABEL_SWEEP))
00643         input->algorithm = ALGORITHM_SWEEP;
00644     else if (!strcmp (buffer, LABEL_GENETIC))
00645     {
00646         input->algorithm = ALGORITHM_GENETIC;
00647
00648         // Obtaining population
00649         if (json_object_get_member (object, LABEL_NPOPULATION))
00650         {
00651             input->nsimulations
00652             = json_object_get_uint (object,
00653 LABEL_NPOPULATION, &error_code);
00654             if (error_code || input->nsimulations < 3)
00655             {
00656                 input_error (_("Invalid population number"));
00657                 goto exit_on_error;
00658             }
00659             else
00660             {
00661                 input_error (_("No population number"));
00662                 goto exit_on_error;
00663             }
00664
00665             // Obtaining generations
00666             if (json_object_get_member (object, LABEL_NGENERATIONS))
00667             {
00668                 input->niterations
00669                 = json_object_get_uint (object,
00670 LABEL_NGENERATIONS, &error_code);
00671                 if (error_code || !input->niterations)
00672                 {
00673                     input_error (_("Invalid generations number"));
00674                     goto exit_on_error;
00675                 }
00676             }
00677             else
00678             {
00679                 input_error (_("No generations number"));
00680                 goto exit_on_error;
00681             }
00682
00683             // Obtaining mutation probability
00684             if (json_object_get_member (object, LABEL_MUTATION))
00685             {
00686                 input->mutation_ratio
00687                 = json_object_get_float (object, LABEL_MUTATION, &error_code
00688 );
00689                 if (error_code || input->mutation_ratio < 0.
00690 || input->mutation_ratio >= 1.)
00691                 {
00692                     input_error (_("Invalid mutation probability"));
00693                     goto exit_on_error;
00694                 }
00695             }
00696             else
00697             {
00698                 input_error (_("No mutation probability"));
00699                 goto exit_on_error;
00700             }
00701
00702             // Obtaining reproduction probability
00703             if (json_object_get_member (object, LABEL_REPRODUCTION))
00704             {
00705                 input->reproduction_ratio
00706                 = json_object_get_float (object,
00707 LABEL_REPRODUCTION, &error_code);
00708                 if (error_code || input->reproduction_ratio < 0.
00709 || input->reproduction_ratio >= 1.0)
00710                 {

```

```

00708         input_error (_("Invalid reproduction probability"));
00709         goto exit_on_error;
00710     }
00711 }
00712 else
00713 {
00714     input_error (_("No reproduction probability"));
00715     goto exit_on_error;
00716 }
00717
00718 // Obtaining adaptation probability
00719 if (json_object_get_member (object, LABEL_ADAPTATION))
00720 {
00721     input->adaptation_ratio
00722     = json_object_get_float (object,
00723 LABEL_ADAPTATION, &error_code);
00724     if (error_code || input->adaptation_ratio < 0.
00725         || input->adaptation_ratio >= 1.)
00726     {
00727         input_error (_("Invalid adaptation probability"));
00728         goto exit_on_error;
00729     }
00730 }
00731 else
00732 {
00733     input_error (_("No adaptation probability"));
00734     goto exit_on_error;
00735 }
00736
00737 // Checking survivals
00738 i = input->mutation_ratio * input->nsimulations;
00739 i += input->reproduction_ratio * input->
00740 nsimulations;
00741 i += input->adaptation_ratio * input->
00742 nsimulations;
00743 if (i > input->nsimulations - 2)
00744 {
00745     input_error
00746     (_("No enough survival entities to reproduce the population"));
00747     goto exit_on_error;
00748 }
00749 }
00750 else
00751 {
00752     input_error (_("Unknown algorithm"));
00753     goto exit_on_error;
00754 }
00755 }
00756
00757 if (input->algorithm == ALGORITHM_MONTE_CARLO
00758     || input->algorithm == ALGORITHM_SWEEP)
00759 {
00760     // Obtaining iterations number
00761     input->niterations
00762     = json_object_get_uint (object, LABEL_NITERATIONS, &error_code
00763 );
00764     if (error_code == 1)
00765     {
00766         input->niterations = 1;
00767     }
00768     else if (error_code)
00769     {
00770         input_error (_("Bad iterations number"));
00771         goto exit_on_error;
00772     }
00773 }
00774
00775 // Obtaining best number
00776 input->nbest
00777 = json_object_get_uint_with_default (object,
00778 LABEL_NBEST, 1,
00779                                     &error_code);
00780 if (error_code || !input->nbest)
00781 {
00782     input_error (_("Invalid best number"));
00783     goto exit_on_error;
00784 }
00785
00786 // Obtaining tolerance
00787 input->tolerance
00788 = json_object_get_float_with_default (object,
00789 LABEL_TOLERANCE, 0.,
00790                                     &error_code);
00791 if (error_code || input->tolerance < 0.)
00792 {
00793     input_error (_("Invalid tolerance"));
00794     goto exit_on_error;
00795 }
00796
00797 // Getting direction search method parameters

```

```

00789     if (json_object_get_member (object, LABEL_NSTEPS))
00790     {
00791         input->nsteps
00792         = json_object_get_uint (object, LABEL_NSTEPS, &error_code);
00793         if (error_code)
00794         {
00795             input_error (_("Invalid steps number"));
00796             goto exit_on_error;
00797         }
00798         buffer = json_object_get_string_member (object, LABEL_DIRECTION);
00799         if (!strcmp (buffer, LABEL_COORDINATES))
00800             input->direction = DIRECTION_METHOD_COORDINATES;
00801         else if (!strcmp (buffer, LABEL_RANDOM))
00802         {
00803             input->direction = DIRECTION_METHOD_RANDOM;
00804             input->nestimates
00805             = json_object_get_uint (object,
00806 LABEL_NESTIMATES, &error_code);
00807             if (error_code || !input->nestimates)
00808             {
00809                 input_error (_("Invalid estimates number"));
00810                 goto exit_on_error;
00811             }
00812             else
00813             {
00814                 input_error
00815                 (_("Unknown method to estimate the direction search"));
00816                 goto exit_on_error;
00817             }
00818             input->relaxation
00819             = json_object_get_float_with_default (object,
00820 LABEL_RELAXATION,
00821                                     DEFAULT_RELAXATION,
00822                                     &error_code);
00823             if (error_code || input->relaxation < 0. || input->
00824 relaxation > 2.)
00825             {
00826                 input_error (_("Invalid relaxation parameter"));
00827                 goto exit_on_error;
00828             }
00829             else
00830             {
00831                 input->nsteps = 0;
00832             }
00833             // Obtaining the threshold
00834             input->threshold
00835             = json_object_get_float_with_default (object,
00836 LABEL_THRESHOLD, 0.,
00837                                     &error_code);
00838             if (error_code)
00839             {
00840                 input_error (_("Invalid threshold"));
00841                 goto exit_on_error;
00842             }
00843             // Reading the experimental data
00844             array = json_object_get_array_member (object, LABEL_EXPERIMENTS);
00845             n = json_array_get_length (array);
00846             input->experiment = (Experiment *) g_malloc (n * sizeof (
00847 Experiment));
00848             for (i = 0; i < n; ++i)
00849             {
00850                 #if DEBUG_INPUT
00851                 fprintf (stderr, "input_open_json: nexperiments=%u\n",
00852                     input->nexperiments);
00853                 #endif
00854                 child = json_array_get_element (array, i);
00855                 if (!input->nexperiments)
00856                 {
00857                     if (!experiment_open_json (input->experiment, child, 0))
00858                         goto exit_on_error;
00859                 }
00860                 else
00861                 {
00862                     if (!experiment_open_json (input->experiment +
00863 input->nexperiments,
00864                                     child, input->experiment->
00865 ninputs))
00866                         goto exit_on_error;
00867                 }
00868                 ++input->nexperiments;
00869                 #if DEBUG_INPUT
00870                 fprintf (stderr, "input_open_json: nexperiments=%u\n",
00871                     input->nexperiments);
00872                 #endif
00873             }
00874         }


```

```

00869     if (!input->nexperiments)
00870     {
00871         input_error (_("No optimization experiments"));
00872         goto exit_on_error;
00873     }
00874
00875     // Reading the variables data
00876     array = json_object_get_array_member (object, LABEL_VARIABLES);
00877     n = json_array_get_length (array);
00878     input->variable = (Variable *) g_malloc (n * sizeof (
Variable));
00879     for (i = 0; i < n; ++i)
00880     {
00881         #if DEBUG_INPUT
00882             fprintf (stderr, "input_open_json: nvariables=%u\n", input->
nvariables);
00883         #endif
00884         child = json_array_get_element (array, i);
00885         if (!variable_open_json (input->variable +
input->nvariables, child,
00886                                 input->algorithm, input->
nsteps))
00887             goto exit_on_error;
00888         ++input->nvariables;
00889     }
00890     if (!input->nvariables)
00891     {
00892         input_error (_("No optimization variables"));
00893         goto exit_on_error;
00894     }
00895
00896     // Obtaining the error norm
00897     if (json_object_get_member (object, LABEL_NORM))
00898     {
00899         buffer = json_object_get_string_member (object, LABEL_NORM);
00900         if (!strcmp (buffer, LABEL_EUCLIDIAN))
00901             input->norm = ERROR_NORM_EUCLIDIAN;
00902         else if (!strcmp (buffer, LABEL_MAXIMUM))
00903             input->norm = ERROR_NORM_MAXIMUM;
00904         else if (!strcmp (buffer, LABEL_P))
00905         {
00906             input->norm = ERROR_NORM_P;
00907             input->p = json_object_get_float (object,
LABEL_P, &error_code);
00908             if (!error_code)
00909             {
00910                 input_error (_("Bad P parameter"));
00911                 goto exit_on_error;
00912             }
00913         }
00914         else if (!strcmp (buffer, LABEL_TAXICAB))
00915             input->norm = ERROR_NORM_TAXICAB;
00916         else
00917         {
00918             input_error (_("Unknown error norm"));
00919             goto exit_on_error;
00920         }
00921     }
00922     else
00923         input->norm = ERROR_NORM_EUCLIDIAN;
00924
00925     // Closing the JSON document
00926     g_object_unref (parser);
00927
00928     #if DEBUG_INPUT
00929         fprintf (stderr, "input_open_json: end\n");
00930     #endif
00931     return 1;
00932
00933 exit_on_error:
00934     g_object_unref (parser);
00935     #if DEBUG_INPUT
00936         fprintf (stderr, "input_open_json: end\n");
00937     #endif
00938     return 0;
00939 }

```

Here is the call graph for this function:



#### 4.9.3.4 input\_open\_xml()

```
int input_open_xml (
    xmlDoc * doc )
```

Function to open the input file in XML format.

##### Parameters

<i>doc</i>	xmlDoc struct.
------------	----------------

##### Returns

1\_on\_success, 0\_on\_error.

Definition at line 139 of file [input.c](#).

```

00140 {
00141     char buffer2[64];
00142     xmlNode *node, *child;
00143     xmlChar *buffer;
00144     int error_code;
00145     unsigned int i;
00146
00147     #if DEBUG_INPUT
00148         fprintf (stderr, "input_open_xml: start\n");
00149     #endif
00150
00151     // Resetting input data
00152     buffer = NULL;
00153     input->type = INPUT_TYPE_XML;
00154
00155     // Getting the root node
00156     #if DEBUG_INPUT
00157         fprintf (stderr, "input_open_xml: getting the root node\n");
00158     #endif
00159     node = xmlDocGetRootElement (doc);
00160     if (xmlStrcmp (node->name, (const xmlChar *) LABEL_OPTIMIZE))
00161     {
00162         input_error (_("Bad root XML node"));
00163         goto exit_on_error;
00164     }
00165
00166     // Getting result and variables file names
00167     if (!input->result)
00168     {
00169         input->result =
00170             (char *) xmlGetProp (node, (const xmlChar *) LABEL_RESULT_FILE);
00171         if (!input->result)

```

```

00172     input->result = (char *) xmlStrdup ((const xmlChar *)
result_name);
00173 }
00174 if (!input->variables)
00175 {
00176     input->variables =
00177         (char *) xmlGetProp (node, (const xmlChar *) LABEL_VARIABLES_FILE);
00178     if (!input->variables)
00179         input->variables =
00180             (char *) xmlStrdup ((const xmlChar *) variables_name);
00181 }
00182
00183 // Opening simulator program name
00184 input->simulator =
00185     (char *) xmlGetProp (node, (const xmlChar *) LABEL_SIMULATOR);
00186 if (!input->simulator)
00187 {
00188     input_error _("Bad simulator program");
00189     goto exit_on_error;
00190 }
00191
00192 // Opening evaluator program name
00193 input->evaluator =
00194     (char *) xmlGetProp (node, (const xmlChar *) LABEL_EVALUATOR);
00195
00196 // Obtaining pseudo-random numbers generator seed
00197 input->seed
00198     = xml_node_get_uint_with_default (node, (const xmlChar *)
LABEL_SEED,
00199                                     DEFAULT_RANDOM_SEED, &error_code);
00200 if (error_code)
00201 {
00202     input_error _("Bad pseudo-random numbers generator seed");
00203     goto exit_on_error;
00204 }
00205
00206 // Opening algorithm
00207 buffer = xmlGetProp (node, (const xmlChar *) LABEL_ALGORITHM);
00208 if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_MONTE_CARLO))
00209 {
00210     input->algorithm = ALGORITHM_MONTE_CARLO;
00211 }
00212 // Obtaining simulations number
00213 input->nsimulations
00214     = xml_node_get_int (node, (const xmlChar *)
LABEL_NSIMULATIONS,
00215                       &error_code);
00216 if (error_code)
00217 {
00218     input_error _("Bad simulations number");
00219     goto exit_on_error;
00220 }
00221 }
00222 else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_SWEEP))
00223     input->algorithm = ALGORITHM_SWEEP;
00224 else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_GENETIC))
00225 {
00226     input->algorithm = ALGORITHM_GENETIC;
00227 }
00228 // Obtaining population
00229 if (xmlHasProp (node, (const xmlChar *) LABEL_NPOPULATION))
00230 {
00231     input->nsimulations
00232         = xml_node_get_uint (node, (const xmlChar *) LABEL_NPOPULATION,
00233                             &error_code);
00234     if (error_code || input->nsimulations < 3)
00235     {
00236         input_error _("Invalid population number");
00237         goto exit_on_error;
00238     }
00239 }
00240 else
00241 {
00242     input_error _("No population number");
00243     goto exit_on_error;
00244 }
00245
00246 // Obtaining generations
00247 if (xmlHasProp (node, (const xmlChar *) LABEL_NGENERATIONS))
00248 {
00249     input->niterations
00250         = xml_node_get_uint (node, (const xmlChar *) LABEL_NGENERATIONS,
00251                             &error_code);
00252     if (error_code || !input->niterations)
00253     {
00254         input_error _("Invalid generations number");
00255         goto exit_on_error;

```



```

00256     }
00257 }
00258 else
00259 {
00260     input_error (_("No generations number"));
00261     goto exit_on_error;
00262 }
00263
00264 // Obtaining mutation probability
00265 if (xmlHasProp (node, (const xmlChar *) LABEL_MUTATION))
00266 {
00267     input->mutation_ratio
00268     = xml_node_get_float (node, (const xmlChar *) LABEL_MUTATION,
00269                          &error_code);
00270     if (error_code || input->mutation_ratio < 0.
00271         || input->mutation_ratio >= 1.)
00272     {
00273         input_error (_("Invalid mutation probability"));
00274         goto exit_on_error;
00275     }
00276 }
00277 else
00278 {
00279     input_error (_("No mutation probability"));
00280     goto exit_on_error;
00281 }
00282
00283 // Obtaining reproduction probability
00284 if (xmlHasProp (node, (const xmlChar *) LABEL_REPRODUCTION))
00285 {
00286     input->reproduction_ratio
00287     = xml_node_get_float (node, (const xmlChar *) LABEL_REPRODUCTION,
00288                          &error_code);
00289     if (error_code || input->reproduction_ratio < 0.
00290         || input->reproduction_ratio >= 1.0)
00291     {
00292         input_error (_("Invalid reproduction probability"));
00293         goto exit_on_error;
00294     }
00295 }
00296 else
00297 {
00298     input_error (_("No reproduction probability"));
00299     goto exit_on_error;
00300 }
00301
00302 // Obtaining adaptation probability
00303 if (xmlHasProp (node, (const xmlChar *) LABEL_ADAPTATION))
00304 {
00305     input->adaptation_ratio
00306     = xml_node_get_float (node, (const xmlChar *) LABEL_ADAPTATION,
00307                          &error_code);
00308     if (error_code || input->adaptation_ratio < 0.
00309         || input->adaptation_ratio >= 1.)
00310     {
00311         input_error (_("Invalid adaptation probability"));
00312         goto exit_on_error;
00313     }
00314 }
00315 else
00316 {
00317     input_error (_("No adaptation probability"));
00318     goto exit_on_error;
00319 }
00320
00321 // Checking survivals
00322 i = input->mutation_ratio * input->nsimulations;
00323 i += input->reproduction_ratio * input->
00324 nsimulations;
00325 if (i > input->nsimulations - 2)
00326 {
00327     input_error
00328     (_("No enough survival entities to reproduce the population"));
00329     goto exit_on_error;
00330 }
00331 }
00332 else
00333 {
00334     input_error (_("Unknown algorithm"));
00335     goto exit_on_error;
00336 }
00337 xmlFree (buffer);
00338 buffer = NULL;
00339
00340 if (input->algorithm == ALGORITHM_MONTE_CARLO

```

```

00341     || input->algorithm == ALGORITHM_SWEEP)
00342     {
00343
00344         // Obtaining iterations number
00345         input->niterations
00346         = xml_node_get_uint (node, (const xmlChar *)
LABEL_NITERATIONS,
00347                             &error_code);
00348         if (error_code == 1)
00349             input->niterations = 1;
00350         else if (error_code)
00351         {
00352             input_error (_("Bad iterations number"));
00353             goto exit_on_error;
00354         }
00355
00356         // Obtaining best number
00357         input->nbest
00358         = xml_node_get_uint_with_default (node, (const xmlChar *)
LABEL_NBEST,
00359                                         1, &error_code);
00360         if (error_code || !input->nbest)
00361         {
00362             input_error (_("Invalid best number"));
00363             goto exit_on_error;
00364         }
00365         if (input->nbest > input->nsimulations)
00366         {
00367             input_error (_("Best number higher than simulations number"));
00368             goto exit_on_error;
00369         }
00370
00371         // Obtaining tolerance
00372         input->tolerance
00373         = xml_node_get_float_with_default (node,
00374                                           (const xmlChar *) LABEL_TOLERANCE,
00375                                           0., &error_code);
00376         if (error_code || input->tolerance < 0.)
00377         {
00378             input_error (_("Invalid tolerance"));
00379             goto exit_on_error;
00380         }
00381
00382         // Getting direction search method parameters
00383         if (xmlHasProp (node, (const xmlChar *) LABEL_NSTEPS))
00384         {
00385             input->nsteps =
00386             xml_node_get_uint (node, (const xmlChar *) LABEL_NSTEPS,
00387                               &error_code);
00388             if (error_code)
00389             {
00390                 input_error (_("Invalid steps number"));
00391                 goto exit_on_error;
00392             }
00393             buffer = xmlGetProp (node, (const xmlChar *) LABEL_DIRECTION);
00394             if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_COORDINATES))
00395                 input->direction = DIRECTION_METHOD_COORDINATES;
00396             else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_RANDOM))
00397             {
00398                 input->direction = DIRECTION_METHOD_RANDOM;
00399                 input->nestimates
00400                 = xml_node_get_uint (node, (const xmlChar *)
LABEL_NESTIMATES,
00401                                     &error_code);
00402                 if (error_code || !input->nestimates)
00403                 {
00404                     input_error (_("Invalid estimates number"));
00405                     goto exit_on_error;
00406                 }
00407             }
00408             else
00409             {
00410                 input_error
00411                 (_("Unknown method to estimate the direction search"));
00412                 goto exit_on_error;
00413             }
00414             xmlFree (buffer);
00415             buffer = NULL;
00416             input->relaxation
00417             = xml_node_get_float_with_default (node,
00418                                               (const xmlChar *)
00419                                               LABEL_RELAXATION,
00420                                               DEFAULT_RELAXATION, &error_code);
00421             if (error_code || input->relaxation < 0. || input->
relaxation > 2.)
00422             {
00423                 input_error (_("Invalid relaxation parameter"));

```

```

00424         goto exit_on_error;
00425     }
00426 }
00427 else
00428     input->nsteps = 0;
00429 }
00430 // Obtaining the threshold
00431 input->threshold =
00432     xml_node_get_float_with_default (node, (const xmlChar *)
LABEL_THRESHOLD,
00433                                     0., &error_code);
00434 if (error_code)
00435 {
00436     input_error (_("Invalid threshold"));
00437     goto exit_on_error;
00438 }
00439
00440 // Reading the experimental data
00441 for (child = node->children; child; child = child->next)
00442 {
00443     if (xmlStrcmp (child->name, (const xmlChar *) LABEL_EXPERIMENT))
00444         break;
00445 #if DEBUG_INPUT
00446     fprintf (stderr, "input_open_xml: nexperiments=%u\n",
00447             input->nexperiments);
00448 #endif
00449     input->experiment = (Experiment *)
00450         g_realloc (input->experiment,
00451                   (1 + input->nexperiments) * sizeof (
Experiment));
00452     if (!input->nexperiments)
00453     {
00454         if (!experiment_open_xml (input->experiment, child, 0))
00455             goto exit_on_error;
00456     }
00457     else
00458     {
00459         if (!experiment_open_xml (input->experiment +
input->nexperiments,
00460                                 child, input->experiment->
ninputs))
00461             goto exit_on_error;
00462     }
00463     ++input->nexperiments;
00464 #if DEBUG_INPUT
00465     fprintf (stderr, "input_open_xml: nexperiments=%u\n",
00466             input->nexperiments);
00467 #endif
00468 }
00469 if (!input->nexperiments)
00470 {
00471     input_error (_("No optimization experiments"));
00472     goto exit_on_error;
00473 }
00474 buffer = NULL;
00475
00476 // Reading the variables data
00477 for (; child; child = child->next)
00478 {
00479     #if DEBUG_INPUT
00480     fprintf (stderr, "input_open_xml: nvariables=%u\n", input->nvariables);
00481     #endif
00482     if (xmlStrcmp (child->name, (const xmlChar *) LABEL_VARIABLE))
00483     {
00484         snprintf (buffer2, 64, "%s %u: %s",
00485                 _("Variable"), input->nvariables + 1, _("bad XML node"));
00486         input_error (buffer2);
00487         goto exit_on_error;
00488     }
00489     input->variable = (Variable *)
00490         g_realloc (input->variable,
00491                   (1 + input->nvariables) * sizeof (Variable));
00492     if (!variable_open_xml (input->variable +
input->nvariables, child,
00493                             input->algorithm, input->nsteps))
00494         goto exit_on_error;
00495     ++input->nvariables;
00496 }
00497 if (!input->nvariables)
00498 {
00499     input_error (_("No optimization variables"));
00500     goto exit_on_error;
00501 }
00502 buffer = NULL;
00503
00504 // Obtaining the error norm
00505 if (xmlHasProp (node, (const xmlChar *) LABEL_NORM))

```

```

00506     {
00507         buffer = xmlGetProp (node, (const xmlChar *) LABEL_NORM);
00508         if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_EUCLIDIAN))
00509             input->norm = ERROR_NORM_EUCLIDIAN;
00510         else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_MAXIMUM))
00511             input->norm = ERROR_NORM_MAXIMUM;
00512         else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_P))
00513             {
00514                 input->norm = ERROR_NORM_P;
00515                 input->p
00516                     = xml_node_get_float (node, (const xmlChar *) LABEL_P, &error_code);
00517                 if (!error_code)
00518                     {
00519                         input_error (_("Bad P parameter"));
00520                         goto exit_on_error;
00521                     }
00522             }
00523         else if (!xmlStrcmp (buffer, (const xmlChar *) LABEL_TAXICAB))
00524             input->norm = ERROR_NORM_TAXICAB;
00525         else
00526             {
00527                 input_error (_("Unknown error norm"));
00528                 goto exit_on_error;
00529             }
00530         xmlFree (buffer);
00531     }
00532     else
00533         input->norm = ERROR_NORM_EUCLIDIAN;
00534     // Closing the XML document
00535     xmlFreeDoc (doc);
00536     #if DEBUG_INPUT
00537     fprintf (stderr, "input_open_xml: end\n");
00538     #endif
00539     return 1;
00540 exit_on_error:
00541     xmlFree (buffer);
00542     xmlFreeDoc (doc);
00543     #if DEBUG_INPUT
00544     fprintf (stderr, "input_open_xml: end\n");
00545     #endif
00546     return 0;
00547 }

```

Here is the call graph for this function:



## 4.10 input.h

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burquete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013 1. Redistributions of source code must retain the above copyright notice,
00014    this list of conditions and the following disclaimer.

```

```

00015
00016 2. Redistributions in binary form must reproduce the above copyright notice,
00017 this list of conditions and the following disclaimer in the
00018 documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #ifndef INPUT__H
00033 #define INPUT__H 1
00034
00035 enum DirectionMethod
00036 {
00037     DIRECTION_METHOD_COORDINATES = 0,
00038     DIRECTION_METHOD_RANDOM = 1,
00039 };
00040
00041 enum ErrorNorm
00042 {
00043     ERROR_NORM_EUCLIDIAN = 0,
00044     ERROR_NORM_MAXIMUM = 1,
00045     ERROR_NORM_P = 2,
00046     ERROR_NORM_TAXICAB = 3
00047 };
00048
00049 typedef struct
00050 {
00051     Experiment *experiment;
00052     Variable *variable;
00053     char *result;
00054     char *variables;
00055     char *simulator;
00056     char *evaluator;
00057     char *directory;
00058     char *name;
00059     double tolerance;
00060     double mutation_ratio;
00061     double reproduction_ratio;
00062     double adaptation_ratio;
00063     double relaxation;
00064     double p;
00065     double threshold;
00066     unsigned long int seed;
00067     unsigned int nvariables;
00068     unsigned int nexperiments;
00069     unsigned int nsimulations;
00070     unsigned int algorithm;
00071     unsigned int nsteps;
00072     unsigned int direction;
00073     unsigned int nestimates;
00074     unsigned int niterations;
00075     unsigned int nbest;
00076     unsigned int norm;
00077     unsigned int type;
00078 } Input;
00079
00080 extern Input input[1];
00081 extern const char *result_name;
00082 extern const char *variables_name;
00083
00084 // Public functions
00085 void input_new ();
00086 void input_free ();
00087 void input_error (char *message);
00088 int input_open_xml (xmlDoc * doc);
00089 int input_open_json (JsonParser * parser);
00090 int input_open (char *filename);
00091
00092 #endif

```

## 4.11 interface.c File Reference

Source file to define the graphical interface functions.

```

#include "config.h"
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <math.h>
#include <gsl/gsl_rng.h>
#include <libxml/parser.h>
#include <libintl.h>
#include <glib.h>
#include <glib/gstdio.h>
#include <json-glib/json-glib.h>
#include <mpi.h>
#include <gio/gio.h>
#include <gtk/gtk.h>
#include "genetic/genetic.h"
#include "utils.h"
#include "experiment.h"
#include "variable.h"
#include "input.h"
#include "optimize.h"
#include "interface.h"

```

Include dependency graph for interface.c:



## Macros

- `#define DEBUG_INTERFACE 0`  
Macro to debug interface functions.
- `#define INPUT_FILE "test-ga.xml"`  
Macro to define the initial input file.

## Functions

- void `input_save_direction_xml` (xmlNode \*node)  
Function to save the direction search method data in a XML node.
- void `input_save_direction_json` (JsonNode \*node)  
Function to save the direction search method data in a JSON node.
- void `input_save_xml` (xmlDoc \*doc)  
Function to save the input file in XML format.
- void `input_save_json` (JsonGenerator \*generator)  
Function to save the input file in JSON format.
- void `input_save` (char \*filename)  
Function to save the input file.
- void `options_new` ()  
Function to open the options dialog.
- void `running_new` ()  
Function to open the running dialog.
- unsigned int `window_get_algorithm` ()  
Function to get the stochastic algorithm number.

- unsigned int [window\\_get\\_direction](#) ()  
*Function to get the direction search method number.*
- unsigned int [window\\_get\\_norm](#) ()  
*Function to get the norm method number.*
- void [window\\_save\\_direction](#) ()  
*Function to save the direction search method data in the input file.*
- int [window\\_save](#) ()  
*Function to save the input file.*
- void [window\\_run](#) ()  
*Function to run a optimization.*
- void [window\\_help](#) ()  
*Function to show a help dialog.*
- void [window\\_about](#) ()  
*Function to show an about dialog.*
- void [window\\_update\\_direction](#) ()  
*Function to update direction search method widgets view in the main window.*
- void [window\\_update](#) ()  
*Function to update the main window view.*
- void [window\\_set\\_algorithm](#) ()  
*Function to avoid memory errors changing the algorithm.*
- void [window\\_set\\_experiment](#) ()  
*Function to set the experiment data in the main window.*
- void [window\\_remove\\_experiment](#) ()  
*Function to remove an experiment in the main window.*
- void [window\\_add\\_experiment](#) ()  
*Function to add an experiment in the main window.*
- void [window\\_name\\_experiment](#) ()  
*Function to set the experiment name in the main window.*
- void [window\\_weight\\_experiment](#) ()  
*Function to update the experiment weight in the main window.*
- void [window\\_inputs\\_experiment](#) ()  
*Function to update the experiment input templates number in the main window.*
- void [window\\_template\\_experiment](#) (void \*data)  
*Function to update the experiment i-th input template in the main window.*
- void [window\\_set\\_variable](#) ()  
*Function to set the variable data in the main window.*
- void [window\\_remove\\_variable](#) ()  
*Function to remove a variable in the main window.*
- void [window\\_add\\_variable](#) ()  
*Function to add a variable in the main window.*
- void [window\\_label\\_variable](#) ()  
*Function to set the variable label in the main window.*
- void [window\\_precision\\_variable](#) ()  
*Function to update the variable precision in the main window.*
- void [window\\_rangemin\\_variable](#) ()  
*Function to update the variable rangemin in the main window.*
- void [window\\_rangemax\\_variable](#) ()  
*Function to update the variable rangemax in the main window.*
- void [window\\_rangeminabs\\_variable](#) ()  
*Function to update the variable rangeminabs in the main window.*
- void [window\\_rangemaxabs\\_variable](#) ()

- Function to update the variable rangemaxabs in the main window.*

  - void [window\\_step\\_variable](#) ()

*Function to update the variable step in the main window.*

  - void [window\\_update\\_variable](#) ()

*Function to update the variable data in the main window.*

  - int [window\\_read](#) (char \*filename)

*Function to read the input data of a file.*

  - void [window\\_open](#) ()

*Function to open the input data.*

  - void [window\\_new](#) (GtkApplication \*application)

*Function to open the main window.*

## Variables

- const char \* [logo](#) []  
*Logo pixmap.*
- [Options](#) [options](#) [1]  
*Options struct to define the options dialog.*
- [Running](#) [running](#) [1]  
*Running struct to define the running dialog.*
- [Window](#) [window](#) [1]  
*Window struct to define the main interface window.*

### 4.11.1 Detailed Description

Source file to define the graphical interface functions.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [interface.c](#).

### 4.11.2 Function Documentation

#### 4.11.2.1 input\_save()

```
void input_save (
    char * filename )
```

Function to save the input file.



## Parameters

<i>filename</i>	Input file name.
-----------------	------------------


Definition at line 575 of file [interface.c](#).

```

00576 {
00577     xmlDoc *doc;
00578     JsonGenerator *generator;
00579
00580 #if DEBUG_INTERFACE
00581     fprintf (stderr, "input_save: start\n");
00582 #endif
00583
00584     // Getting the input file directory
00585     input->name = g_path_get_basename (filename);
00586     input->directory = g_path_get_dirname (filename);
00587
00588     if (input->type == INPUT_TYPE_XML)
00589     {
00590         // Opening the input file
00591         doc = xmlNewDoc ((const xmlChar *) "1.0");
00592         input_save_xml (doc);
00593
00594         // Saving the XML file
00595         xmlSaveFormatFile (filename, doc, 1);
00596
00597         // Freeing memory
00598         xmlFreeDoc (doc);
00599     }
00600     else
00601     {
00602         // Opening the input file
00603         generator = json_generator_new ();
00604         json_generator_set_pretty (generator, TRUE);
00605         input_save_json (generator);
00606
00607         // Saving the JSON file
00608         json_generator_to_file (generator, filename, NULL);
00609
00610         // Freeing memory
00611         g_object_unref (generator);
00612     }
00613
00614 #if DEBUG_INTERFACE
00615     fprintf (stderr, "input_save: end\n");
00616 #endif
00617 }

```

Here is the call graph for this function:

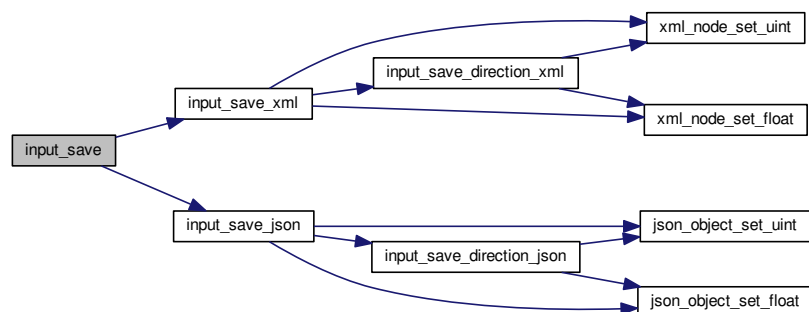

#### 4.11.2.2 input\_save\_direction\_json()

```
void input_save_direction_json (
    JsonNode * node )
```

Function to save the direction search method data in a JSON node.


##### Parameters

<i>node</i>	JSON node.
-------------	------------

Definition at line 207 of file [interface.c](#).

```
00208 {
00209     JsonObject *object;
00210     #if DEBUG_INTERFACE
00211     fprintf (stderr, "input_save_direction_json: start\n");
00212     #endif
00213     object = json_node_get_object (node);
00214     if (input->nsteps)
00215     {
00216         json_object_set_uint (object, LABEL_NSTEPS,
00217                               input->nsteps);
00218         if (input->relaxation != DEFAULT_RELAXATION)
00219             json_object_set_float (object, LABEL_RELAXATION,
00220                                   input->relaxation);
00221         switch (input->direction)
00222         {
00223             case DIRECTION_METHOD_COORDINATES:
00224                 json_object_set_string_member (object, LABEL_DIRECTION,
00225                                                LABEL_COORDINATES);
00226                 break;
00227             default:
00228                 json_object_set_string_member (object, LABEL_DIRECTION,
00229                                                LABEL_RANDOM);
00230         }
00231         json_object_set_uint (object, LABEL_NESTIMATES,
00232                               input->nestimates);
00233     }
00234     #if DEBUG_INTERFACE
00235     fprintf (stderr, "input_save_direction_json: end\n");
00236     #endif
00237 }
```

Here is the call graph for this function:

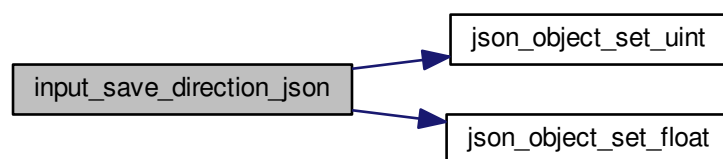

#### 4.11.2.3 input\_save\_direction\_xml()

```
void input_save_direction_xml (
    xmlNode * node )
```

Function to save the direction search method data in a XML node.

## Parameters

<i>node</i>	XML node.
-------------	-----------


Definition at line 171 of file [interface.c](#).

```

00172 {
00173     #if DEBUG_INTERFACE
00174         fprintf (stderr, "input_save_direction_xml: start\n");
00175     #endif
00176     if (input->nsteps)
00177     {
00178         xml_node_set_uint (node, (const xmlChar *) LABEL_NSTEPS,
00179             input->nsteps);
00179         if (input->relaxation != DEFAULT_RELAXATION)
00180             xml_node_set_float (node, (const xmlChar *)
00181                 LABEL_RELAXATION,
00182                 input->relaxation);
00182         switch (input->direction)
00183         {
00184             case DIRECTION_METHOD_COORDINATES:
00185                 xmlSetProp (node, (const xmlChar *) LABEL_DIRECTION,
00186                     (const xmlChar *) LABEL_COORDINATES);
00187                 break;
00188             default:
00189                 xmlSetProp (node, (const xmlChar *) LABEL_DIRECTION,
00190                     (const xmlChar *) LABEL_RANDOM);
00191             xml_node_set_uint (node, (const xmlChar *)
00192                 LABEL_NESTIMATES,
00193                 input->nestimates);
00194         }
00195     #if DEBUG_INTERFACE
00196         fprintf (stderr, "input_save_direction_xml: end\n");
00197     #endif
00198 }

```

Here is the call graph for this function:

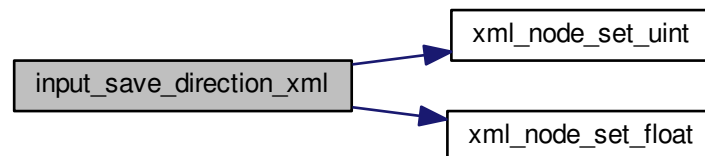

## 4.11.2.4 input\_save\_json()

```

void input_save_json (
    JsonGenerator * generator )

```

Function to save the input file in JSON format.

## Parameters

<i>generator</i>	JsonGenerator struct.
------------------	-----------------------

Definition at line 412 of file [interface.c](#).

```

00413 {
00414     unsigned int i, j;
00415     char *buffer;
00416     JsonNode *node, *child;
00417     JsonObject *object;
00418     JsonArray *array;
00419     GFile *file, *file2;
00420
00421     #if DEBUG_INTERFACE
00422         fprintf (stderr, "input_save_json: start\n");
00423     #endif
00424
00425     // Setting root JSON node
00426     node = json_node_new (JSON_NODE_OBJECT);
00427     object = json_node_get_object (node);
00428     json_generator_set_root (generator, node);
00429
00430     // Adding properties to the root JSON node
00431     if (strcmp (input->result, result_name))
00432         json_object_set_string_member (object, LABEL_RESULT_FILE,
input->result);
00433     if (strcmp (input->variables, variables_name))
00434         json_object_set_string_member (object, LABEL_VARIABLES_FILE,
input->variables);
00435
00436     file = g_file_new_for_path (input->directory);
00437     file2 = g_file_new_for_path (input->simulator);
00438     buffer = g_file_get_relative_path (file, file2);
00439     g_object_unref (file2);
00440     json_object_set_string_member (object, LABEL_SIMULATOR, buffer);
00441     g_free (buffer);
00442     if (input->evaluator)
00443     {
00444         file2 = g_file_new_for_path (input->evaluator);
00445         buffer = g_file_get_relative_path (file, file2);
00446         g_object_unref (file2);
00447         if (strlen (buffer))
00448             json_object_set_string_member (object, LABEL_EVALUATOR, buffer);
00449         g_free (buffer);
00450     }
00451     if (input->seed != DEFAULT_RANDOM_SEED)
00452         json_object_set_uint (object, LABEL_SEED,
input->seed);
00453
00454     // Setting the algorithm
00455     buffer = (char *) g_slice_alloc (64);
00456     switch (input->algorithm)
00457     {
00458     case ALGORITHM_MONTE_CARLO:
00459         json_object_set_string_member (object, LABEL_ALGORITHM,
LABEL_MONTE_CARLO);
00460         snprintf (buffer, 64, "%u", input->nsimulations);
00461         json_object_set_string_member (object, LABEL_NSIMULATIONS, buffer);
00462         snprintf (buffer, 64, "%u", input->niterations);
00463         json_object_set_string_member (object, LABEL_NITERATIONS, buffer);
00464         snprintf (buffer, 64, "%.3lg", input->tolerance);
00465         json_object_set_string_member (object, LABEL_TOLERANCE, buffer);
00466         snprintf (buffer, 64, "%u", input->nbest);
00467         json_object_set_string_member (object, LABEL_NBEST, buffer);
00468         input_save_direction_json (node);
00469         break;
00470     case ALGORITHM_SWEEP:
00471         json_object_set_string_member (object, LABEL_ALGORITHM,
LABEL_SWEEP);
00472         snprintf (buffer, 64, "%u", input->niterations);
00473         json_object_set_string_member (object, LABEL_NITERATIONS, buffer);
00474         snprintf (buffer, 64, "%.3lg", input->tolerance);
00475         json_object_set_string_member (object, LABEL_TOLERANCE, buffer);
00476         snprintf (buffer, 64, "%u", input->nbest);
00477         json_object_set_string_member (object, LABEL_NBEST, buffer);
00478         input_save_direction_json (node);
00479         break;
00480     default:
00481         json_object_set_string_member (object, LABEL_ALGORITHM,
LABEL_GENETIC);
00482         snprintf (buffer, 64, "%u", input->nsimulations);
00483         json_object_set_string_member (object, LABEL_NPOPULATION, buffer);

```

```

00485     snprintf (buffer, 64, "%u", input->niterations);
00486     json_object_set_string_member (object, LABEL_NGENERATIONS, buffer);
00487     snprintf (buffer, 64, "%.3lg", input->mutation_ratio);
00488     json_object_set_string_member (object, LABEL_MUTATION, buffer);
00489     snprintf (buffer, 64, "%.3lg", input->reproduction_ratio);
00490     json_object_set_string_member (object, LABEL_REPRODUCTION, buffer);
00491     snprintf (buffer, 64, "%.3lg", input->adaptation_ratio);
00492     json_object_set_string_member (object, LABEL_ADAPTATION, buffer);
00493     break;
00494 }
00495 g_slice_free1 (64, buffer);
00496 if (input->threshold != 0.)
00497     json_object_set_float (object, LABEL_THRESHOLD,
input->threshold);
00498
00499 // Setting the experimental data
00500 array = json_array_new ();
00501 for (i = 0; i < input->nexperiments; ++i)
00502 {
00503     child = json_node_new (JSON_NODE_OBJECT);
00504     object = json_node_get_object (child);
00505     json_object_set_string_member (object, LABEL_NAME,
00506                                     input->experiment[i].name);
00507     if (input->experiment[i].weight != 1.)
00508         json_object_set_float (object, LABEL_WEIGHT,
00509                                 input->experiment[i].weight);
00510     for (j = 0; j < input->experiment->ninputs; ++j)
00511         json_object_set_string_member (object, template[j],
00512                                         input->experiment[i].
template[j]);
00513     json_array_add_element (array, child);
00514 }
00515 json_object_set_array_member (object, LABEL_EXPERIMENTS, array);
00516
00517 // Setting the variables data
00518 array = json_array_new ();
00519 for (i = 0; i < input->nvariables; ++i)
00520 {
00521     child = json_node_new (JSON_NODE_OBJECT);
00522     object = json_node_get_object (child);
00523     json_object_set_string_member (object, LABEL_NAME,
00524                                     input->variable[i].name);
00525     json_object_set_float (object, LABEL_MINIMUM,
00526                             input->variable[i].rangemin);
00527     if (input->variable[i].rangeminabs != -G_MAXDOUBLE)
00528         json_object_set_float (object,
LABEL_ABSOLUTE_MINIMUM,
00529                                 input->variable[i].rangeminabs);
00530     json_object_set_float (object, LABEL_MAXIMUM,
00531                             input->variable[i].rangemax);
00532     if (input->variable[i].rangemaxabs != G_MAXDOUBLE)
00533         json_object_set_float (object,
LABEL_ABSOLUTE_MAXIMUM,
00534                                 input->variable[i].rangemaxabs);
00535     if (input->variable[i].precision !=
DEFAULT_PRECISION)
00536         json_object_set_uint (object, LABEL_PRECISION,
00537                                 input->variable[i].precision);
00538     if (input->algorithm == ALGORITHM_SWEEP)
00539         json_object_set_uint (object, LABEL_NSWEEPS,
00540                                 input->variable[i].nsweeps);
00541     else if (input->algorithm == ALGORITHM_GENETIC)
00542         json_object_set_uint (object, LABEL_NBITS,
input->variable[i].nbits);
00543     if (input->nsteps)
00544         json_object_set_float (object, LABEL_STEP,
input->variable[i].step);
00545     json_array_add_element (array, child);
00546 }
00547 json_object_set_array_member (object, LABEL_VARIABLES, array);
00548
00549 // Saving the error norm
00550 switch (input->norm)
00551 {
00552     case ERROR_NORM_MAXIMUM:
00553         json_object_set_string_member (object, LABEL_NORM, LABEL_MAXIMUM);
00554         break;
00555     case ERROR_NORM_P:
00556         json_object_set_string_member (object, LABEL_NORM, LABEL_P);
00557         json_object_set_float (object, LABEL_P, input->
p);
00558         break;
00559     case ERROR_NORM_TAXICAB:
00560         json_object_set_string_member (object, LABEL_NORM, LABEL_TAXICAB);
00561 }
00562
00563 #if DEBUG_INTERFACE


```

```

00564     fprintf (stderr, "input_save_json: end\n");
00565 #endif
00566 }

```

Here is the call graph for this function:

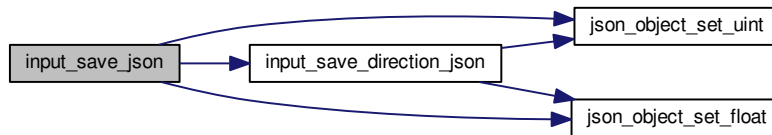

#### 4.11.2.5 input\_save\_xml()

```

void input_save_xml (
    xmlDoc * doc )

```

Function to save the input file in XML format.

##### Parameters

<i>doc</i>	xmlDoc struct.
------------	----------------

Definition at line 242 of file [interface.c](#).

```

00243 {
00244     unsigned int i, j;
00245     char *buffer;
00246     xmlNode *node, *child;
00247     GFile *file, *file2;
00248
00249 #if DEBUG_INTERFACE
00250     fprintf (stderr, "input_save_xml: start\n");
00251 #endif
00252
00253     // Setting root XML node
00254     node = xmlNewDocNode (doc, 0, (const xmlChar *) LABEL_OPTIMIZE, 0);
00255     xmlDocSetRootElement (doc, node);
00256
00257     // Adding properties to the root XML node
00258     if (xmlStrcmp
00259         ((const xmlChar *) input->result, (const xmlChar *) result_name))
00260         xmlSetProp (node, (const xmlChar *) LABEL_RESULT_FILE,
00261             (xmlChar *) input->result);
00262     if (xmlStrcmp
00263         ((const xmlChar *) input->variables, (const xmlChar *)
00264         variables_name))
00265         xmlSetProp (node, (const xmlChar *) LABEL_VARIABLES_FILE,
00266             (xmlChar *) input->variables);
00267     file = g_file_new_for_path (input->directory);
00268     file2 = g_file_new_for_path (input->simulator);
00269     buffer = g_file_get_relative_path (file, file2);
00270     g_object_unref (file2);
00271     xmlSetProp (node, (const xmlChar *) LABEL_SIMULATOR, (xmlChar *) buffer);
00272     g_free (buffer);
00273     if (input->evaluator)
00274     {

```

```

00274     file2 = g_file_new_for_path (input->evaluator);
00275     buffer = g_file_get_relative_path (file, file2);
00276     g_object_unref (file2);
00277     if (xmlStrlen ((xmlChar *) buffer))
00278         xmlSetProp (node, (const xmlChar *) LABEL_EVALUATOR,
00279                     (xmlChar *) buffer);
00280     g_free (buffer);
00281 }
00282 if (input->seed != DEFAULT_RANDOM_SEED)
00283     xml_node_set_uint (node, (const xmlChar *) LABEL_SEED,
input->seed);
00284
00285 // Setting the algorithm
00286 buffer = (char *) g_slice_alloc (64);
00287 switch (input->algorithm)
00288 {
00289     case ALGORITHM_MONTE_CARLO:
00290         xmlSetProp (node, (const xmlChar *) LABEL_ALGORITHM,
00291                     (const xmlChar *) LABEL_MONTE_CARLO);
00292         snprintf (buffer, 64, "%u", input->nsimulations);
00293         xmlSetProp (node, (const xmlChar *) LABEL_NSIMULATIONS,
00294                     (xmlChar *) buffer);
00295         snprintf (buffer, 64, "%u", input->niterations);
00296         xmlSetProp (node, (const xmlChar *) LABEL_NITERATIONS,
00297                     (xmlChar *) buffer);
00298         snprintf (buffer, 64, "%.3lg", input->tolerance);
00299         xmlSetProp (node, (const xmlChar *) LABEL_TOLERANCE, (xmlChar *) buffer);
00300         snprintf (buffer, 64, "%u", input->nbest);
00301         xmlSetProp (node, (const xmlChar *) LABEL_NBEST, (xmlChar *) buffer);
00302         input_save_direction_xml (node);
00303         break;
00304     case ALGORITHM_SWEEP:
00305         xmlSetProp (node, (const xmlChar *) LABEL_ALGORITHM,
00306                     (const xmlChar *) LABEL_SWEEP);
00307         snprintf (buffer, 64, "%u", input->niterations);
00308         xmlSetProp (node, (const xmlChar *) LABEL_NITERATIONS,
00309                     (xmlChar *) buffer);
00310         snprintf (buffer, 64, "%.3lg", input->tolerance);
00311         xmlSetProp (node, (const xmlChar *) LABEL_TOLERANCE, (xmlChar *) buffer);
00312         snprintf (buffer, 64, "%u", input->nbest);
00313         xmlSetProp (node, (const xmlChar *) LABEL_NBEST, (xmlChar *) buffer);
00314         input_save_direction_xml (node);
00315         break;
00316     default:
00317         xmlSetProp (node, (const xmlChar *) LABEL_ALGORITHM,
00318                     (const xmlChar *) LABEL_GENETIC);
00319         snprintf (buffer, 64, "%u", input->nsimulations);
00320         xmlSetProp (node, (const xmlChar *) LABEL_NPOPULATION,
00321                     (xmlChar *) buffer);
00322         snprintf (buffer, 64, "%u", input->niterations);
00323         xmlSetProp (node, (const xmlChar *) LABEL_NGENERATIONS,
00324                     (xmlChar *) buffer);
00325         snprintf (buffer, 64, "%.3lg", input->mutation_ratio);
00326         xmlSetProp (node, (const xmlChar *) LABEL_MUTATION, (xmlChar *) buffer);
00327         snprintf (buffer, 64, "%.3lg", input->reproduction_ratio);
00328         xmlSetProp (node, (const xmlChar *) LABEL_REPRODUCTION,
00329                     (xmlChar *) buffer);
00330         snprintf (buffer, 64, "%.3lg", input->adaptation_ratio);
00331         xmlSetProp (node, (const xmlChar *) LABEL_ADAPTATION, (xmlChar *) buffer);
00332         break;
00333 }
00334 g_slice_free1 (64, buffer);
00335 if (input->threshold != 0.)
00336     xml_node_set_float (node, (const xmlChar *)
LABEL_THRESHOLD,
00337                         input->threshold);
00338
00339 // Setting the experimental data
00340 for (i = 0; i < input->nexperiments; ++i)
00341 {
00342     child = xmlNewChild (node, 0, (const xmlChar *) LABEL_EXPERIMENT, 0);
00343     xmlSetProp (child, (const xmlChar *) LABEL_NAME,
00344                 (xmlChar *) input->experiment[i].name);
00345     if (input->experiment[i].weight != 1.)
00346         xml_node_set_float (child, (const xmlChar *)
LABEL_WEIGHT,
00347                             input->experiment[i].weight);
00348     for (j = 0; j < input->experiment->ninputs; ++j)
00349         xmlSetProp (child, (const xmlChar *) template[j],
00350                     (xmlChar *) input->experiment[i].template[j]);
00351 }
00352
00353 // Setting the variables data
00354 for (i = 0; i < input->nvariables; ++i)
00355 {
00356     child = xmlNewChild (node, 0, (const xmlChar *) LABEL_VARIABLE, 0);
00357     xmlSetProp (child, (const xmlChar *) LABEL_NAME,


```

```

00358         (xmlChar *) input->variable[i].name);
00359     xml_node_set_float (child, (const xmlChar *)
00360 LABEL_MINIMUM,
00361         input->variable[i].rangemin);
00362     if (input->variable[i].rangeminabs != -G_MAXDOUBLE)
00363         xml_node_set_float (child, (const xmlChar *)
00364 LABEL_ABSOLUTE_MINIMUM,
00365         input->variable[i].rangeminabs);
00366     xml_node_set_float (child, (const xmlChar *)
00367 LABEL_MAXIMUM,
00368         input->variable[i].rangemax);
00369     if (input->variable[i].rangemaxabs != G_MAXDOUBLE)
00370         xml_node_set_float (child, (const xmlChar *)
00371 LABEL_ABSOLUTE_MAXIMUM,
00372         input->variable[i].rangemaxabs);
00373     if (input->variable[i].precision !=
00374 DEFAULT_PRECISION)
00375         xml_node_set_uint (child, (const xmlChar *)
00376 LABEL_PRECISION,
00377         input->variable[i].precision);
00378     if (input->algorithm == ALGORITHM_SWEEP)
00379         xml_node_set_uint (child, (const xmlChar *)
00380 LABEL_NSWEEPS,
00381         input->variable[i].nsweeps);
00382     else if (input->algorithm == ALGORITHM_GENETIC)
00383         xml_node_set_uint (child, (const xmlChar *) LABEL_NBITS,
00384         input->variable[i].nbits);
00385     if (input->nsteps)
00386         xml_node_set_float (child, (const xmlChar *)
00387 LABEL_STEP,
00388         input->variable[i].step);
00389 }
00390 // Saving the error norm
00391 switch (input->norm)
00392 {
00393     case ERROR_NORM_MAXIMUM:
00394         xmlSetProp (node, (const xmlChar *) LABEL_NORM,
00395             (const xmlChar *) LABEL_MAXIMUM);
00396         break;
00397     case ERROR_NORM_P:
00398         xmlSetProp (node, (const xmlChar *) LABEL_NORM,
00399             (const xmlChar *) LABEL_P);
00400         xml_node_set_float (node, (const xmlChar *) LABEL_P,
00401             input->p);
00402         break;
00403     case ERROR_NORM_TAXICAB:
00404         xmlSetProp (node, (const xmlChar *) LABEL_NORM,
00405             (const xmlChar *) LABEL_TAXICAB);
00406 }
00407 #if DEBUG_INTERFACE
00408 fprintf (stderr, "input_save: end\n");
00409 #endif
00410 }

```

Here is the call graph for this function:

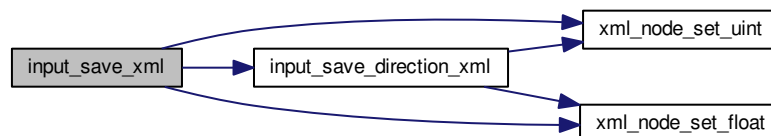

#### 4.11.2.6 window\_get\_algorithm()

```
unsigned int window_get_algorithm ( )
```

Function to get the stochastic algorithm number.



### Returns

Stochastic algorithm number.

Definition at line 725 of file [interface.c](#).

```
00726 {
00727     unsigned int i;
00728     #if DEBUG_INTERFACE
00729     fprintf (stderr, "window_get_algorithm: start\n");
00730     #endif
00731     i = gtk_array_get_active (window->button_algorithm,
00732                             NALGORITHMS);
00733     #if DEBUG_INTERFACE
00734     fprintf (stderr, "window_get_algorithm: %u\n", i);
00735     fprintf (stderr, "window_get_algorithm: end\n");
00736     #endif
00737     return i;
00738 }
```

Here is the call graph for this function:



#### 4.11.2.7 window\_get\_direction()

```
unsigned int window_get_direction ( )
```

Function to get the direction search method number.

### Returns

Direction search method number.

Definition at line 745 of file [interface.c](#).

```
00746 {
00747     unsigned int i;
00748     #if DEBUG_INTERFACE
00749     fprintf (stderr, "window_get_direction: start\n");
00750     #endif
00751     i = gtk_array_get_active (window->button_direction,
00752                             NDIRECTIONS);
00753     #if DEBUG_INTERFACE
00754     fprintf (stderr, "window_get_direction: %u\n", i);
00755     fprintf (stderr, "window_get_direction: end\n");
00756     #endif
00757     return i;
00758 }
```

Here is the call graph for this function:



#### 4.11.2.8 window\_get\_norm()

```
unsigned int window_get_norm ( )
```

Function to get the norm method number.

##### Returns

Norm method number.

Definition at line 765 of file [interface.c](#).

```
00766 {
00767     unsigned int i;
00768     #if DEBUG_INTERFACE
00769     fprintf (stderr, "window_get_norm: start\n");
00770     #endif
00771     i = gtk_array_get_active (window->button_norm,
00772                             NNORMS);
00772     #if DEBUG_INTERFACE
00773     fprintf (stderr, "window_get_norm: %u\n", i);
00774     fprintf (stderr, "window_get_norm: end\n");
00775     #endif
00776     return i;
00777 }
```

Here is the call graph for this function:



#### 4.11.2.9 window\_new()

```
void window_new (
    GtkApplication * application )
```

Function to open the main window.

## Parameters

<i>application</i>	GtkApplication struct.
--------------------	------------------------

Definition at line 2075 of file [interface.c](#).

```

02076 {
02077     unsigned int i;
02078     char *buffer, *buffer2, buffer3[64];
02079     char *label_algorithm[NALGORITHMS] = {
02080         "_Monte-Carlo", _("_Sweep"), _("_Genetic")
02081     };
02082     char *tip_algorithm[NALGORITHMS] = {
02083         _("Monte-Carlo brute force algorithm"),
02084         _("Sweep brute force algorithm"),
02085         _("Genetic algorithm")
02086     };
02087     char *label_direction[N DIRECTIONS] = {
02088         _("_Coordinates descent"), _("_Random")
02089     };
02090     char *tip_direction[N DIRECTIONS] = {
02091         _("Coordinates direction estimate method"),
02092         _("Random direction estimate method")
02093     };
02094     char *label_norm[NNORMS] = { "L2", "L", "Lp", "L1" };
02095     char *tip_norm[NNORMS] = {
02096         _("Euclidean error norm (L2)"),
02097         _("Maximum error norm (L)"),
02098         _("P error norm (Lp)"),
02099         _("Taxicab error norm (L1)")
02100     };
02101
02102     #if DEBUG_INTERFACE
02103         fprintf (stderr, "window_new: start\n");
02104     #endif
02105
02106     // Creating the window
02107     window->window = main_window
02108         = (GtkWindow *) gtk_application_window_new (application);
02109
02110     // Finish when closing the window
02111     g_signal_connect_swapped (window->window, "delete-event",
02112                             G_CALLBACK (g_application_quit),
02113                             G_APPLICATION (application));
02114
02115     // Setting the window title
02116     gtk_window_set_title (window->window, "MPCOTool");
02117
02118     // Creating the open button
02119     window->button_open = (GtkToolButton *) gtk_tool_button_new
02120         (gtk_image_new_from_icon_name ("document-open",
02121                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Open"));
02122     g_signal_connect (window->button_open, "clicked", window_open, NULL);
02123
02124     // Creating the save button
02125     window->button_save = (GtkToolButton *) gtk_tool_button_new
02126         (gtk_image_new_from_icon_name ("document-save",
02127                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Save"));
02128     g_signal_connect (window->button_save, "clicked", (void *)
02129 window_save,
02130                     NULL);
02131
02132     // Creating the run button
02133     window->button_run = (GtkToolButton *) gtk_tool_button_new
02134         (gtk_image_new_from_icon_name ("system-run",
02135                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Run"));
02136     g_signal_connect (window->button_run, "clicked", window_run, NULL);
02137
02138     // Creating the options button
02139     window->button_options = (GtkToolButton *) gtk_tool_button_new
02140         (gtk_image_new_from_icon_name ("preferences-system",
02141                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Options"));
02142     g_signal_connect (window->button_options, "clicked",
02143 options_new, NULL);
02144
02145     // Creating the help button
02146     window->button_help = (GtkToolButton *) gtk_tool_button_new
02147         (gtk_image_new_from_icon_name ("help-browser",
02148                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Help"));
02149     g_signal_connect (window->button_help, "clicked", window_help, NULL);
02150
02151     // Creating the about button

```

```

02150     window->button_about = (GtkToolButton *) gtk_tool_button_new
02151         (gtk_image_new_from_icon_name ("help-about",
02152             GTK_ICON_SIZE_LARGE_TOOLBAR), _("About"));
02153     g_signal_connect (window->button_about, "clicked",
window_about, NULL);
02154
02155     // Creating the exit button
02156     window->button_exit = (GtkToolButton *) gtk_tool_button_new
02157         (gtk_image_new_from_icon_name ("application-exit",
02158             GTK_ICON_SIZE_LARGE_TOOLBAR), _("Exit"));
02159     g_signal_connect_swapped (window->button_exit, "clicked",
02160         G_CALLBACK (g_application_quit),
02161         G_APPLICATION (application));
02162
02163     // Creating the buttons bar
02164     window->bar_buttons = (GtkToolbar *) gtk_toolbar_new ();
02165     gtk_toolbar_insert
02166         (window->bar_buttons, GTK_TOOL_ITEM (window->
button_open), 0);
02167     gtk_toolbar_insert
02168         (window->bar_buttons, GTK_TOOL_ITEM (window->
button_save), 1);
02169     gtk_toolbar_insert
02170         (window->bar_buttons, GTK_TOOL_ITEM (window->
button_run), 2);
02171     gtk_toolbar_insert
02172         (window->bar_buttons, GTK_TOOL_ITEM (window->
button_options), 3);
02173     gtk_toolbar_insert
02174         (window->bar_buttons, GTK_TOOL_ITEM (window->
button_help), 4);
02175     gtk_toolbar_insert
02176         (window->bar_buttons, GTK_TOOL_ITEM (window->
button_about), 5);
02177     gtk_toolbar_insert
02178         (window->bar_buttons, GTK_TOOL_ITEM (window->
button_exit), 6);
02179     gtk_toolbar_set_style (window->bar_buttons, GTK_TOOLBAR_BOTH);
02180
02181     // Creating the simulator program label and entry
02182     window->label_simulator = (GtkLabel *) gtk_label_new (_("Simulator program"));
02183     window->button_simulator = (GtkFileChooserButton *)
02184         gtk_file_chooser_button_new (_("Simulator program"),
02185             GTK_FILE_CHOOSER_ACTION_OPEN);
02186     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_simulator),
02187         _("Simulator program executable file"));
02188     gtk_widget_set_hexpand (GTK_WIDGET (window->button_simulator), TRUE);
02189
02190     // Creating the evaluator program label and entry
02191     window->check_evaluator = (GtkCheckButton *)
02192         gtk_check_button_new_with_mnemonic (_("Evaluator program"));
02193     g_signal_connect (window->check_evaluator, "toggled",
window_update, NULL);
02194     window->button_evaluator = (GtkFileChooserButton *)
02195         gtk_file_chooser_button_new (_("Evaluator program"),
02196             GTK_FILE_CHOOSER_ACTION_OPEN);
02197     gtk_widget_set_tooltip_text
02198         (GTK_WIDGET (window->button_evaluator),
02199         _("Optional evaluator program executable file"));
02200
02201     // Creating the results files labels and entries
02202     window->label_result = (GtkLabel *) gtk_label_new (_("Result file"));
02203     window->entry_result = (GtkEntry *) gtk_entry_new ();
02204     gtk_widget_set_tooltip_text
02205         (GTK_WIDGET (window->entry_result), _("Best results file"));
02206     window->label_variables = (GtkLabel *) gtk_label_new (_("Variables file"));
02207     window->entry_variables = (GtkEntry *) gtk_entry_new ();
02208     gtk_widget_set_tooltip_text
02209         (GTK_WIDGET (window->entry_variables), _("All simulated results file"));
02210
02211     // Creating the files grid and attaching widgets
02212     window->grid_files = (GtkGrid *) gtk_grid_new ();
02213     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_simulator),
02214         0, 0, 1, 1);
02215     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
button_simulator),
02216         1, 0, 1, 1);
02217     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
check_evaluator),
02218         0, 1, 1, 1);
02219     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
button_evaluator),
02220         1, 1, 1, 1);
02221     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_result),
02222         0, 2, 1, 1);

```

```

02223     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
02224     entry_result),
02225     1, 2, 1, 1);
02226     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
02227     label_variables),
02228     0, 3, 1, 1);
02229     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
02230     entry_variables),
02231     1, 3, 1, 1);
02232     // Creating the algorithm properties
02233     window->label_simulations = (GtkLabel *) gtk_label_new
02234     (_("Simulations number"));
02235     window->spin_simulations
02236     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02237     gtk_widget_set_tooltip_text
02238     (GTK_WIDGET (window->spin_simulations),
02239     _("Number of simulations to perform for each iteration"));
02240     gtk_widget_set_hexexpand (GTK_WIDGET (window->spin_simulations), TRUE);
02241     window->label_iterations = (GtkLabel *)
02242     gtk_label_new (_("Iterations number"));
02243     window->spin_iterations
02244     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02245     gtk_widget_set_tooltip_text
02246     (GTK_WIDGET (window->spin_iterations), _("Number of iterations"));
02247     g_signal_connect
02248     (window->spin_iterations, "value-changed",
02249     window_update, NULL);
02250     gtk_widget_set_hexexpand (GTK_WIDGET (window->spin_iterations), TRUE);
02251     window->label_tolerance = (GtkLabel *) gtk_label_new (_("Tolerance"));
02252     window->spin_tolerance =
02253     (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02254     gtk_widget_set_tooltip_text
02255     (GTK_WIDGET (window->spin_tolerance),
02256     _("Tolerance to set the variable interval on the next iteration"));
02257     window->label_bests = (GtkLabel *) gtk_label_new (_("Bests number"));
02258     window->spin_bests
02259     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02260     gtk_widget_set_tooltip_text
02261     (GTK_WIDGET (window->spin_bests),
02262     _("Number of best simulations used to set the variable interval "
02263     "on the next iteration"));
02264     window->label_population
02265     = (GtkLabel *) gtk_label_new (_("Population number"));
02266     window->spin_population
02267     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02268     gtk_widget_set_tooltip_text
02269     (GTK_WIDGET (window->spin_population),
02270     _("Number of population for the genetic algorithm"));
02271     gtk_widget_set_hexexpand (GTK_WIDGET (window->spin_population), TRUE);
02272     window->label_generations
02273     = (GtkLabel *) gtk_label_new (_("Generations number"));
02274     window->spin_generations
02275     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02276     gtk_widget_set_tooltip_text
02277     (GTK_WIDGET (window->spin_generations),
02278     _("Number of generations for the genetic algorithm"));
02279     window->label_mutation = (GtkLabel *) gtk_label_new (_("Mutation ratio"));
02280     window->spin_mutation
02281     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02282     gtk_widget_set_tooltip_text
02283     (GTK_WIDGET (window->spin_mutation),
02284     _("Ratio of mutation for the genetic algorithm"));
02285     window->label_reproduction
02286     = (GtkLabel *) gtk_label_new (_("Reproduction ratio"));
02287     window->spin_reproduction
02288     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02289     gtk_widget_set_tooltip_text
02290     (GTK_WIDGET (window->spin_reproduction),
02291     _("Ratio of reproduction for the genetic algorithm"));
02292     window->label_adaptation = (GtkLabel *) gtk_label_new (_("Adaptation ratio"));
02293     window->spin_adaptation
02294     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02295     gtk_widget_set_tooltip_text
02296     (GTK_WIDGET (window->spin_adaptation),
02297     _("Ratio of adaptation for the genetic algorithm"));
02298     window->label_threshold = (GtkLabel *) gtk_label_new (_("Threshold"));
02299     window->spin_threshold = (GtkSpinButton *)
02300     gtk_spin_button_new_with_range (-G_MAXDOUBLE, G_MAXDOUBLE,
02301     precision[DEFAULT_PRECISION]);
02302     gtk_widget_set_tooltip_text
02303     (GTK_WIDGET (window->spin_threshold),
02304     _("Threshold in the objective function to finish the simulations"));
02305     window->scrolled_threshold =
02306     (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02307     gtk_container_add (GTK_CONTAINER (window->scrolled_threshold),
02308     GTK_WIDGET (window->spin_threshold));

```

```

02306 // gtk_widget_set_hexpand (GTK_WIDGET (window->scrolled_threshold), TRUE);
02307 // gtk_widget_set_halign (GTK_WIDGET (window->scrolled_threshold),
02308 //                          GTK_ALIGN_FILL);
02309
02310 // Creating the direction search method properties
02311 window->check_direction = (GtkCheckButton *)
02312   gtk_check_button_new_with_mnemonic (_("_Direction search method"));
02313 g_signal_connect (window->check_direction, "clicked",
02314   window_update, NULL);
02314 window->grid_direction = (GtkGrid *) gtk_grid_new ();
02315 window->button_direction[0] = (GtkRadioButton *)
02316   gtk_radio_button_new_with_mnemonic (NULL, label_direction[0]);
02317 gtk_grid_attach (window->grid_direction,
02318   GTK_WIDGET (window->button_direction[0]), 0, 0, 1, 1);
02319 g_signal_connect (window->button_direction[0], "clicked",
02320   window_update,
02321   NULL);
02321 for (i = 0; ++i < NDIRECTIONS;)
02322 {
02323   window->button_direction[i] = (GtkRadioButton *)
02324     gtk_radio_button_new_with_mnemonic
02325       (gtk_radio_button_get_group (window->button_direction[0]),
02326        label_direction[i]);
02327   gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_direction[i]),
02328     tip_direction[i]);
02329   gtk_grid_attach (window->grid_direction,
02330     GTK_WIDGET (window->button_direction[i]), 0, i, 1, 1);
02331   g_signal_connect (window->button_direction[i], "clicked",
02332     window_update, NULL);
02333 }
02334 window->label_steps = (GtkLabel *) gtk_label_new (_("Steps number"));
02335 window->spin_steps = (GtkSpinButton *)
02336   gtk_spin_button_new_with_range (1., 1.e12, 1.);
02337 gtk_widget_set_hexpand (GTK_WIDGET (window->spin_steps), TRUE);
02338 window->label_estimates
02339   = (GtkLabel *) gtk_label_new (_("Direction estimates number"));
02340 window->spin_estimates = (GtkSpinButton *)
02341   gtk_spin_button_new_with_range (1., 1.e3, 1.);
02342 window->label_relaxation
02343   = (GtkLabel *) gtk_label_new (_("Relaxation parameter"));
02344 window->spin_relaxation = (GtkSpinButton *)
02345   gtk_spin_button_new_with_range (0., 2., 0.001);
02346 gtk_grid_attach (window->grid_direction, GTK_WIDGET (
02347   window->label_steps),
02348   0, NDIRECTIONS, 1, 1);
02349 gtk_grid_attach (window->grid_direction, GTK_WIDGET (
02350   window->spin_steps),
02351   1, NDIRECTIONS, 1, 1);
02352 gtk_grid_attach (window->grid_direction,
02353   GTK_WIDGET (window->label_estimates), 0, NDIRECTIONS + 1,
02354   1, 1);
02355 gtk_grid_attach (window->grid_direction,
02356   GTK_WIDGET (window->spin_estimates), 1, NDIRECTIONS + 1, 1,
02357   1);
02358 gtk_grid_attach (window->grid_direction,
02359   GTK_WIDGET (window->label_relaxation), 0, NDIRECTIONS + 2,
02360   1, 1);
02361 gtk_grid_attach (window->grid_direction,
02362   GTK_WIDGET (window->spin_relaxation), 1, NDIRECTIONS + 2,
02363   1, 1);
02364 // Creating the array of algorithms
02365 window->grid_algorithm = (GtkGrid *) gtk_grid_new ();
02366 window->button_algorithm[0] = (GtkRadioButton *)
02367   gtk_radio_button_new_with_mnemonic (NULL, label_algorithm[0]);
02368 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_algorithm[0]),
02369   tip_algorithm[0]);
02370 gtk_grid_attach (window->grid_algorithm,
02371   GTK_WIDGET (window->button_algorithm[0]), 0, 0, 1, 1);
02372 g_signal_connect (window->button_algorithm[0], "clicked",
02373   window_set_algorithm, NULL);
02374 for (i = 0; ++i < NALGORITHMS;)
02375 {
02376   window->button_algorithm[i] = (GtkRadioButton *)
02377     gtk_radio_button_new_with_mnemonic
02378       (gtk_radio_button_get_group (window->button_algorithm[0]),
02379        label_algorithm[i]);
02380   gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_algorithm[i]),
02381     tip_algorithm[i]);
02382   gtk_grid_attach (window->grid_algorithm,
02383     GTK_WIDGET (window->button_algorithm[i]), 0, i, 1, 1);
02384   g_signal_connect (window->button_algorithm[i], "clicked",
02385     window_set_algorithm, NULL);
02386 }
02387 gtk_grid_attach (window->grid_algorithm,
02388   GTK_WIDGET (window->label_simulations), 0,
02389   NALGORITHMS, 1, 1);

```

```

02389  gtk_grid_attach (window->grid_algorithm,
02390                  GTK_WIDGET (window->spin_simulations), 1, NALGORITHMS, 1, 1);
02391  gtk_grid_attach (window->grid_algorithm,
02392                  GTK_WIDGET (window->label_iterations), 0, NALGORITHMS + 1,
02393                  1, 1);
02394  gtk_grid_attach (window->grid_algorithm,
02395                  GTK_WIDGET (window->spin_iterations), 1, NALGORITHMS + 1,
02396                  1, 1);
02397  gtk_grid_attach (window->grid_algorithm,
02398                  GTK_WIDGET (window->label_tolerance), 0, NALGORITHMS + 2,
02399                  1, 1);
02400  gtk_grid_attach (window->grid_algorithm,
02401                  GTK_WIDGET (window->spin_tolerance), 1, NALGORITHMS + 2, 1,
02402                  1);
02403  gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (
02404                  window->label_bests),
02405                  0, NALGORITHMS + 3, 1, 1);
02406  gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (
02407                  window->spin_bests), 1,
02408                  NALGORITHMS + 3, 1, 1);
02409  gtk_grid_attach (window->grid_algorithm,
02410                  GTK_WIDGET (window->label_population), 0, NALGORITHMS + 4,
02411                  1, 1);
02412  gtk_grid_attach (window->grid_algorithm,
02413                  GTK_WIDGET (window->spin_population), 1, NALGORITHMS + 4,
02414                  1, 1);
02415  gtk_grid_attach (window->grid_algorithm,
02416                  GTK_WIDGET (window->label_generations), 0, NALGORITHMS + 5,
02417                  1, 1);
02418  gtk_grid_attach (window->grid_algorithm,
02419                  GTK_WIDGET (window->spin_generations), 1, NALGORITHMS + 5,
02420                  1, 1);
02421  gtk_grid_attach (window->grid_algorithm,
02422                  GTK_WIDGET (window->label_mutation), 0, NALGORITHMS + 6, 1,
02423                  1);
02424  gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (
02425                  window->spin_mutation),
02426                  1, NALGORITHMS + 6, 1, 1);
02427  gtk_grid_attach (window->grid_algorithm,
02428                  GTK_WIDGET (window->label_reproduction), 0,
02429                  NALGORITHMS + 7, 1, 1);
02430  gtk_grid_attach (window->grid_algorithm,
02431                  GTK_WIDGET (window->spin_reproduction), 1, NALGORITHMS + 7,
02432                  1, 1);
02433  gtk_grid_attach (window->grid_algorithm,
02434                  GTK_WIDGET (window->label_adaptation), 0, NALGORITHMS + 8,
02435                  1, 1);
02436  gtk_grid_attach (window->grid_algorithm,
02437                  GTK_WIDGET (window->spin_adaptation), 1, NALGORITHMS + 8,
02438                  1, 1);
02439  gtk_grid_attach (window->grid_algorithm,
02440                  GTK_WIDGET (window->check_direction), 0, NALGORITHMS + 9,
02441                  2, 1);
02442  gtk_grid_attach (window->grid_algorithm,
02443                  GTK_WIDGET (window->grid_direction), 0, NALGORITHMS + 10,
02444                  2, 1);
02445  gtk_grid_attach (window->grid_algorithm,
02446                  GTK_WIDGET (window->label_threshold), 0, NALGORITHMS + 11,
02447                  1, 1);
02448  gtk_grid_attach (window->grid_algorithm,
02449                  GTK_WIDGET (window->scrolled_threshold), 1,
02450                  NALGORITHMS + 11, 1, 1);
02451  window->frame_algorithm = (GtkFrame *) gtk_frame_new (_("Algorithm"));
02452  gtk_container_add (GTK_CONTAINER (window->frame_algorithm),
02453                    GTK_WIDGET (window->grid_algorithm));
02454  // Creating the variable widgets
02455  window->combo_variable = (GtkComboBoxText *) gtk_combo_box_text_new ();
02456  gtk_widget_set_tooltip_text
02457  (GTK_WIDGET (window->combo_variable), _("Variables selector"));
02458  window->id_variable = g_signal_connect
02459  (window->combo_variable, "changed", window_set_variable, NULL);
02460  window->button_add_variable
02461  = (GtkButton *) gtk_button_new_from_icon_name ("list-add",
02462                                                GTK_ICON_SIZE_BUTTON);
02463  g_signal_connect
02464  (window->button_add_variable, "clicked",
02465   window_add_variable, NULL);
02466  gtk_widget_set_tooltip_text
02467  (GTK_WIDGET (window->button_add_variable), _("Add variable"));
02468  window->button_remove_variable
02469  = (GtkButton *) gtk_button_new_from_icon_name ("list-remove",
02470                                                GTK_ICON_SIZE_BUTTON);
02471  g_signal_connect
02472  (window->button_remove_variable, "clicked",
02473   window_remove_variable, NULL);
02474  gtk_widget_set_tooltip_text

```

```

02471     (GTK_WIDGET (window->button_remove_variable), _("Remove variable"));
02472     window->label_variable = (GtkLabel *) gtk_label_new (_("Name"));
02473     window->entry_variable = (GtkEntry *) gtk_entry_new ();
02474     gtk_widget_set_tooltip_text
02475         (GTK_WIDGET (window->entry_variable), _("Variable name"));
02476     gtk_widget_set_hexpand (GTK_WIDGET (window->entry_variable), TRUE);
02477     window->id_variable_label = g_signal_connect
02478         (window->entry_variable, "changed",
02479          window_label_variable, NULL);
02479     window->label_min = (GtkLabel *) gtk_label_new (_("Minimum"));
02480     window->spin_min = (GtkSpinButton *) gtk_spin_button_new_with_range
02481         (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02482     gtk_widget_set_tooltip_text
02483         (GTK_WIDGET (window->spin_min), _("Minimum initial value of the variable"));
02484     window->scrolled_min
02485         = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02486     gtk_container_add (GTK_CONTAINER (window->scrolled_min),
02487                        GTK_WIDGET (window->spin_min));
02488     g_signal_connect (window->spin_min, "value-changed",
02489                       window_rangemin_variable, NULL);
02490     window->label_max = (GtkLabel *) gtk_label_new (_("Maximum"));
02491     window->spin_max = (GtkSpinButton *) gtk_spin_button_new_with_range
02492         (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02493     gtk_widget_set_tooltip_text
02494         (GTK_WIDGET (window->spin_max), _("Maximum initial value of the variable"));
02495     window->scrolled_max
02496         = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02497     gtk_container_add (GTK_CONTAINER (window->scrolled_max),
02498                        GTK_WIDGET (window->spin_max));
02499     g_signal_connect (window->spin_max, "value-changed",
02500                       window_rangemax_variable, NULL);
02501     window->check_minabs = (GtkCheckButton *)
02502         gtk_check_button_new_with_mnemonic (_("Absolute minimum"));
02503     g_signal_connect (window->check_minabs, "toggled",
02504                       window_update, NULL);
02504     window->spin_minabs = (GtkSpinButton *) gtk_spin_button_new_with_range
02505         (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02506     gtk_widget_set_tooltip_text
02507         (GTK_WIDGET (window->spin_minabs),
02508          _("Minimum allowed value of the variable"));
02509     window->scrolled_minabs
02510         = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02511     gtk_container_add (GTK_CONTAINER (window->scrolled_minabs),
02512                        GTK_WIDGET (window->spin_minabs));
02513     g_signal_connect (window->spin_minabs, "value-changed",
02514                       window_rangeminabs_variable, NULL);
02515     window->check_maxabs = (GtkCheckButton *)
02516         gtk_check_button_new_with_mnemonic (_("Absolute maximum"));
02517     g_signal_connect (window->check_maxabs, "toggled",
02518                       window_update, NULL);
02518     window->spin_maxabs = (GtkSpinButton *) gtk_spin_button_new_with_range
02519         (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02520     gtk_widget_set_tooltip_text
02521         (GTK_WIDGET (window->spin_maxabs),
02522          _("Maximum allowed value of the variable"));
02523     window->scrolled_maxabs
02524         = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02525     gtk_container_add (GTK_CONTAINER (window->scrolled_maxabs),
02526                        GTK_WIDGET (window->spin_maxabs));
02527     g_signal_connect (window->spin_maxabs, "value-changed",
02528                       window_rangemaxabs_variable, NULL);
02529     window->label_precision = (GtkLabel *) gtk_label_new (_("Precision digits"));
02530     window->spin_precision = (GtkSpinButton *)
02531         gtk_spin_button_new_with_range (0., (gdouble) DEFAULT_PRECISION, 1.);
02532     gtk_widget_set_tooltip_text
02533         (GTK_WIDGET (window->spin_precision),
02534          _("Number of precision floating point digits\n"
02535            "0 is for integer numbers"));
02536     g_signal_connect (window->spin_precision, "value-changed",
02537                       window_precision_variable, NULL);
02538     window->label_sweeps = (GtkLabel *) gtk_label_new (_("Sweeps number"));
02539     window->spin_sweeps =
02540         (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02541     gtk_widget_set_tooltip_text (GTK_WIDGET (window->spin_sweeps),
02542                                  _("Number of steps sweeping the variable"));
02543     g_signal_connect (window->spin_sweeps, "value-changed",
02544                       window_update_variable, NULL);
02545     window->label_bits = (GtkLabel *) gtk_label_new (_("Bits number"));
02546     window->spin_bits
02547         = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 64., 1.);
02548     gtk_widget_set_tooltip_text
02549         (GTK_WIDGET (window->spin_bits),
02550          _("Number of bits to encode the variable"));
02551     g_signal_connect
02552         (window->spin_bits, "value-changed", window_update_variable, NULL);
02553     window->label_step = (GtkLabel *) gtk_label_new (_("Step size"));

```



```

02554 window->spin_step = (GtkSpinButton *) gtk_spin_button_new_with_range
02555 (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02556 gtk_widget_set_tooltip_text
02557 (GTK_WIDGET (window->spin_step),
02558  _("Initial step size for the direction search method"));
02559 window->scrolled_step
02560 = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02561 gtk_container_add (GTK_CONTAINER (window->scrolled_step),
02562                   GTK_WIDGET (window->spin_step));
02563 g_signal_connect
02564 (window->spin_step, "value-changed", window_step_variable, NULL);
02565 window->grid_variable = (GtkGrid *) gtk_grid_new ();
02566 gtk_grid_attach (window->grid_variable,
02567                 GTK_WIDGET (window->combo_variable), 0, 0, 2, 1);
02568 gtk_grid_attach (window->grid_variable,
02569                 GTK_WIDGET (window->button_add_variable), 2, 0, 1, 1);
02570 gtk_grid_attach (window->grid_variable,
02571                 GTK_WIDGET (window->button_remove_variable), 3, 0, 1, 1);
02572 gtk_grid_attach (window->grid_variable,
02573                 GTK_WIDGET (window->label_variable), 0, 1, 1, 1);
02574 gtk_grid_attach (window->grid_variable,
02575                 GTK_WIDGET (window->entry_variable), 1, 1, 3, 1);
02576 gtk_grid_attach (window->grid_variable,
02577                 GTK_WIDGET (window->label_min), 0, 2, 1, 1);
02578 gtk_grid_attach (window->grid_variable,
02579                 GTK_WIDGET (window->scrolled_min), 1, 2, 3, 1);
02580 gtk_grid_attach (window->grid_variable,
02581                 GTK_WIDGET (window->label_max), 0, 3, 1, 1);
02582 gtk_grid_attach (window->grid_variable,
02583                 GTK_WIDGET (window->scrolled_max), 1, 3, 3, 1);
02584 gtk_grid_attach (window->grid_variable,
02585                 GTK_WIDGET (window->check_minabs), 0, 4, 1, 1);
02586 gtk_grid_attach (window->grid_variable,
02587                 GTK_WIDGET (window->scrolled_minabs), 1, 4, 3, 1);
02588 gtk_grid_attach (window->grid_variable,
02589                 GTK_WIDGET (window->check_maxabs), 0, 5, 1, 1);
02590 gtk_grid_attach (window->grid_variable,
02591                 GTK_WIDGET (window->scrolled_maxabs), 1, 5, 3, 1);
02592 gtk_grid_attach (window->grid_variable,
02593                 GTK_WIDGET (window->label_precision), 0, 6, 1, 1);
02594 gtk_grid_attach (window->grid_variable,
02595                 GTK_WIDGET (window->spin_precision), 1, 6, 3, 1);
02596 gtk_grid_attach (window->grid_variable,
02597                 GTK_WIDGET (window->label_sweeps), 0, 7, 1, 1);
02598 gtk_grid_attach (window->grid_variable,
02599                 GTK_WIDGET (window->spin_sweeps), 1, 7, 3, 1);
02600 gtk_grid_attach (window->grid_variable,
02601                 GTK_WIDGET (window->label_bits), 0, 8, 1, 1);
02602 gtk_grid_attach (window->grid_variable,
02603                 GTK_WIDGET (window->spin_bits), 1, 8, 3, 1);
02604 gtk_grid_attach (window->grid_variable,
02605                 GTK_WIDGET (window->label_step), 0, 9, 1, 1);
02606 gtk_grid_attach (window->grid_variable,
02607                 GTK_WIDGET (window->scrolled_step), 1, 9, 3, 1);
02608 window->frame_variable = (GtkFrame *) gtk_frame_new (_("Variable"));
02609 gtk_container_add (GTK_CONTAINER (window->frame_variable),
02610                   GTK_WIDGET (window->grid_variable));
02611
02612 // Creating the experiment widgets
02613 window->combo_experiment = (GtkComboBoxText *) gtk_combo_box_text_new ();
02614 gtk_widget_set_tooltip_text (GTK_WIDGET (window->combo_experiment),
02615                             _("Experiment selector"));
02616 window->id_experiment = g_signal_connect
02617 (window->combo_experiment, "changed",
02618  window_set_experiment, NULL);
02619 window->button_add_experiment
02620 = (GtkButton *) gtk_button_new_from_icon_name ("list-add",
02621                                                GTK_ICON_SIZE_BUTTON);
02622 g_signal_connect
02623 (window->button_add_experiment, "clicked",
02624  window_add_experiment, NULL);
02625 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_add_experiment),
02626                             _("Add experiment"));
02627 window->button_remove_experiment
02628 = (GtkButton *) gtk_button_new_from_icon_name ("list-remove",
02629                                                GTK_ICON_SIZE_BUTTON);
02630 g_signal_connect (window->button_remove_experiment, "clicked",
02631                  window_remove_experiment, NULL);
02632 gtk_widget_set_tooltip_text (GTK_WIDGET (window->
02633 button_remove_experiment),
02634                             _("Remove experiment"));
02635 window->label_experiment
02636 = (GtkLabel *) gtk_label_new (_("Experimental data file"));
02637 window->button_experiment = (GtkFileChooserButton *)
02638   gtk_file_chooser_button_new (_("Experimental data file"),
02639                               GTK_FILE_CHOOSER_ACTION_OPEN);
02640 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_experiment),

```

```

02638         _("Experimental data file"));
02639     window->id_experiment_name
02640     = g_signal_connect (window->button_experiment, "selection-changed",
02641         window_name_experiment, NULL);
02642     gtk_widget_set_hexpend (GTK_WIDGET (window->button_experiment), TRUE);
02643     window->label_weight = (GtkLabel *) gtk_label_new (_("Weight"));
02644     window->spin_weight
02645     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02646     gtk_widget_set_tooltip_text
02647     (GTK_WIDGET (window->spin_weight),
02648         _("Weight factor to build the objective function"));
02649     g_signal_connect
02650     (window->spin_weight, "value-changed",
02651         window_weight_experiment, NULL);
02652     window->grid_experiment = (GtkGrid *) gtk_grid_new ();
02653     gtk_grid_attach (window->grid_experiment,
02654         GTK_WIDGET (window->combo_experiment), 0, 0, 2, 1);
02655     gtk_grid_attach (window->grid_experiment,
02656         GTK_WIDGET (window->button_add_experiment), 2, 0, 1, 1);
02657     gtk_grid_attach (window->grid_experiment,
02658         GTK_WIDGET (window->button_remove_experiment), 3, 0, 1, 1);
02659 ;
02660     gtk_grid_attach (window->grid_experiment,
02661         GTK_WIDGET (window->label_experiment), 0, 1, 1, 1);
02662     gtk_grid_attach (window->grid_experiment,
02663         GTK_WIDGET (window->button_experiment), 1, 1, 3, 1);
02664     gtk_grid_attach (window->grid_experiment,
02665         GTK_WIDGET (window->label_weight), 0, 2, 1, 1);
02666     gtk_grid_attach (window->grid_experiment,
02667         GTK_WIDGET (window->spin_weight), 1, 2, 3, 1);
02668     for (i = 0; i < MAX_NINPUTS; ++i)
02669     {
02670         snprintf (buffer3, 64, "%s %u", _("Input template"), i + 1);
02671         window->check_template[i] = (GtkCheckButton *)
02672             gtk_check_button_new_with_label (buffer3);
02673         window->id_template[i]
02674         = g_signal_connect (window->check_template[i], "toggled",
02675             window_inputs_experiment, NULL);
02676         gtk_grid_attach (window->grid_experiment,
02677             GTK_WIDGET (window->check_template[i]), 0, 3 + i, 1, 1);
02678         window->button_template[i] =
02679             (GtkFileChooserButton *)
02680             gtk_file_chooser_button_new (_("Input template"),
02681                 GTK_FILE_CHOOSER_ACTION_OPEN);
02682         gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_template[i]),
02683             _("Experimental input template file"));
02684         window->id_input[i] =
02685             g_signal_connect_swapped (window->button_template[i],
02686                 "selection-changed",
02687                 (void (*)(void *)) window_template_experiment,
02688                 (void *) (size_t) i);
02689         gtk_grid_attach (window->grid_experiment,
02690             GTK_WIDGET (window->button_template[i]), 1, 3 + i, 3, 1);
02691     }
02692     window->frame_experiment = (GtkFrame *) gtk_frame_new (_("Experiment"));
02693     gtk_container_add (GTK_CONTAINER (window->frame_experiment),
02694         GTK_WIDGET (window->grid_experiment));
02695 // Creating the error norm widgets
02696 window->frame_norm = (GtkFrame *) gtk_frame_new (_("Error norm"));
02697 window->grid_norm = (GtkGrid *) gtk_grid_new ();
02698 gtk_container_add (GTK_CONTAINER (window->frame_norm),
02699     GTK_WIDGET (window->grid_norm));
02700 window->button_norm[0] = (GtkRadioButton *)
02701     gtk_radio_button_new_with_mnemonic (NULL, label_norm[0]);
02702 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_norm[0]),
02703     tip_norm[0]);
02704 gtk_grid_attach (window->grid_norm,
02705     GTK_WIDGET (window->button_norm[0]), 0, 0, 1, 1);
02706 g_signal_connect (window->button_norm[0], "clicked",
02707     window_update, NULL);
02708 for (i = 0; ++i < NNORMS;)
02709 {
02710     window->button_norm[i] = (GtkRadioButton *)
02711         gtk_radio_button_new_with_mnemonic
02712         (gtk_radio_button_get_group (window->button_norm[0]), label_norm[i]);
02713     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_norm[i]),
02714         tip_norm[i]);
02715     gtk_grid_attach (window->grid_norm,
02716         GTK_WIDGET (window->button_norm[i]), 0, i, 1, 1);
02717     g_signal_connect (window->button_norm[i], "clicked",
02718         window_update, NULL);
02719 }
02720 window->label_p = (GtkLabel *) gtk_label_new (_("P parameter"));
02721 gtk_grid_attach (window->grid_norm, GTK_WIDGET (window->
02722     label_p), 1, 1, 1, 1);
02723 window->spin_p =

```

```

02720     (GtkSpinButton *) gtk_spin_button_new_with_range (-G_MAXDOUBLE,
02721                                                       G_MAXDOUBLE, 0.01);
02722     gtk_widget_set_tooltip_text (GTK_WIDGET (window->spin_p),
02723                                  _("P parameter for the P error norm"));
02724     window->scrolled_p =
02725         (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02726     gtk_container_add (GTK_CONTAINER (window->scrolled_p),
02727                        GTK_WIDGET (window->spin_p));
02728     gtk_widget_set_hexpand (GTK_WIDGET (window->scrolled_p), TRUE);
02729     gtk_widget_set_halign (GTK_WIDGET (window->scrolled_p), GTK_ALIGN_FILL);
02730     gtk_grid_attach (window->grid_norm, GTK_WIDGET (window->
02731 scrolled_p),
02732                     1, 2, 1, 2);
02733
02734     // Creating the grid and attaching the widgets to the grid
02735     window->grid = (GtkGrid *) gtk_grid_new ();
02736     gtk_grid_attach (window->grid, GTK_WIDGET (window->bar_buttons), 0, 0, 3, 1);
02737     gtk_grid_attach (window->grid, GTK_WIDGET (window->grid_files), 0, 1, 1, 1);
02738     gtk_grid_attach (window->grid,
02739                      GTK_WIDGET (window->frame_algorithm), 0, 2, 1, 1);
02740     gtk_grid_attach (window->grid,
02741                      GTK_WIDGET (window->frame_variable), 1, 2, 1, 1);
02742     gtk_grid_attach (window->grid,
02743                      GTK_WIDGET (window->frame_experiment), 2, 2, 1, 1);
02744     gtk_grid_attach (window->grid, GTK_WIDGET (window->frame_norm), 1, 1, 2, 1);
02745     gtk_container_add (GTK_CONTAINER (window->window), GTK_WIDGET (
02746 window->grid));
02747
02748     // Setting the window logo
02749     window->logo = gdk_pixbuf_new_from_xpm_data (logo);
02750     gtk_window_set_icon (window->window, window->logo);
02751
02752     // Showing the window
02753     gtk_widget_show_all (GTK_WIDGET (window->window));
02754
02755     // In GTK+ 3.16 and 3.18 the default scrolled size is wrong
02756     #if GTK_MINOR_VERSION >= 16
02757     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_min), -1, 40);
02758     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_max), -1, 40);
02759     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_minabs), -1, 40);
02760     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_maxabs), -1, 40);
02761     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_step), -1, 40);
02762     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_p), -1, 40);
02763     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_threshold), -1, 40);
02764     #endif
02765
02766     // Reading initial example
02767     input_new ();
02768     buffer2 = g_get_current_dir ();
02769     buffer = g_build_filename (buffer2, "..", "tests", "test1", INPUT_FILE, NULL);
02770     g_free (buffer2);
02771     window_read (buffer);
02772     g_free (buffer);
02773
02774     #if DEBUG_INTERFACE
02775     fprintf (stderr, "window_new: start\n");
02776     #endif
02777 }

```

#### 4.11.2.10 window\_read()

```

int window_read (
    char * filename )

```

Function to read the input data of a file.

##### Parameters

<i>filename</i>	File name.
-----------------	------------

## Returns

1 on succes, 0 on error.

Definition at line 1873 of file [interface.c](#).

```

01874 {
01875     unsigned int i;
01876     char *buffer;
01877     #if DEBUG_INTERFACE
01878     fprintf (stderr, "window_read: start\n");
01879     #endif
01880
01881     // Reading new input file
01882     input_free ();
01883     if (!input_open (filename))
01884     {
01885         #if DEBUG_INTERFACE
01886         fprintf (stderr, "window_read: end\n");
01887         #endif
01888         return 0;
01889     }
01890
01891     // Setting GTK+ widgets data
01892     gtk_entry_set_text (window->entry_result, input->result);
01893     gtk_entry_set_text (window->entry_variables, input->
variables);
01894     buffer = g_build_filename (input->directory, input->
simulator, NULL);
01895     gtk_file_chooser_set_filename (GTK_FILE_CHOOSER
(window->button_simulator), buffer);
01896     g_free (buffer);
01897     gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON (window->check_evaluator),
(size_t) input->evaluator);
01898     if (input->evaluator)
01899     {
01900         buffer = g_build_filename (input->directory, input->
evaluator, NULL);
01901         gtk_file_chooser_set_filename (GTK_FILE_CHOOSER
(window->button_evaluator), buffer);
01902         g_free (buffer);
01903     }
01904     gtk_toggle_button_set_active
01905     (GTK_TOGGLE_BUTTON (window->button_algorithm[input->
algorithm]), TRUE);
01906     switch (input->algorithm)
01907     {
01908     case ALGORITHM_MONTE_CARLO:
01909         gtk_spin_button_set_value (window->spin_simulations,
(gdouble) input->nsimulations);
01910     case ALGORITHM_SWEEP:
01911         gtk_spin_button_set_value (window->spin_iterations,
(gdouble) input->niterations);
01912         gtk_spin_button_set_value (window->spin_bests, (gdouble)
input->nbest);
01913         gtk_spin_button_set_value (window->spin_tolerance,
input->tolerance);
01914         gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON
(window->check_direction),
input->nsteps);
01915         if (input->nsteps)
01916         {
01917             gtk_toggle_button_set_active
01918             (GTK_TOGGLE_BUTTON (window->button_direction
[input->direction]), TRUE);
01919             gtk_spin_button_set_value (window->spin_steps,
(gdouble) input->nsteps);
01920             gtk_spin_button_set_value (window->spin_relaxation,
(gdouble) input->relaxation);
01921             switch (input->direction)
01922             {
01923             case DIRECTION_METHOD_RANDOM:
01924                 gtk_spin_button_set_value (window->spin_estimates,
(gdouble) input->nestimates);
01925             }
01926         }
01927         break;
01928     default:
01929         gtk_spin_button_set_value (window->spin_population,
(gdouble) input->nsimulations);
01930         gtk_spin_button_set_value (window->spin_generations,
(gdouble) input->niterations);
01931         gtk_spin_button_set_value (window->spin_mutation, input->
mutation_ratio);


```

```

01944     gtk_spin_button_set_value (window->spin_reproduction,
01945                               input->reproduction_ratio);
01946     gtk_spin_button_set_value (window->spin_adaptation,
01947                               input->adaptation_ratio);
01948 }
01949 gtk_toggle_button_set_active
01950 (GTK_TOGGLE_BUTTON (window->button_norm[input->norm]), TRUE);
01951 gtk_spin_button_set_value (window->spin_p, input->p);
01952 gtk_spin_button_set_value (window->spin_threshold, input->
threshold);
01953 g_signal_handler_block (window->combo_experiment, window->
id_experiment);
01954 g_signal_handler_block (window->button_experiment,
01955                         window->id_experiment_name);
01956 gtk_combo_box_text_remove_all (window->combo_experiment);
01957 for (i = 0; i < input->nexperiments; ++i)
01958     gtk_combo_box_text_append_text (window->combo_experiment,
01959                                     input->experiment[i].name);
01960 g_signal_handler_unblock
01961 (window->button_experiment, window->
id_experiment_name);
01962 g_signal_handler_unblock (window->combo_experiment,
01963                         window->id_experiment);
01964 g_signal_handler_block (window->combo_variable, window->
id_variable);
01965 g_signal_handler_block (window->entry_variable, window->
id_variable_label);
01966 gtk_combo_box_text_remove_all (window->combo_variable);
01967 for (i = 0; i < input->nvariables; ++i)
01968     gtk_combo_box_text_append_text (window->combo_variable,
01969                                     input->variable[i].name);
01970 g_signal_handler_unblock (window->entry_variable, window->
id_variable_label);
01971 g_signal_handler_unblock (window->combo_variable, window->
id_variable);
01972 gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_variable), 0);
01973 window_set_variable ();
01974 window_update ();
01975
01976 #if DEBUG_INTERFACE
01977     fprintf (stderr, "window_read: end\n");
01978 #endif
01979     return 1;
01980 }

```

Here is the call graph for this function:

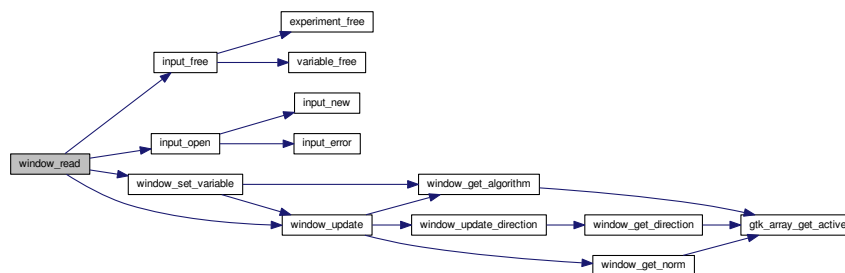

#### 4.11.2.11 window\_save()

```
int window_save ( )
```

Function to save the input file.

## Returns

1 on OK, 0 on Cancel.

Definition at line 818 of file [interface.c](#).

```

00819 {
00820     GtkFileChooserDialog *dlg;
00821     GtkFileFilter *filter1, *filter2;
00822     char *buffer;
00823
00824 #if DEBUG_INTERFACE
00825     fprintf (stderr, "window_save: start\n");
00826 #endif
00827
00828     // Opening the saving dialog
00829     dlg = (GtkFileChooserDialog *)
00830         gtk_file_chooser_dialog_new (_("Save file"),
00831                                     window->window,
00832                                     GTK_FILE_CHOOSER_ACTION_SAVE,
00833                                     _("_Cancel"), GTK_RESPONSE_CANCEL,
00834                                     _("_OK"), GTK_RESPONSE_OK, NULL);
00835     gtk_file_chooser_set_do_overwrite_confirmation (GTK_FILE_CHOOSER (dlg), TRUE);
00836     buffer = g_build_filename (input->directory, input->name, NULL);
00837     gtk_file_chooser_set_filename (GTK_FILE_CHOOSER (dlg), buffer);
00838     g_free (buffer);
00839
00840     // Adding XML filter
00841     filter1 = (GtkFileFilter *) gtk_file_filter_new ();
00842     gtk_file_filter_set_name (filter1, "XML");
00843     gtk_file_filter_add_pattern (filter1, "*.xml");
00844     gtk_file_filter_add_pattern (filter1, "*.XML");
00845     gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter1);
00846
00847     // Adding JSON filter
00848     filter2 = (GtkFileFilter *) gtk_file_filter_new ();
00849     gtk_file_filter_set_name (filter2, "JSON");
00850     gtk_file_filter_add_pattern (filter2, "*.json");
00851     gtk_file_filter_add_pattern (filter2, "*.JSON");
00852     gtk_file_filter_add_pattern (filter2, "*.js");
00853     gtk_file_filter_add_pattern (filter2, "*.JS");
00854     gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter2);
00855
00856     if (input->type == INPUT_TYPE_XML)
00857         gtk_file_chooser_set_filter (GTK_FILE_CHOOSER (dlg), filter1);
00858     else
00859         gtk_file_chooser_set_filter (GTK_FILE_CHOOSER (dlg), filter2);
00860
00861     // If OK response then saving
00862     if (gtk_dialog_run (GTK_DIALOG (dlg)) == GTK_RESPONSE_OK)
00863     {
00864         // Setting input file type
00865         filter1 = gtk_file_chooser_get_filter (GTK_FILE_CHOOSER (dlg));
00866         buffer = (char *) gtk_file_filter_get_name (filter1);
00867         if (!strcmp (buffer, "XML"))
00868             input->type = INPUT_TYPE_XML;
00869         else
00870             input->type = INPUT_TYPE_JSON;
00871
00872         // Adding properties to the root XML node
00873         input->simulator = gtk_file_chooser_get_filename
00874             (GTK_FILE_CHOOSER (window->button_simulator));
00875         if (gtk_toggle_button_get_active
00876             (GTK_TOGGLE_BUTTON (window->check_evaluator)))
00877             input->evaluator = gtk_file_chooser_get_filename
00878                 (GTK_FILE_CHOOSER (window->button_evaluator));
00879         else
00880             input->evaluator = NULL;
00881         if (input->type == INPUT_TYPE_XML)
00882         {
00883             input->result
00884                 = (char *) xmlStrdup ((const xmlChar *)
00885                                     gtk_entry_get_text (window->entry_result));
00886             input->variables
00887                 = (char *) xmlStrdup ((const xmlChar *)
00888                                     gtk_entry_get_text (window->
00889                                     entry_variables));
00890         }
00891         else
00892         {
00893             input->result = g_strdup (gtk_entry_get_text (window->
00894             entry_result));
00895             input->variables =
00896                 g_strdup (gtk_entry_get_text (window->entry_variables));
00897         }
00898     }
00899 }

```

```

00895     }
00896
00897     // Setting the algorithm
00898     switch (window_get_algorithm ())
00899     {
00900     case ALGORITHM_MONTE_CARLO:
00901         input->algorithm = ALGORITHM_MONTE_CARLO;
00902         input->nsimulations
00903             = gtk_spin_button_get_value_as_int (window->spin_simulations);
00904         input->niterations
00905             = gtk_spin_button_get_value_as_int (window->spin_iterations);
00906         input->tolerance = gtk_spin_button_get_value (window->
spin_tolerance);
00907         input->nbest = gtk_spin_button_get_value_as_int (window->
spin_best);
00908         window_save_direction ();
00909         break;
00910     case ALGORITHM_SWEEP:
00911         input->algorithm = ALGORITHM_SWEEP;
00912         input->niterations
00913             = gtk_spin_button_get_value_as_int (window->spin_iterations);
00914         input->tolerance = gtk_spin_button_get_value (window->
spin_tolerance);
00915         input->nbest = gtk_spin_button_get_value_as_int (window->
spin_best);
00916         window_save_direction ();
00917         break;
00918     default:
00919         input->algorithm = ALGORITHM_GENETIC;
00920         input->nsimulations
00921             = gtk_spin_button_get_value_as_int (window->spin_population);
00922         input->niterations
00923             = gtk_spin_button_get_value_as_int (window->spin_generations);
00924         input->mutation_ratio
00925             = gtk_spin_button_get_value (window->spin_mutation);
00926         input->reproduction_ratio
00927             = gtk_spin_button_get_value (window->spin_reproduction);
00928         input->adaptation_ratio
00929             = gtk_spin_button_get_value (window->spin_adaptation);
00930         break;
00931     }
00932     input->norm = window_get_norm ();
00933     input->p = gtk_spin_button_get_value (window->spin_p);
00934     input->threshold = gtk_spin_button_get_value (window->
spin_threshold);
00935
00936     // Saving the XML file
00937     buffer = gtk_file_chooser_get_filename (GTK_FILE_CHOOSER (dlg));
00938     input_save (buffer);
00939
00940     // Closing and freeing memory
00941     g_free (buffer);
00942     gtk_widget_destroy (GTK_WIDGET (dlg));
00943     #if DEBUG_INTERFACE
00944     fprintf (stderr, "window_save: end\n");
00945     #endif
00946     return 1;
00947 }
00948
00949 // Closing and freeing memory
00950 gtk_widget_destroy (GTK_WIDGET (dlg));
00951 #if DEBUG_INTERFACE
00952 fprintf (stderr, "window_save: end\n");
00953 #endif
00954 return 0;
00955 }

```

#### 4.11.2.12 window\_template\_experiment()

```

void window_template_experiment (
    void * data )

```

Function to update the experiment i-th input template in the main window.

## Parameters

<i>data</i>	Callback data (i-th input template).
-------------	--------------------------------------

Definition at line 1517 of file [interface.c](#).

```

01518 {
01519     unsigned int i, j;
01520     char *buffer;
01521     GFile *file1, *file2;
01522     #if DEBUG_INTERFACE
01523         fprintf (stderr, "window_template_experiment: start\n");
01524     #endif
01525     i = (size_t) data;
01526     j = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01527     file1
01528     = gtk_file_chooser_get_file (GTK_FILE_CHOOSER (window->button_template[i]));
01529     file2 = g_file_new_for_path (input->directory);
01530     buffer = g_file_get_relative_path (file2, file1);
01531     if (input->type == INPUT_TYPE_XML)
01532         input->experiment[j].template[i] = (char *) xmlStrdup ((xmlChar *) buffer);
01533     else
01534         input->experiment[j].template[i] = g_strdup (buffer);
01535     g_free (buffer);
01536     g_object_unref (file2);
01537     g_object_unref (file1);
01538     #if DEBUG_INTERFACE
01539         fprintf (stderr, "window_template_experiment: end\n");
01540     #endif
01541 }
```

## 4.12 interface.c

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #define _GNU_SOURCE
00033 #include "config.h"
00034 #include <stdio.h>
00035 #include <stdlib.h>
00036 #include <string.h>
00037 #include <math.h>
00038 #include <gsl/gsl_rng.h>
00039 #include <libxml/parser.h>
00040 #include <libintl.h>
00041 #include <glib.h>
00042 #include <glib/gstdio.h>
00043 #include <json-glib/json-glib.h>
```



```

00050 #ifdef G_OS_WIN32
00051 #include <windows.h>
00052 #endif
00053 #if HAVE_MPI
00054 #include <mpi.h>
00055 #endif
00056 #include <gio/gio.h>
00057 #include <gtk/gtk.h>
00058 #include "genetic/genetic.h"
00059 #include "utils.h"
00060 #include "experiment.h"
00061 #include "variable.h"
00062 #include "input.h"
00063 #include "optimize.h"
00064 #include "interface.h"
00065
00066 #define DEBUG_INTERFACE 0
00067
00068
00072 #ifdef G_OS_WIN32
00073 #define INPUT_FILE "test-ga-win.xml"
00074 #else
00075 #define INPUT_FILE "test-ga.xml"
00076 #endif
00077
00078 const char *logo[] = {
00079     "32 32 3 1",
00080     "    c None",
00081     ".    c #0000FF",
00082     "+    c #FF0000",
00083     "                                ",
00084     "                                ",
00085     "                                ",
00086     "    .    .    .    .    ",
00087     "    .    .    .    .    ",
00088     "    .    .    .    .    ",
00089     "    .    .    .    .    ",
00090     "    .    .    +++    .    ",
00091     "    .    .    +++++    .    ",
00092     "    .    .    +++++    .    ",
00093     "    .    .    +++++    .    ",
00094     "    +++    .    +++    +++    ",
00095     "    +++++    .    .    +++++    ",
00096     "    +++++    .    .    +++++    ",
00097     "    +++++    .    .    +++++    ",
00098     "    +++    .    .    +++    ",
00099     "    .    .    .    .    ",
00100     "    .    +++    .    .    ",
00101     "    .    +++++    .    .    ",
00102     "    .    +++++    .    .    ",
00103     "    .    +++++    .    .    ",
00104     "    .    +++    .    .    ",
00105     "    .    .    .    .    ",
00106     "    .    .    .    .    ",
00107     "    .    .    .    .    ",
00108     "    .    .    .    .    ",
00109     "    .    .    .    .    ",
00110     "    .    .    .    .    ",
00111     "    .    .    .    .    ",
00112     "                                ",
00113     "                                ",
00114     "                                ",
00115 };
00116
00117 /*
00118 const char * logo[] = {
00119     "32 32 3 1",
00120     "    c #FFFFFFFF",
00121     ".    c #00000000",
00122     "X    c #FFF0000000",
00123     "                                ",
00124     "                                ",
00125     "                                ",
00126     "    .    .    .    .    ",
00127     "    .    .    .    .    ",
00128     "    .    .    .    .    ",
00129     "    .    .    .    .    ",
00130     "    .    .    XXX    .    ",
00131     "    .    .    XXXXX    .    ",
00132     "    .    .    XXXXX    .    ",
00133     "    .    .    XXXXX    .    ",
00134     "    XXX    .    XXX    XXX    ",
00135     "    XXXXX    .    .    XXXXX    ",
00136     "    XXXXX    .    .    XXXXX    ",
00137     "    XXXXX    .    .    XXXXX    ",
00138     "    XXX    .    .    XXX    ",
00139     "    .    .    .    .    ",

```

```

00140 "      .      XXX      .      .      " ,
00141 "      .      XXXXX     .      .      " ,
00142 "      .      XXXXX     .      .      " ,
00143 "      .      XXXXX     .      .      " ,
00144 "      .      XXX      .      .      " ,
00145 "      .      .      .      .      .      " ,
00146 "      .      .      .      .      .      " ,
00147 "      .      .      .      .      .      " ,
00148 "      .      .      .      .      .      " ,
00149 "      .      .      .      .      .      " ,
00150 "      .      .      .      .      .      " ,
00151 "      .      .      .      .      .      " ,
00152 "      .      .      .      .      .      " ,
00153 "      .      .      .      .      .      " ,
00154 "      .      .      .      .      .      " };
00155 */
00156
00157 Options options[1];
00159 Running running[1];
00161 Window window[1];
00163
00170 void
00171 input_save_direction_xml (xmlNode * node)
00172 {
00173     #if DEBUG_INTERFACE
00174         fprintf (stderr, "input_save_direction_xml: start\n");
00175     #endif
00176     if (input->nsteps)
00177     {
00178         xml_node_set_uint (node, (const xmlChar *) LABEL_NSTEPS,
00179 input->nsteps);
00179         if (input->relaxation != DEFAULT_RELAXATION)
00180             xml_node_set_float (node, (const xmlChar *)
00181 LABEL_RELAXATION,
00182 input->relaxation);
00182         switch (input->direction)
00183         {
00184             case DIRECTION_METHOD_COORDINATES:
00185                 xmlSetProp (node, (const xmlChar *) LABEL_DIRECTION,
00186 (const xmlChar *) LABEL_COORDINATES);
00187                 break;
00188             default:
00189                 xmlSetProp (node, (const xmlChar *) LABEL_DIRECTION,
00190 (const xmlChar *) LABEL_RANDOM);
00191                 xml_node_set_uint (node, (const xmlChar *)
00192 LABEL_NESTIMATES,
00193 input->nestimates);
00194         }
00195     }
00196     #if DEBUG_INTERFACE
00197         fprintf (stderr, "input_save_direction_xml: end\n");
00198     #endif
00199 }
00206 void
00207 input_save_direction_json (JsonNode * node)
00208 {
00209     JsonObject *object;
00210     #if DEBUG_INTERFACE
00211         fprintf (stderr, "input_save_direction_json: start\n");
00212     #endif
00213     object = json_node_get_object (node);
00214     if (input->nsteps)
00215     {
00216         json_object_set_uint (object, LABEL_NSTEPS,
00217 input->nsteps);
00217         if (input->relaxation != DEFAULT_RELAXATION)
00218             json_object_set_float (object, LABEL_RELAXATION,
00219 input->relaxation);
00219         switch (input->direction)
00220         {
00221             case DIRECTION_METHOD_COORDINATES:
00222                 json_object_set_string_member (object, LABEL_DIRECTION,
00223 LABEL_COORDINATES);
00224                 break;
00225             default:
00226                 json_object_set_string_member (object, LABEL_DIRECTION,
00227 LABEL_RANDOM);
00227                 json_object_set_uint (object, LABEL_NESTIMATES,
00228 input->nestimates);
00229         }
00230     }
00230     #if DEBUG_INTERFACE
00231         fprintf (stderr, "input_save_direction_json: end\n");
00232     #endif
00233 }
00234

```

```

00241 void
00242 input_save_xml (xmlDoc * doc)
00243 {
00244     unsigned int i, j;
00245     char *buffer;
00246     xmlNode *node, *child;
00247     GFile *file, *file2;
00248
00249 #if DEBUG_INTERFACE
00250     fprintf (stderr, "input_save_xml: start\n");
00251 #endif
00252
00253     // Setting root XML node
00254     node = xmlNewDocNode (doc, 0, (const xmlChar *) LABEL_OPTIMIZE, 0);
00255     xmlDocSetRootElement (doc, node);
00256
00257     // Adding properties to the root XML node
00258     if (xmlStrcmp
00259         ((const xmlChar *) input->result, (const xmlChar *) result_name))
00260         xmlSetProp (node, (const xmlChar *) LABEL_RESULT_FILE,
00261                     (xmlChar *) input->result);
00262     if (xmlStrcmp
00263         ((const xmlChar *) input->variables, (const xmlChar *)
00264          variables_name))
00265         xmlSetProp (node, (const xmlChar *) LABEL_VARIABLES_FILE,
00266                     (xmlChar *) input->variables);
00267     file = g_file_new_for_path (input->directory);
00268     file2 = g_file_new_for_path (input->simulator);
00269     buffer = g_file_get_relative_path (file, file2);
00270     g_object_unref (file2);
00271     xmlSetProp (node, (const xmlChar *) LABEL_SIMULATOR, (xmlChar *) buffer);
00272     g_free (buffer);
00273     if (input->evaluator)
00274     {
00275         file2 = g_file_new_for_path (input->evaluator);
00276         buffer = g_file_get_relative_path (file, file2);
00277         g_object_unref (file2);
00278         if (xmlStrlen ((xmlChar *) buffer))
00279             xmlSetProp (node, (const xmlChar *) LABEL_EVALUATOR,
00280                         (xmlChar *) buffer);
00281         g_free (buffer);
00282     }
00283     if (input->seed != DEFAULT_RANDOM_SEED)
00284         xml_node_set_uint (node, (const xmlChar *) LABEL_SEED,
00285                           input->seed);
00286
00287     // Setting the algorithm
00288     buffer = (char *) g_slice_alloc (64);
00289     switch (input->algorithm)
00290     {
00291     case ALGORITHM_MONTE_CARLO:
00292         xmlSetProp (node, (const xmlChar *) LABEL_ALGORITHM,
00293                     (const xmlChar *) LABEL_MONTE_CARLO);
00294         snprintf (buffer, 64, "%u", input->nsimulations);
00295         xmlSetProp (node, (const xmlChar *) LABEL_NSIMULATIONS,
00296                     (xmlChar *) buffer);
00297         snprintf (buffer, 64, "%u", input->niterations);
00298         xmlSetProp (node, (const xmlChar *) LABEL_NITERATIONS,
00299                     (xmlChar *) buffer);
00300         snprintf (buffer, 64, "%.3lg", input->tolerance);
00301         xmlSetProp (node, (const xmlChar *) LABEL_TOLERANCE, (xmlChar *) buffer);
00302         snprintf (buffer, 64, "%u", input->nbest);
00303         xmlSetProp (node, (const xmlChar *) LABEL_NBEST, (xmlChar *) buffer);
00304         input_save_direction_xml (node);
00305         break;
00306     case ALGORITHM_SWEEP:
00307         xmlSetProp (node, (const xmlChar *) LABEL_ALGORITHM,
00308                     (const xmlChar *) LABEL_SWEEP);
00309         snprintf (buffer, 64, "%u", input->niterations);
00310         xmlSetProp (node, (const xmlChar *) LABEL_NITERATIONS,
00311                     (xmlChar *) buffer);
00312         snprintf (buffer, 64, "%.3lg", input->tolerance);
00313         xmlSetProp (node, (const xmlChar *) LABEL_TOLERANCE, (xmlChar *) buffer);
00314         snprintf (buffer, 64, "%u", input->nbest);
00315         xmlSetProp (node, (const xmlChar *) LABEL_NBEST, (xmlChar *) buffer);
00316         input_save_direction_xml (node);
00317         break;
00318     default:
00319         xmlSetProp (node, (const xmlChar *) LABEL_ALGORITHM,
00320                     (const xmlChar *) LABEL_GENETIC);
00321         snprintf (buffer, 64, "%u", input->nsimulations);
00322         xmlSetProp (node, (const xmlChar *) LABEL_NPOPULATION,
00323                     (xmlChar *) buffer);
00324         snprintf (buffer, 64, "%u", input->niterations);
00325         xmlSetProp (node, (const xmlChar *) LABEL_NGENERATIONS,
00326                     (xmlChar *) buffer);
00327         snprintf (buffer, 64, "%.3lg", input->mutation_ratio);

```

```

00326     xmlSetProp (node, (const xmlChar *) LABEL_MUTATION, (xmlChar *) buffer);
00327     snprintf (buffer, 64, "%.3lg", input->reproduction_ratio);
00328     xmlSetProp (node, (const xmlChar *) LABEL_REPRODUCTION,
00329                 (xmlChar *) buffer);
00330     snprintf (buffer, 64, "%.3lg", input->adaptation_ratio);
00331     xmlSetProp (node, (const xmlChar *) LABEL_ADAPTATION, (xmlChar *) buffer);
00332     break;
00333 }
00334 g_slice_free1 (64, buffer);
00335 if (input->threshold != 0.)
00336     xml_node_set_float (node, (const xmlChar *)
00337 LABEL_THRESHOLD,
00338                         input->threshold);
00339 // Setting the experimental data
00340 for (i = 0; i < input->nexperiments; ++i)
00341 {
00342     child = xmlNewChild (node, 0, (const xmlChar *) LABEL_EXPERIMENT, 0);
00343     xmlSetProp (child, (const xmlChar *) LABEL_NAME,
00344                 (xmlChar *) input->experiment[i].name);
00345     if (input->experiment[i].weight != 1.)
00346         xml_node_set_float (child, (const xmlChar *)
00347 LABEL_WEIGHT,
00348                             input->experiment[i].weight);
00349     for (j = 0; j < input->experiment->ninputs; ++j)
00350         xmlSetProp (child, (const xmlChar *) template[j],
00351                     (xmlChar *) input->experiment[i].template[j]);
00352 }
00353 // Setting the variables data
00354 for (i = 0; i < input->nvariables; ++i)
00355 {
00356     child = xmlNewChild (node, 0, (const xmlChar *) LABEL_VARIABLE, 0);
00357     xmlSetProp (child, (const xmlChar *) LABEL_NAME,
00358                 (xmlChar *) input->variable[i].name);
00359     xml_node_set_float (child, (const xmlChar *)
00360 LABEL_MINIMUM,
00361                         input->variable[i].rangemin);
00362     if (input->variable[i].rangeminabs != -G_MAXDOUBLE)
00363         xml_node_set_float (child, (const xmlChar *)
00364 LABEL_ABSOLUTE_MINIMUM,
00365                             input->variable[i].rangeminabs);
00366     xml_node_set_float (child, (const xmlChar *)
00367 LABEL_MAXIMUM,
00368                         input->variable[i].rangemax);
00369     if (input->variable[i].rangemaxabs != G_MAXDOUBLE)
00370         xml_node_set_float (child, (const xmlChar *)
00371 LABEL_ABSOLUTE_MAXIMUM,
00372                             input->variable[i].rangemaxabs);
00373     if (input->variable[i].precision !=
00374         DEFAULT_PRECISION)
00375         xml_node_set_uint (child, (const xmlChar *)
00376 LABEL_PRECISION,
00377                         input->variable[i].precision);
00378     if (input->algorithm == ALGORITHM_SWEEP)
00379         xml_node_set_uint (child, (const xmlChar *)
00380 LABEL_NSWEEPS,
00381                         input->variable[i].nsweeps);
00382     else if (input->algorithm == ALGORITHM_GENETIC)
00383         xml_node_set_uint (child, (const xmlChar *) LABEL_NBITS,
00384                             input->variable[i].nbits);
00385     if (input->nsteps)
00386         xml_node_set_float (child, (const xmlChar *)
00387 LABEL_STEP,
00388                             input->variable[i].step);
00389 }
00390 // Saving the error norm
00391 switch (input->norm)
00392 {
00393     case ERROR_NORM_MAXIMUM:
00394         xmlSetProp (node, (const xmlChar *) LABEL_NORM,
00395                     (const xmlChar *) LABEL_MAXIMUM);
00396         break;
00397     case ERROR_NORM_P:
00398         xmlSetProp (node, (const xmlChar *) LABEL_NORM,
00399                     (const xmlChar *) LABEL_P);
00400         xml_node_set_float (node, (const xmlChar *) LABEL_P,
00401                             input->p);
00402         break;
00403     case ERROR_NORM_TAXICAB:
00404         xmlSetProp (node, (const xmlChar *) LABEL_NORM,
00405                     (const xmlChar *) LABEL_TAXICAB);
00406         break;
00407 }
00408 #if DEBUG_INTERFACE
00409 fprintf (stderr, "input_save: end\n");

```

```

00402 #endif
00403 }
00404
00411 void
00412 input_save_json (JsonGenerator * generator)
00413 {
00414     unsigned int i, j;
00415     char *buffer;
00416     JsonNode *node, *child;
00417     JsonObject *object;
00418     JsonArray *array;
00419     GFile *file, *file2;
00420
00421 #if DEBUG_INTERFACE
00422     fprintf (stderr, "input_save_json: start\n");
00423 #endif
00424
00425     // Setting root JSON node
00426     node = json_node_new (JSON_NODE_OBJECT);
00427     object = json_node_get_object (node);
00428     json_generator_set_root (generator, node);
00429
00430     // Adding properties to the root JSON node
00431     if (strcmp (input->result, result_name))
00432         json_object_set_string_member (object, LABEL_RESULT_FILE,
input->result);
00433     if (strcmp (input->variables, variables_name))
00434         json_object_set_string_member (object, LABEL_VARIABLES_FILE,
input->variables);
00435     file = g_file_new_for_path (input->directory);
00436     file2 = g_file_new_for_path (input->simulator);
00437     buffer = g_file_get_relative_path (file, file2);
00438     g_object_unref (file2);
00439     json_object_set_string_member (object, LABEL_SIMULATOR, buffer);
00440     g_free (buffer);
00441     if (input->evaluator)
00442     {
00443         file2 = g_file_new_for_path (input->evaluator);
00444         buffer = g_file_get_relative_path (file, file2);
00445         g_object_unref (file2);
00446         if (strlen (buffer))
00447             json_object_set_string_member (object, LABEL_EVALUATOR, buffer);
00448         g_free (buffer);
00449     }
00450     if (input->seed != DEFAULT_RANDOM_SEED)
00451         json_object_set_uint (object, LABEL_SEED,
input->seed);
00452
00453     // Setting the algorithm
00454     buffer = (char *) g_slice_alloc (64);
00455     switch (input->algorithm)
00456     {
00457     case ALGORITHM_MONTE_CARLO:
00458         json_object_set_string_member (object, LABEL_ALGORITHM,
LABEL_MONTE_CARLO);
00459         snprintf (buffer, 64, "%u", input->nsimulations);
00460         json_object_set_string_member (object, LABEL_NSIMULATIONS, buffer);
00461         snprintf (buffer, 64, "%u", input->niterations);
00462         json_object_set_string_member (object, LABEL_NITERATIONS, buffer);
00463         snprintf (buffer, 64, "%.3lg", input->tolerance);
00464         json_object_set_string_member (object, LABEL_TOLERANCE, buffer);
00465         snprintf (buffer, 64, "%u", input->nbest);
00466         json_object_set_string_member (object, LABEL_NBEST, buffer);
00467         input_save_direction_json (node);
00468         break;
00469     case ALGORITHM_SWEEP:
00470         json_object_set_string_member (object, LABEL_ALGORITHM,
LABEL_SWEEP);
00471         snprintf (buffer, 64, "%u", input->niterations);
00472         json_object_set_string_member (object, LABEL_NITERATIONS, buffer);
00473         snprintf (buffer, 64, "%.3lg", input->tolerance);
00474         json_object_set_string_member (object, LABEL_TOLERANCE, buffer);
00475         snprintf (buffer, 64, "%u", input->nbest);
00476         json_object_set_string_member (object, LABEL_NBEST, buffer);
00477         input_save_direction_json (node);
00478         break;
00479     default:
00480         json_object_set_string_member (object, LABEL_ALGORITHM,
LABEL_GENETIC);
00481         snprintf (buffer, 64, "%u", input->nsimulations);
00482         json_object_set_string_member (object, LABEL_NPOPULATION, buffer);
00483         snprintf (buffer, 64, "%u", input->niterations);
00484         json_object_set_string_member (object, LABEL_NGENERATIONS, buffer);
00485         snprintf (buffer, 64, "%.3lg", input->mutation_ratio);
00486         json_object_set_string_member (object, LABEL_MUTATION, buffer);
00487         snprintf (buffer, 64, "%.3lg", input->reproduction_ratio);
00488         json_object_set_string_member (object, LABEL_REPRODUCTION, buffer);
00489

```

```

00491     snprintf (buffer, 64, "%.3lg", input->adaptation_ratio);
00492     json_object_set_string_member (object, LABEL_ADAPTATION, buffer);
00493     break;
00494 }
00495 g_slice_free1 (64, buffer);
00496 if (input->threshold != 0.)
00497     json_object_set_float (object, LABEL_THRESHOLD,
input->threshold);
00498
00499 // Setting the experimental data
00500 array = json_array_new ();
00501 for (i = 0; i < input->nexperiments; ++i)
00502 {
00503     child = json_node_new (JSON_NODE_OBJECT);
00504     object = json_node_get_object (child);
00505     json_object_set_string_member (object, LABEL_NAME,
00506                                     input->experiment[i].name);
00507     if (input->experiment[i].weight != 1.)
00508         json_object_set_float (object, LABEL_WEIGHT,
00509                                 input->experiment[i].weight);
00510     for (j = 0; j < input->experiment->ninputs; ++j)
00511         json_object_set_string_member (object, template[j],
00512                                         input->experiment[i].
template[j]);
00513     json_array_add_element (array, child);
00514 }
00515 json_object_set_array_member (object, LABEL_EXPERIMENTS, array);
00516
00517 // Setting the variables data
00518 array = json_array_new ();
00519 for (i = 0; i < input->nvariables; ++i)
00520 {
00521     child = json_node_new (JSON_NODE_OBJECT);
00522     object = json_node_get_object (child);
00523     json_object_set_string_member (object, LABEL_NAME,
00524                                     input->variable[i].name);
00525     json_object_set_float (object, LABEL_MINIMUM,
00526                             input->variable[i].rangemin);
00527     if (input->variable[i].rangeminabs != -G_MAXDOUBLE)
00528         json_object_set_float (object,
LABEL_ABSOLUTE_MINIMUM,
00529                                 input->variable[i].rangeminabs);
00530     json_object_set_float (object, LABEL_MAXIMUM,
00531                             input->variable[i].rangemax);
00532     if (input->variable[i].rangemaxabs != G_MAXDOUBLE)
00533         json_object_set_float (object,
LABEL_ABSOLUTE_MAXIMUM,
00534                                 input->variable[i].rangemaxabs);
00535     if (input->variable[i].precision !=
DEFAULT_PRECISION)
00536         json_object_set_uint (object, LABEL_PRECISION,
00537                                 input->variable[i].precision);
00538     if (input->algorithm == ALGORITHM_SWEEP)
00539         json_object_set_uint (object, LABEL_NSWEEPS,
00540                                 input->variable[i].nsweeps);
00541     else if (input->algorithm == ALGORITHM_GENETIC)
00542         json_object_set_uint (object, LABEL_NBITS,
input->variable[i].nbits);
00543     if (input->nsteps)
00544         json_object_set_float (object, LABEL_STEP,
input->variable[i].step);
00545     json_array_add_element (array, child);
00546 }
00547 json_object_set_array_member (object, LABEL_VARIABLES, array);
00548
00549 // Saving the error norm
00550 switch (input->norm)
00551 {
00552     case ERROR_NORM_MAXIMUM:
00553         json_object_set_string_member (object, LABEL_NORM, LABEL_MAXIMUM);
00554         break;
00555     case ERROR_NORM_P:
00556         json_object_set_string_member (object, LABEL_NORM, LABEL_P);
00557         json_object_set_float (object, LABEL_P, input->
p);
00558         break;
00559     case ERROR_NORM_TAXICAB:
00560         json_object_set_string_member (object, LABEL_NORM, LABEL_TAXICAB);
00561     }
00562
00563 #if DEBUG_INTERFACE
00564     fprintf (stderr, "input_save_json: end\n");
00565 #endif
00566 }
00567
00574 void
00575 input_save (char *filename)

```

```

00576 {
00577     xmlDoc *doc;
00578     JsonGenerator *generator;
00579
00580 #if DEBUG_INTERFACE
00581     fprintf (stderr, "input_save: start\n");
00582 #endif
00583
00584     // Getting the input file directory
00585     input->name = g_path_get_basename (filename);
00586     input->directory = g_path_get_dirname (filename);
00587
00588     if (input->type == INPUT_TYPE_XML)
00589     {
00590         // Opening the input file
00591         doc = xmlNewDoc ((const xmlChar *) "1.0");
00592         input_save_xml (doc);
00593
00594         // Saving the XML file
00595         xmlSaveFormatFile (filename, doc, 1);
00596
00597         // Freeing memory
00598         xmlFreeDoc (doc);
00599     }
00600     else
00601     {
00602         // Opening the input file
00603         generator = json_generator_new ();
00604         json_generator_set_pretty (generator, TRUE);
00605         input_save_json (generator);
00606
00607         // Saving the JSON file
00608         json_generator_to_file (generator, filename, NULL);
00609
00610         // Freeing memory
00611         g_object_unref (generator);
00612     }
00613
00614 #if DEBUG_INTERFACE
00615     fprintf (stderr, "input_save: end\n");
00616 #endif
00617 }
00618
00623 void
00624 options_new ()
00625 {
00626 #if DEBUG_INTERFACE
00627     fprintf (stderr, "options_new: start\n");
00628 #endif
00629     options->label_seed = (GtkLabel *)
00630         gtk_label_new (_("Pseudo-random numbers generator seed"));
00631     options->spin_seed = (GtkSpinButton *)
00632         gtk_spin_button_new_with_range (0., (gdouble) G_MAXULONG, 1.);
00633     gtk_widget_set_tooltip_text
00634         (GTK_WIDGET (options->spin_seed),
00635          _("Seed to init the pseudo-random numbers generator"));
00636     gtk_spin_button_set_value (options->spin_seed, (gdouble) input->
seed);
00637     options->label_threads = (GtkLabel *)
00638         gtk_label_new (_("Threads number for the stochastic algorithm"));
00639     options->spin_threads
00640         = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 64., 1.);
00641     gtk_widget_set_tooltip_text
00642         (GTK_WIDGET (options->spin_threads),
00643          _("Number of threads to perform the calibration/optimization for "
00644            "the stochastic algorithm"));
00645     gtk_spin_button_set_value (options->spin_threads, (gdouble)
nthreads);
00646     options->label_direction = (GtkLabel *)
00647         gtk_label_new (_("Threads number for the direction search method"));
00648     options->spin_direction =
00649         (GtkSpinButton *) gtk_spin_button_new_with_range (1., 64., 1.);
00650     gtk_widget_set_tooltip_text (GTK_WIDGET (options->spin_direction),
00651         _("Number of threads to perform the calibration/optimization for "
00652           "the direction search method"));
00653     gtk_spin_button_set_value (options->spin_direction,
00654         (gdouble) nthreads_direction);
00655     options->grid = (GtkGrid *) gtk_grid_new ();
00656     gtk_grid_attach (options->grid, GTK_WIDGET (options->label_seed), 0, 0, 1, 1);
00657     gtk_grid_attach (options->grid, GTK_WIDGET (options->spin_seed), 1, 0, 1, 1);
00658     gtk_grid_attach (options->grid, GTK_WIDGET (options->label_threads), 0, 1,
00659         1, 1);
00660     gtk_grid_attach (options->grid, GTK_WIDGET (options->spin_threads), 1, 1, 1,
00661         1);
00662     gtk_grid_attach (options->grid, GTK_WIDGET (options->label_direction), 0, 2,
00663         1, 1);

```

```

00665 gtk_grid_attach (options->grid, GTK_WIDGET (options->spin_direction), 1, 2,
00666                  1, 1);
00667 gtk_widget_show_all (GTK_WIDGET (options->grid));
00668 options->dialog = (GtkDialog *)
00669     gtk_dialog_new_with_buttons (_("Options"),
00670                                window->window,
00671                                GTK_DIALOG_MODAL,
00672                                _("_OK"), GTK_RESPONSE_OK,
00673                                _("_Cancel"), GTK_RESPONSE_CANCEL, NULL);
00674 gtk_container_add
00675     (GTK_CONTAINER (gtk_dialog_get_content_area (options->dialog)),
00676      GTK_WIDGET (options->grid));
00677 if (gtk_dialog_run (options->dialog) == GTK_RESPONSE_OK)
00678 {
00679     input->seed
00680     = (unsigned long int) gtk_spin_button_get_value (options->spin_seed);
00681     nthreads = gtk_spin_button_get_value_as_int (options->spin_threads);
00682     nthreads_direction
00683     = gtk_spin_button_get_value_as_int (options->spin_direction);
00684 }
00685 gtk_widget_destroy (GTK_WIDGET (options->dialog));
00686 #if DEBUG_INTERFACE
00687 fprintf (stderr, "options_new: end\n");
00688 #endif
00689 }
00690
00691 void
00692 running_new ()
00693 {
00694     #if DEBUG_INTERFACE
00695     fprintf (stderr, "running_new: start\n");
00696     #endif
00697     running->label = (GtkLabel *) gtk_label_new (_("Calculating ..."));
00698     running->spinner = (GtkSpinner *) gtk_spinner_new ();
00699     running->grid = (GtkGrid *) gtk_grid_new ();
00700     gtk_grid_attach (running->grid, GTK_WIDGET (running->label), 0, 0, 1, 1);
00701     gtk_grid_attach (running->grid, GTK_WIDGET (running->spinner), 0, 1, 1, 1);
00702     running->dialog = (GtkDialog *)
00703         gtk_dialog_new_with_buttons (_("Calculating"),
00704                                     window->window, GTK_DIALOG_MODAL, NULL, NULL);
00705     gtk_container_add (GTK_CONTAINER
00706         (gtk_dialog_get_content_area (running->dialog)),
00707         GTK_WIDGET (running->grid));
00708     gtk_spinner_start (running->spinner);
00709     gtk_widget_show_all (GTK_WIDGET (running->dialog));
00710     #if DEBUG_INTERFACE
00711     fprintf (stderr, "running_new: end\n");
00712     #endif
00713 }
00714
00715 unsigned int
00716 window_get_algorithm ()
00717 {
00718     unsigned int i;
00719     #if DEBUG_INTERFACE
00720     fprintf (stderr, "window_get_algorithm: start\n");
00721     #endif
00722     i = gtk_array_get_active (window->button_algorithm,
00723                             NALGORITHMS);
00724     #if DEBUG_INTERFACE
00725     fprintf (stderr, "window_get_algorithm: %u\n", i);
00726     fprintf (stderr, "window_get_algorithm: end\n");
00727     #endif
00728     return i;
00729 }
00730
00731 unsigned int
00732 window_get_direction ()
00733 {
00734     unsigned int i;
00735     #if DEBUG_INTERFACE
00736     fprintf (stderr, "window_get_direction: start\n");
00737     #endif
00738     i = gtk_array_get_active (window->button_direction,
00739                             NDIRECTIONS);
00740     #if DEBUG_INTERFACE
00741     fprintf (stderr, "window_get_direction: %u\n", i);
00742     fprintf (stderr, "window_get_direction: end\n");
00743     #endif
00744     return i;
00745 }
00746
00747 unsigned int
00748 window_get_norm ()
00749 {
00750     unsigned int i;
00751     #if DEBUG_INTERFACE

```



```

00769     fprintf (stderr, "window_get_norm: start\n");
00770 #endif
00771     i = gtk_array_get_active (window->button_norm,
NNORMS);
00772 #if DEBUG_INTERFACE
00773     fprintf (stderr, "window_get_norm: %u\n", i);
00774     fprintf (stderr, "window_get_norm: end\n");
00775 #endif
00776     return i;
00777 }
00778
00783 void
00784 window_save_direction ()
00785 {
00786 #if DEBUG_INTERFACE
00787     fprintf (stderr, "window_save_direction: start\n");
00788 #endif
00789     if (gtk_toggle_button_get_active
(GTK_TOGGLE_BUTTON (window->check_direction)))
00790     {
00791         input->nsteps = gtk_spin_button_get_value_as_int (window->
spin_steps);
00792         input->relaxation = gtk_spin_button_get_value (window->
spin_relaxation);
00793         switch (window_get_direction ())
00794         {
00795             case DIRECTION_METHOD_COORDINATES:
00796                 input->direction = DIRECTION_METHOD_COORDINATES;
00797                 break;
00798             default:
00799                 input->direction = DIRECTION_METHOD_RANDOM;
00800                 input->nestimates
= gtk_spin_button_get_value_as_int (window->spin_estimates);
00801         }
00802     }
00803     else
00804         input->nsteps = 0;
00805 #if DEBUG_INTERFACE
00806     fprintf (stderr, "window_save_direction: end\n");
00807 #endif
00808 }
00809
00810 int
00811 window_save ()
00812 {
00813     GtkFileChooserDialog *dlg;
00814     GtkFileFilter *filter1, *filter2;
00815     char *buffer;
00816 #if DEBUG_INTERFACE
00817     fprintf (stderr, "window_save: start\n");
00818 #endif
00819     // Opening the saving dialog
00820     dlg = (GtkFileChooserDialog *)
gtk_file_chooser_dialog_new (_("Save file"),
window->window,
GTK_FILE_CHOOSER_ACTION_SAVE,
_("_Cancel"), GTK_RESPONSE_CANCEL,
_("_OK"), GTK_RESPONSE_OK, NULL);
00821     gtk_file_chooser_set_do_overwrite_confirmation (GTK_FILE_CHOOSER (dlg), TRUE);
00822     buffer = g_build_filename (input->directory, input->name, NULL);
00823     gtk_file_chooser_set_filename (GTK_FILE_CHOOSER (dlg), buffer);
00824     g_free (buffer);
00825     // Adding XML filter
00826     filter1 = (GtkFileFilter *) gtk_file_filter_new ();
00827     gtk_file_filter_set_name (filter1, "XML");
00828     gtk_file_filter_add_pattern (filter1, "*.xml");
00829     gtk_file_filter_add_pattern (filter1, "*.XML");
00830     gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter1);
00831     // Adding JSON filter
00832     filter2 = (GtkFileFilter *) gtk_file_filter_new ();
00833     gtk_file_filter_set_name (filter2, "JSON");
00834     gtk_file_filter_add_pattern (filter2, "*.json");
00835     gtk_file_filter_add_pattern (filter2, "*.JSON");
00836     gtk_file_filter_add_pattern (filter2, "*.js");
00837     gtk_file_filter_add_pattern (filter2, "*.JS");
00838     gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter2);
00839     if (input->type == INPUT_TYPE_XML)
00840         gtk_file_chooser_set_filter (GTK_FILE_CHOOSER (dlg), filter1);
00841     else
00842         gtk_file_chooser_set_filter (GTK_FILE_CHOOSER (dlg), filter2);
00843     // If OK response then saving

```

```

00862     if (gtk_dialog_run (GTK_DIALOG (dlg)) == GTK_RESPONSE_OK)
00863     {
00864         // Setting input file type
00865         filter1 = gtk_file_chooser_get_filter (GTK_FILE_CHOOSER (dlg));
00866         buffer = (char *) gtk_file_filter_get_name (filter1);
00867         if (!strcmp (buffer, "XML"))
00868             input->type = INPUT_TYPE_XML;
00869         else
00870             input->type = INPUT_TYPE_JSON;
00871
00872         // Adding properties to the root XML node
00873         input->simulator = gtk_file_chooser_get_filename
00874             (GTK_FILE_CHOOSER (window->button_simulator));
00875         if (gtk_toggle_button_get_active
00876             (GTK_TOGGLE_BUTTON (window->check_evaluator)))
00877             input->evaluator = gtk_file_chooser_get_filename
00878                 (GTK_FILE_CHOOSER (window->button_evaluator));
00879         else
00880             input->evaluator = NULL;
00881         if (input->type == INPUT_TYPE_XML)
00882         {
00883             input->result
00884                 = (char *) xmlStrdup ((const xmlChar *)
00885                                         gtk_entry_get_text (window->entry_result));
00886             input->variables
00887                 = (char *) xmlStrdup ((const xmlChar *)
00888                                         gtk_entry_get_text (window->entry_variables));
00889         }
00890         else
00891         {
00892             input->result = g_strdup (gtk_entry_get_text (window->
00893 entry_result));
00894             input->variables =
00895                 g_strdup (gtk_entry_get_text (window->entry_variables));
00896         }
00897         // Setting the algorithm
00898         switch (window_get_algorithm ())
00899         {
00900             case ALGORITHM_MONTE_CARLO:
00901                 input->algorithm = ALGORITHM_MONTE_CARLO;
00902                 input->nsimulations
00903                     = gtk_spin_button_get_value_as_int (window->spin_simulations);
00904                 input->niterations
00905                     = gtk_spin_button_get_value_as_int (window->spin_iterations);
00906                 input->tolerance = gtk_spin_button_get_value (window->
00907 spin_tolerance);
00908                 input->nbest = gtk_spin_button_get_value_as_int (window->
00909 spin_bests);
00910                 window_save_direction ();
00911                 break;
00912             case ALGORITHM_SWEEP:
00913                 input->algorithm = ALGORITHM_SWEEP;
00914                 input->niterations
00915                     = gtk_spin_button_get_value_as_int (window->spin_iterations);
00916                 input->tolerance = gtk_spin_button_get_value (window->
00917 spin_tolerance);
00918                 input->nbest = gtk_spin_button_get_value_as_int (window->
00919 spin_bests);
00920                 window_save_direction ();
00921                 break;
00922             default:
00923                 input->algorithm = ALGORITHM_GENETIC;
00924                 input->nsimulations
00925                     = gtk_spin_button_get_value_as_int (window->spin_population);
00926                 input->niterations
00927                     = gtk_spin_button_get_value_as_int (window->spin_generations);
00928                 input->mutation_ratio
00929                     = gtk_spin_button_get_value (window->spin_mutation);
00930                 input->reproduction_ratio
00931                     = gtk_spin_button_get_value (window->spin_reproduction);
00932                 input->adaptation_ratio
00933                     = gtk_spin_button_get_value (window->spin_adaptation);
00934                 break;
00935         }
00936         input->norm = window_get_norm ();
00937         input->p = gtk_spin_button_get_value (window->spin_p);
00938         input->threshold = gtk_spin_button_get_value (window->
00939 spin_threshold);
00940
00941         // Saving the XML file
00942         buffer = gtk_file_chooser_get_filename (GTK_FILE_CHOOSER (dlg));
00943         input_save (buffer);
00944
00945         // Closing and freeing memory
00946         g_free (buffer);
00947         gtk_widget_destroy (GTK_WIDGET (dlg));

```

```

00943 #if DEBUG_INTERFACE
00944     fprintf (stderr, "window_save: end\n");
00945 #endif
00946     return 1;
00947 }
00948
00949 // Closing and freeing memory
00950 gtk_widget_destroy (GTK_WIDGET (dlg));
00951 #if DEBUG_INTERFACE
00952     fprintf (stderr, "window_save: end\n");
00953 #endif
00954     return 0;
00955 }
00956
00961 void
00962 window_run ()
00963 {
00964     unsigned int i;
00965     char *msg, *msg2, buffer[64], buffer2[64];
00966     #if DEBUG_INTERFACE
00967         fprintf (stderr, "window_run: start\n");
00968     #endif
00969     if (!window_save ())
00970     {
00971         #if DEBUG_INTERFACE
00972             fprintf (stderr, "window_run: end\n");
00973         #endif
00974         return;
00975     }
00976     running_new ();
00977     while (gtk_events_pending ())
00978         gtk_main_iteration ();
00979     optimize_open ();
00980     #if DEBUG_INTERFACE
00981         fprintf (stderr, "window_run: closing running dialog\n");
00982     #endif
00983     gtk_spinner_stop (running->spinner);
00984     gtk_widget_destroy (GTK_WIDGET (running->dialog));
00985     #if DEBUG_INTERFACE
00986         fprintf (stderr, "window_run: displaying results\n");
00987     #endif
00988     snprintf (buffer, 64, "error = %.15le\n", optimize->error_old[0]);
00989     msg2 = g_strdup (buffer);
00990     for (i = 0; i < optimize->nvariables; ++i, msg2 = msg)
00991     {
00992         snprintf (buffer, 64, "%s = %s\n",
00993             input->variable[i].name, format[input->
00994             variable[i].precision]);
00995         snprintf (buffer2, 64, buffer, optimize->value_old[i]);
00996         msg = g_strconcat (msg2, buffer2, NULL);
00997         g_free (msg2);
00998     }
00999     snprintf (buffer, 64, "%s = %.6lg s", _("Calculation time"),
01000         optimize->calculation_time);
01001     msg = g_strconcat (msg2, buffer, NULL);
01002     g_free (msg2);
01003     show_message (_("Best result"), msg, INFO_TYPE);
01004     g_free (msg);
01005     #if DEBUG_INTERFACE
01006         fprintf (stderr, "window_run: freeing memory\n");
01007     #endif
01008     optimize_free ();
01009     #if DEBUG_INTERFACE
01010         fprintf (stderr, "window_run: end\n");
01011     #endif
01012 }
01017 void
01018 window_help ()
01019 {
01020     char *buffer, *buffer2;
01021     #if DEBUG_INTERFACE
01022         fprintf (stderr, "window_help: start\n");
01023     #endif
01024     buffer2 = g_build_filename (window->application_directory, "..", "manuals",
01025         _("user-manual.pdf"), NULL);
01026     buffer = g_filename_to_uri (buffer2, NULL, NULL);
01027     g_free (buffer2);
01028     gtk_show_uri (NULL, buffer, GDK_CURRENT_TIME, NULL);
01029     #if DEBUG_INTERFACE
01030         fprintf (stderr, "window_help: uri=%s\n", buffer);
01031     #endif
01032     g_free (buffer);
01033     #if DEBUG_INTERFACE
01034         fprintf (stderr, "window_help: end\n");
01035     #endif
01036 }

```

```

01037
01042 void
01043 window_about ()
01044 {
01045     static const gchar *authors[] = {
01046         "Javier Burguete Tolosa <jburguete@eead.csic.es>",
01047         "Borja Latorre Garcés <borja.latorre@csic.es>",
01048         NULL
01049     };
01050 #if DEBUG_INTERFACE
01051     fprintf (stderr, "window_about: start\n");
01052 #endif
01053     gtk_show_about_dialog
01054     (window->window,
01055      "program_name", "MPCOTool",
01056      "comments",
01057      _("The Multi-Purposes Calibration and Optimization Tool.\n"
01058       "A software to perform calibrations or optimizations of empirical"
01059       " parameters"),
01060      "authors", authors,
01061      "translator-credits",
01062      "Javier Burguete Tolosa <jburguete@eead.csic.es> "
01063       "(english, french and spanish)\n"
01064       "Uğur Çayoğlu (german)",
01065      "version", "3.4.2",
01066      "copyright", "Copyright 2012-2017 Javier Burguete Tolosa",
01067      "logo", window->logo,
01068      "website", "https://github.com/jburguete/mpcotool",
01069      "license-type", GTK_LICENSE_BSD, NULL);
01070 #if DEBUG_INTERFACE
01071     fprintf (stderr, "window_about: end\n");
01072 #endif
01073 }
01074
01080 void
01081 window_update_direction ()
01082 {
01083     #if DEBUG_INTERFACE
01084         fprintf (stderr, "window_update_direction: start\n");
01085     #endif
01086     gtk_widget_show (GTK_WIDGET (window->check_direction));
01087     if (gtk_toggle_button_get_active
01088         (GTK_TOGGLE_BUTTON (window->check_direction)))
01089     {
01090         gtk_widget_show (GTK_WIDGET (window->grid_direction));
01091         gtk_widget_show (GTK_WIDGET (window->label_step));
01092         gtk_widget_show (GTK_WIDGET (window->spin_step));
01093     }
01094     switch (window_get_direction ())
01095     {
01096     case DIRECTION_METHOD_COORDINATES:
01097         gtk_widget_hide (GTK_WIDGET (window->label_estimates));
01098         gtk_widget_hide (GTK_WIDGET (window->spin_estimates));
01099         break;
01100     default:
01101         gtk_widget_show (GTK_WIDGET (window->label_estimates));
01102         gtk_widget_show (GTK_WIDGET (window->spin_estimates));
01103     }
01104 #if DEBUG_INTERFACE
01105     fprintf (stderr, "window_update_direction: end\n");
01106 #endif
01107 }
01108
01113 void
01114 window_update ()
01115 {
01116     unsigned int i;
01117     #if DEBUG_INTERFACE
01118         fprintf (stderr, "window_update: start\n");
01119     #endif
01120     gtk_widget_set_sensitive
01121     (GTK_WIDGET (window->button_evaluator),
01122      gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON
01123                                   (window->check_evaluator)));
01124     gtk_widget_hide (GTK_WIDGET (window->label_simulations));
01125     gtk_widget_hide (GTK_WIDGET (window->spin_simulations));
01126     gtk_widget_hide (GTK_WIDGET (window->label_iterations));
01127     gtk_widget_hide (GTK_WIDGET (window->spin_iterations));
01128     gtk_widget_hide (GTK_WIDGET (window->label_tolerance));
01129     gtk_widget_hide (GTK_WIDGET (window->spin_tolerance));
01130     gtk_widget_hide (GTK_WIDGET (window->label_bests));
01131     gtk_widget_hide (GTK_WIDGET (window->spin_bests));
01132     gtk_widget_hide (GTK_WIDGET (window->label_population));
01133     gtk_widget_hide (GTK_WIDGET (window->spin_population));
01134     gtk_widget_hide (GTK_WIDGET (window->label_generations));
01135     gtk_widget_hide (GTK_WIDGET (window->spin_generations));
01136     gtk_widget_hide (GTK_WIDGET (window->label_mutation));

```

```

01137 gtk_widget_hide (GTK_WIDGET (window->spin_mutation));
01138 gtk_widget_hide (GTK_WIDGET (window->label_reproduction));
01139 gtk_widget_hide (GTK_WIDGET (window->spin_reproduction));
01140 gtk_widget_hide (GTK_WIDGET (window->label_adaptation));
01141 gtk_widget_hide (GTK_WIDGET (window->spin_adaptation));
01142 gtk_widget_hide (GTK_WIDGET (window->label_sweeps));
01143 gtk_widget_hide (GTK_WIDGET (window->spin_sweeps));
01144 gtk_widget_hide (GTK_WIDGET (window->label_bits));
01145 gtk_widget_hide (GTK_WIDGET (window->spin_bits));
01146 gtk_widget_hide (GTK_WIDGET (window->check_direction));
01147 gtk_widget_hide (GTK_WIDGET (window->grid_direction));
01148 gtk_widget_hide (GTK_WIDGET (window->label_step));
01149 gtk_widget_hide (GTK_WIDGET (window->spin_step));
01150 gtk_widget_hide (GTK_WIDGET (window->label_p));
01151 gtk_widget_hide (GTK_WIDGET (window->spin_p));
01152 i = gtk_spin_button_get_value_as_int (window->spin_iterations);
01153 switch (window_get_algorithm ())
01154 {
01155     case ALGORITHM_MONTE_CARLO:
01156         gtk_widget_show (GTK_WIDGET (window->label_simulations));
01157         gtk_widget_show (GTK_WIDGET (window->spin_simulations));
01158         gtk_widget_show (GTK_WIDGET (window->label_iterations));
01159         gtk_widget_show (GTK_WIDGET (window->spin_iterations));
01160         if (i > 1)
01161         {
01162             gtk_widget_show (GTK_WIDGET (window->label_tolerance));
01163             gtk_widget_show (GTK_WIDGET (window->spin_tolerance));
01164             gtk_widget_show (GTK_WIDGET (window->label_bests));
01165             gtk_widget_show (GTK_WIDGET (window->spin_bests));
01166         }
01167         window_update_direction ();
01168         break;
01169     case ALGORITHM_SWEEP:
01170         gtk_widget_show (GTK_WIDGET (window->label_iterations));
01171         gtk_widget_show (GTK_WIDGET (window->spin_iterations));
01172         if (i > 1)
01173         {
01174             gtk_widget_show (GTK_WIDGET (window->label_tolerance));
01175             gtk_widget_show (GTK_WIDGET (window->spin_tolerance));
01176             gtk_widget_show (GTK_WIDGET (window->label_bests));
01177             gtk_widget_show (GTK_WIDGET (window->spin_bests));
01178         }
01179         gtk_widget_show (GTK_WIDGET (window->label_sweeps));
01180         gtk_widget_show (GTK_WIDGET (window->spin_sweeps));
01181         gtk_widget_show (GTK_WIDGET (window->check_direction));
01182         window_update_direction ();
01183         break;
01184     default:
01185         gtk_widget_show (GTK_WIDGET (window->label_population));
01186         gtk_widget_show (GTK_WIDGET (window->spin_population));
01187         gtk_widget_show (GTK_WIDGET (window->label_generations));
01188         gtk_widget_show (GTK_WIDGET (window->spin_generations));
01189         gtk_widget_show (GTK_WIDGET (window->label_mutation));
01190         gtk_widget_show (GTK_WIDGET (window->spin_mutation));
01191         gtk_widget_show (GTK_WIDGET (window->label_reproduction));
01192         gtk_widget_show (GTK_WIDGET (window->spin_reproduction));
01193         gtk_widget_show (GTK_WIDGET (window->label_adaptation));
01194         gtk_widget_show (GTK_WIDGET (window->spin_adaptation));
01195         gtk_widget_show (GTK_WIDGET (window->label_bits));
01196         gtk_widget_show (GTK_WIDGET (window->spin_bits));
01197     }
01198     gtk_widget_set_sensitive
01199     (GTK_WIDGET (window->button_remove_experiment),
01200      input->nexperiments > 1);
01200     gtk_widget_set_sensitive
01201     (GTK_WIDGET (window->button_remove_variable), input->
01202      nvariables > 1);
01202     for (i = 0; i < input->experiment->ninputs; ++i)
01203     {
01204         gtk_widget_show (GTK_WIDGET (window->check_template[i]));
01205         gtk_widget_show (GTK_WIDGET (window->button_template[i]));
01206         gtk_widget_set_sensitive (GTK_WIDGET (window->check_template[i]), 0);
01207         gtk_widget_set_sensitive (GTK_WIDGET (window->button_template[i]), 1);
01208         g_signal_handler_block
01209         (window->check_template[i], window->id_template[i]);
01210         g_signal_handler_block (window->button_template[i], window->
01211          id_input[i]);
01211         gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON
01212          (window->check_template[i]), 1);
01213         g_signal_handler_unblock (window->button_template[i],
01214          window->id_input[i]);
01215         g_signal_handler_unblock (window->check_template[i],
01216          window->id_template[i]);
01217     }
01218     if (i > 0)
01219     {
01220         gtk_widget_set_sensitive (GTK_WIDGET (window->check_template[i - 1]), 1);

```

```

01221     gtk_widget_set_sensitive (GTK_WIDGET (window->button_template[i - 1]),
01222                               gtk_toggle_button_get_active
01223                               GTK_TOGGLE_BUTTON (window->check_template
01224                               [i - 1]));
01225 }
01226 if (i < MAX_NINPUTS)
01227 {
01228     gtk_widget_show (GTK_WIDGET (window->check_template[i]));
01229     gtk_widget_show (GTK_WIDGET (window->button_template[i]));
01230     gtk_widget_set_sensitive (GTK_WIDGET (window->check_template[i]), 1);
01231     gtk_widget_set_sensitive
01232     (GTK_WIDGET (window->button_template[i]),
01233      gtk_toggle_button_get_active
01234      GTK_TOGGLE_BUTTON (window->check_template[i]));
01235     g_signal_handler_block
01236     (window->check_template[i], window->id_template[i]);
01237     g_signal_handler_block (window->button_template[i], window->
id_input[i]);
01238     gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON
                                (window->check_template[i]), 0);
01239     g_signal_handler_unblock (window->button_template[i],
01240                              window->id_input[i]);
01241     g_signal_handler_unblock (window->check_template[i],
01242                              window->id_template[i]);
01243 }
01244 while (++i < MAX_NINPUTS)
01245 {
01246     gtk_widget_hide (GTK_WIDGET (window->check_template[i]));
01247     gtk_widget_hide (GTK_WIDGET (window->button_template[i]));
01248 }
01249 gtk_widget_set_sensitive
01250 (GTK_WIDGET (window->spin_minabs),
01251  gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON (window->check_minabs)));
01252 gtk_widget_set_sensitive
01253 (GTK_WIDGET (window->spin_maxabs),
01254  gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON (window->check_maxabs)));
01255 if (window_get_norm () == ERROR_NORM_P)
01256 {
01257     gtk_widget_show (GTK_WIDGET (window->label_p));
01258     gtk_widget_show (GTK_WIDGET (window->spin_p));
01259 }
01260 #if DEBUG_INTERFACE
01261 fprintf (stderr, "window_update: end\n");
01262 #endif
01263 }
01264 void
01265 window_set_algorithm ()
01266 {
01267     int i;
01268     #if DEBUG_INTERFACE
01269     fprintf (stderr, "window_set_algorithm: start\n");
01270     #endif
01271     i = window_get_algorithm ();
01272     switch (i)
01273     {
01274     case ALGORITHM_SWEEP:
01275         i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01276         if (i < 0)
01277             i = 0;
01278         gtk_spin_button_set_value (window->spin_sweeps,
01279                                   (gdouble) input->variable[i].
01280                                   nsweeps);
01281         break;
01282     case ALGORITHM_GENETIC:
01283         i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01284         if (i < 0)
01285             i = 0;
01286         gtk_spin_button_set_value (window->spin_bits,
01287                                   (gdouble) input->variable[i].nbits);
01288     }
01289     window_update ();
01290 #if DEBUG_INTERFACE
01291 fprintf (stderr, "window_set_algorithm: end\n");
01292 #endif
01293 }
01294 void
01295 window_set_experiment ()
01296 {
01297     unsigned int i, j;
01298     char *buffer1, *buffer2;
01299     #if DEBUG_INTERFACE
01300     fprintf (stderr, "window_set_experiment: start\n");
01301     #endif
01302     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01303     gtk_spin_button_set_value (window->spin_weight, input->

```

```

    experiment[i].weight);
01314     buffer1 = gtk_combo_box_text_get_active_text (window->combo_experiment);
01315     buffer2 = g_build_filename (input->directory, buffer1, NULL);
01316     g_free (buffer1);
01317     g_signal_handler_block
01318         (window->button_experiment, window->id_experiment_name);
01319     gtk_file_chooser_set_filename
01320         (GTK_FILE_CHOOSER (window->button_experiment), buffer2);
01321     g_signal_handler_unblock
01322         (window->button_experiment, window->id_experiment_name);
01323     g_free (buffer2);
01324     for (j = 0; j < input->experiment->ninputs; ++j)
01325     {
01326         g_signal_handler_block (window->button_template[j], window->
id_input[j]);
01327         buffer2 =
01328             g_build_filename (input->directory, input->experiment[i].
template[j],
01329                             NULL);
01330         gtk_file_chooser_set_filename (GTK_FILE_CHOOSER
01331                                         (window->button_template[j]), buffer2);
01332         g_free (buffer2);
01333         g_signal_handler_unblock
01334             (window->button_template[j], window->id_input[j]);
01335     }
01336     #if DEBUG_INTERFACE
01337     fprintf (stderr, "window_set_experiment: end\n");
01338     #endif
01339 }
01340
01341 void
01342 window_remove_experiment ()
01343 {
01344     unsigned int i, j;
01345     #if DEBUG_INTERFACE
01346     fprintf (stderr, "window_remove_experiment: start\n");
01347     #endif
01348     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01349     g_signal_handler_block (window->combo_experiment, window->
id_experiment);
01350     gtk_combo_box_text_remove (window->combo_experiment, i);
01351     g_signal_handler_unblock (window->combo_experiment, window->
id_experiment);
01352     experiment_free (input->experiment + i, input->
type);
01353     --input->nexperiments;
01354     for (j = i; j < input->nexperiments; ++j)
01355         memcpy (input->experiment + j, input->experiment + j + 1,
01356                 sizeof (Experiment));
01357     j = input->nexperiments - 1;
01358     if (i > j)
01359         i = j;
01360     for (j = 0; j < input->experiment->ninputs; ++j)
01361         g_signal_handler_block (window->button_template[j], window->
id_input[j]);
01362     g_signal_handler_block
01363         (window->button_experiment, window->id_experiment_name);
01364     gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_experiment), i);
01365     g_signal_handler_unblock
01366         (window->button_experiment, window->id_experiment_name);
01367     for (j = 0; j < input->experiment->ninputs; ++j)
01368         g_signal_handler_unblock (window->button_template[j], window->
id_input[j]);
01369     window_update ();
01370     #if DEBUG_INTERFACE
01371     fprintf (stderr, "window_remove_experiment: end\n");
01372     #endif
01373 }
01374
01375 void
01376 window_add_experiment ()
01377 {
01378     unsigned int i, j;
01379     #if DEBUG_INTERFACE
01380     fprintf (stderr, "window_add_experiment: start\n");
01381     #endif
01382     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01383     g_signal_handler_block (window->combo_experiment, window->
id_experiment);
01384     gtk_combo_box_text_insert_text
01385         (window->combo_experiment, i, input->experiment[i].
name);
01386     g_signal_handler_unblock (window->combo_experiment, window->
id_experiment);
01387     input->experiment = (Experiment *) g_realloc
01388         (input->experiment, (input->nexperiments + 1) * sizeof (
Experiment));

```

```

01397     for (j = input->nexperiments - 1; j > i; --j)
01398         memcpy (input->experiment + j + 1, input->experiment + j,
01399                 sizeof (Experiment));
01400     input->experiment[j + 1].weight = input->experiment[j].
weight;
01401     input->experiment[j + 1].ninputs = input->
experiment[j].ninputs;
01402     if (input->type == INPUT_TYPE_XML)
01403     {
01404         input->experiment[j + 1].name
01405             = (char *) xmlStrdup ((xmlChar *) input->experiment[j].
name);
01406         for (j = 0; j < input->experiment->ninputs; ++j)
01407             input->experiment[i + 1].template[j]
01408                 = (char *) xmlStrdup ((xmlChar *) input->experiment[i].
template[j]);
01409     }
01410     else
01411     {
01412         input->experiment[j + 1].name = g_strdup (input->
experiment[j].name);
01413         for (j = 0; j < input->experiment->ninputs; ++j)
01414             input->experiment[i + 1].template[j]
01415                 = g_strdup (input->experiment[i].template[j]);
01416     }
01417     ++input->nexperiments;
01418     for (j = 0; j < input->experiment->ninputs; ++j)
01419         g_signal_handler_block (window->button_template[j], window->
id_input[j]);
01420     g_signal_handler_block
01421         (window->button_experiment, window->id_experiment_name);
01422     gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_experiment), i + 1);
01423     g_signal_handler_unblock
01424         (window->button_experiment, window->id_experiment_name);
01425     for (j = 0; j < input->experiment->ninputs; ++j)
01426         g_signal_handler_unblock (window->button_template[j], window->
id_input[j]);
01427     window_update ();
01428     #if DEBUG_INTERFACE
01429     fprintf (stderr, "window_add_experiment: end\n");
01430     #endif
01431 }
01432
01433 void
01434 window_name_experiment ()
01435 {
01436     unsigned int i;
01437     char *buffer;
01438     GFile *file1, *file2;
01439     #if DEBUG_INTERFACE
01440     fprintf (stderr, "window_name_experiment: start\n");
01441     #endif
01442     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01443     file1
01444         = gtk_file_chooser_get_file (GTK_FILE_CHOOSER (window->button_experiment));
01445     file2 = g_file_new_for_path (input->directory);
01446     buffer = g_file_get_relative_path (file2, file1);
01447     g_signal_handler_block (window->combo_experiment, window->
id_experiment);
01448     gtk_combo_box_text_remove (window->combo_experiment, i);
01449     gtk_combo_box_text_insert_text (window->combo_experiment, i, buffer);
01450     gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_experiment), i);
01451     g_signal_handler_unblock (window->combo_experiment, window->
id_experiment);
01452     g_free (buffer);
01453     g_object_unref (file2);
01454     g_object_unref (file1);
01455     #if DEBUG_INTERFACE
01456     fprintf (stderr, "window_name_experiment: end\n");
01457     #endif
01458 }
01459
01460 void
01461 window_weight_experiment ()
01462 {
01463     unsigned int i;
01464     #if DEBUG_INTERFACE
01465     fprintf (stderr, "window_weight_experiment: start\n");
01466     #endif
01467     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01468     input->experiment[i].weight = gtk_spin_button_get_value (window->
spin_weight);
01469     #if DEBUG_INTERFACE
01470     fprintf (stderr, "window_weight_experiment: end\n");
01471     #endif
01472 }
01473
01474
01475

```



```

01487 void
01488 window_inputs_experiment ()
01489 {
01490     unsigned int j;
01491     #if DEBUG_INTERFACE
01492     fprintf (stderr, "window_inputs_experiment: start\n");
01493     #endif
01494     j = input->experiment->ninputs - 1;
01495     if (j)
01496         && !gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON
01497                                             (window->check_template[j]))
01498         --input->experiment->ninputs;
01499     if (input->experiment->ninputs < MAX_NINPUTS
01500         && gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON
01501                                             (window->check_template[j])))
01502         ++input->experiment->ninputs;
01503     window_update ();
01504     #if DEBUG_INTERFACE
01505     fprintf (stderr, "window_inputs_experiment: end\n");
01506     #endif
01507 }
01508
01516 void
01517 window_template_experiment (void *data)
01518 {
01519     unsigned int i, j;
01520     char *buffer;
01521     GFile *file1, *file2;
01522     #if DEBUG_INTERFACE
01523     fprintf (stderr, "window_template_experiment: start\n");
01524     #endif
01525     i = (size_t) data;
01526     j = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01527     file1
01528         = gtk_file_chooser_get_file (GTK_FILE_CHOOSER (window->button_template[i]));
01529     file2 = g_file_new_for_path (input->directory);
01530     buffer = g_file_get_relative_path (file2, file1);
01531     if (input->type == INPUT_TYPE_XML)
01532         input->experiment[j].template[i] = (char *) xmlStrdup ((xmlChar *) buffer);
01533     else
01534         input->experiment[j].template[i] = g_strdup (buffer);
01535     g_free (buffer);
01536     g_object_unref (file2);
01537     g_object_unref (file1);
01538     #if DEBUG_INTERFACE
01539     fprintf (stderr, "window_template_experiment: end\n");
01540     #endif
01541 }
01542
01547 void
01548 window_set_variable ()
01549 {
01550     unsigned int i;
01551     #if DEBUG_INTERFACE
01552     fprintf (stderr, "window_set_variable: start\n");
01553     #endif
01554     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01555     g_signal_handler_block (window->entry_variable, window->
01556                             id_variable_label);
01556     gtk_entry_set_text (window->entry_variable, input->variable[i].
01557                         name);
01557     g_signal_handler_unblock (window->entry_variable, window->
01558                               id_variable_label);
01558     gtk_spin_button_set_value (window->spin_min, input->variable[i].
01559                               rangemin);
01559     gtk_spin_button_set_value (window->spin_max, input->variable[i].
01560                               rangemax);
01560     if (input->variable[i].rangeminabs != -G_MAXDOUBLE)
01561     {
01562         gtk_spin_button_set_value (window->spin_minabs,
01563                                     input->variable[i].rangeminabs);
01564         gtk_toggle_button_set_active
01565             (GTK_TOGGLE_BUTTON (window->check_minabs), 1);
01566     }
01567     else
01568     {
01569         gtk_spin_button_set_value (window->spin_minabs, -G_MAXDOUBLE);
01570         gtk_toggle_button_set_active
01571             (GTK_TOGGLE_BUTTON (window->check_minabs), 0);
01572     }
01573     if (input->variable[i].rangemaxabs != G_MAXDOUBLE)
01574     {
01575         gtk_spin_button_set_value (window->spin_maxabs,
01576                                     input->variable[i].rangemaxabs);
01577         gtk_toggle_button_set_active
01578             (GTK_TOGGLE_BUTTON (window->check_maxabs), 1);
01579     }

```

```

01580     else
01581     {
01582         gtk_spin_button_set_value (window->spin_maxabs, G_MAXDOUBLE);
01583         gtk_toggle_button_set_active
01584             (GTK_TOGGLE_BUTTON (window->check_maxabs), 0);
01585     }
01586     gtk_spin_button_set_value (window->spin_precision,
01587         input->variable[i].precision);
01588     gtk_spin_button_set_value (window->spin_steps, (gdouble) input->
nsteps);
01589     if (input->nsteps)
01590         gtk_spin_button_set_value (window->spin_step, input->variable[i].
step);
01591     #if DEBUG_INTERFACE
01592         fprintf (stderr, "window_set_variable: precision[%u]=%u\n", i,
01593             input->variable[i].precision);
01594     #endif
01595     switch (window_get_algorithm ())
01596     {
01597         case ALGORITHM_SWEEP:
01598             gtk_spin_button_set_value (window->spin_sweeps,
01599                 (gdouble) input->variable[i].
nsweeps);
01600         #if DEBUG_INTERFACE
01601             fprintf (stderr, "window_set_variable: nsweeps[%u]=%u\n", i,
01602                 input->variable[i].nsweeps);
01603         #endif
01604         break;
01605         case ALGORITHM_GENETIC:
01606             gtk_spin_button_set_value (window->spin_bits,
01607                 (gdouble) input->variable[i].nbits);
01608         #if DEBUG_INTERFACE
01609             fprintf (stderr, "window_set_variable: nbits[%u]=%u\n", i,
01610                 input->variable[i].nbits);
01611         #endif
01612         break;
01613     }
01614     window_update ();
01615     #if DEBUG_INTERFACE
01616         fprintf (stderr, "window_set_variable: end\n");
01617     #endif
01618 }
01619
01624 void
01625 window_remove_variable ()
01626 {
01627     unsigned int i, j;
01628     #if DEBUG_INTERFACE
01629         fprintf (stderr, "window_remove_variable: start\n");
01630     #endif
01631     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01632     g_signal_handler_block (window->combo_variable, window->
id_variable);
01633     gtk_combo_box_text_remove (window->combo_variable, i);
01634     g_signal_handler_unblock (window->combo_variable, window->
id_variable);
01635     xmlFree (input->variable[i].name);
01636     --input->nvariables;
01637     for (j = i; j < input->nvariables; ++j)
01638         memcpy (input->variable + j, input->variable + j + 1, sizeof (
Variable));
01639     j = input->nvariables - 1;
01640     if (i > j)
01641         i = j;
01642     g_signal_handler_block (window->entry_variable, window->
id_variable_label);
01643     gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_variable), i);
01644     g_signal_handler_unblock (window->entry_variable, window->
id_variable_label);
01645     window_update ();
01646     #if DEBUG_INTERFACE
01647         fprintf (stderr, "window_remove_variable: end\n");
01648     #endif
01649 }
01650
01655 void
01656 window_add_variable ()
01657 {
01658     unsigned int i, j;
01659     #if DEBUG_INTERFACE
01660         fprintf (stderr, "window_add_variable: start\n");
01661     #endif
01662     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01663     g_signal_handler_block (window->combo_variable, window->
id_variable);
01664     gtk_combo_box_text_insert_text (window->combo_variable, i,
01665         input->variable[i].name);

```

```

01666 g_signal_handler_unblock (window->combo_variable, window->
id_variable);
01667 input->variable = (Variable *) g_realloc
01668 (input->variable, (input->nvariables + 1) * sizeof (
Variable));
01669 for (j = input->nvariables - 1; j > i; --j)
01670 memcpy (input->variable + j + 1, input->variable + j, sizeof (
Variable));
01671 memcpy (input->variable + j + 1, input->variable + j, sizeof (
Variable));
01672 if (input->type == INPUT_TYPE_XML)
01673 input->variable[j + 1].name
01674 = (char *) xmlStrdup ((xmlChar *) input->variable[j].name);
01675 else
01676 input->variable[j + 1].name = g_strdup (input->
variable[j].name);
01677 ++input->nvariables;
01678 g_signal_handler_block (window->entry_variable, window->
id_variable_label);
01679 gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_variable), i + 1);
01680 g_signal_handler_unblock (window->entry_variable, window->
id_variable_label);
01681 window_update ();
01682 #if DEBUG_INTERFACE
01683 fprintf (stderr, "window_add_variable: end\n");
01684 #endif
01685 }
01686
01691 void
01692 window_label_variable ()
01693 {
01694 unsigned int i;
01695 const char *buffer;
01696 #if DEBUG_INTERFACE
01697 fprintf (stderr, "window_label_variable: start\n");
01698 #endif
01699 i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01700 buffer = gtk_entry_get_text (window->entry_variable);
01701 g_signal_handler_block (window->combo_variable, window->
id_variable);
01702 gtk_combo_box_text_remove (window->combo_variable, i);
01703 gtk_combo_box_text_insert_text (window->combo_variable, i, buffer);
01704 gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_variable), i);
01705 g_signal_handler_unblock (window->combo_variable, window->
id_variable);
01706 #if DEBUG_INTERFACE
01707 fprintf (stderr, "window_label_variable: end\n");
01708 #endif
01709 }
01710
01715 void
01716 window_precision_variable ()
01717 {
01718 unsigned int i;
01719 #if DEBUG_INTERFACE
01720 fprintf (stderr, "window_precision_variable: start\n");
01721 #endif
01722 i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01723 input->variable[i].precision
01724 = (unsigned int) gtk_spin_button_get_value_as_int (window->spin_precision);
01725 gtk_spin_button_set_digits (window->spin_min, input->variable[i].
precision);
01726 gtk_spin_button_set_digits (window->spin_max, input->variable[i].
precision);
01727 gtk_spin_button_set_digits (window->spin_minabs,
input->variable[i].precision);
01728 gtk_spin_button_set_digits (window->spin_maxabs,
input->variable[i].precision);
01729
01731 #if DEBUG_INTERFACE
01732 fprintf (stderr, "window_precision_variable: end\n");
01733 #endif
01734 }
01735
01740 void
01741 window_rangemin_variable ()
01742 {
01743 unsigned int i;
01744 #if DEBUG_INTERFACE
01745 fprintf (stderr, "window_rangemin_variable: start\n");
01746 #endif
01747 i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01748 input->variable[i].rangemin = gtk_spin_button_get_value (window->
spin_min);
01749 #if DEBUG_INTERFACE
01750 fprintf (stderr, "window_rangemin_variable: end\n");
01751 #endif
01752 }

```

```

01753
01758 void
01759 window_rangemax_variable ()
01760 {
01761     unsigned int i;
01762     #if DEBUG_INTERFACE
01763         fprintf (stderr, "window_rangemax_variable: start\n");
01764     #endif
01765     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01766     input->variable[i].rangemax = gtk_spin_button_get_value (window->
        spin_max);
01767     #if DEBUG_INTERFACE
01768         fprintf (stderr, "window_rangemax_variable: end\n");
01769     #endif
01770 }
01771
01776 void
01777 window_rangeminabs_variable ()
01778 {
01779     unsigned int i;
01780     #if DEBUG_INTERFACE
01781         fprintf (stderr, "window_rangeminabs_variable: start\n");
01782     #endif
01783     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01784     input->variable[i].rangeminabs
        = gtk_spin_button_get_value (window->spin_minabs);
01785     #if DEBUG_INTERFACE
01786         fprintf (stderr, "window_rangeminabs_variable: end\n");
01787     #endif
01788 }
01789
01790
01795 void
01796 window_rangemaxabs_variable ()
01797 {
01798     unsigned int i;
01799     #if DEBUG_INTERFACE
01800         fprintf (stderr, "window_rangemaxabs_variable: start\n");
01801     #endif
01802     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01803     input->variable[i].rangemaxabs
        = gtk_spin_button_get_value (window->spin_maxabs);
01804     #if DEBUG_INTERFACE
01805         fprintf (stderr, "window_rangemaxabs_variable: end\n");
01806     #endif
01807 }
01808
01809
01814 void
01815 window_step_variable ()
01816 {
01817     unsigned int i;
01818     #if DEBUG_INTERFACE
01819         fprintf (stderr, "window_step_variable: start\n");
01820     #endif
01821     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01822     input->variable[i].step = gtk_spin_button_get_value (window->
        spin_step);
01823     #if DEBUG_INTERFACE
01824         fprintf (stderr, "window_step_variable: end\n");
01825     #endif
01826 }
01827
01832 void
01833 window_update_variable ()
01834 {
01835     int i;
01836     #if DEBUG_INTERFACE
01837         fprintf (stderr, "window_update_variable: start\n");
01838     #endif
01839     i = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_variable));
01840     if (i < 0)
01841         i = 0;
01842     switch (window_get_algorithm ())
01843     {
01844         case ALGORITHM_SWEEP:
01845             input->variable[i].nsweeps
                = gtk_spin_button_get_value_as_int (window->spin_sweeps);
01846             #if DEBUG_INTERFACE
01847                 fprintf (stderr, "window_update_variable: nsweeps[%d]=%u\n", i,
                    input->variable[i].nsweeps);
01848             #endif
01849             break;
01850         case ALGORITHM_GENETIC:
01851             input->variable[i].nbits
                = gtk_spin_button_get_value_as_int (window->spin_bits);
01852             #if DEBUG_INTERFACE
01853                 fprintf (stderr, "window_update_variable: nbits[%d]=%u\n", i,
                    input->variable[i].nbits);
01854             #endif
01855     }
01856 }

```

```

01858 #endif
01859 }
01860 #if DEBUG_INTERFACE
01861 fprintf (stderr, "window_update_variable: end\n");
01862 #endif
01863 }
01864
01872 int
01873 window_read (char *filename)
01874 {
01875     unsigned int i;
01876     char *buffer;
01877     #if DEBUG_INTERFACE
01878     fprintf (stderr, "window_read: start\n");
01879     #endif
01880
01881     // Reading new input file
01882     input_free ();
01883     if (!input_open (filename))
01884     {
01885         #if DEBUG_INTERFACE
01886         fprintf (stderr, "window_read: end\n");
01887         #endif
01888         return 0;
01889     }
01890
01891     // Setting GTK+ widgets data
01892     gtk_entry_set_text (window->entry_result, input->result);
01893     gtk_entry_set_text (window->entry_variables, input->
variables);
01894     buffer = g_build_filename (input->directory, input->
simulator, NULL);
01895     gtk_file_chooser_set_filename (GTK_FILE_CHOOSER
(window->button_simulator), buffer);
01896     g_free (buffer);
01897     gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON (window->check_evaluator),
(size_t) input->evaluator);
01898     if (input->evaluator)
01899     {
01900         buffer = g_build_filename (input->directory, input->
evaluator, NULL);
01901         gtk_file_chooser_set_filename (GTK_FILE_CHOOSER
(window->button_evaluator), buffer);
01902         g_free (buffer);
01903     }
01904     gtk_toggle_button_set_active
(GTK_TOGGLE_BUTTON (window->button_algorithm[input->
algorithm]), TRUE);
01905     switch (input->algorithm)
01906     {
01907     case ALGORITHM_MONTE_CARLO:
01908         gtk_spin_button_set_value (window->spin_simulations,
(gdouble) input->nsimulations);
01909     case ALGORITHM_SWEEP:
01910         gtk_spin_button_set_value (window->spin_iterations,
(gdouble) input->niterations);
01911         gtk_spin_button_set_value (window->spin_bests, (gdouble) input->
nbest);
01912         gtk_spin_button_set_value (window->spin_tolerance, input->
tolerance);
01913         gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON
(window->check_direction),
input->nsteps);
01914         if (input->nsteps)
01915         {
01916             gtk_toggle_button_set_active
(GTK_TOGGLE_BUTTON (window->button_direction
[input->direction]), TRUE);
01917             gtk_spin_button_set_value (window->spin_steps,
(gdouble) input->nsteps);
01918             gtk_spin_button_set_value (window->spin_relaxation,
(gdouble) input->relaxation);
01919             switch (input->direction)
01920             {
01921             case DIRECTION_METHOD_RANDOM:
01922                 gtk_spin_button_set_value (window->spin_estimates,
(gdouble) input->nestimates);
01923             }
01924             break;
01925         }
01926     default:
01927         gtk_spin_button_set_value (window->spin_population,
(gdouble) input->nsimulations);
01928         gtk_spin_button_set_value (window->spin_generations,
(gdouble) input->niterations);
01929         gtk_spin_button_set_value (window->spin_mutation, input->
mutation_ratio);

```

```

01944     gtk_spin_button_set_value (window->spin_reproduction,
01945                               input->reproduction_ratio);
01946     gtk_spin_button_set_value (window->spin_adaptation,
01947                               input->adaptation_ratio);
01948 }
01949 gtk_toggle_button_set_active
01950 (GTK_TOGGLE_BUTTON (window->button_norm[input->norm]), TRUE);
01951 gtk_spin_button_set_value (window->spin_p, input->p);
01952 gtk_spin_button_set_value (window->spin_threshold, input->
threshold);
01953 g_signal_handler_block (window->combo_experiment, window->
id_experiment);
01954 g_signal_handler_block (window->button_experiment,
01955                         window->id_experiment_name);
01956 gtk_combo_box_text_remove_all (window->combo_experiment);
01957 for (i = 0; i < input->nexperiments; ++i)
01958     gtk_combo_box_text_append_text (window->combo_experiment,
01959                                     input->experiment[i].name);
01960 g_signal_handler_unblock
01961 (window->button_experiment, window->id_experiment_name);
01962 g_signal_handler_unblock (window->combo_experiment, window->
id_experiment);
01963 gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_experiment), 0);
01964 g_signal_handler_block (window->combo_variable, window->
id_variable);
01965 g_signal_handler_block (window->entry_variable, window->
id_variable_label);
01966 gtk_combo_box_text_remove_all (window->combo_variable);
01967 for (i = 0; i < input->nvariables; ++i)
01968     gtk_combo_box_text_append_text (window->combo_variable,
01969                                     input->variable[i].name);
01970 g_signal_handler_unblock (window->entry_variable, window->
id_variable_label);
01971 g_signal_handler_unblock (window->combo_variable, window->
id_variable);
01972 gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_variable), 0);
01973 window_set_variable ();
01974 window_update ();
01975
01976 #if DEBUG_INTERFACE
01977 fprintf (stderr, "window_read: end\n");
01978 #endif
01979 return 1;
01980 }
01981
01986 void
01987 window_open ()
01988 {
01989     GtkFileChooserDialog *dlg;
01990     GtkFileFilter *filter;
01991     char *buffer, *directory, *name;
01992
01993     #if DEBUG_INTERFACE
01994     fprintf (stderr, "window_open: start\n");
01995     #endif
01996
01997     // Saving a backup of the current input file
01998     directory = g_strdup (input->directory);
01999     name = g_strdup (input->name);
02000
02001     // Opening dialog
02002     dlg = (GtkFileChooserDialog *)
02003     gtk_file_chooser_dialog_new (_, ("Open input file"),
02004                                 window->window,
02005                                 GTK_FILE_CHOOSER_ACTION_OPEN,
02006                                 _("_Cancel"), GTK_RESPONSE_CANCEL,
02007                                 _("_OK"), GTK_RESPONSE_OK, NULL);
02008
02009     // Adding XML filter
02010     filter = (GtkFileFilter *) gtk_file_filter_new ();
02011     gtk_file_filter_set_name (filter, "XML");
02012     gtk_file_filter_add_pattern (filter, "*.xml");
02013     gtk_file_filter_add_pattern (filter, "*.XML");
02014     gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter);
02015
02016     // Adding JSON filter
02017     filter = (GtkFileFilter *) gtk_file_filter_new ();
02018     gtk_file_filter_set_name (filter, "JSON");
02019     gtk_file_filter_add_pattern (filter, "*.json");
02020     gtk_file_filter_add_pattern (filter, "*.JSON");
02021     gtk_file_filter_add_pattern (filter, "*.js");
02022     gtk_file_filter_add_pattern (filter, "*.JS");
02023     gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter);
02024
02025     // If OK saving
02026     while (gtk_dialog_run (GTK_DIALOG (dlg)) == GTK_RESPONSE_OK)
02027     {

```

```

02028
02029 // Trying to open the input file
02030 buffer = gtk_file_chooser_get_filename (GTK_FILE_CHOOSER (dlg));
02031 if (!window_read (buffer))
02032 {
02033 #if DEBUG_INTERFACE
02034     fprintf (stderr, "window_open: error reading input file\n");
02035 #endif
02036     g_free (buffer);
02037
02038     // Reading backup file on error
02039     buffer = g_build_filename (directory, name, NULL);
02040     if (!input_open (buffer))
02041     {
02042
02043         // Closing on backup file reading error
02044         #if DEBUG_INTERFACE
02045             fprintf (stderr, "window_read: error reading backup file\n");
02046         #endif
02047         g_free (buffer);
02048         break;
02049     }
02050     g_free (buffer);
02051 }
02052 else
02053 {
02054     g_free (buffer);
02055     break;
02056 }
02057 }
02058
02059 // Freeing and closing
02060 g_free (name);
02061 g_free (directory);
02062 gtk_widget_destroy (GTK_WIDGET (dlg));
02063 #if DEBUG_INTERFACE
02064     fprintf (stderr, "window_open: end\n");
02065 #endif
02066 }
02067
02074 void
02075 window_new (GtkApplication * application)
02076 {
02077     unsigned int i;
02078     char *buffer, *buffer2, buffer3[64];
02079     char *label_algorithm[NALGORITHMS] = {
02080         "_Monte-Carlo", _("_Sweep"), _("_Genetic")
02081     };
02082     char *tip_algorithm[NALGORITHMS] = {
02083         _("Monte-Carlo brute force algorithm"),
02084         _("Sweep brute force algorithm"),
02085         _("Genetic algorithm")
02086     };
02087     char *label_direction[N DIRECTIONS] = {
02088         _("_Coordinates descent"), _("_Random")
02089     };
02090     char *tip_direction[N DIRECTIONS] = {
02091         _("Coordinates direction estimate method"),
02092         _("Random direction estimate method")
02093     };
02094     char *label_norm[NNORMS] = { "L2", "L", "Lp", "L1" };
02095     char *tip_norm[NNORMS] = {
02096         _("Euclidean error norm (L2)"),
02097         _("Maximum error norm (L)"),
02098         _("P error norm (Lp)"),
02099         _("Taxicab error norm (L1)")
02100     };
02101
02102 #if DEBUG_INTERFACE
02103     fprintf (stderr, "window_new: start\n");
02104 #endif
02105
02106 // Creating the window
02107 window->window = main_window
02108     = (GtkWindow *) gtk_application_window_new (application);
02109
02110 // Finish when closing the window
02111 g_signal_connect_swapped (window->window, "delete-event",
02112     G_CALLBACK (g_application_quit),
02113     G_APPLICATION (application));
02114
02115 // Setting the window title
02116 gtk_window_set_title (window->window, "MPCOTool");
02117
02118 // Creating the open button
02119 window->button_open = (GtkToolButton *) gtk_tool_button_new
02120     (gtk_image_new_from_icon_name ("document-open",

```

```

02121                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Open"));
02122 g_signal_connect (window->button_open, "clicked", window_open, NULL);
02123
02124 // Creating the save button
02125 window->button_save = (GtkToolButton *) gtk_tool_button_new
02126     (gtk_image_new_from_icon_name ("document-save",
02127                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Save"));
02128 g_signal_connect (window->button_save, "clicked", (void (*)(
02129     window_save,
02130     NULL));
02131
02132 // Creating the run button
02133 window->button_run = (GtkToolButton *) gtk_tool_button_new
02134     (gtk_image_new_from_icon_name ("system-run",
02135                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Run"));
02136 g_signal_connect (window->button_run, "clicked", window_run, NULL);
02137
02138 // Creating the options button
02139 window->button_options = (GtkToolButton *) gtk_tool_button_new
02140     (gtk_image_new_from_icon_name ("preferences-system",
02141                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Options"));
02142 g_signal_connect (window->button_options, "clicked", options_new, NULL);
02143
02144 // Creating the help button
02145 window->button_help = (GtkToolButton *) gtk_tool_button_new
02146     (gtk_image_new_from_icon_name ("help-browser",
02147                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Help"));
02148 g_signal_connect (window->button_help, "clicked", window_help, NULL);
02149
02150 // Creating the about button
02151 window->button_about = (GtkToolButton *) gtk_tool_button_new
02152     (gtk_image_new_from_icon_name ("help-about",
02153                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("About"));
02154 g_signal_connect (window->button_about, "clicked", window_about, NULL);
02155
02156 // Creating the exit button
02157 window->button_exit = (GtkToolButton *) gtk_tool_button_new
02158     (gtk_image_new_from_icon_name ("application-exit",
02159                                     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Exit"));
02160 g_signal_connect_swapped (window->button_exit, "clicked",
02161     G_CALLBACK (g_application_quit),
02162     G_APPLICATION (application));
02163
02164 // Creating the buttons bar
02165 window->bar_buttons = (GtkToolbar *) gtk_toolbar_new ();
02166 gtk_toolbar_insert
02167     (window->bar_buttons, GTK_TOOL_ITEM (window->button_open), 0);
02168 gtk_toolbar_insert
02169     (window->bar_buttons, GTK_TOOL_ITEM (window->button_save), 1);
02170 gtk_toolbar_insert
02171     (window->bar_buttons, GTK_TOOL_ITEM (window->button_run), 2);
02172 gtk_toolbar_insert
02173     (window->bar_buttons, GTK_TOOL_ITEM (window->button_options), 3);
02174 gtk_toolbar_insert
02175     (window->bar_buttons, GTK_TOOL_ITEM (window->button_help), 4);
02176 gtk_toolbar_insert
02177     (window->bar_buttons, GTK_TOOL_ITEM (window->button_about), 5);
02178 gtk_toolbar_insert
02179     (window->bar_buttons, GTK_TOOL_ITEM (window->button_exit), 6);
02180 gtk_toolbar_set_style (window->bar_buttons, GTK_TOOLBAR_BOTH);
02181
02182 // Creating the simulator program label and entry
02183 window->label_simulator = (GtkLabel *) gtk_label_new (_("Simulator program"));
02184 window->button_simulator = (GtkFileChooserButton *)
02185     gtk_file_chooser_button_new (_("Simulator program"),
02186     GTK_FILE_CHOOSER_ACTION_OPEN);
02187 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_simulator),
02188     _("Simulator program executable file"));
02189 gtk_widget_set_hexpand (GTK_WIDGET (window->button_simulator), TRUE);
02190
02191 // Creating the evaluator program label and entry
02192 window->check_evaluator = (GtkCheckButton *)
02193     gtk_check_button_new_with_mnemonic (_("Evaluator program"));
02194 g_signal_connect (window->check_evaluator, "toggled",
02195     window_update, NULL);
02196 window->button_evaluator = (GtkFileChooserButton *)
02197     gtk_file_chooser_button_new (_("Evaluator program"),
02198     GTK_FILE_CHOOSER_ACTION_OPEN);
02199 gtk_widget_set_tooltip_text
02200     (GTK_WIDGET (window->button_evaluator),
02201     _("Optional evaluator program executable file"));
02202
02203 // Creating the results files labels and entries
02204 window->label_result = (GtkLabel *) gtk_label_new (_("Result file"));
02205 window->entry_result = (GtkEntry *) gtk_entry_new ();
02206 gtk_widget_set_tooltip_text
02207     (GTK_WIDGET (window->entry_result), _("Best results file"));

```



```

02206 window->label_variables = (GtkLabel *) gtk_label_new (_("Variables file"));
02207 window->entry_variables = (GtkEntry *) gtk_entry_new ();
02208 gtk_widget_set_tooltip_text
02209     (GTK_WIDGET (window->entry_variables), _("All simulated results file"));
02210
02211 // Creating the files grid and attaching widgets
02212 window->grid_files = (GtkGrid *) gtk_grid_new ();
02213 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_simulator),
02214                 0, 0, 1, 1);
02215 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
button_simulator),
02216                 1, 0, 1, 1);
02217 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
check_evaluator),
02218                 0, 1, 1, 1);
02219 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
button_evaluator),
02220                 1, 1, 1, 1);
02221 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_result),
02222                 0, 2, 1, 1);
02223 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
entry_result),
02224                 1, 2, 1, 1);
02225 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_variables),
02226                 0, 3, 1, 1);
02227 gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
entry_variables),
02228                 1, 3, 1, 1);
02229
02230 // Creating the algorithm properties
02231 window->label_simulations = (GtkLabel *) gtk_label_new
02232     (_("Simulations number"));
02233 window->spin_simulations
02234     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02235 gtk_widget_set_tooltip_text
02236     (GTK_WIDGET (window->spin_simulations),
02237      _("Number of simulations to perform for each iteration"));
02238 gtk_widget_set_hexexpand (GTK_WIDGET (window->spin_simulations), TRUE);
02239 window->label_iterations = (GtkLabel *)
02240     gtk_label_new (_("Iterations number"));
02241 window->spin_iterations
02242     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02243 gtk_widget_set_tooltip_text
02244     (GTK_WIDGET (window->spin_iterations), _("Number of iterations"));
02245 g_signal_connect
02246     (window->spin_iterations, "value-changed", window_update, NULL);
02247 gtk_widget_set_hexexpand (GTK_WIDGET (window->spin_iterations), TRUE);
02248 window->label_tolerance = (GtkLabel *) gtk_label_new (_("Tolerance"));
02249 window->spin_tolerance =
02250     (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02251 gtk_widget_set_tooltip_text
02252     (GTK_WIDGET (window->spin_tolerance),
02253      _("Tolerance to set the variable interval on the next iteration"));
02254 window->label_bests = (GtkLabel *) gtk_label_new (_("Bests number"));
02255 window->spin_bests
02256     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02257 gtk_widget_set_tooltip_text
02258     (GTK_WIDGET (window->spin_bests),
02259      _("Number of best simulations used to set the variable interval "
02260        "on the next iteration"));
02261 window->label_population
02262     = (GtkLabel *) gtk_label_new (_("Population number"));
02263 window->spin_population
02264     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02265 gtk_widget_set_tooltip_text
02266     (GTK_WIDGET (window->spin_population),
02267      _("Number of population for the genetic algorithm"));
02268 gtk_widget_set_hexexpand (GTK_WIDGET (window->spin_population), TRUE);
02269 window->label_generations
02270     = (GtkLabel *) gtk_label_new (_("Generations number"));
02271 window->spin_generations
02272     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02273 gtk_widget_set_tooltip_text
02274     (GTK_WIDGET (window->spin_generations),
02275      _("Number of generations for the genetic algorithm"));
02276 window->label_mutation = (GtkLabel *) gtk_label_new (_("Mutation ratio"));
02277 window->spin_mutation
02278     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02279 gtk_widget_set_tooltip_text
02280     (GTK_WIDGET (window->spin_mutation),
02281      _("Ratio of mutation for the genetic algorithm"));
02282 window->label_reproduction
02283     = (GtkLabel *) gtk_label_new (_("Reproduction ratio"));
02284 window->spin_reproduction

```

```

02285     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02286     gtk_widget_set_tooltip_text
02287     (GTK_WIDGET (window->spin_reproduction),
02288      _("Ratio of reproduction for the genetic algorithm"));
02289     window->label_adaptation = (GtkLabel *) gtk_label_new (_("Adaptation ratio"));
02290     window->spin_adaptation
02291     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02292     gtk_widget_set_tooltip_text
02293     (GTK_WIDGET (window->spin_adaptation),
02294      _("Ratio of adaptation for the genetic algorithm"));
02295     window->label_threshold = (GtkLabel *) gtk_label_new (_("Threshold"));
02296     window->spin_threshold = (GtkSpinButton *)
02297     gtk_spin_button_new_with_range (-G_MAXDOUBLE, G_MAXDOUBLE,
02298     precision[DEFAULT_PRECISION]);
02299     gtk_widget_set_tooltip_text
02300     (GTK_WIDGET (window->spin_threshold),
02301      _("Threshold in the objective function to finish the simulations"));
02302     window->scrolled_threshold =
02303     (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02304     gtk_container_add (GTK_CONTAINER (window->scrolled_threshold),
02305     GTK_WIDGET (window->spin_threshold));
02306     // gtk_widget_set_hexpand (GTK_WIDGET (window->scrolled_threshold), TRUE);
02307     // gtk_widget_set_halign (GTK_WIDGET (window->scrolled_threshold),
02308     // GTK_ALIGN_FILL);
02309
02310     // Creating the direction search method properties
02311     window->check_direction = (GtkCheckButton *)
02312     gtk_check_button_new_with_mnemonic (_("_Direction search method"));
02313     g_signal_connect (window->check_direction, "clicked",
02314     window_update, NULL);
02315     window->grid_direction = (GtkGrid *) gtk_grid_new ();
02316     window->button_direction[0] = (GtkRadioButton *)
02317     gtk_radio_button_new_with_mnemonic (NULL, label_direction[0]);
02318     gtk_grid_attach (window->grid_direction,
02319     GTK_WIDGET (window->button_direction[0]), 0, 0, 1, 1);
02320     g_signal_connect (window->button_direction[0], "clicked",
02321     window_update,
02322     NULL);
02323     for (i = 0; ++i < NDIRECTIONS;)
02324     {
02325         window->button_direction[i] = (GtkRadioButton *)
02326         gtk_radio_button_new_with_mnemonic
02327         (gtk_radio_button_get_group (window->button_direction[0]),
02328          label_direction[i]);
02329         gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_direction[i]),
02330         tip_direction[i]);
02331         gtk_grid_attach (window->grid_direction,
02332         GTK_WIDGET (window->button_direction[i]), 0, i, 1, 1);
02333         g_signal_connect (window->button_direction[i], "clicked",
02334         window_update, NULL);
02335     }
02336     window->label_steps = (GtkLabel *) gtk_label_new (_("Steps number"));
02337     window->spin_steps = (GtkSpinButton *)
02338     gtk_spin_button_new_with_range (1., 1.e12, 1.);
02339     gtk_widget_set_hexpand (GTK_WIDGET (window->spin_steps), TRUE);
02340     window->label_estimates
02341     = (GtkLabel *) gtk_label_new (_("Direction estimates number"));
02342     window->spin_estimates = (GtkSpinButton *)
02343     gtk_spin_button_new_with_range (1., 1.e3, 1.);
02344     window->label_relaxation
02345     = (GtkLabel *) gtk_label_new (_("Relaxation parameter"));
02346     window->spin_relaxation = (GtkSpinButton *)
02347     gtk_spin_button_new_with_range (0., 2., 0.001);
02348     gtk_grid_attach (window->grid_direction, GTK_WIDGET (window->
02349     label_steps),
02350     0, NDIRECTIONS, 1, 1);
02351     gtk_grid_attach (window->grid_direction, GTK_WIDGET (window->
02352     spin_steps),
02353     1, NDIRECTIONS, 1, 1);
02354     gtk_grid_attach (window->grid_direction,
02355     GTK_WIDGET (window->label_estimates), 0, NDIRECTIONS + 1,
02356     1, 1);
02357     gtk_grid_attach (window->grid_direction,
02358     GTK_WIDGET (window->spin_estimates), 1, NDIRECTIONS + 1, 1,
02359     1);
02360     gtk_grid_attach (window->grid_direction,
02361     GTK_WIDGET (window->label_relaxation), 0, NDIRECTIONS + 2,
02362     1, 1);
02363     gtk_grid_attach (window->grid_direction,
02364     GTK_WIDGET (window->spin_relaxation), 1, NDIRECTIONS + 2,
02365     1, 1);
02366
02367     // Creating the array of algorithms
02368     window->grid_algorithm = (GtkGrid *) gtk_grid_new ();
02369     window->button_algorithm[0] = (GtkRadioButton *)
02370     gtk_radio_button_new_with_mnemonic (NULL, label_algorithm[0]);
02371     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_algorithm[0]),

```

```

02368             tip_algorithm[0]);
02369     gtk_grid_attach (window->grid_algorithm,
02370         GTK_WIDGET (window->button_algorithm[0]), 0, 0, 1, 1);
02371     g_signal_connect (window->button_algorithm[0], "clicked",
02372         window_set_algorithm, NULL);
02373     for (i = 0; ++i < NALGORITHMS;)
02374     {
02375         window->button_algorithm[i] = (GtkRadioButton *)
02376             gtk_radio_button_new_with_mnemonic
02377             (gtk_radio_button_get_group (window->button_algorithm[0]),
02378                 label_algorithm[i]);
02379         gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_algorithm[i]),
02380             tip_algorithm[i]);
02381         gtk_grid_attach (window->grid_algorithm,
02382             GTK_WIDGET (window->button_algorithm[i]), 0, i, 1, 1);
02383         g_signal_connect (window->button_algorithm[i], "clicked",
02384             window_set_algorithm, NULL);
02385     }
02386     gtk_grid_attach (window->grid_algorithm,
02387         GTK_WIDGET (window->label_simulations), 0,
02388             NALGORITHMS, 1, 1);
02389     gtk_grid_attach (window->grid_algorithm,
02390         GTK_WIDGET (window->spin_simulations), 1, NALGORITHMS, 1, 1);
02391     gtk_grid_attach (window->grid_algorithm,
02392         GTK_WIDGET (window->label_iterations), 0, NALGORITHMS + 1,
02393             1, 1);
02394     gtk_grid_attach (window->grid_algorithm,
02395         GTK_WIDGET (window->spin_iterations), 1, NALGORITHMS + 1,
02396             1, 1);
02397     gtk_grid_attach (window->grid_algorithm,
02398         GTK_WIDGET (window->label_tolerance), 0, NALGORITHMS + 2,
02399             1, 1);
02400     gtk_grid_attach (window->grid_algorithm,
02401         GTK_WIDGET (window->spin_tolerance), 1, NALGORITHMS + 2, 1,
02402             1);
02403     gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (window->
02404 label_bests),
02405         0, NALGORITHMS + 3, 1, 1);
02406     gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (window->
02407 spin_bests), 1,
02408         NALGORITHMS + 3, 1, 1);
02409     gtk_grid_attach (window->grid_algorithm,
02410         GTK_WIDGET (window->label_population), 0, NALGORITHMS + 4,
02411             1, 1);
02412     gtk_grid_attach (window->grid_algorithm,
02413         GTK_WIDGET (window->spin_population), 1, NALGORITHMS + 4,
02414             1, 1);
02415     gtk_grid_attach (window->grid_algorithm,
02416         GTK_WIDGET (window->label_generations), 0, NALGORITHMS + 5,
02417             1, 1);
02418     gtk_grid_attach (window->grid_algorithm,
02419         GTK_WIDGET (window->spin_generations), 1, NALGORITHMS + 5,
02420             1, 1);
02421     gtk_grid_attach (window->grid_algorithm,
02422         GTK_WIDGET (window->label_mutation), 0, NALGORITHMS + 6, 1,
02423             1);
02424     gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (window->
02425 spin_mutation),
02426         1, NALGORITHMS + 6, 1, 1);
02427     gtk_grid_attach (window->grid_algorithm,
02428         GTK_WIDGET (window->label_reproduction), 0,
02429             NALGORITHMS + 7, 1, 1);
02430     gtk_grid_attach (window->grid_algorithm,
02431         GTK_WIDGET (window->spin_reproduction), 1, NALGORITHMS + 7,
02432             1, 1);
02433     gtk_grid_attach (window->grid_algorithm,
02434         GTK_WIDGET (window->label_adaptation), 0, NALGORITHMS + 8,
02435             1, 1);
02436     gtk_grid_attach (window->grid_algorithm,
02437         GTK_WIDGET (window->spin_adaptation), 1, NALGORITHMS + 8,
02438             1, 1);
02439     gtk_grid_attach (window->grid_algorithm,
02440         GTK_WIDGET (window->check_direction), 0, NALGORITHMS + 9,
02441             2, 1);
02442     gtk_grid_attach (window->grid_algorithm,
02443         GTK_WIDGET (window->grid_direction), 0, NALGORITHMS + 10,
02444             2, 1);
02445     gtk_grid_attach (window->grid_algorithm,
02446         GTK_WIDGET (window->label_threshold), 0, NALGORITHMS + 11,
02447             1, 1);
02448     gtk_grid_attach (window->grid_algorithm,
02449         GTK_WIDGET (window->scrolled_threshold), 1,
02450             NALGORITHMS + 11, 1, 1);
02451     window->frame_algorithm = (GtkFrame *) gtk_frame_new (_("Algorithm"));
02452     gtk_container_add (GTK_CONTAINER (window->frame_algorithm),
02453         GTK_WIDGET (window->grid_algorithm));

```

```

02452 // Creating the variable widgets
02453 window->combo_variable = (GtkComboBoxText *) gtk_combo_box_text_new ();
02454 gtk_widget_set_tooltip_text
02455     (GTK_WIDGET (window->combo_variable), _("Variables selector"));
02456 window->id_variable = g_signal_connect
02457     (window->combo_variable, "changed", window_set_variable, NULL);
02458 window->button_add_variable
02459     = (GtkButton *) gtk_button_new_from_icon_name ("list-add",
02460     GTK_ICON_SIZE_BUTTON);
02461 g_signal_connect
02462     (window->button_add_variable, "clicked",
02463     window_add_variable, NULL);
02464 gtk_widget_set_tooltip_text
02465     (GTK_WIDGET (window->button_add_variable), _("Add variable"));
02466 window->button_remove_variable
02467     = (GtkButton *) gtk_button_new_from_icon_name ("list-remove",
02468     GTK_ICON_SIZE_BUTTON);
02469 g_signal_connect
02470     (window->button_remove_variable, "clicked",
02471     window_remove_variable, NULL);
02472 gtk_widget_set_tooltip_text
02473     (GTK_WIDGET (window->button_remove_variable), _("Remove variable"));
02474 window->label_variable = (GtkLabel *) gtk_label_new (_("Name"));
02475 window->entry_variable = (GtkEntry *) gtk_entry_new ();
02476 gtk_widget_set_tooltip_text
02477     (GTK_WIDGET (window->entry_variable), _("Variable name"));
02478 gtk_widget_set_hexpand (GTK_WIDGET (window->entry_variable), TRUE);
02479 window->id_variable_label = g_signal_connect
02480     (window->entry_variable, "changed", window_label_variable, NULL);
02481 window->label_min = (GtkLabel *) gtk_label_new (_("Minimum"));
02482 window->spin_min = (GtkSpinButton *) gtk_spin_button_new_with_range
02483     (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02484 gtk_widget_set_tooltip_text
02485     (GTK_WIDGET (window->spin_min), _("Minimum initial value of the variable"));
02486 window->scrolled_min
02487     = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02488 gtk_container_add (GTK_CONTAINER (window->scrolled_min),
02489     GTK_WIDGET (window->spin_min));
02490 g_signal_connect (window->spin_min, "value-changed",
02491     window_rangemin_variable, NULL);
02492 window->label_max = (GtkLabel *) gtk_label_new (_("Maximum"));
02493 window->spin_max = (GtkSpinButton *) gtk_spin_button_new_with_range
02494     (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02495 gtk_widget_set_tooltip_text
02496     (GTK_WIDGET (window->spin_max), _("Maximum initial value of the variable"));
02497 window->scrolled_max
02498     = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02499 gtk_container_add (GTK_CONTAINER (window->scrolled_max),
02500     GTK_WIDGET (window->spin_max));
02501 g_signal_connect (window->spin_max, "value-changed",
02502     window_rangemax_variable, NULL);
02503 window->check_minabs = (GtkCheckButton *)
02504     gtk_check_button_new_with_mnemonic (_("_Absolute minimum"));
02505 g_signal_connect (window->check_minabs, "toggled", window_update, NULL);
02506 window->spin_minabs = (GtkSpinButton *) gtk_spin_button_new_with_range
02507     (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02508 gtk_widget_set_tooltip_text
02509     (GTK_WIDGET (window->spin_minabs),
02510     _("Minimum allowed value of the variable"));
02511 window->scrolled_minabs
02512     = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02513 gtk_container_add (GTK_CONTAINER (window->scrolled_minabs),
02514     GTK_WIDGET (window->spin_minabs));
02515 g_signal_connect (window->spin_minabs, "value-changed",
02516     window_rangeminabs_variable, NULL);
02517 window->check_maxabs = (GtkCheckButton *)
02518     gtk_check_button_new_with_mnemonic (_("_Absolute maximum"));
02519 g_signal_connect (window->check_maxabs, "toggled", window_update, NULL);
02520 window->spin_maxabs = (GtkSpinButton *) gtk_spin_button_new_with_range
02521     (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02522 gtk_widget_set_tooltip_text
02523     (GTK_WIDGET (window->spin_maxabs),
02524     _("Maximum allowed value of the variable"));
02525 window->scrolled_maxabs
02526     = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02527 gtk_container_add (GTK_CONTAINER (window->scrolled_maxabs),
02528     GTK_WIDGET (window->spin_maxabs));
02529 g_signal_connect (window->spin_maxabs, "value-changed",
02530     window_rangemaxabs_variable, NULL);
02531 window->label_precision = (GtkLabel *) gtk_label_new (_("Precision digits"));
02532 window->spin_precision = (GtkSpinButton *)
02533     gtk_spin_button_new_with_range (0., (gdouble) DEFAULT_PRECISION, 1.);
02534 gtk_widget_set_tooltip_text
02535     (GTK_WIDGET (window->spin_precision),
02536     _("Number of precision floating point digits\n"
02537     "0 is for integer numbers"));
02538 g_signal_connect (window->spin_precision, "value-changed",

```

```

02537         window_precision_variable, NULL);
02538 window->label_sweeps = (GtkLabel *) gtk_label_new (_("Sweeps number"));
02539 window->spin_sweeps =
02540     (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02541 gtk_widget_set_tooltip_text (GTK_WIDGET (window->spin_sweeps),
02542     _("Number of steps sweeping the variable"));
02543 g_signal_connect (window->spin_sweeps, "value-changed",
02544     window_update_variable, NULL);
02545 window->label_bits = (GtkLabel *) gtk_label_new (_("Bits number"));
02546 window->spin_bits
02547     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 64., 1.);
02548 gtk_widget_set_tooltip_text
02549     (GTK_WIDGET (window->spin_bits),
02550     _("Number of bits to encode the variable"));
02551 g_signal_connect
02552     (window->spin_bits, "value-changed", window_update_variable, NULL);
02553 window->label_step = (GtkLabel *) gtk_label_new (_("Step size"));
02554 window->spin_step = (GtkSpinButton *) gtk_spin_button_new_with_range
02555     (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02556 gtk_widget_set_tooltip_text
02557     (GTK_WIDGET (window->spin_step),
02558     _("Initial step size for the direction search method"));
02559 window->scrolled_step
02560     = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02561 gtk_container_add (GTK_CONTAINER (window->scrolled_step),
02562     GTK_WIDGET (window->spin_step));
02563 g_signal_connect
02564     (window->spin_step, "value-changed", window_step_variable, NULL);
02565 window->grid_variable = (GtkGrid *) gtk_grid_new ();
02566 gtk_grid_attach (window->grid_variable,
02567     GTK_WIDGET (window->combo_variable), 0, 0, 2, 1);
02568 gtk_grid_attach (window->grid_variable,
02569     GTK_WIDGET (window->button_add_variable), 2, 0, 1, 1);
02570 gtk_grid_attach (window->grid_variable,
02571     GTK_WIDGET (window->button_remove_variable), 3, 0, 1, 1);
02572 gtk_grid_attach (window->grid_variable,
02573     GTK_WIDGET (window->label_variable), 0, 1, 1, 1);
02574 gtk_grid_attach (window->grid_variable,
02575     GTK_WIDGET (window->entry_variable), 1, 1, 3, 1);
02576 gtk_grid_attach (window->grid_variable,
02577     GTK_WIDGET (window->label_min), 0, 2, 1, 1);
02578 gtk_grid_attach (window->grid_variable,
02579     GTK_WIDGET (window->scrolled_min), 1, 2, 3, 1);
02580 gtk_grid_attach (window->grid_variable,
02581     GTK_WIDGET (window->label_max), 0, 3, 1, 1);
02582 gtk_grid_attach (window->grid_variable,
02583     GTK_WIDGET (window->scrolled_max), 1, 3, 3, 1);
02584 gtk_grid_attach (window->grid_variable,
02585     GTK_WIDGET (window->check_minabs), 0, 4, 1, 1);
02586 gtk_grid_attach (window->grid_variable,
02587     GTK_WIDGET (window->scrolled_minabs), 1, 4, 3, 1);
02588 gtk_grid_attach (window->grid_variable,
02589     GTK_WIDGET (window->check_maxabs), 0, 5, 1, 1);
02590 gtk_grid_attach (window->grid_variable,
02591     GTK_WIDGET (window->scrolled_maxabs), 1, 5, 3, 1);
02592 gtk_grid_attach (window->grid_variable,
02593     GTK_WIDGET (window->label_precision), 0, 6, 1, 1);
02594 gtk_grid_attach (window->grid_variable,
02595     GTK_WIDGET (window->spin_precision), 1, 6, 3, 1);
02596 gtk_grid_attach (window->grid_variable,
02597     GTK_WIDGET (window->label_sweeps), 0, 7, 1, 1);
02598 gtk_grid_attach (window->grid_variable,
02599     GTK_WIDGET (window->spin_sweeps), 1, 7, 3, 1);
02600 gtk_grid_attach (window->grid_variable,
02601     GTK_WIDGET (window->label_bits), 0, 8, 1, 1);
02602 gtk_grid_attach (window->grid_variable,
02603     GTK_WIDGET (window->spin_bits), 1, 8, 3, 1);
02604 gtk_grid_attach (window->grid_variable,
02605     GTK_WIDGET (window->label_step), 0, 9, 1, 1);
02606 gtk_grid_attach (window->grid_variable,
02607     GTK_WIDGET (window->scrolled_step), 1, 9, 3, 1);
02608 window->frame_variable = (GtkFrame *) gtk_frame_new (_("Variable"));
02609 gtk_container_add (GTK_CONTAINER (window->frame_variable),
02610     GTK_WIDGET (window->grid_variable));
02611
02612 // Creating the experiment widgets
02613 window->combo_experiment = (GtkComboBoxText *) gtk_combo_box_text_new ();
02614 gtk_widget_set_tooltip_text (GTK_WIDGET (window->combo_experiment),
02615     _("Experiment selector"));
02616 window->id_experiment = g_signal_connect
02617     (window->combo_experiment, "changed", window_set_experiment, NULL);
02618
02619 window->button_add_experiment
02620     = (GtkButton *) gtk_button_new_from_icon_name ("list-add",
02621     GTK_ICON_SIZE_BUTTON);
02622 g_signal_connect
02623     (window->button_add_experiment, "clicked",

```

```

window_add_experiment, NULL);
02623 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_add_experiment),
02624 _("Add experiment"));
02625 window->button_remove_experiment
02626 = (GtkButton *) gtk_button_new_from_icon_name ("list-remove",
02627 GTK_ICON_SIZE_BUTTON);
02628 g_signal_connect (window->button_remove_experiment, "clicked",
02629 window_remove_experiment, NULL);
02630 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_remove_experiment),
02631 _("Remove experiment"));
02632 window->label_experiment
02633 = (GtkLabel *) gtk_label_new (_("Experimental data file"));
02634 window->button_experiment = (GtkFileChooserButton *)
02635 gtk_file_chooser_button_new (_("Experimental data file"),
02636 GTK_FILE_CHOOSER_ACTION_OPEN);
02637 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_experiment),
02638 _("Experimental data file"));
02639 window->id_experiment_name
02640 = g_signal_connect (window->button_experiment, "selection-changed",
02641 window_name_experiment, NULL);
02642 gtk_widget_set_hexand (GTK_WIDGET (window->button_experiment), TRUE);
02643 window->label_weight = (GtkLabel *) gtk_label_new (_("Weight"));
02644 window->spin_weight
02645 = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02646 gtk_widget_set_tooltip_text
02647 (GTK_WIDGET (window->spin_weight),
02648 _("Weight factor to build the objective function"));
02649 g_signal_connect
02650 (window->spin_weight, "value-changed", window_weight_experiment,
NULL);
02651 window->grid_experiment = (GtkGrid *) gtk_grid_new ();
02652 gtk_grid_attach (window->grid_experiment,
02653 GTK_WIDGET (window->combo_experiment), 0, 0, 2, 1);
02654 gtk_grid_attach (window->grid_experiment,
02655 GTK_WIDGET (window->button_add_experiment), 2, 0, 1, 1);
02656 gtk_grid_attach (window->grid_experiment,
02657 GTK_WIDGET (window->button_remove_experiment), 3, 0, 1, 1);
02658 gtk_grid_attach (window->grid_experiment,
02659 GTK_WIDGET (window->label_experiment), 0, 1, 1, 1);
02660 gtk_grid_attach (window->grid_experiment,
02661 GTK_WIDGET (window->button_experiment), 1, 1, 3, 1);
02662 gtk_grid_attach (window->grid_experiment,
02663 GTK_WIDGET (window->label_weight), 0, 2, 1, 1);
02664 gtk_grid_attach (window->grid_experiment,
02665 GTK_WIDGET (window->spin_weight), 1, 2, 3, 1);
02666 for (i = 0; i < MAX_NINPUS; ++i)
02667 {
02668     snprintf (buffer3, 64, "%s %u", _("Input template"), i + 1);
02669     window->check_template[i] = (GtkCheckButton *)
02670     gtk_check_button_new_with_label (buffer3);
02671     window->id_template[i]
02672     = g_signal_connect (window->check_template[i], "toggled",
02673     window_inputs_experiment, NULL);
02674     gtk_grid_attach (window->grid_experiment,
02675     GTK_WIDGET (window->check_template[i]), 0, 3 + i, 1, 1);
02676     window->button_template[i] =
02677     (GtkFileChooserButton *)
02678     gtk_file_chooser_button_new (_("Input template"),
02679     GTK_FILE_CHOOSER_ACTION_OPEN);
02680     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_template[i]),
02681     _("Experimental input template file"));
02682     window->id_input[i] =
02683     g_signal_connect_swapped (window->button_template[i],
02684     "selection-changed",
02685     (void *) window_template_experiment,
02686     (void *) (size_t) i);
02687     gtk_grid_attach (window->grid_experiment,
02688     GTK_WIDGET (window->button_template[i]), 1, 3 + i, 3, 1);
02689 }
02690 window->frame_experiment = (GtkFrame *) gtk_frame_new (_("Experiment"));
02691 gtk_container_add (GTK_CONTAINER (window->frame_experiment),
02692 GTK_WIDGET (window->grid_experiment));
02693
02694 // Creating the error norm widgets
02695 window->frame_norm = (GtkFrame *) gtk_frame_new (_("Error norm"));
02696 window->grid_norm = (GtkGrid *) gtk_grid_new ();
02697 gtk_container_add (GTK_CONTAINER (window->frame_norm),
02698 GTK_WIDGET (window->grid_norm));
02699 window->button_norm[0] = (GtkRadioButton *)
02700     gtk_radio_button_new_with_mnemonic (NULL, label_norm[0]);
02701 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_norm[0]),
02702 tip_norm[0]);
02703 gtk_grid_attach (window->grid_norm,
02704 GTK_WIDGET (window->button_norm[0]), 0, 0, 1, 1);
02705 g_signal_connect (window->button_norm[0], "clicked", window_update, NULL);
02706 for (i = 0; ++i < NNORMS;)
02707 {

```



```


02708     window->button_norm[i] = (GtkRadioButton *)
02709         gtk_radio_button_new_with_mnemonic
02710         (gtk_radio_button_get_group (window->button_norm[0]), label_norm[i]);
02711     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_norm[i]),
02712         tip_norm[i]);
02713     gtk_grid_attach (window->grid_norm,
02714         GTK_WIDGET (window->button_norm[i]), 0, i, 1, 1);
02715     g_signal_connect (window->button_norm[i], "clicked",
02716         window_update, NULL);
02717 }
02718 window->label_p = (GtkLabel *) gtk_label_new (_("P parameter"));
02719 gtk_grid_attach (window->grid_norm, GTK_WIDGET (window->label_p), 1, 1, 1, 1);
02720 window->spin_p =
02721     (GtkSpinButton *) gtk_spin_button_new_with_range (-G_MAXDOUBLE,
02722         G_MAXDOUBLE, 0.01);
02723 gtk_widget_set_tooltip_text (GTK_WIDGET (window->spin_p),
02724     _("P parameter for the P error norm"));
02725 window->scrolled_p =
02726     (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02727 gtk_container_add (GTK_CONTAINER (window->scrolled_p),
02728     GTK_WIDGET (window->spin_p));
02729 gtk_widget_set_hexpand (GTK_WIDGET (window->scrolled_p), TRUE);
02730 gtk_widget_set_halign (GTK_WIDGET (window->scrolled_p), GTK_ALIGN_FILL);
02731 gtk_grid_attach (window->grid_norm, GTK_WIDGET (window->scrolled_p),
02732     1, 2, 1, 2);
02733 // Creating the grid and attaching the widgets to the grid
02734 window->grid = (GtkGrid *) gtk_grid_new ();
02735 gtk_grid_attach (window->grid, GTK_WIDGET (window->bar_buttons), 0, 0, 3, 1);
02736 gtk_grid_attach (window->grid, GTK_WIDGET (window->grid_files), 0, 1, 1, 1);
02737 gtk_grid_attach (window->grid,
02738     GTK_WIDGET (window->frame_algorithm), 0, 2, 1, 1);
02739 gtk_grid_attach (window->grid,
02740     GTK_WIDGET (window->frame_variable), 1, 2, 1, 1);
02741 gtk_grid_attach (window->grid,
02742     GTK_WIDGET (window->frame_experiment), 2, 2, 1, 1);
02743 gtk_grid_attach (window->grid, GTK_WIDGET (window->frame_norm), 1, 1, 2, 1);
02744 gtk_container_add (GTK_CONTAINER (window->window), GTK_WIDGET (window->
02745     grid));
02746 // Setting the window logo
02747 window->logo = gdk_pixbuf_new_from_xpm_data (logo);
02748 gtk_window_set_icon (window->window, window->logo);
02749 // Showing the window
02750 gtk_widget_show_all (GTK_WIDGET (window->window));
02751 // In GTK+ 3.16 and 3.18 the default scrolled size is wrong
02752 #if GTK_MINOR_VERSION >= 16
02753     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_min), -1, 40);
02754     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_max), -1, 40);
02755     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_minabs), -1, 40);
02756     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_maxabs), -1, 40);
02757     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_step), -1, 40);
02758     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_p), -1, 40);
02759     gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_threshold), -1, 40);
02760 #endif
02761 // Reading initial example
02762 input_new ();
02763 buffer2 = g_get_current_dir ();
02764 buffer = g_build_filename (buffer2, "..", "tests", "test1", INPUT_FILE, NULL);
02765 g_free (buffer2);
02766 window_read (buffer);
02767 g_free (buffer);
02768 #if DEBUG_INTERFACE
02769     fprintf (stderr, "window_new: start\n");
02770 #endif
02771 }

```

## 4.13 interface.h File Reference

Header file to define the graphical interface functions.

This graph shows which files directly or indirectly include this file:

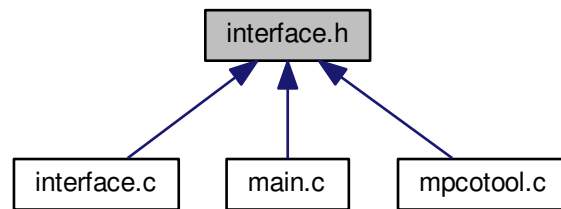

## Data Structures

- struct [Options](#)  
*Struct to define the options dialog.*
- struct [Running](#)  
*Struct to define the running dialog.*
- struct [Window](#)  
*Struct to define the main window.*

## Macros

- `#define` [MAX\\_LENGTH](#) ([DEFAULT\\_PRECISION](#) + 8)  
*Max length of texts allowed in GtkSpinButtons.*

## Functions

- unsigned int [gtk\\_array\\_get\\_active](#) (GtkRadioButton \*array[], unsigned int n)  
*Function to get the active GtkRadioButton.*
- void [input\\_save](#) (char \*filename)  
*Function to save the input file.*
- void [options\\_new](#) ()  
*Function to open the options dialog.*
- void [running\\_new](#) ()  
*Function to open the running dialog.*
- unsigned int [window\\_get\\_algorithm](#) ()  
*Function to get the stochastic algorithm number.*
- unsigned int [window\\_get\\_direction](#) ()  
*Function to get the direction search method number.*
- unsigned int [window\\_get\\_norm](#) ()  
*Function to get the norm method number.*
- void [window\\_save\\_direction](#) ()  
*Function to save the direction search method data in the input file.*
- int [window\\_save](#) ()



- Function to save the input file.*

  - void [window\\_run](#) ()
- Function to run a optimization.*

  - void [window\\_help](#) ()
- Function to show a help dialog.*

  - void [window\\_update\\_direction](#) ()
- Function to update direction search method widgets view in the main window.*

  - void [window\\_update](#) ()
- Function to update the main window view.*

  - void [window\\_set\\_algorithm](#) ()
- Function to avoid memory errors changing the algorithm.*

  - void [window\\_set\\_experiment](#) ()
- Function to set the experiment data in the main window.*

  - void [window\\_remove\\_experiment](#) ()
- Function to remove an experiment in the main window.*

  - void [window\\_add\\_experiment](#) ()
- Function to add an experiment in the main window.*

  - void [window\\_name\\_experiment](#) ()
- Function to set the experiment name in the main window.*

  - void [window\\_weight\\_experiment](#) ()
- Function to update the experiment weight in the main window.*

  - void [window\\_inputs\\_experiment](#) ()
- Function to update the experiment input templates number in the main window.*

  - void [window\\_template\\_experiment](#) (void \*data)
- Function to update the experiment i-th input template in the main window.*

  - void [window\\_set\\_variable](#) ()
- Function to set the variable data in the main window.*

  - void [window\\_remove\\_variable](#) ()
- Function to remove a variable in the main window.*

  - void [window\\_add\\_variable](#) ()
- Function to add a variable in the main window.*

  - void [window\\_label\\_variable](#) ()
- Function to set the variable label in the main window.*

  - void [window\\_precision\\_variable](#) ()
- Function to update the variable precision in the main window.*

  - void [window\\_rangemin\\_variable](#) ()
- Function to update the variable rangemin in the main window.*

  - void [window\\_rangemax\\_variable](#) ()
- Function to update the variable rangemax in the main window.*

  - void [window\\_rangeminabs\\_variable](#) ()
- Function to update the variable rangeminabs in the main window.*

  - void [window\\_rangemaxabs\\_variable](#) ()
- Function to update the variable rangemaxabs in the main window.*

  - void [window\\_update\\_variable](#) ()
- Function to update the variable data in the main window.*

  - int [window\\_read](#) (char \*filename)
- Function to read the input data of a file.*

  - void [window\\_open](#) ()
- Function to open the input data.*

  - void [window\\_new](#) (GtkApplication \*application)
- Function to open the main window.*

## Variables

- `const char * logo []`  
*Logo pixmap.*
- `Options options [1]`  
*[Options](#) struct to define the options dialog.*
- `Running running [1]`  
*[Running](#) struct to define the running dialog.*
- `Window window [1]`  
*[Window](#) struct to define the main interface window.*

### 4.13.1 Detailed Description

Header file to define the graphical interface functions.

#### Authors

Javier Burguete.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [interface.h](#).

### 4.13.2 Function Documentation

#### 4.13.2.1 `gtk_array_get_active()`

```
unsigned int gtk_array_get_active (  
    GtkWidget * array[],  
    unsigned int n )
```

Function to get the active GtkWidget.

#### Parameters

<i>array</i>	Array of GtkWidget.
<i>n</i>	Number of GtkWidget.

#### Returns

Active GtkWidget.

Definition at line [565](#) of file [utils.c](#).

```

00566 {
00567     unsigned int i;
00568     for (i = 0; i < n; ++i)
00569         if (gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON (array[i])))
00570             break;
00571     return i;
00572 }

```

#### 4.13.2.2 input\_save()

```

void input_save (
    char * filename )

```

Function to save the input file.

##### Parameters

<i>filename</i>	Input file name.
-----------------	------------------


Definition at line 575 of file [interface.c](#).

```

00576 {
00577     xmlDoc *doc;
00578     JsonGenerator *generator;
00579
00580 #if DEBUG_INTERFACE
00581     fprintf (stderr, "input_save: start\n");
00582 #endif
00583
00584     // Getting the input file directory
00585     input->name = g_path_get_basename (filename);
00586     input->directory = g_path_get_dirname (filename);
00587
00588     if (input->type == INPUT_TYPE_XML)
00589     {
00590         // Opening the input file
00591         doc = xmlNewDoc ((const xmlChar *) "1.0");
00592         input_save_xml (doc);
00593
00594         // Saving the XML file
00595         xmlSaveFormatFile (filename, doc, 1);
00596
00597         // Freeing memory
00598         xmlFreeDoc (doc);
00599     }
00600     else
00601     {
00602         // Opening the input file
00603         generator = json_generator_new ();
00604         json_generator_set_pretty (generator, TRUE);
00605         input_save_json (generator);
00606
00607         // Saving the JSON file
00608         json_generator_to_file (generator, filename, NULL);
00609
00610         // Freeing memory
00611         g_object_unref (generator);
00612     }
00613
00614 #if DEBUG_INTERFACE
00615     fprintf (stderr, "input_save: end\n");
00616 #endif
00617 }

```

Here is the call graph for this function:

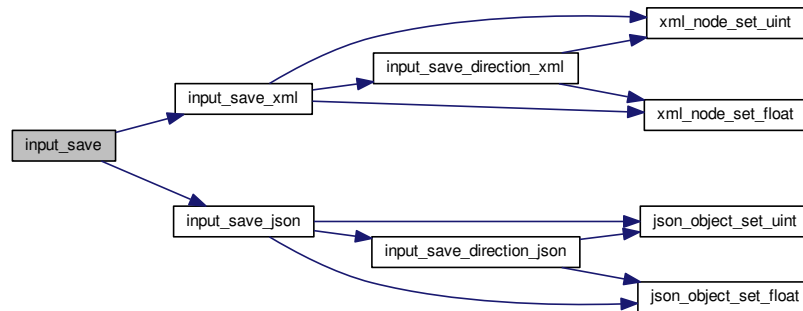

#### 4.13.2.3 window\_get\_algorithm()

```
unsigned int window_get_algorithm ( )
```

Function to get the stochastic algorithm number.

##### Returns

Stochastic algorithm number.

Definition at line 725 of file [interface.c](#).

```

00726 {
00727     unsigned int i;
00728     #if DEBUG_INTERFACE
00729     fprintf (stderr, "window_get_algorithm: start\n");
00730     #endif
00731     i = gtk_array_get_active (window->button_algorithm,
00732                             NALGORITHMS);
00733     #if DEBUG_INTERFACE
00734     fprintf (stderr, "window_get_algorithm: %u\n", i);
00735     fprintf (stderr, "window_get_algorithm: end\n");
00736     #endif
00737     return i;
00738 }

```

Here is the call graph for this function:



#### 4.13.2.4 window\_get\_direction()

```
unsigned int window_get_direction ( )
```

Function to get the direction search method number.

##### Returns

Direction search method number.

Definition at line 745 of file [interface.c](#).

```
00746 {  
00747     unsigned int i;  
00748     #if DEBUG_INTERFACE  
00749     fprintf (stderr, "window_get_direction: start\n");  
00750     #endif  
00751     i = gtk_array_get_active (window->button_direction,  
                             NDIRECTIONS);  
00752     #if DEBUG_INTERFACE  
00753     fprintf (stderr, "window_get_direction: %u\n", i);  
00754     fprintf (stderr, "window_get_direction: end\n");  
00755     #endif  
00756     return i;  
00757 }
```

Here is the call graph for this function:



#### 4.13.2.5 window\_get\_norm()

```
unsigned int window_get_norm ( )
```

Function to get the norm method number.

##### Returns

Norm method number.

Definition at line 765 of file [interface.c](#).

```

00766 {
00767     unsigned int i;
00768     #if DEBUG_INTERFACE
00769     fprintf (stderr, "window_get_norm: start\n");
00770     #endif
00771     i = gtk_array_get_active (window->button_norm,
NNORMS);
00772     #if DEBUG_INTERFACE
00773     fprintf (stderr, "window_get_norm: %u\n", i);
00774     fprintf (stderr, "window_get_norm: end\n");
00775     #endif
00776     return i;
00777 }

```

Here is the call graph for this function:



#### 4.13.2.6 window\_new()

```

void window_new (
    GtkApplication * application )

```

Function to open the main window.

##### Parameters

<i>application</i>	GtkApplication struct.
--------------------	------------------------

Definition at line 2075 of file [interface.c](#).

```

02076 {
02077     unsigned int i;
02078     char *buffer, *buffer2, buffer3[64];
02079     char *label_algorithm[NALGORITHMS] = {
02080         "_Monte-Carlo", _("_Sweep"), _("_Genetic")
02081     };
02082     char *tip_algorithm[NALGORITHMS] = {
02083         _("Monte-Carlo brute force algorithm"),
02084         _("Sweep brute force algorithm"),
02085         _("Genetic algorithm")
02086     };
02087     char *label_direction[NDIRECTIONS] = {
02088         _("_Coordinates descent"), _("_Random")
02089     };
02090     char *tip_direction[NDIRECTIONS] = {
02091         _("Coordinates direction estimate method"),
02092         _("Random direction estimate method")
02093     };
02094     char *label_norm[NNORMS] = { "L2", "L", "Lp", "L1" };
02095     char *tip_norm[NNORMS] = {
02096         _("Euclidean error norm (L2)"),
02097         _("Maximum error norm (L)"),

```

```

02098     _("P error norm (Lp)"),
02099     _("Taxicab error norm (L1)");
02100 };
02101
02102 #if DEBUG_INTERFACE
02103     fprintf (stderr, "window_new: start\n");
02104 #endif
02105
02106 // Creating the window
02107 window->window = main_window
02108     = (GtkWindow *) gtk_application_window_new (application);
02109
02110 // Finish when closing the window
02111 g_signal_connect_swapped (window->window, "delete-event",
02112     G_CALLBACK (g_application_quit),
02113     G_APPLICATION (application));
02114
02115 // Setting the window title
02116 gtk_window_set_title (window->window, "MPCOTool");
02117
02118 // Creating the open button
02119 window->button_open = (GtkToolButton *) gtk_tool_button_new
02120     (gtk_image_new_from_icon_name ("document-open",
02121     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Open"));
02122 g_signal_connect (window->button_open, "clicked", window_open, NULL);
02123
02124 // Creating the save button
02125 window->button_save = (GtkToolButton *) gtk_tool_button_new
02126     (gtk_image_new_from_icon_name ("document-save",
02127     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Save"));
02128 g_signal_connect (window->button_save, "clicked", (void *)
02129 window_save,
02130     NULL);
02131
02132 // Creating the run button
02133 window->button_run = (GtkToolButton *) gtk_tool_button_new
02134     (gtk_image_new_from_icon_name ("system-run",
02135     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Run"));
02136 g_signal_connect (window->button_run, "clicked", window_run, NULL);
02137
02138 // Creating the options button
02139 window->button_options = (GtkToolButton *) gtk_tool_button_new
02140     (gtk_image_new_from_icon_name ("preferences-system",
02141     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Options"));
02142 g_signal_connect (window->button_options, "clicked",
02143 options_new, NULL);
02144
02145 // Creating the help button
02146 window->button_help = (GtkToolButton *) gtk_tool_button_new
02147     (gtk_image_new_from_icon_name ("help-browser",
02148     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Help"));
02149 g_signal_connect (window->button_help, "clicked", window_help, NULL);
02150
02151 // Creating the about button
02152 window->button_about = (GtkToolButton *) gtk_tool_button_new
02153     (gtk_image_new_from_icon_name ("help-about",
02154     GTK_ICON_SIZE_LARGE_TOOLBAR), _("About"));
02155 g_signal_connect (window->button_about, "clicked",
02156 window_about, NULL);
02157
02158 // Creating the exit button
02159 window->button_exit = (GtkToolButton *) gtk_tool_button_new
02160     (gtk_image_new_from_icon_name ("application-exit",
02161     GTK_ICON_SIZE_LARGE_TOOLBAR), _("Exit"));
02162 g_signal_connect_swapped (window->button_exit, "clicked",
02163     G_CALLBACK (g_application_quit),
02164     G_APPLICATION (application));
02165
02166 // Creating the buttons bar
02167 window->bar_buttons = (GtkToolbar *) gtk_toolbar_new ();
02168 gtk_toolbar_insert
02169     (window->bar_buttons, GTK_TOOL_ITEM (window->
02170 button_open), 0);
02171 gtk_toolbar_insert
02172     (window->bar_buttons, GTK_TOOL_ITEM (window->
02173 button_save), 1);
02174 gtk_toolbar_insert
02175     (window->bar_buttons, GTK_TOOL_ITEM (window->
02176 button_run), 2);
02177 gtk_toolbar_insert
02178     (window->bar_buttons, GTK_TOOL_ITEM (window->
02179 button_options), 3);
02180 gtk_toolbar_insert
02181     (window->bar_buttons, GTK_TOOL_ITEM (window->
02182 button_help), 4);
02183 gtk_toolbar_insert
02184     (window->bar_buttons, GTK_TOOL_ITEM (window->

```

```

        button_about), 5);
02177     gtk_toolbar_insert
02178     (window->bar_buttons, GTK_TOOL_ITEM (window->
button_exit), 6);
02179     gtk_toolbar_set_style (window->bar_buttons, GTK_TOOLBAR_BOTH);
02180
02181     // Creating the simulator program label and entry
02182     window->label_simulator = (GtkLabel *) gtk_label_new (_("Simulator program"));
02183     window->button_simulator = (GtkFileChooserButton *)
02184     gtk_file_chooser_button_new (_("Simulator program"),
GTK_FILE_CHOOSER_ACTION_OPEN);
02185     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_simulator),
02186     _("Simulator program executable file"));
02187     gtk_widget_set_hexpand (GTK_WIDGET (window->button_simulator), TRUE);
02188
02189     // Creating the evaluator program label and entry
02190     window->check_evaluator = (GtkCheckButton *)
02191     gtk_check_button_new_with_mnemonic (_("Evaluator program"));
02192     g_signal_connect (window->check_evaluator, "toggled",
02193     window_update, NULL);
02194     window->button_evaluator = (GtkFileChooserButton *)
02195     gtk_file_chooser_button_new (_("Evaluator program"),
GTK_FILE_CHOOSER_ACTION_OPEN);
02196     gtk_widget_set_tooltip_text
02197     (GTK_WIDGET (window->button_evaluator),
02198     _("Optional evaluator program executable file"));
02199
02200     // Creating the results files labels and entries
02201     window->label_result = (GtkLabel *) gtk_label_new (_("Result file"));
02202     window->entry_result = (GtkEntry *) gtk_entry_new ();
02203     gtk_widget_set_tooltip_text
02204     (GTK_WIDGET (window->entry_result), _("Best results file"));
02205     window->label_variables = (GtkLabel *) gtk_label_new (_("Variables file"));
02206     window->entry_variables = (GtkEntry *) gtk_entry_new ();
02207     gtk_widget_set_tooltip_text
02208     (GTK_WIDGET (window->entry_variables), _("All simulated results file"));
02209
02210     // Creating the files grid and attaching widgets
02211     window->grid_files = (GtkGrid *) gtk_grid_new ();
02212     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_simulator),
02213     0, 0, 1, 1);
02214     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
button_simulator),
02215     1, 0, 1, 1);
02216     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
check_evaluator),
02217     0, 1, 1, 1);
02218     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
button_evaluator),
02219     1, 1, 1, 1);
02220     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_result),
02221     0, 2, 1, 1);
02222     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
entry_result),
02223     1, 2, 1, 1);
02224     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
label_variables),
02225     0, 3, 1, 1);
02226     gtk_grid_attach (window->grid_files, GTK_WIDGET (window->
entry_variables),
02227     1, 3, 1, 1);
02228
02229     // Creating the algorithm properties
02230     window->label_simulations = (GtkLabel *) gtk_label_new
02231     (_("Simulations number"));
02232     window->spin_simulations
02233     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02234     gtk_widget_set_tooltip_text
02235     (GTK_WIDGET (window->spin_simulations),
02236     _("Number of simulations to perform for each iteration"));
02237     gtk_widget_set_hexpand (GTK_WIDGET (window->spin_simulations), TRUE);
02238     window->label_iterations = (GtkLabel *)
02239     gtk_label_new (_("Iterations number"));
02240     window->spin_iterations
02241     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02242     gtk_widget_set_tooltip_text
02243     (GTK_WIDGET (window->spin_iterations), _("Number of iterations"));
02244     g_signal_connect
02245     (window->spin_iterations, "value-changed",
02246     window_update, NULL);
02247     gtk_widget_set_hexpand (GTK_WIDGET (window->spin_iterations), TRUE);
02248     window->label_tolerance = (GtkLabel *) gtk_label_new (_("Tolerance"));
02249     window->spin_tolerance =
02250     (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02251     gtk_widget_set_tooltip_text

```



```

02252     (GTK_WIDGET (window->spin_tolerance),
02253      _("Tolerance to set the variable interval on the next iteration"));
02254 window->label_bests = (GtkLabel *) gtk_label_new (_("Bests number"));
02255 window->spin_bests
02256     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02257 gtk_widget_set_tooltip_text
02258     (GTK_WIDGET (window->spin_bests),
02259      _("Number of best simulations used to set the variable interval "
02260        "on the next iteration"));
02261 window->label_population
02262     = (GtkLabel *) gtk_label_new (_("Population number"));
02263 window->spin_population
02264     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02265 gtk_widget_set_tooltip_text
02266     (GTK_WIDGET (window->spin_population),
02267      _("Number of population for the genetic algorithm"));
02268 gtk_widget_set_hexpand (GTK_WIDGET (window->spin_population), TRUE);
02269 window->label_generations
02270     = (GtkLabel *) gtk_label_new (_("Generations number"));
02271 window->spin_generations
02272     = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e6, 1.);
02273 gtk_widget_set_tooltip_text
02274     (GTK_WIDGET (window->spin_generations),
02275      _("Number of generations for the genetic algorithm"));
02276 window->label_mutation = (GtkLabel *) gtk_label_new (_("Mutation ratio"));
02277 window->spin_mutation
02278     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02279 gtk_widget_set_tooltip_text
02280     (GTK_WIDGET (window->spin_mutation),
02281      _("Ratio of mutation for the genetic algorithm"));
02282 window->label_reproduction
02283     = (GtkLabel *) gtk_label_new (_("Reproduction ratio"));
02284 window->spin_reproduction
02285     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02286 gtk_widget_set_tooltip_text
02287     (GTK_WIDGET (window->spin_reproduction),
02288      _("Ratio of reproduction for the genetic algorithm"));
02289 window->label_adaptation = (GtkLabel *) gtk_label_new (_("Adaptation ratio"));
02290 window->spin_adaptation
02291     = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02292 gtk_widget_set_tooltip_text
02293     (GTK_WIDGET (window->spin_adaptation),
02294      _("Ratio of adaptation for the genetic algorithm"));
02295 window->label_threshold = (GtkLabel *) gtk_label_new (_("Threshold"));
02296 window->spin_threshold = (GtkSpinButton *)
02297     gtk_spin_button_new_with_range (-G_MAXDOUBLE, G_MAXDOUBLE,
02298     precision[DEFAULT_PRECISION]);
02299 gtk_widget_set_tooltip_text
02300     (GTK_WIDGET (window->spin_threshold),
02301      _("Threshold in the objective function to finish the simulations"));
02302 window->scrolled_threshold =
02303     (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02304 gtk_container_add (GTK_CONTAINER (window->scrolled_threshold),
02305     GTK_WIDGET (window->spin_threshold));
02306 // gtk_widget_set_hexpand (GTK_WIDGET (window->scrolled_threshold), TRUE);
02307 // gtk_widget_set_halign (GTK_WIDGET (window->scrolled_threshold),
02308 //     GTK_ALIGN_FILL);
02309
02310 // Creating the direction search method properties
02311 window->check_direction = (GtkCheckButton *)
02312     gtk_check_button_new_with_mnemonic (_("Direction search method"));
02313 g_signal_connect (window->check_direction, "clicked",
02314     window_update, NULL);
02315 window->grid_direction = (GtkGrid *) gtk_grid_new ();
02316 window->button_direction[0] = (GtkRadioButton *)
02317     gtk_radio_button_new_with_mnemonic (NULL, label_direction[0]);
02317 gtk_grid_attach (window->grid_direction,
02318     GTK_WIDGET (window->button_direction[0]), 0, 0, 1, 1);
02319 g_signal_connect (window->button_direction[0], "clicked",
02320     window_update,
02321     NULL);
02321 for (i = 0; ++i < NDIRECTIONS;)
02322 {
02323     window->button_direction[i] = (GtkRadioButton *)
02324     gtk_radio_button_new_with_mnemonic
02325     (gtk_radio_button_get_group (window->button_direction[0]),
02326     label_direction[i]);
02327     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_direction[i]),
02328     tip_direction[i]);
02329     gtk_grid_attach (window->grid_direction,
02330     GTK_WIDGET (window->button_direction[i]), 0, i, 1, 1);
02331     g_signal_connect (window->button_direction[i], "clicked",
02332     window_update, NULL);
02333 }
02334 window->label_steps = (GtkLabel *) gtk_label_new (_("Steps number"));
02335 window->spin_steps = (GtkSpinButton *)
02336     gtk_spin_button_new_with_range (1., 1.e12, 1.);

```

```

02337 gtk_widget_set_hexpand (GTK_WIDGET (window->spin_steps), TRUE);
02338 window->label_estimates
02339 = (GtkLabel *) gtk_label_new (_("Direction estimates number"));
02340 window->spin_estimates = (GtkSpinButton *)
02341 gtk_spin_button_new_with_range (1., 1.e3, 1.);
02342 window->label_relaxation
02343 = (GtkLabel *) gtk_label_new (_("Relaxation parameter"));
02344 window->spin_relaxation = (GtkSpinButton *)
02345 gtk_spin_button_new_with_range (0., 2., 0.001);
02346 gtk_grid_attach (window->grid_direction, GTK_WIDGET (
window->label_steps),
02347 0, NDIRECTIONS, 1, 1);
02348 gtk_grid_attach (window->grid_direction, GTK_WIDGET (
window->spin_steps),
02349 1, NDIRECTIONS, 1, 1);
02350 gtk_grid_attach (window->grid_direction,
02351 GTK_WIDGET (window->label_estimates), 0, NDIRECTIONS + 1,
02352 1, 1);
02353 gtk_grid_attach (window->grid_direction,
02354 GTK_WIDGET (window->spin_estimates), 1, NDIRECTIONS + 1, 1,
02355 1);
02356 gtk_grid_attach (window->grid_direction,
02357 GTK_WIDGET (window->label_relaxation), 0, NDIRECTIONS + 2,
02358 1, 1);
02359 gtk_grid_attach (window->grid_direction,
02360 GTK_WIDGET (window->spin_relaxation), 1, NDIRECTIONS + 2,
02361 1, 1);
02362
02363 // Creating the array of algorithms
02364 window->grid_algorithm = (GtkGrid *) gtk_grid_new ();
02365 window->button_algorithm[0] = (GtkRadioButton *)
02366 gtk_radio_button_new_with_mnemonic (NULL, label_algorithm[0]);
02367 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_algorithm[0]),
02368 tip_algorithm[0]);
02369 gtk_grid_attach (window->grid_algorithm,
02370 GTK_WIDGET (window->button_algorithm[0]), 0, 0, 1, 1);
02371 g_signal_connect (window->button_algorithm[0], "clicked",
02372 window_set_algorithm, NULL);
02373 for (i = 0; ++i < NALGORITHMS;)
02374 {
02375 window->button_algorithm[i] = (GtkRadioButton *)
02376 gtk_radio_button_new_with_mnemonic
02377 (gtk_radio_button_get_group (window->button_algorithm[0]),
02378 label_algorithm[i]);
02379 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_algorithm[i]),
02380 tip_algorithm[i]);
02381 gtk_grid_attach (window->grid_algorithm,
02382 GTK_WIDGET (window->button_algorithm[i]), 0, i, 1, 1);
02383 g_signal_connect (window->button_algorithm[i], "clicked",
02384 window_set_algorithm, NULL);
02385 }
02386 gtk_grid_attach (window->grid_algorithm,
02387 GTK_WIDGET (window->label_simulations), 0,
02388 NALGORITHMS, 1, 1);
02389 gtk_grid_attach (window->grid_algorithm,
02390 GTK_WIDGET (window->spin_simulations), 1, NALGORITHMS, 1, 1);
02391 gtk_grid_attach (window->grid_algorithm,
02392 GTK_WIDGET (window->label_iterations), 0, NALGORITHMS + 1,
02393 1, 1);
02394 gtk_grid_attach (window->grid_algorithm,
02395 GTK_WIDGET (window->spin_iterations), 1, NALGORITHMS + 1,
02396 1, 1);
02397 gtk_grid_attach (window->grid_algorithm,
02398 GTK_WIDGET (window->label_tolerance), 0, NALGORITHMS + 2,
02399 1, 1);
02400 gtk_grid_attach (window->grid_algorithm,
02401 GTK_WIDGET (window->spin_tolerance), 1, NALGORITHMS + 2, 1,
02402 1);
02403 gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (
window->label_bests),
02404 0, NALGORITHMS + 3, 1, 1);
02405 gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (
window->spin_bests), 1,
02406 NALGORITHMS + 3, 1, 1);
02407 gtk_grid_attach (window->grid_algorithm,
02408 GTK_WIDGET (window->label_population), 0, NALGORITHMS + 4,
02409 1, 1);
02410 gtk_grid_attach (window->grid_algorithm,
02411 GTK_WIDGET (window->spin_population), 1, NALGORITHMS + 4,
02412 1, 1);
02413 gtk_grid_attach (window->grid_algorithm,
02414 GTK_WIDGET (window->label_generations), 0, NALGORITHMS + 5,
02415 1, 1);
02416 gtk_grid_attach (window->grid_algorithm,
02417 GTK_WIDGET (window->spin_generations), 1, NALGORITHMS + 5,
02418 1, 1);
02419 gtk_grid_attach (window->grid_algorithm,

```

```

02420         GTK_WIDGET (window->label_mutation), 0, NALGORITHMS + 6, 1,
02421         1);
02422     gtk_grid_attach (window->grid_algorithm, GTK_WIDGET (
window->spin_mutation),
02423         1, NALGORITHMS + 6, 1, 1);
02424     gtk_grid_attach (window->grid_algorithm,
02425         GTK_WIDGET (window->label_reproduction), 0,
02426         NALGORITHMS + 7, 1, 1);
02427     gtk_grid_attach (window->grid_algorithm,
02428         GTK_WIDGET (window->spin_reproduction), 1, NALGORITHMS + 7,
02429         1, 1);
02430     gtk_grid_attach (window->grid_algorithm,
02431         GTK_WIDGET (window->label_adaptation), 0, NALGORITHMS + 8,
02432         1, 1);
02433     gtk_grid_attach (window->grid_algorithm,
02434         GTK_WIDGET (window->spin_adaptation), 1, NALGORITHMS + 8,
02435         1, 1);
02436     gtk_grid_attach (window->grid_algorithm,
02437         GTK_WIDGET (window->check_direction), 0, NALGORITHMS + 9,
02438         2, 1);
02439     gtk_grid_attach (window->grid_algorithm,
02440         GTK_WIDGET (window->grid_direction), 0, NALGORITHMS + 10,
02441         2, 1);
02442     gtk_grid_attach (window->grid_algorithm,
02443         GTK_WIDGET (window->label_threshold), 0, NALGORITHMS + 11,
02444         1, 1);
02445     gtk_grid_attach (window->grid_algorithm,
02446         GTK_WIDGET (window->scrolled_threshold), 1,
02447         NALGORITHMS + 11, 1, 1);
02448     window->frame_algorithm = (GtkFrame *) gtk_frame_new (_("Algorithm"));
02449     gtk_container_add (GTK_CONTAINER (window->frame_algorithm),
02450         GTK_WIDGET (window->grid_algorithm));
02451
02452     // Creating the variable widgets
02453     window->combo_variable = (GtkComboBoxText *) gtk_combo_box_text_new ();
02454     gtk_widget_set_tooltip_text
02455         (GTK_WIDGET (window->combo_variable), _("Variables selector"));
02456     window->id_variable = g_signal_connect
02457         (window->combo_variable, "changed", window_set_variable, NULL);
02458     window->button_add_variable
02459         = (GtkButton *) gtk_button_new_from_icon_name ("list-add",
02460             GTK_ICON_SIZE_BUTTON);
02461     g_signal_connect
02462         (window->button_add_variable, "clicked",
window_add_variable, NULL);
02463     gtk_widget_set_tooltip_text
02464         (GTK_WIDGET (window->button_add_variable), _("Add variable"));
02465     window->button_remove_variable
02466         = (GtkButton *) gtk_button_new_from_icon_name ("list-remove",
02467             GTK_ICON_SIZE_BUTTON);
02468     g_signal_connect
02469         (window->button_remove_variable, "clicked",
window_remove_variable, NULL);
02470     gtk_widget_set_tooltip_text
02471         (GTK_WIDGET (window->button_remove_variable), _("Remove variable"));
02472     window->label_variable = (GtkLabel *) gtk_label_new (_("Name"));
02473     window->entry_variable = (GtkEntry *) gtk_entry_new ();
02474     gtk_widget_set_tooltip_text
02475         (GTK_WIDGET (window->entry_variable), _("Variable name"));
02476     gtk_widget_set_expand (GTK_WIDGET (window->entry_variable), TRUE);
02477     window->id_variable_label = g_signal_connect
02478         (window->entry_variable, "changed",
window_label_variable, NULL);
02479     window->label_min = (GtkLabel *) gtk_label_new (_("Minimum"));
02480     window->spin_min = (GtkSpinButton *) gtk_spin_button_new_with_range
02481         (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02482     gtk_widget_set_tooltip_text
02483         (GTK_WIDGET (window->spin_min), _("Minimum initial value of the variable"));
02484     window->scrolled_min
02485         = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02486     gtk_container_add (GTK_CONTAINER (window->scrolled_min),
02487         GTK_WIDGET (window->spin_min));
02488     g_signal_connect (window->spin_min, "value-changed",
02489         window_rangemin_variable, NULL);
02490     window->label_max = (GtkLabel *) gtk_label_new (_("Maximum"));
02491     window->spin_max = (GtkSpinButton *) gtk_spin_button_new_with_range
02492         (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02493     gtk_widget_set_tooltip_text
02494         (GTK_WIDGET (window->spin_max), _("Maximum initial value of the variable"));
02495     window->scrolled_max
02496         = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02497     gtk_container_add (GTK_CONTAINER (window->scrolled_max),
02498         GTK_WIDGET (window->spin_max));
02499     g_signal_connect (window->spin_max, "value-changed",
02500         window_rangemax_variable, NULL);
02501     window->check_minabs = (GtkCheckButton *)
02502         gtk_check_button_new_with_mnemonic (_("_Absolute minimum"));

```

```

02503 g_signal_connect (window->check_minabs, "toggled",
window_update, NULL);
02504 window->spin_minabs = (GtkSpinButton *) gtk_spin_button_new_with_range
02505 (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02506 gtk_widget_set_tooltip_text
02507 (GTK_WIDGET (window->spin_minabs),
02508 _("Minimum allowed value of the variable"));
02509 window->scrolled_minabs
02510 = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02511 gtk_container_add (GTK_CONTAINER (window->scrolled_minabs),
02512 GTK_WIDGET (window->spin_minabs));
02513 g_signal_connect (window->spin_minabs, "value-changed",
02514 window_rangeminabs_variable, NULL);
02515 window->check_maxabs = (GtkCheckButton *)
02516 gtk_check_button_new_with_mnemonic (_("_Absolute maximum"));
02517 g_signal_connect (window->check_maxabs, "toggled",
window_update, NULL);
02518 window->spin_maxabs = (GtkSpinButton *) gtk_spin_button_new_with_range
02519 (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02520 gtk_widget_set_tooltip_text
02521 (GTK_WIDGET (window->spin_maxabs),
02522 _("Maximum allowed value of the variable"));
02523 window->scrolled_maxabs
02524 = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02525 gtk_container_add (GTK_CONTAINER (window->scrolled_maxabs),
02526 GTK_WIDGET (window->spin_maxabs));
02527 g_signal_connect (window->spin_maxabs, "value-changed",
02528 window_rangemaxabs_variable, NULL);
02529 window->label_precision = (GtkLabel *) gtk_label_new (_("Precision digits"));
02530 window->spin_precision = (GtkSpinButton *)
02531 gtk_spin_button_new_with_range (0., (gdouble) DEFAULT_PRECISION, 1.);
02532 gtk_widget_set_tooltip_text
02533 (GTK_WIDGET (window->spin_precision),
02534 _("Number of precision floating point digits\n"
02535 "0 is for integer numbers"));
02536 g_signal_connect (window->spin_precision, "value-changed",
02537 window_precision_variable, NULL);
02538 window->label_sweeps = (GtkLabel *) gtk_label_new (_("Sweeps number"));
02539 window->spin_sweeps =
02540 (GtkSpinButton *) gtk_spin_button_new_with_range (1., 1.e12, 1.);
02541 gtk_widget_set_tooltip_text (GTK_WIDGET (window->spin_sweeps),
02542 _("Number of steps sweeping the variable"));
02543 g_signal_connect (window->spin_sweeps, "value-changed",
02544 window_update_variable, NULL);
02545 window->label_bits = (GtkLabel *) gtk_label_new (_("Bits number"));
02546 window->spin_bits
02547 = (GtkSpinButton *) gtk_spin_button_new_with_range (1., 64., 1.);
02548 gtk_widget_set_tooltip_text
02549 (GTK_WIDGET (window->spin_bits),
02550 _("Number of bits to encode the variable"));
02551 g_signal_connect
02552 (window->spin_bits, "value-changed", window_update_variable, NULL)
;
02553 window->label_step = (GtkLabel *) gtk_label_new (_("Step size"));
02554 window->spin_step = (GtkSpinButton *) gtk_spin_button_new_with_range
02555 (-G_MAXDOUBLE, G_MAXDOUBLE, precision[DEFAULT_PRECISION]);
02556 gtk_widget_set_tooltip_text
02557 (GTK_WIDGET (window->spin_step),
02558 _("Initial step size for the direction search method"));
02559 window->scrolled_step
02560 = (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02561 gtk_container_add (GTK_CONTAINER (window->scrolled_step),
02562 GTK_WIDGET (window->spin_step));
02563 g_signal_connect
02564 (window->spin_step, "value-changed", window_step_variable, NULL);
02565 window->grid_variable = (GtkGrid *) gtk_grid_new ();
02566 gtk_grid_attach (window->grid_variable,
02567 GTK_WIDGET (window->combo_variable), 0, 0, 2, 1);
02568 gtk_grid_attach (window->grid_variable,
02569 GTK_WIDGET (window->button_add_variable), 2, 0, 1, 1);
02570 gtk_grid_attach (window->grid_variable,
02571 GTK_WIDGET (window->button_remove_variable), 3, 0, 1, 1);
02572 gtk_grid_attach (window->grid_variable,
02573 GTK_WIDGET (window->label_variable), 0, 1, 1, 1);
02574 gtk_grid_attach (window->grid_variable,
02575 GTK_WIDGET (window->entry_variable), 1, 1, 3, 1);
02576 gtk_grid_attach (window->grid_variable,
02577 GTK_WIDGET (window->label_min), 0, 2, 1, 1);
02578 gtk_grid_attach (window->grid_variable,
02579 GTK_WIDGET (window->scrolled_min), 1, 2, 3, 1);
02580 gtk_grid_attach (window->grid_variable,
02581 GTK_WIDGET (window->label_max), 0, 3, 1, 1);
02582 gtk_grid_attach (window->grid_variable,
02583 GTK_WIDGET (window->scrolled_max), 1, 3, 3, 1);
02584 gtk_grid_attach (window->grid_variable,
02585 GTK_WIDGET (window->check_minabs), 0, 4, 1, 1);
02586 gtk_grid_attach (window->grid_variable,

```

```

02587         GTK_WIDGET (window->scrolled_minabs), 1, 4, 3, 1);
02588     gtk_grid_attach (window->grid_variable,
02589         GTK_WIDGET (window->check_maxabs), 0, 5, 1, 1);
02590     gtk_grid_attach (window->grid_variable,
02591         GTK_WIDGET (window->scrolled_maxabs), 1, 5, 3, 1);
02592     gtk_grid_attach (window->grid_variable,
02593         GTK_WIDGET (window->label_precision), 0, 6, 1, 1);
02594     gtk_grid_attach (window->grid_variable,
02595         GTK_WIDGET (window->spin_precision), 1, 6, 3, 1);
02596     gtk_grid_attach (window->grid_variable,
02597         GTK_WIDGET (window->label_sweeps), 0, 7, 1, 1);
02598     gtk_grid_attach (window->grid_variable,
02599         GTK_WIDGET (window->spin_sweeps), 1, 7, 3, 1);
02600     gtk_grid_attach (window->grid_variable,
02601         GTK_WIDGET (window->label_bits), 0, 8, 1, 1);
02602     gtk_grid_attach (window->grid_variable,
02603         GTK_WIDGET (window->spin_bits), 1, 8, 3, 1);
02604     gtk_grid_attach (window->grid_variable,
02605         GTK_WIDGET (window->label_step), 0, 9, 1, 1);
02606     gtk_grid_attach (window->grid_variable,
02607         GTK_WIDGET (window->scrolled_step), 1, 9, 3, 1);
02608     window->frame_variable = (GtkFrame *) gtk_frame_new (_("Variable"));
02609     gtk_container_add (GTK_CONTAINER (window->frame_variable),
02610         GTK_WIDGET (window->grid_variable));
02611
02612     // Creating the experiment widgets
02613     window->combo_experiment = (GtkComboBoxText *) gtk_combo_box_text_new ();
02614     gtk_widget_set_tooltip_text (GTK_WIDGET (window->combo_experiment),
02615         _("Experiment selector"));
02616     window->id_experiment = g_signal_connect
02617         (window->combo_experiment, "changed",
02618         window_set_experiment, NULL);
02619     window->button_add_experiment
02620         = (GtkButton *) gtk_button_new_from_icon_name ("list-add",
02621             GTK_ICON_SIZE_BUTTON);
02622     g_signal_connect
02623         (window->button_add_experiment, "clicked",
02624         window_add_experiment, NULL);
02625     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_add_experiment),
02626         _("Add experiment"));
02627     window->button_remove_experiment
02628         = (GtkButton *) gtk_button_new_from_icon_name ("list-remove",
02629             GTK_ICON_SIZE_BUTTON);
02630     g_signal_connect (window->button_remove_experiment, "clicked",
02631         window_remove_experiment, NULL);
02632     gtk_widget_set_tooltip_text (GTK_WIDGET (window->
02633         button_remove_experiment),
02634         _("Remove experiment"));
02635     window->label_experiment
02636         = (GtkLabel *) gtk_label_new (_("Experimental data file"));
02637     window->button_experiment = (GtkFileChooserButton *)
02638         gtk_file_chooser_button_new (_("Experimental data file"),
02639             GTK_FILE_CHOOSER_ACTION_OPEN);
02640     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_experiment),
02641         _("Experimental data file"));
02642     window->id_experiment_name
02643         = g_signal_connect (window->button_experiment, "selection-changed",
02644         window_name_experiment, NULL);
02645     gtk_widget_set_hexpand (GTK_WIDGET (window->button_experiment), TRUE);
02646     window->label_weight = (GtkLabel *) gtk_label_new (_("Weight"));
02647     window->spin_weight
02648         = (GtkSpinButton *) gtk_spin_button_new_with_range (0., 1., 0.001);
02649     gtk_widget_set_tooltip_text
02650         (GTK_WIDGET (window->spin_weight),
02651         _("Weight factor to build the objective function"));
02652     g_signal_connect
02653         (window->spin_weight, "value-changed",
02654         window_weight_experiment, NULL);
02655     window->grid_experiment = (GtkGrid *) gtk_grid_new ();
02656     gtk_grid_attach (window->grid_experiment,
02657         GTK_WIDGET (window->combo_experiment), 0, 0, 2, 1);
02658     gtk_grid_attach (window->grid_experiment,
02659         GTK_WIDGET (window->button_add_experiment), 2, 0, 1, 1);
02660     gtk_grid_attach (window->grid_experiment,
02661         GTK_WIDGET (window->button_remove_experiment), 3, 0, 1, 1);
02662
02663     ;
02664     gtk_grid_attach (window->grid_experiment,
02665         GTK_WIDGET (window->label_experiment), 0, 1, 1, 1);
02666     gtk_grid_attach (window->grid_experiment,
02667         GTK_WIDGET (window->button_experiment), 1, 1, 3, 1);
02668     gtk_grid_attach (window->grid_experiment,
02669         GTK_WIDGET (window->label_weight), 0, 2, 1, 1);
02670     gtk_grid_attach (window->grid_experiment,
02671         GTK_WIDGET (window->spin_weight), 1, 2, 3, 1);
02672     for (i = 0; i < MAX_NINPUTS; ++i)
02673     {
02674         snprintf (buffer3, 64, "%s %u", _("Input template"), i + 1);

```

```

02669     window->check_template[i] = (GtkCheckButton *)
02670     gtk_check_button_new_with_label (buffer3);
02671     window->id_template[i]
02672     = g_signal_connect (window->check_template[i], "toggled",
02673     window_inputs_experiment, NULL);
02674     gtk_grid_attach (window->grid_experiment,
02675     GTK_WIDGET (window->check_template[i]), 0, 3 + i, 1, 1);
02676     window->button_template[i] =
02677     (GtkFileChooserButton *)
02678     gtk_file_chooser_button_new (_("Input template"),
02679     GTK_FILE_CHOOSER_ACTION_OPEN);
02680     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_template[i]),
02681     _("Experimental input template file"));
02682     window->id_input[i] =
02683     g_signal_connect_swapped (window->button_template[i],
02684     "selection-changed",
02685     (void (*)(void *)) window_template_experiment,
02686     (void *) (size_t) i);
02687     gtk_grid_attach (window->grid_experiment,
02688     GTK_WIDGET (window->button_template[i]), 1, 3 + i, 3, 1);
02689 }
02690 window->frame_experiment = (GtkFrame *) gtk_frame_new (_("Experiment"));
02691 gtk_container_add (GTK_CONTAINER (window->frame_experiment),
02692     GTK_WIDGET (window->grid_experiment));
02693
02694 // Creating the error norm widgets
02695 window->frame_norm = (GtkFrame *) gtk_frame_new (_("Error norm"));
02696 window->grid_norm = (GtkGrid *) gtk_grid_new ();
02697 gtk_container_add (GTK_CONTAINER (window->frame_norm),
02698     GTK_WIDGET (window->grid_norm));
02699 window->button_norm[0] = (GtkRadioButton *)
02700     gtk_radio_button_new_with_mnemonic (NULL, label_norm[0]);
02701 gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_norm[0]),
02702     tip_norm[0]);
02703 gtk_grid_attach (window->grid_norm,
02704     GTK_WIDGET (window->button_norm[0]), 0, 0, 1, 1);
02705 g_signal_connect (window->button_norm[0], "clicked",
02706     window_update, NULL);
02707 for (i = 0; ++i < NNORMS;)
02708 {
02709     window->button_norm[i] = (GtkRadioButton *)
02710     gtk_radio_button_new_with_mnemonic
02711     (gtk_radio_button_get_group (window->button_norm[0]), label_norm[i]);
02712     gtk_widget_set_tooltip_text (GTK_WIDGET (window->button_norm[i]),
02713     tip_norm[i]);
02714     gtk_grid_attach (window->grid_norm,
02715     GTK_WIDGET (window->button_norm[i]), 0, i, 1, 1);
02716     g_signal_connect (window->button_norm[i], "clicked",
02717     window_update, NULL);
02718 }
02719 window->label_p = (GtkLabel *) gtk_label_new (_("P parameter"));
02720 gtk_grid_attach (window->grid_norm, GTK_WIDGET (window->
02721     label_p), 1, 1, 1, 1);
02722 window->spin_p =
02723     (GtkSpinButton *) gtk_spin_button_new_with_range (-G_MAXDOUBLE,
02724     G_MAXDOUBLE, 0.01);
02725 gtk_widget_set_tooltip_text (GTK_WIDGET (window->spin_p),
02726     _("P parameter for the P error norm"));
02727 window->scrolled_p =
02728     (GtkScrolledWindow *) gtk_scrolled_window_new (NULL, NULL);
02729 gtk_container_add (GTK_CONTAINER (window->scrolled_p),
02730     GTK_WIDGET (window->spin_p));
02731 gtk_widget_set_expand (GTK_WIDGET (window->scrolled_p), TRUE);
02732 gtk_widget_set_halign (GTK_WIDGET (window->scrolled_p), GTK_ALIGN_FILL);
02733 gtk_grid_attach (window->grid_norm, GTK_WIDGET (window->
02734     scrolled_p),
02735     1, 2, 1, 2);
02736
02737 // Creating the grid and attaching the widgets to the grid
02738 window->grid = (GtkGrid *) gtk_grid_new ();
02739 gtk_grid_attach (window->grid, GTK_WIDGET (window->bar_buttons), 0, 0, 3, 1);
02740 gtk_grid_attach (window->grid, GTK_WIDGET (window->grid_files), 0, 1, 1, 1);
02741 gtk_grid_attach (window->grid,
02742     GTK_WIDGET (window->frame_algorithm), 0, 2, 1, 1);
02743 gtk_grid_attach (window->grid,
02744     GTK_WIDGET (window->frame_variable), 1, 2, 1, 1);
02745 gtk_grid_attach (window->grid,
02746     GTK_WIDGET (window->frame_experiment), 2, 2, 1, 1);
02747 gtk_grid_attach (window->grid, GTK_WIDGET (window->frame_norm), 1, 1, 2, 1);
02748 gtk_container_add (GTK_CONTAINER (window->window), GTK_WIDGET (
02749     window->grid));
02750
02751 // Setting the window logo
02752 window->logo = gdk_pixbuf_new_from_xpm_data (logo);
02753 gtk_window_set_icon (window->window, window->logo);
02754
02755 // Showing the window

```

```

02751  gtk_widget_show_all (GTK_WIDGET (window->window));
02752
02753  // In GTK+ 3.16 and 3.18 the default scrolled size is wrong
02754  #if GTK_MINOR_VERSION >= 16
02755  gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_min), -1, 40);
02756  gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_max), -1, 40);
02757  gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_minabs), -1, 40);
02758  gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_maxabs), -1, 40);
02759  gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_step), -1, 40);
02760  gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_p), -1, 40);
02761  gtk_widget_set_size_request (GTK_WIDGET (window->scrolled_threshold), -1, 40);
02762  #endif
02763
02764  // Reading initial example
02765  input_new ();
02766  buffer2 = g_get_current_dir ();
02767  buffer = g_build_filename (buffer2, "..", "tests", "test1", INPUT_FILE, NULL);
02768  g_free (buffer2);
02769  window_read (buffer);
02770  g_free (buffer);
02771
02772  #if DEBUG_INTERFACE
02773  fprintf (stderr, "window_new: start\n");
02774  #endif
02775  }

```

#### 4.13.2.7 window\_read()

```

int window_read (
    char * filename )

```

Function to read the input data of a file.

##### Parameters

<i>filename</i>	File name.
-----------------	------------

##### Returns

1 on succes, 0 on error.

Definition at line 1873 of file [interface.c](#).

```

01874 {
01875     unsigned int i;
01876     char *buffer;
01877     #if DEBUG_INTERFACE
01878     fprintf (stderr, "window_read: start\n");
01879     #endif
01880
01881     // Reading new input file
01882     input_free ();
01883     if (!input_open (filename))
01884     {
01885     #if DEBUG_INTERFACE
01886         fprintf (stderr, "window_read: end\n");
01887     #endif
01888         return 0;
01889     }
01890
01891     // Setting GTK+ widgets data
01892     gtk_entry_set_text (window->entry_result, input->result);
01893     gtk_entry_set_text (window->entry_variables, input->
variables);
01894     buffer = g_build_filename (input->directory, input->
simulator, NULL);
01895     gtk_file_chooser_set_filename (GTK_FILE_CHOOSER

```



```

01896             (window->button_simulator), buffer);
01897     g_free (buffer);
01898     gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON (window->check_evaluator),
01899                                 (size_t) input->evaluator);
01900     if (input->evaluator)
01901     {
01902         buffer = g_build_filename (input->directory, input->
evaluator, NULL);
01903         gtk_file_chooser_set_filename (GTK_FILE_CHOOSER
01904                                     (window->button_evaluator), buffer);
01905         g_free (buffer);
01906     }
01907     gtk_toggle_button_set_active
01908     (GTK_TOGGLE_BUTTON (window->button_algorithm[input->
algorithm]), TRUE);
01909     switch (input->algorithm)
01910     {
01911         case ALGORITHM_MONTE_CARLO:
01912             gtk_spin_button_set_value (window->spin_simulations,
01913                                       (gdouble) input->nsimulations);
01914         case ALGORITHM_SWEEP:
01915             gtk_spin_button_set_value (window->spin_iterations,
01916                                       (gdouble) input->niterations);
01917             gtk_spin_button_set_value (window->spin_bests, (gdouble)
input->nbest);
01918             gtk_spin_button_set_value (window->spin_tolerance,
input->tolerance);
01919             gtk_toggle_button_set_active (GTK_TOGGLE_BUTTON
01920                                         (window->check_direction),
input->nsteps);
01921             if (input->nsteps)
01922             {
01923                 gtk_toggle_button_set_active
01924                 (GTK_TOGGLE_BUTTON (window->button_direction
01925                                     [input->direction]), TRUE);
01926                 gtk_spin_button_set_value (window->spin_steps,
01927                                           (gdouble) input->nsteps);
01928                 gtk_spin_button_set_value (window->spin_relaxation,
01929                                           (gdouble) input->relaxation);
01930                 switch (input->direction)
01931                 {
01932                     case DIRECTION_METHOD_RANDOM:
01933                         gtk_spin_button_set_value (window->spin_estimates,
01934                                                   (gdouble) input->nestimates);
01935                 }
01936             }
01937             break;
01938         default:
01939             gtk_spin_button_set_value (window->spin_population,
01940                                       (gdouble) input->nsimulations);
01941             gtk_spin_button_set_value (window->spin_generations,
01942                                       (gdouble) input->niterations);
01943             gtk_spin_button_set_value (window->spin_mutation, input->
mutation_ratio);
01944             gtk_spin_button_set_value (window->spin_reproduction,
input->reproduction_ratio);
01946             gtk_spin_button_set_value (window->spin_adaptation,
input->adaptation_ratio);
01948         }
01949     gtk_toggle_button_set_active
01950     (GTK_TOGGLE_BUTTON (window->button_norm[input->norm]), TRUE);
01951     gtk_spin_button_set_value (window->spin_p, input->p);
01952     gtk_spin_button_set_value (window->spin_threshold, input->
threshold);
01953     g_signal_handler_block (window->combo_experiment, window->
id_experiment);
01954     g_signal_handler_block (window->button_experiment,
01955                             window->id_experiment_name);
01956     gtk_combo_box_text_remove_all (window->combo_experiment);
01957     for (i = 0; i < input->nexperiments; ++i)
01958         gtk_combo_box_text_append_text (window->combo_experiment,
input->experiment[i].name);
01959     g_signal_handler_unblock
01960     (window->button_experiment, window->
id_experiment_name);
01962     g_signal_handler_unblock (window->combo_experiment,
window->id_experiment);
01963     gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_experiment), 0);
01964     g_signal_handler_block (window->combo_variable, window->
id_variable);
01965     g_signal_handler_block (window->entry_variable, window->
id_variable_label);
01966     gtk_combo_box_text_remove_all (window->combo_variable);
01967     for (i = 0; i < input->nvariables; ++i)
01968         gtk_combo_box_text_append_text (window->combo_variable,
input->variable[i].name);
01969     g_signal_handler_unblock (window->entry_variable, window->

```




```

    id_variable_label);
01971 g_signal_handler_unblock (window->combo_variable, window->
    id_variable);
01972 gtk_combo_box_set_active (GTK_COMBO_BOX (window->combo_variable), 0);
01973 window_set_variable ();
01974 window_update ();
01975
01976 #if DEBUG_INTERFACE
01977 fprintf (stderr, "window_read: end\n");
01978 #endif
01979 return 1;
01980 }

```

Here is the call graph for this function:

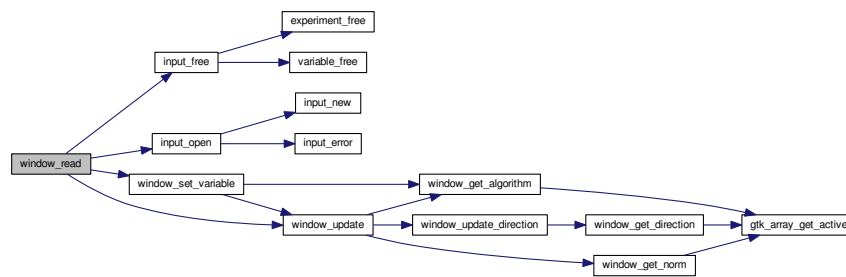

#### 4.13.2.8 window\_save()

```
int window_save ( )
```

Function to save the input file.

##### Returns

1 on OK, 0 on Cancel.

Definition at line 818 of file [interface.c](#).

```

00819 {
00820     GtkFileChooserDialog *dlg;
00821     GtkFileFilter *filter1, *filter2;
00822     char *buffer;
00823
00824     #if DEBUG_INTERFACE
00825     fprintf (stderr, "window_save: start\n");
00826     #endif
00827
00828     // Opening the saving dialog
00829     dlg = (GtkFileChooserDialog *)
00830         gtk_file_chooser_dialog_new (_, "Save file",
00831                                     window->window,
00832                                     GTK_FILE_CHOOSER_ACTION_SAVE,
00833                                     _("_Cancel"), GTK_RESPONSE_CANCEL,
00834                                     _("_OK"), GTK_RESPONSE_OK, NULL);
00835     gtk_file_chooser_set_do_overwrite_confirmation (GTK_FILE_CHOOSER (dlg), TRUE);
00836     buffer = g_build_filename (input->directory, input->name, NULL);
00837     gtk_file_chooser_set_filename (GTK_FILE_CHOOSER (dlg), buffer);
00838     g_free (buffer);
00839
00840     // Adding XML filter
00841     filter1 = (GtkFileFilter *) gtk_file_filter_new ();

```

```

00842 gtk_file_filter_set_name (filter1, "XML");
00843 gtk_file_filter_add_pattern (filter1, "*.xml");
00844 gtk_file_filter_add_pattern (filter1, "*.XML");
00845 gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter1);
00846
00847 // Adding JSON filter
00848 filter2 = (GtkFileFilter *) gtk_file_filter_new ();
00849 gtk_file_filter_set_name (filter2, "JSON");
00850 gtk_file_filter_add_pattern (filter2, "*.json");
00851 gtk_file_filter_add_pattern (filter2, "*.JSON");
00852 gtk_file_filter_add_pattern (filter2, "*.js");
00853 gtk_file_filter_add_pattern (filter2, "*.JS");
00854 gtk_file_chooser_add_filter (GTK_FILE_CHOOSER (dlg), filter2);
00855
00856 if (input->type == INPUT_TYPE_XML)
00857     gtk_file_chooser_set_filter (GTK_FILE_CHOOSER (dlg), filter1);
00858 else
00859     gtk_file_chooser_set_filter (GTK_FILE_CHOOSER (dlg), filter2);
00860
00861 // If OK response then saving
00862 if (gtk_dialog_run (GTK_DIALOG (dlg)) == GTK_RESPONSE_OK)
00863 {
00864     // Setting input file type
00865     filter1 = gtk_file_chooser_get_filter (GTK_FILE_CHOOSER (dlg));
00866     buffer = (char *) gtk_file_filter_get_name (filter1);
00867     if (!strcmp (buffer, "XML"))
00868         input->type = INPUT_TYPE_XML;
00869     else
00870         input->type = INPUT_TYPE_JSON;
00871
00872     // Adding properties to the root XML node
00873     input->simulator = gtk_file_chooser_get_filename
00874         (GTK_FILE_CHOOSER (window->button_simulator));
00875     if (gtk_toggle_button_get_active
00876         (GTK_TOGGLE_BUTTON (window->check_evaluator)))
00877         input->evaluator = gtk_file_chooser_get_filename
00878             (GTK_FILE_CHOOSER (window->button_evaluator));
00879     else
00880         input->evaluator = NULL;
00881     if (input->type == INPUT_TYPE_XML)
00882     {
00883         input->result
00884             = (char *) xmlStrdup ((const xmlChar *)
00885                                     gtk_entry_get_text (window->entry_result));
00886         input->variables
00887             = (char *) xmlStrdup ((const xmlChar *)
00888                                     gtk_entry_get_text (window->
00889 entry_variables));
00890     }
00891     else
00892     {
00893         input->result = g_strdup (gtk_entry_get_text (window->
00894 entry_result));
00895         input->variables =
00896             g_strdup (gtk_entry_get_text (window->entry_variables));
00897     }
00898     // Setting the algorithm
00899     switch (window_get_algorithm ())
00900     {
00901     case ALGORITHM_MONTE_CARLO:
00902         input->algorithm = ALGORITHM_MONTE_CARLO;
00903         input->nsimulations
00904             = gtk_spin_button_get_value_as_int (window->spin_simulations);
00905         input->niterations
00906             = gtk_spin_button_get_value_as_int (window->spin_iterations);
00907         input->tolerance = gtk_spin_button_get_value (window->
00908 spin_tolerance);
00909         input->nbest = gtk_spin_button_get_value_as_int (window->
00910 spin_bests);
00911         window_save_direction ();
00912         break;
00913     case ALGORITHM_SWEEP:
00914         input->algorithm = ALGORITHM_SWEEP;
00915         input->niterations
00916             = gtk_spin_button_get_value_as_int (window->spin_iterations);
00917         input->tolerance = gtk_spin_button_get_value (window->
00918 spin_tolerance);
00919         input->nbest = gtk_spin_button_get_value_as_int (window->
00920 spin_bests);
00921         window_save_direction ();
00922         break;
00923     default:
00924         input->algorithm = ALGORITHM_GENETIC;
00925         input->nsimulations
00926             = gtk_spin_button_get_value_as_int (window->spin_population);
00927         input->niterations

```

```

00923         = gtk_spin_button_get_value_as_int (window->spin_generations);
00924     input->mutation_ratio
00925         = gtk_spin_button_get_value (window->spin_mutation);
00926     input->reproduction_ratio
00927         = gtk_spin_button_get_value (window->spin_reproduction);
00928     input->adaptation_ratio
00929         = gtk_spin_button_get_value (window->spin_adaptation);
00930     break;
00931 }
00932     input->norm = window_get_norm ();
00933     input->p = gtk_spin_button_get_value (window->spin_p);
00934     input->threshold = gtk_spin_button_get_value (window->
spin_threshold);
00935
00936     // Saving the XML file
00937     buffer = gtk_file_chooser_get_filename (GTK_FILE_CHOOSER (dlg));
00938     input_save (buffer);
00939
00940     // Closing and freeing memory
00941     g_free (buffer);
00942     gtk_widget_destroy (GTK_WIDGET (dlg));
00943 #if DEBUG_INTERFACE
00944     fprintf (stderr, "window_save: end\n");
00945 #endif
00946     return 1;
00947 }
00948
00949 // Closing and freeing memory
00950 gtk_widget_destroy (GTK_WIDGET (dlg));
00951 #if DEBUG_INTERFACE
00952 fprintf (stderr, "window_save: end\n");
00953 #endif
00954 return 0;
00955 }

```

#### 4.13.2.9 window\_template\_experiment()

```

void window_template_experiment (
    void * data )

```

Function to update the experiment i-th input template in the main window.

##### Parameters

<i>data</i>	Callback data (i-th input template).
-------------	--------------------------------------

Definition at line 1517 of file [interface.c](#).

```

01518 {
01519     unsigned int i, j;
01520     char *buffer;
01521     GFile *file1, *file2;
01522 #if DEBUG_INTERFACE
01523     fprintf (stderr, "window_template_experiment: start\n");
01524 #endif
01525     i = (size_t) data;
01526     j = gtk_combo_box_get_active (GTK_COMBO_BOX (window->combo_experiment));
01527     file1
01528         = gtk_file_chooser_get_file (GTK_FILE_CHOOSER (window->button_template[i]));
01529     file2 = g_file_new_for_path (input->directory);
01530     buffer = g_file_get_relative_path (file2, file1);
01531     if (input->type == INPUT_TYPE_XML)
01532         input->experiment[j].template[i] = (char *) xmlStrdup ((xmlChar *) buffer);
01533     else
01534         input->experiment[j].template[i] = g_strdup (buffer);
01535     g_free (buffer);
01536     g_object_unref (file2);
01537     g_object_unref (file1);
01538 #if DEBUG_INTERFACE
01539     fprintf (stderr, "window_template_experiment: end\n");
01540 #endif
01541 }

```

## 4.14 interface.h

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #ifndef INTERFACE__H
00033 #define INTERFACE__H 1
00034
00035 #define MAX_LENGTH (DEFAULT_PRECISION + 8)
00036
00037 typedef struct
00038 {
00039     GtkWidget *dialog;
00040     GtkWidget *grid;
00041     GtkWidget *label_seed;
00042     GtkWidget *spin_seed;
00043     GtkWidget *label_threads;
00044     GtkWidget *spin_threads;
00045     GtkWidget *label_direction;
00046     GtkWidget *spin_direction;
00047 } Options;
00048
00049 typedef struct
00050 {
00051     GtkWidget *dialog;
00052     GtkWidget *label;
00053     GtkWidget *spinner;
00054     GtkWidget *grid;
00055 } Running;
00056
00057 typedef struct
00058 {
00059     GtkWidget *window;
00060     GtkWidget *grid;
00061     GtkWidget *bar_buttons;
00062     GtkWidget *button_open;
00063     GtkWidget *button_save;
00064     GtkWidget *button_run;
00065     GtkWidget *button_options;
00066     GtkWidget *button_help;
00067     GtkWidget *button_about;
00068     GtkWidget *button_exit;
00069     GtkWidget *grid_files;
00070     GtkWidget *label_simulator;
00071     GtkWidget *FileChooserButton *button_simulator;
00072     GtkWidget *check_evaluator;
00073     GtkWidget *FileChooserButton *button_evaluator;
00074     GtkWidget *label_result;
00075     GtkWidget *entry_result;
00076     GtkWidget *label_variables;
00077     GtkWidget *entry_variables;
00078     GtkWidget *frame_norm;
00079     GtkWidget *grid_norm;
00080     GtkWidget *radio_button_norm[NNORMS];
00081     GtkWidget *label_p;
00082     GtkWidget *spin_p;
00083     GtkWidget *scrolled_p;
00084     GtkWidget *frame_algorithm;

```

```

00111   GtkWidget *grid_algorithm;
00112   GtkRadioButton *button_algorithm[NALGORITHMS];
00114   GtkLabel *label_simulations;
00115   GtkSpinButton *spin_simulations;
00117   GtkLabel *label_iterations;
00118   GtkSpinButton *spin_iterations;
00120   GtkLabel *label_tolerance;
00121   GtkSpinButton *spin_tolerance;
00122   GtkLabel *label_bests;
00123   GtkSpinButton *spin_bests;
00124   GtkLabel *label_population;
00125   GtkSpinButton *spin_population;
00127   GtkLabel *label_generations;
00128   GtkSpinButton *spin_generations;
00130   GtkLabel *label_mutation;
00131   GtkSpinButton *spin_mutation;
00132   GtkLabel *label_reproduction;
00133   GtkSpinButton *spin_reproduction;
00135   GtkLabel *label_adaptation;
00136   GtkSpinButton *spin_adaptation;
00138   GtkCheckButton *check_direction;
00140   GtkWidget *grid_direction;
00142   GtkRadioButton *button_direction[NDIRECTIONS];
00144   GtkLabel *label_steps;
00145   GtkSpinButton *spin_steps;
00146   GtkLabel *label_estimates;
00147   GtkSpinButton *spin_estimates;
00149   GtkLabel *label_relaxation;
00151   GtkSpinButton *spin_relaxation;
00153   GtkLabel *label_threshold;
00154   GtkSpinButton *spin_threshold;
00155   GtkScrolledWindow *scrolled_threshold;
00157   GtkFrame *frame_variable;
00158   GtkWidget *grid_variable;
00159   GtkComboBoxText *combo_variable;
00161   GtkButton *button_add_variable;
00162   GtkButton *button_remove_variable;
00163   GtkLabel *label_variable;
00164   GtkEntry *entry_variable;
00165   GtkLabel *label_min;
00166   GtkSpinButton *spin_min;
00167   GtkScrolledWindow *scrolled_min;
00168   GtkLabel *label_max;
00169   GtkSpinButton *spin_max;
00170   GtkScrolledWindow *scrolled_max;
00171   GtkCheckButton *check_minabs;
00172   GtkSpinButton *spin_minabs;
00173   GtkScrolledWindow *scrolled_minabs;
00174   GtkCheckButton *check_maxabs;
00175   GtkSpinButton *spin_maxabs;
00176   GtkScrolledWindow *scrolled_maxabs;
00177   GtkLabel *label_precision;
00178   GtkSpinButton *spin_precision;
00179   GtkLabel *label_sweeps;
00180   GtkSpinButton *spin_sweeps;
00181   GtkLabel *label_bits;
00182   GtkSpinButton *spin_bits;
00183   GtkLabel *label_step;
00184   GtkSpinButton *spin_step;
00185   GtkScrolledWindow *scrolled_step;
00186   GtkFrame *frame_experiment;
00187   GtkWidget *grid_experiment;
00188   GtkComboBoxText *combo_experiment;
00189   GtkButton *button_add_experiment;
00190   GtkButton *button_remove_experiment;
00191   GtkLabel *label_experiment;
00192   GtkFileChooserButton *button_experiment;
00194   GtkLabel *label_weight;
00195   GtkSpinButton *spin_weight;
00196   GtkCheckButton *check_template[MAX_NINPUTS];
00198   GtkFileChooserButton *button_template[MAX_NINPUTS];
00200   GdkPixbuf *logo;
00201   Experiment *experiment;
00202   Variable *variable;
00203   char *application_directory;
00204   gulong id_experiment;
00205   gulong id_experiment_name;
00206   gulong id_variable;
00207   gulong id_variable_label;
00208   gulong id_template[MAX_NINPUTS];
00210   gulong id_input[MAX_NINPUTS];
00212   unsigned int nexperiments;
00213   unsigned int nvariables;
00214 } Window;
00215
00216 // Global variables
00217 extern const char *logo[];

```

```

00218 extern Options options[1];
00219 extern Running running[1];
00220 extern Window window[1];
00221
00222 // Inline functions
00223 #if GTK_MINOR_VERSION < 10
00224 static inline GtkWidget *
00225 gtk_button_new_from_icon_name (const char *name, GtkIconSize size)
00226 {
00227     GtkWidget *button;
00228     GtkWidget *image;
00229     button = (GtkWidget *) gtk_button_new ();
00230     image = (GtkWidget *) gtk_image_new_from_icon_name (name, size);
00231     gtk_button_set_image (button, GTK_WIDGET (image));
00232     return button;
00233 }
00234 #endif
00235
00236 // Public functions
00237 unsigned int gtk_array_get_active (GtkRadioButton * array[], unsigned int n);
00238 void input_save (char *filename);
00239 void options_new ();
00240 void running_new ();
00241 unsigned int window_get_algorithm ();
00242 unsigned int window_get_direction ();
00243 unsigned int window_get_norm ();
00244 void window_save_direction ();
00245 int window_save ();
00246 void window_run ();
00247 void window_help ();
00248 void window_update_direction ();
00249 void window_update ();
00250 void window_set_algorithm ();
00251 void window_set_experiment ();
00252 void window_remove_experiment ();
00253 void window_add_experiment ();
00254 void window_name_experiment ();
00255 void window_weight_experiment ();
00256 void window_inputs_experiment ();
00257 void window_template_experiment (void *data);
00258 void window_set_variable ();
00259 void window_remove_variable ();
00260 void window_add_variable ();
00261 void window_label_variable ();
00262 void window_precision_variable ();
00263 void window_rangemin_variable ();
00264 void window_rangemax_variable ();
00265 void window_rangeminabs_variable ();
00266 void window_rangemaxabs_variable ();
00267 void window_update_variable ();
00268 int window_read (char *filename);
00269 void window_open ();
00270 void window_new (GtkApplication * application);
00271
00272 #endif

```

## 4.15 main.c File Reference

Main source file.

```

#include "config.h"
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <math.h>
#include <locale.h>
#include <gsl/gsl_rng.h>
#include <libxml/parser.h>
#include <libintl.h>
#include <glib.h>
#include <json-glib/json-glib.h>
#include <mpi.h>
#include <gio/gio.h>
#include <gtk/gtk.h>

```

```
#include "genetic/genetic.h"
#include "utils.h"
#include "experiment.h"
#include "variable.h"
#include "input.h"
#include "optimize.h"
#include "interface.h"
#include "mpcotool.h"
```

Include dependency graph for main.c:



## Functions

- int **main** (int argc, char \*\*argv)

### 4.15.1 Detailed Description

Main source file.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [main.c](#).

## 4.16 main.c

```
00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
```

```

00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00038 #define _GNU_SOURCE
00039 #include "config.h"
00040 #include <stdio.h>
00041 #include <stdlib.h>
00042 #include <string.h>
00043 #include <math.h>
00044 #include <locale.h>
00045 #include <gsl/gsl_rng.h>
00046 #include <libxml/parser.h>
00047 #include <libintl.h>
00048 #include <glib.h>
00049 #include <json-glib/json-glib.h>
00050 #ifdef G_OS_WIN32
00051 #include <windows.h>
00052 #endif
00053 #if HAVE_MPI
00054 #include <mpi.h>
00055 #endif
00056 #if HAVE_GTK
00057 #include <gio/gio.h>
00058 #include <gtk/gtk.h>
00059 #endif
00060 #include "genetic/genetic.h"
00061 #include "utils.h"
00062 #include "experiment.h"
00063 #include "variable.h"
00064 #include "input.h"
00065 #include "optimize.h"
00066 #if HAVE_GTK
00067 #include "interface.h"
00068 #endif
00069 #include "mpcotool.h"
00070
00071 int
00072 main (int argn, char **argc)
00073 {
00074     #if HAVE_GTK
00075         show_pending = process_pending;
00076     #endif
00077     return mpcotool (argn, argc);
00078 }

```

## 4.17 optimize.c File Reference

Source file to define the optimization functions.

```

#include "config.h"
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <math.h>
#include <sys/param.h>
#include <gsl/gsl_rng.h>
#include <libxml/parser.h>
#include <libintl.h>
#include <glib.h>
#include <glib/gstdio.h>
#include <json-glib/json-glib.h>
#include <alloca.h>
#include <mpi.h>
#include "genetic/genetic.h"
#include "utils.h"
#include "experiment.h"
#include "variable.h"

```



```
#include "input.h"
#include "optimize.h"
Include dependency graph for optimize.c:
```



## Macros

- `#define DEBUG_OPTIMIZE 0`  
*Macro to debug optimize functions.*
- `#define RM "rm"`  
*Macro to define the shell remove command.*

## Functions

- void `optimize_input` (unsigned int simulation, char \*input, GMappedFile \*template)  
*Function to write the simulation input file.*
- double `optimize_parse` (unsigned int simulation, unsigned int experiment)  
*Function to parse input files, simulating and calculating the \ objective function.*
- double `optimize_norm_euclidian` (unsigned int simulation)  
*Function to calculate the Euclidian error norm.*
- double `optimize_norm_maximum` (unsigned int simulation)  
*Function to calculate the maximum error norm.*
- double `optimize_norm_p` (unsigned int simulation)  
*Function to calculate the P error norm.*
- double `optimize_norm_taxicab` (unsigned int simulation)  
*Function to calculate the taxicab error norm.*
- void `optimize_print` ()  
*Function to print the results.*
- void `optimize_save_variables` (unsigned int simulation, double error)  
*Function to save in a file the variables and the error.*
- void `optimize_best` (unsigned int simulation, double value)  
*Function to save the best simulations.*
- void `optimize_sequential` ()  
*Function to optimize sequentially.*
- void \* `optimize_thread` (ParallelData \*data)  
*Function to optimize on a thread.*
- void `optimize_merge` (unsigned int nsaveds, unsigned int \*simulation\_best, double \*error\_best)  
*Function to merge the 2 optimization results.*
- void `optimize_synchronise` ()  
*Function to synchronise the optimization results of MPI tasks.*
- void `optimize_sweep` ()  
*Function to optimize with the sweep algorithm.*
- void `optimize_MonteCarlo` ()  
*Function to optimize with the Monte-Carlo algorithm.*
- void `optimize_best_direction` (unsigned int simulation, double value)  
*Function to save the best simulation in a direction search method.*

- void [optimize\\_direction\\_sequential](#) (unsigned int simulation)  
*Function to estimate the direction search sequentially.*
- void \* [optimize\\_direction\\_thread](#) ([ParallelData](#) \*data)  
*Function to estimate the direction search on a thread.*
- double [optimize\\_estimate\\_direction\\_random](#) (unsigned int variable, unsigned int estimate)  
*Function to estimate a component of the direction search vector.*
- double [optimize\\_estimate\\_direction\\_coordinates](#) (unsigned int variable, unsigned int estimate)  
*Function to estimate a component of the direction search vector.*
- void [optimize\\_step\\_direction](#) (unsigned int simulation)  
*Function to do a step of the direction search method.*
- void [optimize\\_direction](#) ()  
*Function to optimize with a direction search method.*
- double [optimize\\_genetic\\_objective](#) ( [Entity](#) \*entity)  
*Function to calculate the objective function of an entity.*
- void [optimize\\_genetic](#) ()  
*Function to optimize with the genetic algorithm.*
- void [optimize\\_save\\_old](#) ()  
*Function to save the best results on iterative methods.*
- void [optimize\\_merge\\_old](#) ()  
*Function to merge the best results with the previous step best results on iterative methods.*
- void [optimize\\_refine](#) ()  
*Function to refine the search ranges of the variables in iterative algorithms.*
- void [optimize\\_step](#) ()  
*Function to do a step of the iterative algorithm.*
- void [optimize\\_iterate](#) ()  
*Function to iterate the algorithm.*
- void [optimize\\_free](#) ()  
*Function to free the memory used by the [Optimize](#) struct.*
- void [optimize\\_open](#) ()  
*Function to open and perform a optimization.*

## Variables

- int [ntasks](#)  
*Number of tasks.*
- unsigned int [nthreads](#)  
*Number of threads.*
- unsigned int [nthreads\\_direction](#)  
*Number of threads for the direction search method.*
- GMutex [mutex](#) [1]  
*Mutex struct.*
- void(\* [optimize\\_algorithm](#) )()  
*Pointer to the function to perform a optimization algorithm step.*
- double(\* [optimize\\_estimate\\_direction](#) )(unsigned int variable, unsigned int estimate)  
*Pointer to the function to estimate the direction.*
- double(\* [optimize\\_norm](#) )(unsigned int simulation)  
*Pointer to the error norm function.*
- [Optimize](#) [optimize](#) [1]  
*Optimization data.*

### 4.17.1 Detailed Description

Source file to define the optimization functions.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [optimize.c](#).

### 4.17.2 Function Documentation

#### 4.17.2.1 optimize\_best()

```
void optimize_best (
    unsigned int simulation,
    double value )
```

Function to save the best simulations.

#### Parameters

<i>simulation</i>	Simulation number.
<i>value</i>	Objective function value.

Definition at line [469](#) of file [optimize.c](#).

```
00470 {
00471     unsigned int i, j;
00472     double e;
00473     #if DEBUG_OPTIMIZE
00474     fprintf (stderr, "optimize_best: start\n");
00475     fprintf (stderr, "optimize_best: nsaveds=%u nbest=%u\n",
00476             optimize->nsaveds, optimize->nbest);
00477     #endif
00478     if (optimize->nsaveds < optimize->nbest
00479         || value < optimize->error_best[optimize->nsaveds - 1])
00480     {
00481         if (optimize->nsaveds < optimize->nbest)
00482             ++optimize->nsaveds;
00483         optimize->error_best[optimize->nsaveds - 1] = value;
00484         optimize->simulation_best[optimize->nsaveds - 1] = simulation;
00485         for (i = optimize->nsaveds; --i;)
00486         {
00487             if (optimize->error_best[i] < optimize->
00488                 error_best[i - 1])
00489             {
00489                 j = optimize->simulation_best[i];
00490                 e = optimize->error_best[i];
00491                 optimize->simulation_best[i] = optimize->
00492                     simulation_best[i - 1];
```

```

00492         optimize->error_best[i] = optimize->
error_best[i - 1];
00493         optimize->simulation_best[i - 1] = j;
00494         optimize->error_best[i - 1] = e;
00495     }
00496     else
00497         break;
00498     }
00499 }
00500 #if DEBUG_OPTIMIZE
00501 fprintf (stderr, "optimize_best: end\n");
00502 #endif
00503 }

```

#### 4.17.2.2 optimize\_best\_direction()

```

void optimize_best_direction (
    unsigned int simulation,
    double value )

```

Function to save the best simulation in a direction search method.

##### Parameters

<i>simulation</i>	Simulation number.
<i>value</i>	Objective function value.

Definition at line 794 of file [optimize.c](#).

```

00795 {
00796 #if DEBUG_OPTIMIZE
00797     fprintf (stderr, "optimize_best_direction: start\n");
00798     fprintf (stderr,
00799         "optimize_best_direction: simulation=%u value=%.14le best=%.14le\n",
00800         simulation, value, optimize->error_best[0]);
00801 #endif
00802     if (value < optimize->error_best[0])
00803     {
00804         optimize->error_best[0] = value;
00805         optimize->simulation_best[0] = simulation;
00806 #if DEBUG_OPTIMIZE
00807         fprintf (stderr,
00808             "optimize_best_direction: BEST simulation=%u value=%.14le\n",
00809             simulation, value);
00810 #endif
00811     }
00812 #if DEBUG_OPTIMIZE
00813     fprintf (stderr, "optimize_best_direction: end\n");
00814 #endif
00815 }

```

#### 4.17.2.3 optimize\_direction\_sequential()

```

void optimize_direction_sequential (
    unsigned int simulation )

```

Function to estimate the direction search sequentially.

## Parameters

<i>simulation</i>	Simulation number.
-------------------	--------------------


Definition at line 824 of file [optimize.c](#).

```

00825 {
00826     unsigned int i, j;
00827     double e;
00828     #if DEBUG_OPTIMIZE
00829     fprintf (stderr, "optimize_direction_sequential: start\n");
00830     fprintf (stderr, "optimize_direction_sequential: nstart_direction=%u "
00831             "nend_direction=%u\n",
00832             optimize->nstart_direction, optimize->
nend_direction);
00833     #endif
00834     for (i = optimize->nstart_direction; i < optimize->nend_direction; ++i)
00835     {
00836         j = simulation + i;
00837         e = optimize_norm (j);
00838         optimize_best_direction (j, e);
00839         optimize_save_variables (j, e);
00840         if (e < optimize->threshold)
00841         {
00842             optimize->stop = 1;
00843             break;
00844         }
00845     #if DEBUG_OPTIMIZE
00846     fprintf (stderr, "optimize_direction_sequential: i=%u e=%lg\n", i, e);
00847     #endif
00848     }
00849     #if DEBUG_OPTIMIZE
00850     fprintf (stderr, "optimize_direction_sequential: end\n");
00851     #endif
00852 }

```

Here is the call graph for this function:

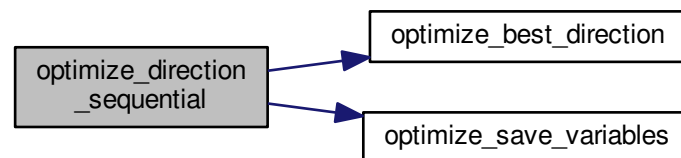

## 4.17.2.4 optimize\_direction\_thread()

```

void * optimize_direction_thread (
    ParallelData * data )

```

Function to estimate the direction search on a thread.

## Parameters

<i>data</i>	Function data.
-------------	----------------

## Returns


NULL

Definition at line 862 of file [optimize.c](#).

```

00863 {
00864     unsigned int i, thread;
00865     double e;
00866     #if DEBUG_OPTIMIZE
00867         fprintf (stderr, "optimize_direction_thread: start\n");
00868     #endif
00869     thread = data->thread;
00870     #if DEBUG_OPTIMIZE
00871         fprintf (stderr, "optimize_direction_thread: thread=%u start=%u end=%u\n",
00872                 thread,
00873                 optimize->thread_direction[thread],
00874                 optimize->thread_direction[thread + 1]);
00875     #endif
00876     for (i = optimize->thread_direction[thread];
00877          i < optimize->thread_direction[thread + 1]; ++i)
00878     {
00879         e = optimize_norm (i);
00880         g_mutex_lock (mutex);
00881         optimize_best_direction (i, e);
00882         optimize_save_variables (i, e);
00883         if (e < optimize->threshold)
00884             optimize->stop = 1;
00885         g_mutex_unlock (mutex);
00886         if (optimize->stop)
00887             break;
00888     #if DEBUG_OPTIMIZE
00889         fprintf (stderr, "optimize_direction_thread: i=%u e=%lg\n", i, e);
00890     #endif
00891     }
00892     #if DEBUG_OPTIMIZE
00893         fprintf (stderr, "optimize_direction_thread: end\n");
00894     #endif
00895     g_thread_exit (NULL);
00896     return NULL;
00897 }
```

Here is the call graph for this function:

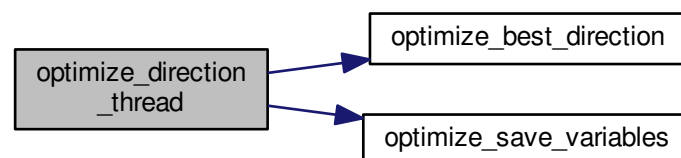

#### 4.17.2.5 optimize\_estimate\_direction\_coordinates()

```
double optimize_estimate_direction_coordinates (
    unsigned int variable,
    unsigned int estimate )
```

Function to estimate a component of the direction search vector.

## Parameters

<i>variable</i>	Variable number.
<i>estimate</i>	Estimate number.

Definition at line 936 of file [optimize.c](#).

```

00938 {
00939     double x;
00940     #if DEBUG_OPTIMIZE
00941     fprintf (stderr, "optimize_estimate_direction_coordinates: start\n");
00942     #endif
00943     x = optimize->direction[variable];
00944     if (estimate >= (2 * variable) && estimate < (2 * variable + 2))
00945     {
00946         if (estimate & 1)
00947             x += optimize->step[variable];
00948         else
00949             x -= optimize->step[variable];
00950     }
00951     #if DEBUG_OPTIMIZE
00952     fprintf (stderr,
00953             "optimize_estimate_direction_coordinates: direction%u=%lg\n",
00954             variable, x);
00955     fprintf (stderr, "optimize_estimate_direction_coordinates: end\n");
00956     #endif
00957     return x;
00958 }
```

4.17.2.6 `optimize_estimate_direction_random()`

```

double optimize_estimate_direction_random (
    unsigned int variable,
    unsigned int estimate )
```

Function to estimate a component of the direction search vector.

## Parameters

<i>variable</i>	Variable number.
<i>estimate</i>	Estimate number.

Definition at line 909 of file [optimize.c](#).

```

00911 {
00912     double x;
00913     #if DEBUG_OPTIMIZE
00914     fprintf (stderr, "optimize_estimate_direction_random: start\n");
00915     #endif
00916     x = optimize->direction[variable]
00917         + (1. - 2. * gsl_rng_uniform (optimize->rng)) * optimize->
00918         step[variable];
00919     #if DEBUG_OPTIMIZE
00920     fprintf (stderr, "optimize_estimate_direction_random: direction%u=%lg\n",
00921             variable, x);
00922     fprintf (stderr, "optimize_estimate_direction_random: end\n");
00923     #endif
00924     return x;
00925 }
```



## 4.17.2.7 optimize\_genetic\_objective()

```
double optimize_genetic_objective (
    Entity * entity )
```

Function to calculate the objective function of an entity.

## Parameters

<i>entity</i>	entity data.
---------------	--------------


## Returns

objective function value.

Definition at line 1103 of file [optimize.c](#).

```
01104 {
01105     unsigned int j;
01106     double objective;
01107     char buffer[64];
01108     #if DEBUG_OPTIMIZE
01109     fprintf (stderr, "optimize_genetic_objective: start\n");
01110     #endif
01111     for (j = 0; j < optimize->nvariables; ++j)
01112     {
01113         optimize->value[entity->id * optimize->nvariables + j]
01114             = genetic_get_variable (entity, optimize->genetic_variable + j);
01115     }
01116     objective = optimize_norm (entity->id);
01117     g_mutex_lock (mutex);
01118     for (j = 0; j < optimize->nvariables; ++j)
01119     {
01120         snprintf (buffer, 64, "%s ", format[optimize->precision[j]]);
01121         fprintf (optimize->file_variables, buffer,
01122             genetic_get_variable (entity, optimize->genetic_variable + j));
01123     }
01124     fprintf (optimize->file_variables, "%.14le\n", objective);
01125     g_mutex_unlock (mutex);
01126     #if DEBUG_OPTIMIZE
01127     fprintf (stderr, "optimize_genetic_objective: end\n");
01128     #endif
01129     return objective;
01130 }
```

Here is the call graph for this function:



#### 4.17.2.8 optimize\_input()

```
void optimize_input (
    unsigned int simulation,
    char * input,
    GMappedFile * template )
```

Function to write the simulation input file.

## Parameters

<i>simulation</i>	Simulation number.
<i>input</i>	Input file name.
<i>template</i>	Template of the input file name.

Definition at line 104 of file `optimize.c`.

```

00105 {
00106     unsigned int i;
00107     char buffer[32], value[32], *buffer2, *buffer3, *content;
00108     FILE *file;
00109     gsize length;
00110     GRegex *regex;
00111
00112     #if DEBUG_OPTIMIZE
00113     fprintf (stderr, "optimize_input: start\n");
00114     #endif
00115
00116     // Checking the file
00117     if (!template)
00118         goto optimize_input_end;
00119
00120     // Opening template
00121     content = g_mapped_file_get_contents (template);
00122     length = g_mapped_file_get_length (template);
00123     #if DEBUG_OPTIMIZE
00124     fprintf (stderr, "optimize_input: length=%lu\ncontent:\n%s", length, content);
00125     #endif
00126     file = g_fopen (input, "w");
00127
00128     // Parsing template
00129     for (i = 0; i < optimize->nvariables; ++i)
00130     {
00131         #if DEBUG_OPTIMIZE
00132         fprintf (stderr, "optimize_input: variable=%u\n", i);
00133         #endif
00134         snprintf (buffer, 32, "@variable%u@", i + 1);
00135         regex = g_regex_new (buffer, 0, 0, NULL);
00136         if (i == 0)
00137         {
00138             buffer2 = g_regex_replace_literal (regex, content, length, 0,
00139                                               optimize->label[i], 0, NULL);
00140             #if DEBUG_OPTIMIZE
00141             fprintf (stderr, "optimize_input: buffer2\n%s", buffer2);
00142             #endif
00143         }
00144         else
00145         {
00146             length = strlen (buffer3);
00147             buffer2 = g_regex_replace_literal (regex, buffer3, length, 0,
00148                                               optimize->label[i], 0, NULL);
00149             g_free (buffer3);
00150         }
00151         g_regex_unref (regex);
00152         length = strlen (buffer2);
00153         snprintf (buffer, 32, "@value%u@", i + 1);
00154         regex = g_regex_new (buffer, 0, 0, NULL);
00155         snprintf (value, 32, format[optimize->precision[i]],
00156                 optimize->value[simulation * optimize->
nvariables + i]);
00157
00158         #if DEBUG_OPTIMIZE
00159         fprintf (stderr, "optimize_input: value=%s\n", value);
00160         #endif
00161         buffer3 = g_regex_replace_literal (regex, buffer2, length, 0, value,
00162                                           0, NULL);
00163         g_free (buffer2);
00164         g_regex_unref (regex);
00165     }
00166
00167     // Saving input file
00168     fwrite (buffer3, strlen (buffer3), sizeof (char), file);
00169     g_free (buffer3);
00170     fclose (file);
00171
00172 optimize_input_end:
00173     #if DEBUG_OPTIMIZE
00174     fprintf (stderr, "optimize_input: end\n");
00175     #endif
00176     return;
00177 }

```

#### 4.17.2.9 optimize\_merge()

```
void optimize_merge (
    unsigned int nsaveds,
    unsigned int * simulation_best,
    double * error_best )
```

Function to merge the 2 optimization results.

##### Parameters

<i>nsaveds</i>	Number of saved results.
<i>simulation_best</i>	Array of best simulation numbers.
<i>error_best</i>	Array of best objective function values.

Definition at line 592 of file [optimize.c](#).

```
00594 {
00595     unsigned int i, j, k, s[optimize->nbest];
00596     double e[optimize->nbest];
00597     #if DEBUG_OPTIMIZE
00598         fprintf (stderr, "optimize_merge: start\n");
00599     #endif
00600     i = j = k = 0;
00601     do
00602     {
00603         if (i == optimize->nsaveds)
00604         {
00605             s[k] = simulation_best[j];
00606             e[k] = error_best[j];
00607             ++j;
00608             ++k;
00609             if (j == nsaveds)
00610                 break;
00611         }
00612         else if (j == nsaveds)
00613         {
00614             s[k] = optimize->simulation_best[i];
00615             e[k] = optimize->error_best[i];
00616             ++i;
00617             ++k;
00618             if (i == optimize->nsaveds)
00619                 break;
00620         }
00621         else if (optimize->error_best[i] > error_best[j])
00622         {
00623             s[k] = simulation_best[j];
00624             e[k] = error_best[j];
00625             ++j;
00626             ++k;
00627         }
00628         else
00629         {
00630             s[k] = optimize->simulation_best[i];
00631             e[k] = optimize->error_best[i];
00632             ++i;
00633             ++k;
00634         }
00635     }
00636     while (k < optimize->nbest);
00637     optimize->nsaveds = k;
00638     memcpy (optimize->simulation_best, s, k * sizeof (unsigned int));
00639     memcpy (optimize->error_best, e, k * sizeof (double));
00640     #if DEBUG_OPTIMIZE
00641         fprintf (stderr, "optimize_merge: end\n");
00642     #endif
00643 }
```

## 4.17.2.10 optimize\_norm\_euclidian()

```
double optimize_norm_euclidian (
    unsigned int simulation )
```

Function to calculate the Euclidian error norm.

## Parameters

<i>simulation</i>	simulation number.
-------------------	--------------------


## Returns

Euclidian error norm.

Definition at line 301 of file [optimize.c](#).

```
00302 {
00303     double e, ei;
00304     unsigned int i;
00305     #if DEBUG_OPTIMIZE
00306     fprintf (stderr, "optimize_norm_euclidian: start\n");
00307     #endif
00308     e = 0.;
00309     for (i = 0; i < optimize->nexperiments; ++i)
00310     {
00311         ei = optimize_parse (simulation, i);
00312         e += ei * ei;
00313     }
00314     e = sqrt (e);
00315     #if DEBUG_OPTIMIZE
00316     fprintf (stderr, "optimize_norm_euclidian: error=%lg\n", e);
00317     fprintf (stderr, "optimize_norm_euclidian: end\n");
00318     #endif
00319     return e;
00320 }
```

Here is the call graph for this function:



## 4.17.2.11 optimize\_norm\_maximum()

```
double optimize_norm_maximum (
    unsigned int simulation )
```

Function to calculate the maximum error norm.

**Parameters**

<i>simulation</i>	simulation number.
-------------------	--------------------

**Returns**

Maximum error norm.


Definition at line 330 of file [optimize.c](#).

```

00331 {
00332     double e, ei;
00333     unsigned int i;
00334     #if DEBUG_OPTIMIZE
00335     fprintf (stderr, "optimize_norm_maximum: start\n");
00336     #endif
00337     e = 0.;
00338     for (i = 0; i < optimize->nexperiments; ++i)
00339     {
00340         ei = fabs (optimize_parse (simulation, i));
00341         e = fmax (e, ei);
00342     }
00343     #if DEBUG_OPTIMIZE
00344     fprintf (stderr, "optimize_norm_maximum: error=%lg\n", e);
00345     fprintf (stderr, "optimize_norm_maximum: end\n");
00346     #endif
00347     return e;
00348 }

```

Here is the call graph for this function:

**4.17.2.12 optimize\_norm\_p()**

```

double optimize_norm_p (
    unsigned int simulation )

```

Function to calculate the P error norm.

**Parameters**

<i>simulation</i>	simulation number.
-------------------	--------------------

**Returns**


P error norm.

Definition at line 358 of file [optimize.c](#).

```

00359 {
00360     double e, ei;
00361     unsigned int i;
00362     #if DEBUG_OPTIMIZE
00363     fprintf (stderr, "optimize_norm_p: start\n");
00364     #endif
00365     e = 0.;
00366     for (i = 0; i < optimize->nexperiments; ++i)
00367     {
00368         ei = fabs (optimize_parse (simulation, i));
00369         e += pow (ei, optimize->p);
00370     }
00371     e = pow (e, 1. / optimize->p);
00372     #if DEBUG_OPTIMIZE
00373     fprintf (stderr, "optimize_norm_p: error=%lg\n", e);
00374     fprintf (stderr, "optimize_norm_p: end\n");
00375     #endif
00376     return e;
00377 }
```

Here is the call graph for this function:



#### 4.17.2.13 optimize\_norm\_taxicab()

```
double optimize_norm_taxicab (
    unsigned int simulation )
```

Function to calculate the taxicab error norm.

##### Parameters

<i>simulation</i>	simulation number.
-------------------	--------------------

##### Returns

Taxicab error norm.

Definition at line 387 of file [optimize.c](#).

```


00388 {
00389     double e;
00390     unsigned int i;
00391     #if DEBUG_OPTIMIZE
00392     fprintf (stderr, "optimize_norm_taxicab: start\n");
00393     #endif
00394     e = 0.;
00395     for (i = 0; i < optimize->nexperiments; ++i)
```

```

00396     e += fabs (optimize_parse (simulation, i));
00397 #if DEBUG_OPTIMIZE
00398     fprintf (stderr, "optimize_norm_taxicab: error=%lg\n", e);
00399     fprintf (stderr, "optimize_norm_taxicab: end\n");
00400 #endif
00401     return e;
00402 }

```

Here is the call graph for this function:



#### 4.17.2.14 optimize\_parse()

```

double optimize_parse (
    unsigned int simulation,
    unsigned int experiment )

```

Function to parse input files, simulating and calculating the \ objective function.

##### Parameters

<i>simulation</i>	Simulation number.
<i>experiment</i>	Experiment number.

##### Returns

Objective function value.

Definition at line 190 of file [optimize.c](#).

```

00191 {
00192     unsigned int i;
00193     double e;
00194     char buffer[512], input[MAX_NINPUTS][32], output[32], result[32], *buffer2,
00195         *buffer3, *buffer4;
00196     FILE *file_result;
00197
00198 #if DEBUG_OPTIMIZE
00199     fprintf (stderr, "optimize_parse: start\n");
00200     fprintf (stderr, "optimize_parse: simulation=%u experiment=%u\n",
00201             simulation, experiment);
00202 #endif
00203
00204     // Opening input files
00205     for (i = 0; i < optimize->ninputs; ++i)
00206     {
00207         snprintf (&input[i][0], 32, "input-%u-%u-%u", i, simulation, experiment);
00208 #if DEBUG_OPTIMIZE
00209         fprintf (stderr, "optimize_parse: i=%u input=%s\n", i, &input[i][0]);
00210 #endif
00211         optimize_input (simulation, &input[i][0], optimize->

```



```

    file[i][experiment]);
00212     }
00213     for (; i < MAX_NINPUTS; ++i)
00214         strcpy (&input[i][0], "");
00215     #if DEBUG_OPTIMIZE
00216         fprintf (stderr, "optimize_parse: parsing end\n");
00217     #endif
00218
00219     // Performing the simulation
00220     snprintf (output, 32, "output-%u-%u", simulation, experiment);
00221     buffer2 = g_path_get_dirname (optimize->simulator);
00222     buffer3 = g_path_get_basename (optimize->simulator);
00223     buffer4 = g_build_filename (buffer2, buffer3, NULL);
00224     snprintf (buffer, 512, "\"%s\" %s %s %s %s %s %s %s %s %s",
00225             buffer4, input[0], input[1], input[2], input[3], input[4],
00226             input[5], input[6], input[7], output);
00227     g_free (buffer4);
00228     g_free (buffer3);
00229     g_free (buffer2);
00230     #if DEBUG_OPTIMIZE
00231         fprintf (stderr, "optimize_parse: %s\n", buffer);
00232     #endif
00233     system (buffer);
00234
00235     // Checking the objective value function
00236     if (optimize->evaluator)
00237     {
00238         snprintf (result, 32, "result-%u-%u", simulation, experiment);
00239         buffer2 = g_path_get_dirname (optimize->evaluator);
00240         buffer3 = g_path_get_basename (optimize->evaluator);
00241         buffer4 = g_build_filename (buffer2, buffer3, NULL);
00242         snprintf (buffer, 512, "\"%s\" %s %s %s",
00243             buffer4, output, optimize->experiment[experiment], result);
00244         g_free (buffer4);
00245         g_free (buffer3);
00246         g_free (buffer2);
00247         #if DEBUG_OPTIMIZE
00248             fprintf (stderr, "optimize_parse: %s\n", buffer);
00249             fprintf (stderr, "optimize_parse: result=%s\n", result);
00250         #endif
00251         system (buffer);
00252         file_result = g_fopen (result, "r");
00253         e = atof (fgets (buffer, 512, file_result));
00254         fclose (file_result);
00255     }
00256     else
00257     {
00258         #if DEBUG_OPTIMIZE
00259             fprintf (stderr, "optimize_parse: output=%s\n", output);
00260         #endif
00261         strcpy (result, "");
00262         file_result = g_fopen (output, "r");
00263         e = atof (fgets (buffer, 512, file_result));
00264         fclose (file_result);
00265     }
00266
00267     // Removing files
00268     #if !DEBUG_OPTIMIZE
00269         for (i = 0; i < optimize->ninputs; ++i)
00270         {
00271             if (optimize->file[i][0])
00272             {
00273                 snprintf (buffer, 512, RM " %s", &input[i][0]);
00274                 system (buffer);
00275             }
00276         }
00277         snprintf (buffer, 512, RM " %s %s", output, result);
00278         system (buffer);
00279     #endif
00280
00281     // Processing pending events
00282     if (show_pending)
00283         show_pending ();
00284
00285     #if DEBUG_OPTIMIZE
00286         fprintf (stderr, "optimize_parse: end\n");
00287     #endif
00288
00289     // Returning the objective function
00290     return e * optimize->weight[experiment];
00291 }

```

Here is the call graph for this function:



#### 4.17.2.15 optimize\_save\_variables()

```
void optimize_save_variables (
    unsigned int simulation,
    double error )
```

Function to save in a file the variables and the error.

##### Parameters

<i>simulation</i>	Simulation number.
<i>error</i>	Error value.

Definition at line 440 of file [optimize.c](#).

```
00441 {
00442     unsigned int i;
00443     char buffer[64];
00444     #if DEBUG_OPTIMIZE
00445     fprintf (stderr, "optimize_save_variables: start\n");
00446     #endif
00447     for (i = 0; i < optimize->nvariables; ++i)
00448     {
00449         snprintf (buffer, 64, "%s ", format[optimize->precision[i]]);
00450         fprintf (optimize->file_variables, buffer,
00451             optimize->value[simulation * optimize->
00452                 nvariables + i]);
00453         fprintf (optimize->file_variables, "%.14le\n", error);
00454         fflush (optimize->file_variables);
00455     #if DEBUG_OPTIMIZE
00456     fprintf (stderr, "optimize_save_variables: end\n");
00457     #endif
00458 }
```

#### 4.17.2.16 optimize\_step\_direction()

```
void optimize_step_direction (
    unsigned int simulation )
```

Function to do a step of the direction search method.

## Parameters

<i>simulation</i>	Simulation number.
-------------------	--------------------


Definition at line 967 of file `optimize.c`.

```

00968 {
00969     GThread *thread[nthreads_direction];
00970     ParallelData data[nthreads_direction];
00971     unsigned int i, j, k, b;
00972     #if DEBUG_OPTIMIZE
00973     fprintf (stderr, "optimize_step_direction: start\n");
00974     #endif
00975     for (i = 0; i < optimize->nestimates; ++i)
00976     {
00977         k = (simulation + i) * optimize->nvariables;
00978         b = optimize->simulation_best[0] * optimize->
nvariables;
00979     #if DEBUG_OPTIMIZE
00980         fprintf (stderr, "optimize_step_direction: simulation=%u best=%u\n",
00981                 simulation + i, optimize->simulation_best[0]);
00982     #endif
00983         for (j = 0; j < optimize->nvariables; ++j, ++k, ++b)
00984         {
00985             #if DEBUG_OPTIMIZE
00986             fprintf (stderr,
00987                     "optimize_step_direction: estimate=%u best%u=%.14le\n",
00988                     i, j, optimize->value[b]);
00989             #endif
00990             optimize->value[k]
00991             = optimize->value[b] + optimize_estimate_direction (j,
i);
00992             optimize->value[k] = fmin (fmax (optimize->value[k],
00993                                             optimize->rangeminabs[j]),
00994                                       optimize->rangemaxabs[j]);
00995             #if DEBUG_OPTIMIZE
00996             fprintf (stderr,
00997                     "optimize_step_direction: estimate=%u variable%u=%.14le\n",
00998                     i, j, optimize->value[k]);
00999             #endif
01000         }
01001     }
01002     if (nthreads_direction == 1)
01003         optimize_direction_sequential (simulation);
01004     else
01005     {
01006         for (i = 0; i <= nthreads_direction; ++i)
01007         {
01008             optimize->thread_direction[i]
01009             = simulation + optimize->nstart_direction
01010             + i * (optimize->nend_direction - optimize->
nstart_direction)
01011             / nthreads_direction;
01012             #if DEBUG_OPTIMIZE
01013             fprintf (stderr,
01014                     "optimize_step_direction: i=%u thread_direction=%u\n",
01015                     i, optimize->thread_direction[i]);
01016             #endif
01017         }
01018         for (i = 0; i < nthreads_direction; ++i)
01019         {
01020             data[i].thread = i;
01021             thread[i] = g_thread_new
01022             (NULL, (void (*) ) optimize_direction_thread, &data[i]);
01023         }
01024         for (i = 0; i < nthreads_direction; ++i)
01025             g_thread_join (thread[i]);
01026     }
01027     #if DEBUG_OPTIMIZE
01028     fprintf (stderr, "optimize_step_direction: end\n");
01029     #endif
01030 }

```

Here is the call graph for this function:

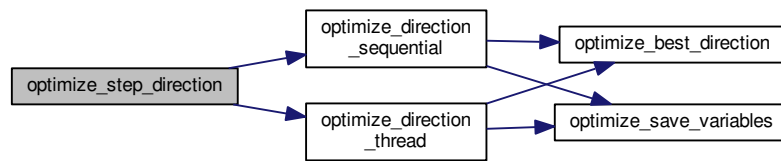

#### 4.17.2.17 optimize\_thread()

```
void * optimize_thread (
    ParallelData * data )
```

Function to optimize on a thread.

##### Parameters

<i>data</i>	Function data.
-------------	----------------

##### Returns


NULL

Definition at line 546 of file `optimize.c`.

```

00547 {
00548     unsigned int i, thread;
00549     double e;
00550     #if DEBUG_OPTIMIZE
00551     fprintf (stderr, "optimize_thread: start\n");
00552     #endif
00553     thread = data->thread;
00554     #if DEBUG_OPTIMIZE
00555     fprintf (stderr, "optimize_thread: thread=%u start=%u end=%u\n", thread,
00556             optimize->thread[thread], optimize->thread[thread + 1]);
00557     #endif
00558     for (i = optimize->thread[thread]; i < optimize->thread[thread + 1]; ++i)
00559     {
00560         e = optimize_norm (i);
00561         g_mutex_lock (mutex);
00562         optimize_best (i, e);
00563         optimize_save_variables (i, e);
00564         if (e < optimize->threshold)
00565             optimize->stop = 1;
00566         g_mutex_unlock (mutex);
00567         if (optimize->stop)
00568             break;
00569     #if DEBUG_OPTIMIZE
00570     fprintf (stderr, "optimize_thread: i=%u e=%lg\n", i, e);
00571     #endif
00572     }
00573     #if DEBUG_OPTIMIZE
00574     fprintf (stderr, "optimize_thread: end\n");
00575     #endif
00576     g_thread_exit (NULL);
00577     return NULL;
00578 }
```

Here is the call graph for this function:

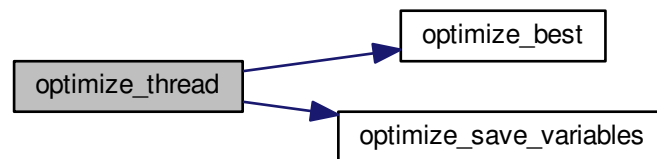

## 4.18 optimize.c

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burquete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #define _GNU_SOURCE
00033 #include "config.h"
00034 #include <stdio.h>
00035 #include <stdlib.h>
00036 #include <string.h>
00037 #include <math.h>
00038 #include <sys/param.h>
00039 #include <gsl/gsl_rng.h>
00040 #include <libxml/parser.h>
00041 #include <libintl.h>
00042 #include <glib.h>
00043 #include <glib/gstdio.h>
00044 #include <json-glib/json-glib.h>
00045 #ifdef G_OS_WIN32
00046 #include <windows.h>
00047 #elif !defined(__BSD_VISIBLE) && !defined(NetBSD)
00048 #include <alloca.h>
00049 #endif
00050 #if HAVE_MPI
00051 #include <mpi.h>
00052 #endif
00053 #include "genetic/genetic.h"
00054 #include "utils.h"
00055 #include "experiment.h"
00056 #include "variable.h"
00057 #include "input.h"

```

```

00064 #include "optimize.h"
00065
00066 #define DEBUG_OPTIMIZE 0
00067
00068
00072 #ifdef G_OS_WIN32
00073 #define RM "del"
00074 #else
00075 #define RM "rm"
00076 #endif
00077
00078 int ntasks;
00079 unsigned int nthreads;
00080 unsigned int nthreads_direction;
00082 GMutex mutex[1];
00083 void (*optimize_algorithm) ();
00085 double (*optimize_estimate_direction) (unsigned int variable,
00086                                         unsigned int estimate);
00088 double (*optimize_norm) (unsigned int simulation);
00090 Optimize optimize[1];
00091
00103 void
00104 optimize_input (unsigned int simulation, char *input, GMappedFile * template)
00105 {
00106     unsigned int i;
00107     char buffer[32], value[32], *buffer2, *buffer3, *content;
00108     FILE *file;
00109     gsize length;
00110     GRegex *regex;
00111
00112     #if DEBUG_OPTIMIZE
00113         fprintf (stderr, "optimize_input: start\n");
00114     #endif
00115
00116     // Checking the file
00117     if (!template)
00118         goto optimize_input_end;
00119
00120     // Opening template
00121     content = g_mapped_file_get_contents (template);
00122     length = g_mapped_file_get_length (template);
00123     #if DEBUG_OPTIMIZE
00124         fprintf (stderr, "optimize_input: length=%lu\ncontent:\n%s", length, content);
00125     #endif
00126     file = g_fopen (input, "w");
00127
00128     // Parsing template
00129     for (i = 0; i < optimize->nvariables; ++i)
00130     {
00131         #if DEBUG_OPTIMIZE
00132             fprintf (stderr, "optimize_input: variable=%u\n", i);
00133         #endif
00134         snprintf (buffer, 32, "@variable%u@", i + 1);
00135         regex = g_regex_new (buffer, 0, 0, NULL);
00136         if (i == 0)
00137         {
00138             buffer2 = g_regex_replace_literal (regex, content, length, 0,
00139                                                 optimize->label[i], 0, NULL);
00140         #if DEBUG_OPTIMIZE
00141             fprintf (stderr, "optimize_input: buffer2\n%s", buffer2);
00142         #endif
00143         }
00144         else
00145         {
00146             length = strlen (buffer3);
00147             buffer2 = g_regex_replace_literal (regex, buffer3, length, 0,
00148                                                 optimize->label[i], 0, NULL);
00149             g_free (buffer3);
00150         }
00151         g_regex_unref (regex);
00152         length = strlen (buffer2);
00153         snprintf (buffer, 32, "@value%u@", i + 1);
00154         regex = g_regex_new (buffer, 0, 0, NULL);
00155         snprintf (value, 32, format[optimize->precision[i]],
00156                 optimize->value[simulation * optimize->nvariables + i]);
00157
00158         #if DEBUG_OPTIMIZE
00159             fprintf (stderr, "optimize_input: value=%s\n", value);
00160         #endif
00161         buffer3 = g_regex_replace_literal (regex, buffer2, length, 0, value,
00162                                           0, NULL);
00163         g_free (buffer2);
00164         g_regex_unref (regex);
00165     }
00166
00167     // Saving input file
00168     fwrite (buffer3, strlen (buffer3), sizeof (char), file);

```

```

00169     g_free (buffer3);
00170     fclose (file);
00171
00172 optimize_input_end:
00173 #if DEBUG_OPTIMIZE
00174     fprintf (stderr, "optimize_input: end\n");
00175 #endif
00176     return;
00177 }
00178
00179 double
00190 optimize_parse (unsigned int simulation, unsigned int experiment)
00191 {
00192     unsigned int i;
00193     double e;
00194     char buffer[512], input[MAX_NINPUTS][32], output[32], result[32], *buffer2,
00195         *buffer3, *buffer4;
00196     FILE *file_result;
00197
00198 #if DEBUG_OPTIMIZE
00199     fprintf (stderr, "optimize_parse: start\n");
00200     fprintf (stderr, "optimize_parse: simulation=%u experiment=%u\n",
00201             simulation, experiment);
00202 #endif
00203
00204     // Opening input files
00205     for (i = 0; i < optimize->ninputs; ++i)
00206     {
00207         snprintf (&input[i][0], 32, "input-%u-%u-%u", i, simulation, experiment);
00208 #if DEBUG_OPTIMIZE
00209         fprintf (stderr, "optimize_parse: i=%u input=%s\n", i, &input[i][0]);
00210 #endif
00211         optimize_input (simulation, &input[i][0], optimize->file[i][experiment]);
00212     }
00213     for (; i < MAX_NINPUTS; ++i)
00214         strcpy (&input[i][0], "");
00215 #if DEBUG_OPTIMIZE
00216     fprintf (stderr, "optimize_parse: parsing end\n");
00217 #endif
00218
00219     // Performing the simulation
00220     snprintf (output, 32, "output-%u-%u", simulation, experiment);
00221     buffer2 = g_path_get_dirname (optimize->simulator);
00222     buffer3 = g_path_get_basename (optimize->simulator);
00223     buffer4 = g_build_filename (buffer2, buffer3, NULL);
00224     snprintf (buffer, 512, "\"%s\" %s %s %s %s %s %s %s %s",
00225             buffer4, input[0], input[1], input[2], input[3], input[4],
00226             input[5], input[6], input[7], output);
00227     g_free (buffer4);
00228     g_free (buffer3);
00229     g_free (buffer2);
00230 #if DEBUG_OPTIMIZE
00231     fprintf (stderr, "optimize_parse: %s\n", buffer);
00232 #endif
00233     system (buffer);
00234
00235     // Checking the objective value function
00236     if (optimize->evaluator)
00237     {
00238         snprintf (result, 32, "result-%u-%u", simulation, experiment);
00239         buffer2 = g_path_get_dirname (optimize->evaluator);
00240         buffer3 = g_path_get_basename (optimize->evaluator);
00241         buffer4 = g_build_filename (buffer2, buffer3, NULL);
00242         snprintf (buffer, 512, "\"%s\" %s %s %s",
00243             buffer4, output, optimize->experiment[experiment], result);
00244         g_free (buffer4);
00245         g_free (buffer3);
00246         g_free (buffer2);
00247 #if DEBUG_OPTIMIZE
00248         fprintf (stderr, "optimize_parse: %s\n", buffer);
00249         fprintf (stderr, "optimize_parse: result=%s\n", result);
00250 #endif
00251         system (buffer);
00252         file_result = g_fopen (result, "r");
00253         e = atof (fgets (buffer, 512, file_result));
00254         fclose (file_result);
00255     }
00256     else
00257     {
00258 #if DEBUG_OPTIMIZE
00259         fprintf (stderr, "optimize_parse: output=%s\n", output);
00260 #endif
00261         strcpy (result, "");
00262         file_result = g_fopen (output, "r");
00263         e = atof (fgets (buffer, 512, file_result));
00264         fclose (file_result);
00265     }

```

```

00266
00267 // Removing files
00268 #if !DEBUG_OPTIMIZE
00269 for (i = 0; i < optimize->ninputs; ++i)
00270 {
00271     if (optimize->file[i][0])
00272     {
00273         snprintf (buffer, 512, RM " %s", &input[i][0]);
00274         system (buffer);
00275     }
00276 }
00277 snprintf (buffer, 512, RM " %s %s", output, result);
00278 system (buffer);
00279 #endif
00280
00281 // Processing pending events
00282 if (show_pending)
00283     show_pending ();
00284
00285 #if DEBUG_OPTIMIZE
00286 fprintf (stderr, "optimize_parse: end\n");
00287 #endif
00288
00289 // Returning the objective function
00290 return e * optimize->weight[experiment];
00291 }
00292
00300 double
00301 optimize_norm_euclidian (unsigned int simulation)
00302 {
00303     double e, ei;
00304     unsigned int i;
00305     #if DEBUG_OPTIMIZE
00306     fprintf (stderr, "optimize_norm_euclidian: start\n");
00307     #endif
00308     e = 0.;
00309     for (i = 0; i < optimize->nexperiments; ++i)
00310     {
00311         ei = optimize_parse (simulation, i);
00312         e += ei * ei;
00313     }
00314     e = sqrt (e);
00315     #if DEBUG_OPTIMIZE
00316     fprintf (stderr, "optimize_norm_euclidian: error=%lg\n", e);
00317     fprintf (stderr, "optimize_norm_euclidian: end\n");
00318     #endif
00319     return e;
00320 }
00321
00329 double
00330 optimize_norm_maximum (unsigned int simulation)
00331 {
00332     double e, ei;
00333     unsigned int i;
00334     #if DEBUG_OPTIMIZE
00335     fprintf (stderr, "optimize_norm_maximum: start\n");
00336     #endif
00337     e = 0.;
00338     for (i = 0; i < optimize->nexperiments; ++i)
00339     {
00340         ei = fabs (optimize_parse (simulation, i));
00341         e = fmax (e, ei);
00342     }
00343     #if DEBUG_OPTIMIZE
00344     fprintf (stderr, "optimize_norm_maximum: error=%lg\n", e);
00345     fprintf (stderr, "optimize_norm_maximum: end\n");
00346     #endif
00347     return e;
00348 }
00349
00357 double
00358 optimize_norm_p (unsigned int simulation)
00359 {
00360     double e, ei;
00361     unsigned int i;
00362     #if DEBUG_OPTIMIZE
00363     fprintf (stderr, "optimize_norm_p: start\n");
00364     #endif
00365     e = 0.;
00366     for (i = 0; i < optimize->nexperiments; ++i)
00367     {
00368         ei = fabs (optimize_parse (simulation, i));
00369         e += pow (ei, optimize->p);
00370     }
00371     e = pow (e, 1. / optimize->p);
00372     #if DEBUG_OPTIMIZE
00373     fprintf (stderr, "optimize_norm_p: error=%lg\n", e);

```



```

00374     fprintf (stderr, "optimize_norm_p: end\n");
00375 #endif
00376     return e;
00377 }
00378
00386 double
00387 optimize_norm_taxicab (unsigned int simulation)
00388 {
00389     double e;
00390     unsigned int i;
00391     #if DEBUG_OPTIMIZE
00392     fprintf (stderr, "optimize_norm_taxicab: start\n");
00393 #endif
00394     e = 0.;
00395     for (i = 0; i < optimize->nexperiments; ++i)
00396         e += fabs (optimize_parse (simulation, i));
00397     #if DEBUG_OPTIMIZE
00398     fprintf (stderr, "optimize_norm_taxicab: error=%lg\n", e);
00399     fprintf (stderr, "optimize_norm_taxicab: end\n");
00400 #endif
00401     return e;
00402 }
00403
00408 void
00409 optimize_print ()
00410 {
00411     unsigned int i;
00412     char buffer[512];
00413     #if HAVE_MPI
00414     if (optimize->mpi_rank)
00415         return;
00416 #endif
00417     printf ("%s\n", _("Best result"));
00418     fprintf (optimize->file_result, "%s\n", _("Best result"));
00419     printf ("error = %.15le\n", optimize->error_old[0]);
00420     fprintf (optimize->file_result, "error = %.15le\n", optimize->
error_old[0]);
00421     for (i = 0; i < optimize->nvariables; ++i)
00422     {
00423         snprintf (buffer, 512, "%s = %s\n",
00424                 optimize->label[i], format[optimize->precision[i]]);
00425         printf (buffer, optimize->value_old[i]);
00426         fprintf (optimize->file_result, buffer, optimize->value_old[i]);
00427     }
00428     fflush (optimize->file_result);
00429 }
00430
00439 void
00440 optimize_save_variables (unsigned int simulation, double error)
00441 {
00442     unsigned int i;
00443     char buffer[64];
00444     #if DEBUG_OPTIMIZE
00445     fprintf (stderr, "optimize_save_variables: start\n");
00446 #endif
00447     for (i = 0; i < optimize->nvariables; ++i)
00448     {
00449         snprintf (buffer, 64, "%s ", format[optimize->precision[i]]);
00450         fprintf (optimize->file_variables, buffer,
00451                 optimize->value[simulation * optimize->nvariables + i]);
00452     }
00453     fprintf (optimize->file_variables, "%.14le\n", error);
00454     fflush (optimize->file_variables);
00455     #if DEBUG_OPTIMIZE
00456     fprintf (stderr, "optimize_save_variables: end\n");
00457 #endif
00458 }
00459
00468 void
00469 optimize_best (unsigned int simulation, double value)
00470 {
00471     unsigned int i, j;
00472     double e;
00473     #if DEBUG_OPTIMIZE
00474     fprintf (stderr, "optimize_best: start\n");
00475     fprintf (stderr, "optimize_best: nsaveds=%u nbest=%u\n",
00476             optimize->nsaveds, optimize->nbest);
00477 #endif
00478     if (optimize->nsaveds < optimize->nbest
00479         || value < optimize->error_best[optimize->nsaveds - 1])
00480     {
00481         if (optimize->nsaveds < optimize->nbest)
00482             ++optimize->nsaveds;
00483         optimize->error_best[optimize->nsaveds - 1] = value;
00484         optimize->simulation_best[optimize->nsaveds - 1] = simulation;
00485         for (i = optimize->nsaveds; --i;)
00486             {

```

```

00487         if (optimize->error_best[i] < optimize->error_best[i - 1])
00488         {
00489             j = optimize->simulation_best[i];
00490             e = optimize->error_best[i];
00491             optimize->simulation_best[i] = optimize->
simulation_best[i - 1];
00492             optimize->error_best[i] = optimize->error_best[i - 1];
00493             optimize->simulation_best[i - 1] = j;
00494             optimize->error_best[i - 1] = e;
00495         }
00496     else
00497         break;
00498 }
00499 }
00500 #if DEBUG_OPTIMIZE
00501 fprintf (stderr, "optimize_best: end\n");
00502 #endif
00503 }
00504
00509 void
00510 optimize_sequential ()
00511 {
00512     unsigned int i;
00513     double e;
00514     #if DEBUG_OPTIMIZE
00515     fprintf (stderr, "optimize_sequential: start\n");
00516     fprintf (stderr, "optimize_sequential: nstart=%u nend=%u\n",
optimize->nstart, optimize->nend);
00517     #endif
00518     for (i = optimize->nstart; i < optimize->nend; ++i)
00519     {
00520         e = optimize_norm (i);
00521         optimize_best (i, e);
00522         optimize_save_variables (i, e);
00523         if (e < optimize->threshold)
00524         {
00525             optimize->stop = 1;
00526             break;
00527         }
00528     }
00529     #if DEBUG_OPTIMIZE
00530     fprintf (stderr, "optimize_sequential: i=%u e=%lg\n", i, e);
00531     #endif
00532 }
00533 #if DEBUG_OPTIMIZE
00534 fprintf (stderr, "optimize_sequential: end\n");
00535 #endif
00536 }
00537
00545 void *
00546 optimize_thread (ParallelData * data)
00547 {
00548     unsigned int i, thread;
00549     double e;
00550     #if DEBUG_OPTIMIZE
00551     fprintf (stderr, "optimize_thread: start\n");
00552     #endif
00553     thread = data->thread;
00554     #if DEBUG_OPTIMIZE
00555     fprintf (stderr, "optimize_thread: thread=%u start=%u end=%u\n", thread,
optimize->thread[thread], optimize->thread[thread + 1]);
00556     #endif
00557     for (i = optimize->thread[thread]; i < optimize->thread[thread + 1]; ++i)
00558     {
00559         e = optimize_norm (i);
00560         g_mutex_lock (mutex);
00561         optimize_best (i, e);
00562         optimize_save_variables (i, e);
00563         if (e < optimize->threshold)
00564         {
00565             optimize->stop = 1;
00566             g_mutex_unlock (mutex);
00567             if (optimize->stop)
00568                 break;
00569             #if DEBUG_OPTIMIZE
00570             fprintf (stderr, "optimize_thread: i=%u e=%lg\n", i, e);
00571             #endif
00572         }
00573     }
00574     #if DEBUG_OPTIMIZE
00575     fprintf (stderr, "optimize_thread: end\n");
00576     #endif
00577     g_thread_exit (NULL);
00578     return NULL;
00579 }
00591 void
00592 optimize_merge (unsigned int nsaveds, unsigned int *simulation_best,
00593                double *error_best)
00594 {

```

```

00595     unsigned int i, j, k, s[optimize->nbest];
00596     double e[optimize->nbest];
00597     #if DEBUG_OPTIMIZE
00598     fprintf (stderr, "optimize_merge: start\n");
00599     #endif
00600     i = j = k = 0;
00601     do
00602     {
00603         if (i == optimize->nsaveds)
00604         {
00605             s[k] = simulation_best[j];
00606             e[k] = error_best[j];
00607             ++j;
00608             ++k;
00609             if (j == nsaveds)
00610                 break;
00611         }
00612         else if (j == nsaveds)
00613         {
00614             s[k] = optimize->simulation_best[i];
00615             e[k] = optimize->error_best[i];
00616             ++i;
00617             ++k;
00618             if (i == optimize->nsaveds)
00619                 break;
00620         }
00621         else if (optimize->error_best[i] > error_best[j])
00622         {
00623             s[k] = simulation_best[j];
00624             e[k] = error_best[j];
00625             ++j;
00626             ++k;
00627         }
00628         else
00629         {
00630             s[k] = optimize->simulation_best[i];
00631             e[k] = optimize->error_best[i];
00632             ++i;
00633             ++k;
00634         }
00635     }
00636     while (k < optimize->nbest);
00637     optimize->nsaveds = k;
00638     memcpy (optimize->simulation_best, s, k * sizeof (unsigned int));
00639     memcpy (optimize->error_best, e, k * sizeof (double));
00640     #if DEBUG_OPTIMIZE
00641     fprintf (stderr, "optimize_merge: end\n");
00642     #endif
00643 }
00644
00649 #if HAVE_MPI
00650 void
00651 optimize_synchronise ()
00652 {
00653     unsigned int i, nsaveds, simulation_best[optimize->nbest], stop;
00654     double error_best[optimize->nbest];
00655     MPI_Status mpi_stat;
00656     #if DEBUG_OPTIMIZE
00657     fprintf (stderr, "optimize_synchronise: start\n");
00658     #endif
00659     if (optimize->mpi_rank == 0)
00660     {
00661         for (i = 1; i < ntasks; ++i)
00662         {
00663             MPI_Recv (&nsaveds, 1, MPI_INT, i, 1, MPI_COMM_WORLD, &mpi_stat);
00664             MPI_Recv (simulation_best, nsaveds, MPI_INT, i, 1,
00665                     MPI_COMM_WORLD, &mpi_stat);
00666             MPI_Recv (error_best, nsaveds, MPI_DOUBLE, i, 1,
00667                     MPI_COMM_WORLD, &mpi_stat);
00668             optimize_merge (nsaveds, simulation_best, error_best);
00669             MPI_Recv (&stop, 1, MPI_UNSIGNED, i, 1, MPI_COMM_WORLD, &mpi_stat);
00670             if (stop)
00671                 optimize->stop = 1;
00672         }
00673         for (i = 1; i < ntasks; ++i)
00674             MPI_Send (&optimize->stop, 1, MPI_UNSIGNED, i, 1, MPI_COMM_WORLD);
00675     }
00676     else
00677     {
00678         MPI_Send (&optimize->nsaveds, 1, MPI_INT, 0, 1, MPI_COMM_WORLD);
00679         MPI_Send (optimize->simulation_best, optimize->nsaveds, MPI_INT, 0, 1,
00680                 MPI_COMM_WORLD);
00681         MPI_Send (optimize->error_best, optimize->nsaveds, MPI_DOUBLE, 0, 1,
00682                 MPI_COMM_WORLD);
00683         MPI_Send (&optimize->stop, 1, MPI_UNSIGNED, 0, 1, MPI_COMM_WORLD);
00684         MPI_Recv (&stop, 1, MPI_UNSIGNED, 0, 1, MPI_COMM_WORLD, &mpi_stat);
00685         if (stop)

```

```

00686         optimize->stop = 1;
00687     }
00688     #if DEBUG_OPTIMIZE
00689     fprintf (stderr, "optimize_synchronise: end\n");
00690     #endif
00691 }
00692 #endif
00693
00694 void
00695 optimize_sweep ()
00696 {
00701     unsigned int i, j, k, l;
00702     double e;
00703     GThread *thread[nthreads];
00704     ParallelData data[nthreads];
00705     #if DEBUG_OPTIMIZE
00706     fprintf (stderr, "optimize_sweep: start\n");
00707     #endif
00708     for (i = 0; i < optimize->nsimulations; ++i)
00709     {
00710         k = i;
00711         for (j = 0; j < optimize->nvariables; ++j)
00712         {
00713             l = k % optimize->nsweeps[j];
00714             k /= optimize->nsweeps[j];
00715             e = optimize->rangemin[j];
00716             if (optimize->nsweeps[j] > 1)
00717                 e += l * (optimize->rangemax[j] - optimize->rangemin[j])
00718                     / (optimize->nsweeps[j] - 1);
00719             optimize->value[i * optimize->nvariables + j] = e;
00720         }
00721     }
00722     optimize->nsaveds = 0;
00723     if (nthreads <= 1)
00724         optimize_sequential ();
00725     else
00726     {
00727         for (i = 0; i < nthreads; ++i)
00728         {
00729             data[i].thread = i;
00730             thread[i] = g_thread_new (NULL, (void (*)(void *)) optimize_thread, &data[i]);
00731         }
00732         for (i = 0; i < nthreads; ++i)
00733             g_thread_join (thread[i]);
00734     }
00735     #if HAVE_MPI
00736     // Communicating tasks results
00737     optimize_synchronise ();
00738     #endif
00739     #if DEBUG_OPTIMIZE
00740     fprintf (stderr, "optimize_sweep: end\n");
00741     #endif
00742 }
00743
00744 void
00745 optimize_MonteCarlo ()
00746 {
00751     unsigned int i, j;
00752     GThread *thread[nthreads];
00753     ParallelData data[nthreads];
00754     #if DEBUG_OPTIMIZE
00755     fprintf (stderr, "optimize_MonteCarlo: start\n");
00756     #endif
00757     for (i = 0; i < optimize->nsimulations; ++i)
00758         for (j = 0; j < optimize->nvariables; ++j)
00759             optimize->value[i * optimize->nvariables + j]
00760                 = optimize->rangemin[j] + gsl_rng_uniform (optimize->rng)
00761                   * (optimize->rangemax[j] - optimize->rangemin[j]);
00762     optimize->nsaveds = 0;
00763     if (nthreads <= 1)
00764         optimize_sequential ();
00765     else
00766     {
00767         for (i = 0; i < nthreads; ++i)
00768         {
00769             data[i].thread = i;
00770             thread[i] = g_thread_new (NULL, (void (*)(void *)) optimize_thread, &data[i]);
00771         }
00772         for (i = 0; i < nthreads; ++i)
00773             g_thread_join (thread[i]);
00774     }
00775     #if HAVE_MPI
00776     // Communicating tasks results
00777     optimize_synchronise ();
00778     #endif
00779     #if DEBUG_OPTIMIZE
00780     fprintf (stderr, "optimize_MonteCarlo: end\n");

```

```

00781 #endif
00782 }
00783
00793 void
00794 optimize_best_direction (unsigned int simulation, double value)
00795 {
00796     #if DEBUG_OPTIMIZE
00797         fprintf (stderr, "optimize_best_direction: start\n");
00798         fprintf (stderr,
00799             "optimize_best_direction: simulation=%u value=%.14le best=%.14le\n",
00800             simulation, value, optimize->error_best[0]);
00801     #endif
00802     if (value < optimize->error_best[0])
00803     {
00804         optimize->error_best[0] = value;
00805         optimize->simulation_best[0] = simulation;
00806     #if DEBUG_OPTIMIZE
00807         fprintf (stderr,
00808             "optimize_best_direction: BEST simulation=%u value=%.14le\n",
00809             simulation, value);
00810     #endif
00811     }
00812     #if DEBUG_OPTIMIZE
00813         fprintf (stderr, "optimize_best_direction: end\n");
00814     #endif
00815 }
00816
00823 void
00824 optimize_direction_sequential (unsigned int simulation)
00825 {
00826     unsigned int i, j;
00827     double e;
00828     #if DEBUG_OPTIMIZE
00829         fprintf (stderr, "optimize_direction_sequential: start\n");
00830         fprintf (stderr, "optimize_direction_sequential: nstart_direction=%u "
00831             "nend_direction=%u\n",
00832             optimize->nstart_direction, optimize->nend_direction);
00833     #endif
00834     for (i = optimize->nstart_direction; i < optimize->nend_direction; ++i)
00835     {
00836         j = simulation + i;
00837         e = optimize_norm (j);
00838         optimize_best_direction (j, e);
00839         optimize_save_variables (j, e);
00840         if (e < optimize->threshold)
00841         {
00842             optimize->stop = 1;
00843             break;
00844         }
00845     #if DEBUG_OPTIMIZE
00846         fprintf (stderr, "optimize_direction_sequential: i=%u e=%lg\n", i, e);
00847     #endif
00848     }
00849     #if DEBUG_OPTIMIZE
00850         fprintf (stderr, "optimize_direction_sequential: end\n");
00851     #endif
00852 }
00853
00861 void *
00862 optimize_direction_thread (ParallelData * data)
00863 {
00864     unsigned int i, thread;
00865     double e;
00866     #if DEBUG_OPTIMIZE
00867         fprintf (stderr, "optimize_direction_thread: start\n");
00868     #endif
00869     thread = data->thread;
00870     #if DEBUG_OPTIMIZE
00871         fprintf (stderr, "optimize_direction_thread: thread=%u start=%u end=%u\n",
00872             thread,
00873             optimize->thread_direction[thread],
00874             optimize->thread_direction[thread + 1]);
00875     #endif
00876     for (i = optimize->thread_direction[thread];
00877         i < optimize->thread_direction[thread + 1]; ++i)
00878     {
00879         e = optimize_norm (i);
00880         g_mutex_lock (mutex);
00881         optimize_best_direction (i, e);
00882         optimize_save_variables (i, e);
00883         if (e < optimize->threshold)
00884             optimize->stop = 1;
00885         g_mutex_unlock (mutex);
00886         if (optimize->stop)
00887             break;
00888     #if DEBUG_OPTIMIZE
00889         fprintf (stderr, "optimize_direction_thread: i=%u e=%lg\n", i, e);

```

```

00890 #endif
00891 }
00892 #if DEBUG_OPTIMIZE
00893     fprintf (stderr, "optimize_direction_thread: end\n");
00894 #endif
00895     g_thread_exit (NULL);
00896     return NULL;
00897 }
00898
00900 double
00901 optimize_estimate_direction_random (unsigned int variable,
00902                                     unsigned int estimate)
00903 {
00904     double x;
00905     #if DEBUG_OPTIMIZE
00906         fprintf (stderr, "optimize_estimate_direction_random: start\n");
00907     #endif
00908     x = optimize->direction[variable]
00909         + (1. - 2. * gsl_rng_uniform (optimize->rng)) * optimize->step[variable];
00910     #if DEBUG_OPTIMIZE
00911         fprintf (stderr, "optimize_estimate_direction_random: direction%u=%lg\n",
00912                 variable, x);
00913     #endif
00914     fprintf (stderr, "optimize_estimate_direction_random: end\n");
00915     #endif
00916     return x;
00917 }
00918
00919 double
00920 optimize_estimate_direction_coordinates (unsigned int variable,
00921                                         unsigned int estimate)
00922 {
00923     double x;
00924     #if DEBUG_OPTIMIZE
00925         fprintf (stderr, "optimize_estimate_direction_coordinates: start\n");
00926     #endif
00927     x = optimize->direction[variable];
00928     if (estimate >= (2 * variable) && estimate < (2 * variable + 2))
00929     {
00930         if (estimate & 1)
00931             x += optimize->step[variable];
00932         else
00933             x -= optimize->step[variable];
00934     }
00935     #if DEBUG_OPTIMIZE
00936         fprintf (stderr,
00937                 "optimize_estimate_direction_coordinates: direction%u=%lg\n",
00938                 variable, x);
00939         fprintf (stderr, "optimize_estimate_direction_coordinates: end\n");
00940     #endif
00941     return x;
00942 }
00943
00944 void
00945 optimize_step_direction (unsigned int simulation)
00946 {
00947     GThread *thread[nthreads_direction];
00948     ParallelData data[nthreads_direction];
00949     unsigned int i, j, k, b;
00950     #if DEBUG_OPTIMIZE
00951         fprintf (stderr, "optimize_step_direction: start\n");
00952     #endif
00953     for (i = 0; i < optimize->nestimates; ++i)
00954     {
00955         k = (simulation + i) * optimize->nvariables;
00956         b = optimize->simulation_best[0] * optimize->nvariables;
00957         #if DEBUG_OPTIMIZE
00958             fprintf (stderr, "optimize_step_direction: simulation=%u best=%u\n",
00959                     simulation + i, optimize->simulation_best[0]);
00960         #endif
00961         for (j = 0; j < optimize->nvariables; ++j, ++k, ++b)
00962         {
00963             #if DEBUG_OPTIMIZE
00964                 fprintf (stderr,
00965                         "optimize_step_direction: estimate=%u best%u=%.14le\n",
00966                         i, j, optimize->value[b]);
00967             #endif
00968             optimize->value[k]
00969                 = optimize->value[b] + optimize_estimate_direction (j, i);
00970             optimize->value[k] = fmin (fmax (optimize->value[k],
00971                                             optimize->rangeminabs[j]),
00972                                     optimize->rangemaxabs[j]);
00973             #if DEBUG_OPTIMIZE
00974                 fprintf (stderr,
00975                         "optimize_step_direction: estimate=%u variable%u=%.14le\n",
00976                         i, j, optimize->value[k]);
00977             #endif
00978         }
00979     }
00980 }

```

```

01001     }
01002     if (nthreads_direction == 1)
01003         optimize_direction_sequential (simulation);
01004     else
01005     {
01006         for (i = 0; i <= nthreads_direction; ++i)
01007         {
01008             optimize->thread_direction[i]
01009                 = simulation + optimize->nstart_direction
01010                   + i * (optimize->nend_direction - optimize->
01011                        nstart_direction)
01012                   / nthreads_direction;
01013             #if DEBUG_OPTIMIZE
01014             fprintf (stderr,
01015                     "optimize_step_direction: i=%u thread_direction=%u\n",
01016                     i, optimize->thread_direction[i]);
01017             #endif
01018             for (i = 0; i < nthreads_direction; ++i)
01019             {
01020                 data[i].thread = i;
01021                 thread[i] = g_thread_new
01022                     (NULL, (void (*)(void *)) optimize_direction_thread, &data[i]);
01023             }
01024             for (i = 0; i < nthreads_direction; ++i)
01025                 g_thread_join (thread[i]);
01026         }
01027         #if DEBUG_OPTIMIZE
01028         fprintf (stderr, "optimize_step_direction: end\n");
01029         #endif
01030     }
01031 }
01032 void
01033 optimize_direction ()
01034 {
01035     unsigned int i, j, k, b, s, adjust;
01036     #if DEBUG_OPTIMIZE
01037     fprintf (stderr, "optimize_direction: start\n");
01038     #endif
01039     for (i = 0; i < optimize->nvariables; ++i)
01040         optimize->direction[i] = 0.;
01041     b = optimize->simulation_best[0] * optimize->nvariables;
01042     s = optimize->nsimulations;
01043     adjust = 1;
01044     for (i = 0; i < optimize->nsteps; ++i, s += optimize->nestimates, b = k)
01045     {
01046         #if DEBUG_OPTIMIZE
01047         fprintf (stderr, "optimize_direction: step=%u old_best=%u\n",
01048                 i, optimize->simulation_best[0]);
01049         #endif
01050         optimize_step_direction (s);
01051         k = optimize->simulation_best[0] * optimize->nvariables;
01052         #if DEBUG_OPTIMIZE
01053         fprintf (stderr, "optimize_direction: step=%u best=%u\n",
01054                 i, optimize->simulation_best[0]);
01055         #endif
01056         if (k == b)
01057         {
01058             if (adjust)
01059             {
01060                 for (j = 0; j < optimize->nvariables; ++j)
01061                     optimize->step[j] *= 0.5;
01062                 for (j = 0; j < optimize->nvariables; ++j)
01063                     optimize->direction[j] = 0.;
01064                 adjust = 1;
01065             }
01066             else
01067             {
01068                 for (j = 0; j < optimize->nvariables; ++j)
01069                 {
01070                     #if DEBUG_OPTIMIZE
01071                     fprintf (stderr,
01072                             "optimize_direction: best=%u old=%u\n",
01073                             j, optimize->value[k + j], j, optimize->value[b + j]);
01074                     #endif
01075                     optimize->direction[j]
01076                         = (1. - optimize->relaxation) * optimize->direction[j]
01077                           + optimize->relaxation
01078                           * (optimize->value[k + j] - optimize->value[b + j]);
01079                     #if DEBUG_OPTIMIZE
01080                     fprintf (stderr, "optimize_direction: direction%u=%u\n",
01081                             j, optimize->direction[j]);
01082                     #endif
01083                 }
01084                 adjust = 0;
01085             }
01086         }
01087     }
01088     #if DEBUG_OPTIMIZE
01089     fprintf (stderr, "optimize_direction: end\n");
01090     #endif
01091 }

```

```

01091     fprintf (stderr, "optimize_direction: end\n");
01092 #endif
01093 }
01094
01102 double
01103 optimize_genetic_objective (Entity * entity)
01104 {
01105     unsigned int j;
01106     double objective;
01107     char buffer[64];
01108     #if DEBUG_OPTIMIZE
01109     fprintf (stderr, "optimize_genetic_objective: start\n");
01110 #endif
01111     for (j = 0; j < optimize->nvariables; ++j)
01112     {
01113         optimize->value[entity->id * optimize->nvariables + j]
01114             = genetic_get_variable (entity, optimize->genetic_variable + j);
01115     }
01116     objective = optimize_norm (entity->id);
01117     g_mutex_lock (mutex);
01118     for (j = 0; j < optimize->nvariables; ++j)
01119     {
01120         snprintf (buffer, 64, "%s ", format[optimize->precision[j]]);
01121         fprintf (optimize->file_variables, buffer,
01122             genetic_get_variable (entity, optimize->genetic_variable + j));
01123     }
01124     fprintf (optimize->file_variables, "%.14le\n", objective);
01125     g_mutex_unlock (mutex);
01126     #if DEBUG_OPTIMIZE
01127     fprintf (stderr, "optimize_genetic_objective: end\n");
01128 #endif
01129     return objective;
01130 }
01131
01136 void
01137 optimize_genetic ()
01138 {
01139     char *best_genome;
01140     double best_objective, *best_variable;
01141     #if DEBUG_OPTIMIZE
01142     fprintf (stderr, "optimize_genetic: start\n");
01143     fprintf (stderr, "optimize_genetic: ntasks=%u nthreads=%u\n", ntasks,
01144         nthreads);
01145     fprintf (stderr,
01146         "optimize_genetic: nvariables=%u population=%u generations=%u\n",
01147         optimize->nvariables, optimize->nsimulations, optimize->
01148         niterations);
01149     fprintf (stderr,
01150         "optimize_genetic: mutation=%lg reproduction=%lg adaptation=%lg\n",
01151         optimize->mutation_ratio, optimize->reproduction_ratio,
01152         optimize->adaptation_ratio);
01153 #endif
01154     genetic_algorithm_default (optimize->nvariables,
01155         optimize->genetic_variable,
01156         optimize->nsimulations,
01157         optimize->niterations,
01158         optimize->mutation_ratio,
01159         optimize->reproduction_ratio,
01160         optimize->adaptation_ratio,
01161         optimize->seed,
01162         optimize->threshold,
01163         &optimize_genetic_objective,
01164         &best_genome, &best_variable, &best_objective);
01165     #if DEBUG_OPTIMIZE
01166     fprintf (stderr, "optimize_genetic: the best\n");
01167 #endif
01168     optimize->error_old = (double *) g_malloc (sizeof (double));
01169     optimize->value_old
01170         = (double *) g_malloc (optimize->nvariables * sizeof (double));
01171     memcpy (optimize->error_old[0] = best_objective,
01172         optimize->value_old, best_variable,
01173         optimize->nvariables * sizeof (double));
01174     g_free (best_genome);
01175     g_free (best_variable);
01176     optimize_print ();
01177     #if DEBUG_OPTIMIZE
01178     fprintf (stderr, "optimize_genetic: end\n");
01179 #endif
01180 }
01185 void
01186 optimize_save_old ()
01187 {
01188     unsigned int i, j;
01189     #if DEBUG_OPTIMIZE
01190     fprintf (stderr, "optimize_save_old: start\n");
01191     fprintf (stderr, "optimize_save_old: nsaveds=%u\n", optimize->nsaveds);

```



```

01192 #endif
01193     memcpy (optimize->error_old, optimize->error_best,
01194             optimize->nbest * sizeof (double));
01195     for (i = 0; i < optimize->nbest; ++i)
01196     {
01197         j = optimize->simulation_best[i];
01198         #if DEBUG_OPTIMIZE
01199             fprintf (stderr, "optimize_save_old: i=%u j=%u\n", i, j);
01200         #endif
01201         memcpy (optimize->value_old + i * optimize->nvariables,
01202                 optimize->value + j * optimize->nvariables,
01203                 optimize->nvariables * sizeof (double));
01204     }
01205     #if DEBUG_OPTIMIZE
01206         for (i = 0; i < optimize->nvariables; ++i)
01207             fprintf (stderr, "optimize_save_old: best variable %u=%lg\n",
01208                     i, optimize->value_old[i]);
01209         fprintf (stderr, "optimize_save_old: end\n");
01210     #endif
01211 }
01212
01218 void
01219 optimize_merge_old ()
01220 {
01221     unsigned int i, j, k;
01222     double v[optimize->nbest * optimize->nvariables], e[optimize->
01223         nbest],
01224         *enew, *eold;
01225     #if DEBUG_OPTIMIZE
01226         fprintf (stderr, "optimize_merge_old: start\n");
01227     #endif
01228     enew = optimize->error_best;
01229     eold = optimize->error_old;
01230     i = j = k = 0;
01231     do
01232     {
01233         if (*enew < *eold)
01234         {
01235             memcpy (v + k * optimize->nvariables,
01236                     optimize->value
01237                     + optimize->simulation_best[i] * optimize->
01238                     nvariables,
01239                     optimize->nvariables * sizeof (double));
01240             e[k] = *enew;
01241             ++k;
01242             ++enew;
01243             ++i;
01244         }
01245         else
01246         {
01247             memcpy (v + k * optimize->nvariables,
01248                     optimize->value_old + j * optimize->nvariables,
01249                     optimize->nvariables * sizeof (double));
01250             e[k] = *eold;
01251             ++k;
01252             ++eold;
01253             ++j;
01254         }
01255     } while (k < optimize->nbest);
01256     memcpy (optimize->value_old, v, k * optimize->nvariables * sizeof (double));
01257     memcpy (optimize->error_old, e, k * sizeof (double));
01258     #if DEBUG_OPTIMIZE
01259         fprintf (stderr, "optimize_merge_old: end\n");
01260     #endif
01261 }
01262
01267 void
01268 optimize_refine ()
01269 {
01270     unsigned int i, j;
01271     double d;
01272     #if HAVE_MPI
01273         MPI_Status mpi_stat;
01274     #endif
01275     #if DEBUG_OPTIMIZE
01276         fprintf (stderr, "optimize_refine: start\n");
01277     #endif
01278     #if HAVE_MPI
01279         if (!optimize->mpi_rank)
01280         {
01281             #endif
01282             for (j = 0; j < optimize->nvariables; ++j)
01283             {
01284                 optimize->rangemin[j] = optimize->rangemax[j]
01285                 = optimize->value_old[j];
01286             }
01287         }
01288     #endif

```

```

01287     for (i = 0; ++i < optimize->nbest;)
01288     {
01289         for (j = 0; j < optimize->nvariables; ++j)
01290         {
01291             optimize->rangemin[j]
01292             = fmin (optimize->rangemin[j],
01293                   optimize->value_old[i * optimize->nvariables + j]);
01294             optimize->rangemax[j]
01295             = fmax (optimize->rangemax[j],
01296                   optimize->value_old[i * optimize->nvariables + j]);
01297         }
01298     }
01299     for (j = 0; j < optimize->nvariables; ++j)
01300     {
01301         d = optimize->tolerance
01302         * (optimize->rangemax[j] - optimize->rangemin[j]);
01303         switch (optimize->algorithm)
01304         {
01305             case ALGORITHM_MONTE_CARLO:
01306                 d *= 0.5;
01307                 break;
01308             default:
01309                 if (optimize->nsweeps[j] > 1)
01310                     d /= optimize->nsweeps[j] - 1;
01311                 else
01312                     d = 0.;
01313         }
01314         optimize->rangemin[j] -= d;
01315         optimize->rangemin[j]
01316         = fmax (optimize->rangemin[j], optimize->rangeminabs[j]);
01317         optimize->rangemax[j] += d;
01318         optimize->rangemax[j]
01319         = fmin (optimize->rangemax[j], optimize->rangemaxabs[j]);
01320         printf ("%s min=%lg max=%lg\n", optimize->label[j],
01321               optimize->rangemin[j], optimize->rangemax[j]);
01322         fprintf (optimize->file_result, "%s min=%lg max=%lg\n",
01323               optimize->label[j], optimize->rangemin[j],
01324               optimize->rangemax[j]);
01325     }
01326     #if HAVE_MPI
01327     for (i = 1; i < ntasks; ++i)
01328     {
01329         MPI_Send (optimize->rangemin, optimize->nvariables, MPI_DOUBLE, i,
01330                 1, MPI_COMM_WORLD);
01331         MPI_Send (optimize->rangemax, optimize->nvariables, MPI_DOUBLE, i,
01332                 1, MPI_COMM_WORLD);
01333     }
01334     }
01335     else
01336     {
01337         MPI_Recv (optimize->rangemin, optimize->nvariables, MPI_DOUBLE, 0, 1,
01338                 MPI_COMM_WORLD, &mpi_stat);
01339         MPI_Recv (optimize->rangemax, optimize->nvariables, MPI_DOUBLE, 0, 1,
01340                 MPI_COMM_WORLD, &mpi_stat);
01341     }
01342     #endif
01343     #if DEBUG_OPTIMIZE
01344     fprintf (stderr, "optimize_refine: end\n");
01345     #endif
01346 }
01347
01352 void
01353 optimize_step ()
01354 {
01355     #if DEBUG_OPTIMIZE
01356     fprintf (stderr, "optimize_step: start\n");
01357     #endif
01358     optimize_algorithm ();
01359     if (optimize->nsteps)
01360         optimize_direction ();
01361     #if DEBUG_OPTIMIZE
01362     fprintf (stderr, "optimize_step: end\n");
01363     #endif
01364 }
01365
01370 void
01371 optimize_iterate ()
01372 {
01373     unsigned int i;
01374     #if DEBUG_OPTIMIZE
01375     fprintf (stderr, "optimize_iterate: start\n");
01376     #endif
01377     optimize->error_old = (double *) g_malloc (optimize->nbest * sizeof (double));
01378     optimize->value_old =
01379     (double *) g_malloc (optimize->nbest * optimize->nvariables *
01380                         sizeof (double));
01381     optimize_step ();

```

```

01382     optimize_save_old ();
01383     optimize_refine ();
01384     optimize_print ();
01385     for (i = 1; i < optimize->niterations && !optimize->stop; ++i)
01386     {
01387         optimize_step ();
01388         optimize_merge_old ();
01389         optimize_refine ();
01390         optimize_print ();
01391     }
01392     #if DEBUG_OPTIMIZE
01393     fprintf (stderr, "optimize_iterate: end\n");
01394 #endif
01395 }
01396
01401 void
01402 optimize_free ()
01403 {
01404     unsigned int i, j;
01405     #if DEBUG_OPTIMIZE
01406     fprintf (stderr, "optimize_free: start\n");
01407 #endif
01408     for (j = 0; j < optimize->ninputs; ++j)
01409     {
01410         for (i = 0; i < optimize->nexperiments; ++i)
01411             g_mapped_file_unref (optimize->file[j][i]);
01412         g_free (optimize->file[j]);
01413     }
01414     g_free (optimize->error_old);
01415     g_free (optimize->value_old);
01416     g_free (optimize->value);
01417     g_free (optimize->genetic_variable);
01418     #if DEBUG_OPTIMIZE
01419     fprintf (stderr, "optimize_free: end\n");
01420 #endif
01421 }
01422
01427 void
01428 optimize_open ()
01429 {
01430     GTimeZone *tz;
01431     GDateTime *t0, *t;
01432     unsigned int i, j;
01433
01434     #if DEBUG_OPTIMIZE
01435     char *buffer;
01436     fprintf (stderr, "optimize_open: start\n");
01437 #endif
01438
01439     // Getting initial time
01440     #if DEBUG_OPTIMIZE
01441     fprintf (stderr, "optimize_open: getting initial time\n");
01442 #endif
01443     tz = g_time_zone_new_utc ();
01444     t0 = g_date_time_new_now (tz);
01445
01446     // Obtaining and initing the pseudo-random numbers generator seed
01447     #if DEBUG_OPTIMIZE
01448     fprintf (stderr, "optimize_open: getting initial seed\n");
01449 #endif
01450     if (optimize->seed == DEFAULT_RANDOM_SEED)
01451         optimize->seed = input->seed;
01452     gsl_rng_set (optimize->rng, optimize->seed);
01453
01454     // Replacing the working directory
01455     #if DEBUG_OPTIMIZE
01456     fprintf (stderr, "optimize_open: replacing the working directory\n");
01457 #endif
01458     g_chdir (input->directory);
01459
01460     // Getting results file names
01461     optimize->result = input->result;
01462     optimize->variables = input->variables;
01463
01464     // Obtaining the simulator file
01465     optimize->simulator = input->simulator;
01466
01467     // Obtaining the evaluator file
01468     optimize->evaluator = input->evaluator;
01469
01470     // Reading the algorithm
01471     optimize->algorithm = input->algorithm;
01472     switch (optimize->algorithm)
01473     {
01474         case ALGORITHM_MONTE_CARLO:
01475             optimize_algorithm = optimize_MonteCarlo;
01476             break;

```

```

01477     case ALGORITHM_SWEEP:
01478         optimize_algorithm = optimize_sweep;
01479         break;
01480     default:
01481         optimize_algorithm = optimize_genetic;
01482         optimize->mutation_ratio = input->mutation_ratio;
01483         optimize->reproduction_ratio = input->
reproduction_ratio;
01484         optimize->adaptation_ratio = input->adaptation_ratio;
01485     }
01486     optimize->nvariables = input->nvariables;
01487     optimize->nsimulations = input->nsimulations;
01488     optimize->niterations = input->niterations;
01489     optimize->nbest = input->nbest;
01490     optimize->tolerance = input->tolerance;
01491     optimize->nsteps = input->nsteps;
01492     optimize->nestimates = 0;
01493     optimize->threshold = input->threshold;
01494     optimize->stop = 0;
01495     if (input->nsteps)
01496     {
01497         optimize->relaxation = input->relaxation;
01498         switch (input->direction)
01499         {
01500             case DIRECTION_METHOD_COORDINATES:
01501                 optimize->nestimates = 2 * optimize->nvariables;
01502                 optimize_estimate_direction =
optimize_estimate_direction_coordinates;
01503                 break;
01504             default:
01505                 optimize->nestimates = input->nestimates;
01506                 optimize_estimate_direction =
optimize_estimate_direction_random;
01507         }
01508     }
01509
01510 #if DEBUG_OPTIMIZE
01511     fprintf (stderr, "optimize_open: nbest=%u\n", optimize->nbest);
01512 #endif
01513     optimize->simulation_best
01514     = (unsigned int *) alloca (optimize->nbest * sizeof (unsigned int));
01515     optimize->error_best = (double *) alloca (optimize->nbest * sizeof (double));
01516
01517     // Reading the experimental data
01518 #if DEBUG_OPTIMIZE
01519     buffer = g_get_current_dir ();
01520     fprintf (stderr, "optimize_open: current directory=%s\n", buffer);
01521     g_free (buffer);
01522 #endif
01523     optimize->nexperiments = input->nexperiments;
01524     optimize->ninputs = input->experiment->ninputs;
01525     optimize->experiment
01526     = (char **) alloca (input->nexperiments * sizeof (char *));
01527     optimize->weight = (double *) alloca (input->nexperiments * sizeof (double));
01528     for (i = 0; i < input->experiment->ninputs; ++i)
01529         optimize->file[i] = (GMappedFile **)
01530         g_malloc (input->nexperiments * sizeof (GMappedFile *));
01531     for (i = 0; i < input->nexperiments; ++i)
01532     {
01533         #if DEBUG_OPTIMIZE
01534             fprintf (stderr, "optimize_open: i=%u\n", i);
01535         #endif
01536         optimize->experiment[i] = input->experiment[i].
name;
01537         optimize->weight[i] = input->experiment[i].weight;
01538         #if DEBUG_OPTIMIZE
01539             fprintf (stderr, "optimize_open: experiment=%s weight=%lg\n",
optimize->experiment[i], optimize->weight[i]);
01540         #endif
01541         for (j = 0; j < input->experiment->ninputs; ++j)
01542         {
01543             #if DEBUG_OPTIMIZE
01544                 fprintf (stderr, "optimize_open: template%u\n", j + 1);
01545             #endif
01546             optimize->file[j][i]
01547             = g_mapped_file_new (input->experiment[i].template[j], 0, NULL);
01548         }
01549     }
01550
01551     // Reading the variables data
01552 #if DEBUG_OPTIMIZE
01553     fprintf (stderr, "optimize_open: reading variables\n");
01554 #endif
01555     optimize->label = (char **) alloca (input->nvariables * sizeof (char *));
01556     j = input->nvariables * sizeof (double);
01557     optimize->rangemin = (double *) alloca (j);
01558     optimize->rangeminabs = (double *) alloca (j);

```

```

01560     optimize->rangemax = (double *) alloca (j);
01561     optimize->rangemaxabs = (double *) alloca (j);
01562     optimize->step = (double *) alloca (j);
01563     j = input->nvariables * sizeof (unsigned int);
01564     optimize->precision = (unsigned int *) alloca (j);
01565     optimize->nsweeps = (unsigned int *) alloca (j);
01566     optimize->nbits = (unsigned int *) alloca (j);
01567     for (i = 0; i < input->nvariables; ++i)
01568     {
01569         optimize->label[i] = input->variable[i].name;
01570         optimize->rangemin[i] = input->variable[i].rangemin;
01571         optimize->rangeminabs[i] = input->variable[i].
rangeminabs;
01572         optimize->rangemax[i] = input->variable[i].rangemax;
01573         optimize->rangemaxabs[i] = input->variable[i].
rangemaxabs;
01574         optimize->precision[i] = input->variable[i].
precision;
01575         optimize->step[i] = input->variable[i].step;
01576         optimize->nsweeps[i] = input->variable[i].nsweeps;
01577         optimize->nbits[i] = input->variable[i].nbits;
01578     }
01579     if (input->algorithm == ALGORITHM_SWEEP)
01580     {
01581         optimize->nsimulations = 1;
01582         for (i = 0; i < input->nvariables; ++i)
01583         {
01584             if (input->algorithm == ALGORITHM_SWEEP)
01585             {
01586                 optimize->nsimulations *= optimize->nsweeps[i];
01587 #if DEBUG_OPTIMIZE
01588                 fprintf (stderr, "optimize_open: nsweeps=%u nsimulations=%u\n",
01589                     optimize->nsweeps[i], optimize->nsimulations);
01590 #endif
01591             }
01592         }
01593     }
01594     if (optimize->nsteps)
01595         optimize->direction
01596         = (double *) alloca (optimize->nvariables * sizeof (double));
01597     // Setting error norm
01598     switch (input->norm)
01599     {
01600     case ERROR_NORM_EUCLIDIAN:
01601         optimize_norm = optimize_norm_euclidian;
01602         break;
01603     case ERROR_NORM_MAXIMUM:
01604         optimize_norm = optimize_norm_maximum;
01605         break;
01606     case ERROR_NORM_P:
01607         optimize_norm = optimize_norm_p;
01608         optimize->p = input->p;
01609         break;
01610     default:
01611         optimize_norm = optimize_norm_taxicab;
01612     }
01613     // Allocating values
01614 #if DEBUG_OPTIMIZE
01615     fprintf (stderr, "optimize_open: allocating variables\n");
01616     fprintf (stderr, "optimize_open: nvariables=%u algorithm=%u\n",
01617         optimize->nvariables, optimize->algorithm);
01618 #endif
01619     optimize->genetic_variable = NULL;
01620     if (optimize->algorithm == ALGORITHM_GENETIC)
01621     {
01622         optimize->genetic_variable = (GeneticVariable *)
g_malloc (optimize->nvariables * sizeof (GeneticVariable));
01623         for (i = 0; i < optimize->nvariables; ++i)
01624         {
01625             optimize->genetic_variable[i].minimum = optimize->
rangemin[i];
01626             optimize->genetic_variable[i].maximum = optimize->
rangemax[i];
01627             optimize->genetic_variable[i].nbits = optimize->nbits[i];
01628         }
01629 #if DEBUG_OPTIMIZE
01630         fprintf (stderr, "optimize_open: i=%u min=%lg max=%lg nbits=%u\n",
01631             i, optimize->rangemin[i], optimize->rangemax[i],
01632             optimize->nbits[i]);
01633 #endif
01634     }
01635     #if DEBUG_OPTIMIZE
01636     fprintf (stderr, "optimize_open: nvariables=%u nsimulations=%u\n",
01637         optimize->nvariables, optimize->nsimulations);
01638 #endif

```

```

01642     optimize->value = (double *)
01643         g_malloc ((optimize->nsimulations
01644             + optimize->nestimates * optimize->nsteps)
01645             * optimize->nvariables * sizeof (double));
01646
01647     // Calculating simulations to perform for each task
01648     #if HAVE_MPI
01649     #if DEBUG_OPTIMIZE
01650     fprintf (stderr, "optimize_open: rank=%u ntasks=%u\n",
01651         optimize->mpi_rank, ntasks);
01652     #endif
01653     optimize->nstart = optimize->mpi_rank * optimize->nsimulations /
01654         ntasks;
01655     optimize->nend = (1 + optimize->mpi_rank) * optimize->nsimulations /
01656         ntasks;
01657     if (optimize->nsteps)
01658     {
01659         optimize->nstart_direction
01660             = optimize->mpi_rank * optimize->nestimates / ntasks;
01661         optimize->nend_direction
01662             = (1 + optimize->mpi_rank) * optimize->nestimates /
01663                 ntasks;
01664     }
01665     #else
01666     optimize->nstart = 0;
01667     optimize->nend = optimize->nsimulations;
01668     if (optimize->nsteps)
01669     {
01670         optimize->nstart_direction = 0;
01671         optimize->nend_direction = optimize->nestimates;
01672     }
01673     #endif
01674     #if DEBUG_OPTIMIZE
01675     fprintf (stderr, "optimize_open: nstart=%u nend=%u\n", optimize->nstart,
01676         optimize->nend);
01677     #endif
01678     // Calculating simulations to perform for each thread
01679     optimize->thread
01680         = (unsigned int *) alloca ((1 + nthreads) * sizeof (unsigned int));
01681     for (i = 0; i <= nthreads; ++i)
01682     {
01683         optimize->thread[i] = optimize->nstart
01684             + i * (optimize->nend - optimize->nstart) / nthreads;
01685     }
01686     #if DEBUG_OPTIMIZE
01687     fprintf (stderr, "optimize_open: i=%u thread=%u\n", i,
01688         optimize->thread[i]);
01689     #endif
01690     if (optimize->nsteps)
01691     {
01692         optimize->thread_direction = (unsigned int *)
01693             alloca ((1 + nthreads_direction) * sizeof (unsigned int));
01694     }
01695     // Opening result files
01696     optimize->file_result = g_fopen (optimize->result, "w");
01697     optimize->file_variables = g_fopen (optimize->variables, "w");
01698
01699     // Performing the algorithm
01700     switch (optimize->algorithm)
01701     {
01702         // Genetic algorithm
01703         case ALGORITHM_GENETIC:
01704             optimize_genetic ();
01705             break;
01706
01707         // Iterative algorithm
01708         default:
01709             optimize_iterate ();
01710     }
01711
01712     // Getting calculation time
01713     t = g_date_time_new_now (tz);
01714     optimize->calculation_time = 0.000001 * g_date_time_difference (t, t0);
01715     g_date_time_unref (t);
01716     g_date_time_unref (t0);
01717     g_time_zone_unref (tz);
01718     printf ("%s = %.6lg s\n", _("Calculation time"), optimize->calculation_time);
01719     fprintf (optimize->file_result, "%s = %.6lg s\n",
01720         _("Calculation time"), optimize->calculation_time);
01721
01722     // Closing result files
01723     fclose (optimize->file_variables);
01724     fclose (optimize->file_result);
01725
01726     #if DEBUG_OPTIMIZE
01727     fprintf (stderr, "optimize_open: end\n");
01728     #endif


```

```
01726 }
```

## 4.19 optimize.h File Reference

Header file to define the optimization functions.

This graph shows which files directly or indirectly include this file:

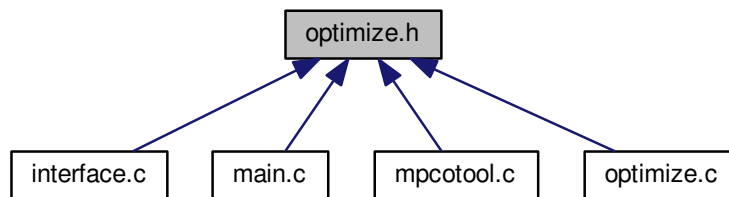

### Data Structures

- struct [Optimize](#)  
*Struct to define the optimization ation data.*
- struct [ParallelData](#)  
*Struct to pass to the GThreads parallelized function.*

### Functions

- void [optimize\\_input](#) (unsigned int simulation, char \*[input](#), GMappedFile \*[template](#))  
*Function to write the simulation input file.*
- double [optimize\\_parse](#) (unsigned int simulation, unsigned int experiment)  
*Function to parse input files, simulating and calculating the \ objective function.*
- double [optimize\\_norm\\_euclidian](#) (unsigned int simulation)  
*Function to calculate the Euclidian error norm.*
- double [optimize\\_norm\\_maximum](#) (unsigned int simulation)  
*Function to calculate the maximum error norm.*
- double [optimize\\_norm\\_p](#) (unsigned int simulation)  
*Function to calculate the P error norm.*
- double [optimize\\_norm\\_taxicab](#) (unsigned int simulation)  
*Function to calculate the taxicab error norm.*
- void [optimize\\_print](#) ()  
*Function to print the results.*
- void [optimize\\_save\\_variables](#) (unsigned int simulation, double error)  
*Function to save in a file the variables and the error.*
- void [optimize\\_best](#) (unsigned int simulation, double value)  
*Function to save the best simulations.*

- void `optimize_sequential` ()  
*Function to optimize sequentially.*
- void \* `optimize_thread` (`ParallelData` \*data)  
*Function to optimize on a thread.*
- void `optimize_merge` (unsigned int nsaveds, unsigned int \*simulation\_best, double \*error\_best)  
*Function to merge the 2 optimization results.*
- void `optimize_synchronise` ()  
*Function to synchronise the optimization results of MPI tasks.*
- void `optimize_sweep` ()  
*Function to optimize with the sweep algorithm.*
- void `optimize_MonteCarlo` ()  
*Function to optimize with the Monte-Carlo algorithm.*
- void `optimize_best_direction` (unsigned int simulation, double value)  
*Function to save the best simulation in a direction search method.*
- void `optimize_direction_sequential` (unsigned int simulation)  
*Function to estimate the direction search sequentially.*
- void \* `optimize_direction_thread` (`ParallelData` \*data)  
*Function to estimate the direction search on a thread.*
- double `optimize_estimate_direction_random` (unsigned int variable, unsigned int estimate)  
*Function to estimate a component of the direction search vector.*
- double `optimize_estimate_direction_coordinates` (unsigned int variable, unsigned int estimate)  
*Function to estimate a component of the direction search vector.*
- void `optimize_step_direction` (unsigned int simulation)  
*Function to do a step of the direction search method.*
- void `optimize_direction` ()  
*Function to optimize with a direction search method.*
- double `optimize_genetic_objective` ( **Entity** \*entity)  
*Function to calculate the objective function of an entity.*
- void `optimize_genetic` ()  
*Function to optimize with the genetic algorithm.*
- void `optimize_save_old` ()  
*Function to save the best results on iterative methods.*
- void `optimize_merge_old` ()  
*Function to merge the best results with the previous step best results on iterative methods.*
- void `optimize_refine` ()  
*Function to refine the search ranges of the variables in iterative algorithms.*
- void `optimize_step` ()  
*Function to do a step of the iterative algorithm.*
- void `optimize_iterate` ()  
*Function to iterate the algorithm.*
- void `optimize_free` ()  
*Function to free the memory used by the `Optimize` struct.*
- void `optimize_open` ()  
*Function to open and perform a optimization.*



## Variables

- int [ntasks](#)  
*Number of tasks.*
- unsigned int [nthreads](#)  
*Number of threads.*
- unsigned int [nthreads\\_direction](#)  
*Number of threads for the direction search method.*
- GMutex [mutex](#) [1]  
*Mutex struct.*
- void(\* [optimize\\_algorithm](#) )()  
*Pointer to the function to perform a optimization algorithm step.*
- double(\* [optimize\\_estimate\\_direction](#) )(unsigned int variable, unsigned int estimate)  
*Pointer to the function to estimate the direction.*
- double(\* [optimize\\_norm](#) )(unsigned int simulation)  
*Pointer to the error norm function.*
- [Optimize optimize](#) [1]  
*Optimization data.*

### 4.19.1 Detailed Description

Header file to define the optimization functions.

#### Authors

Javier Burguete.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [optimize.h](#).

### 4.19.2 Function Documentation

#### 4.19.2.1 optimize\_best()

```
void optimize_best (
    unsigned int simulation,
    double value )
```

Function to save the best simulations.

#### Parameters

<i>simulation</i>	Simulation number.
<i>value</i>	Objective function value.

Definition at line 469 of file `optimize.c`.

```

00470 {
00471     unsigned int i, j;
00472     double e;
00473     #if DEBUG_OPTIMIZE
00474         fprintf (stderr, "optimize_best: start\n");
00475         fprintf (stderr, "optimize_best: nsaveds=%u nbest=%u\n",
00476                 optimize->nsaveds, optimize->nbest);
00477     #endif
00478     if (optimize->nsaveds < optimize->nbest
00479         || value < optimize->error_best[optimize->nsaveds - 1])
00480     {
00481         if (optimize->nsaveds < optimize->nbest)
00482             ++optimize->nsaveds;
00483         optimize->error_best[optimize->nsaveds - 1] = value;
00484         optimize->simulation_best[optimize->nsaveds - 1] = simulation;
00485         for (i = optimize->nsaveds; --i;)
00486         {
00487             if (optimize->error_best[i] < optimize->
00488                 error_best[i - 1])
00489             {
00489                 j = optimize->simulation_best[i];
00490                 e = optimize->error_best[i];
00491                 optimize->simulation_best[i] = optimize->
00492                     simulation_best[i - 1];
00492                 optimize->error_best[i] = optimize->
00493                     error_best[i - 1];
00493                 optimize->simulation_best[i - 1] = j;
00494                 optimize->error_best[i - 1] = e;
00495             }
00496             else
00497                 break;
00498         }
00499     }
00500     #if DEBUG_OPTIMIZE
00501         fprintf (stderr, "optimize_best: end\n");
00502     #endif
00503 }

```

#### 4.19.2.2 `optimize_best_direction()`

```

void optimize_best_direction (
    unsigned int simulation,
    double value )

```

Function to save the best simulation in a direction search method.

##### Parameters

<i>simulation</i>	Simulation number.
<i>value</i>	Objective function value.

Definition at line 794 of file `optimize.c`.

```

00795 {
00796     #if DEBUG_OPTIMIZE
00797         fprintf (stderr, "optimize_best_direction: start\n");
00798         fprintf (stderr,
00799                 "optimize_best_direction: simulation=%u value=%.14le best=%.14le\n",
00800                 simulation, value, optimize->error_best[0]);
00801     #endif
00802     if (value < optimize->error_best[0])
00803     {
00804         optimize->error_best[0] = value;
00805         optimize->simulation_best[0] = simulation;
00806     #if DEBUG_OPTIMIZE

```

```

00807     fprintf (stderr,
00808             "optimize_best_direction: BEST simulation=%u value=%.14le\n",
00809             simulation, value);
00810 #endif
00811 }
00812 #if DEBUG_OPTIMIZE
00813 fprintf (stderr, "optimize_best_direction: end\n");
00814 #endif
00815 }

```

#### 4.19.2.3 optimize\_direction\_sequential()

```

void optimize_direction_sequential (
    unsigned int simulation )

```

Function to estimate the direction search sequentially.

##### Parameters

<i>simulation</i>	Simulation number.
-------------------	--------------------


Definition at line 824 of file [optimize.c](#).

```

00825 {
00826     unsigned int i, j;
00827     double e;
00828 #if DEBUG_OPTIMIZE
00829     fprintf (stderr, "optimize_direction_sequential: start\n");
00830     fprintf (stderr, "optimize_direction_sequential: nstart_direction=%u "
00831             "nend_direction=%u\n",
00832             optimize->nstart_direction, optimize->
00833             nend_direction);
00834 #endif
00835     for (i = optimize->nstart_direction; i < optimize->nend_direction; ++i)
00836     {
00837         j = simulation + i;
00838         e = optimize_norm (j);
00839         optimize_best_direction (j, e);
00840         optimize_save_variables (j, e);
00841         if (e < optimize->threshold)
00842         {
00843             optimize->stop = 1;
00844             break;
00845         }
00846 #if DEBUG_OPTIMIZE
00847         fprintf (stderr, "optimize_direction_sequential: i=%u e=%lg\n", i, e);
00848 #endif
00849 #if DEBUG_OPTIMIZE
00850     fprintf (stderr, "optimize_direction_sequential: end\n");
00851 #endif
00852 }

```

Here is the call graph for this function:

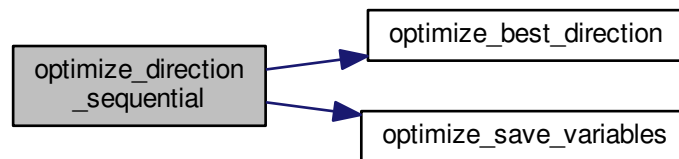

#### 4.19.2.4 optimize\_direction\_thread()

```
void* optimize_direction_thread (
    ParallelData * data )
```

Function to estimate the direction search on a thread.

##### Parameters

<i>data</i>	Function data.
-------------	----------------

##### Returns

NULL

Definition at line 862 of file [optimize.c](#).

```


00863 {
00864     unsigned int i, thread;
00865     double e;
00866     #if DEBUG_OPTIMIZE
00867     fprintf (stderr, "optimize_direction_thread: start\n");
00868     #endif
00869     thread = data->thread;
00870     #if DEBUG_OPTIMIZE
00871     fprintf (stderr, "optimize_direction_thread: thread=%u start=%u end=%u\n",
00872             thread,
00873             optimize->thread_direction[thread],
00874             optimize->thread_direction[thread + 1]);
00875     #endif
00876     for (i = optimize->thread_direction[thread];
00877          i < optimize->thread_direction[thread + 1]; ++i)
00878     {
00879         e = optimize_norm (i);
00880         g_mutex_lock (mutex);
00881         optimize_best_direction (i, e);
00882         optimize_save_variables (i, e);
00883         if (e < optimize->threshold)
00884             optimize->stop = 1;
00885         g_mutex_unlock (mutex);
00886         if (optimize->stop)
00887             break;
00888     #if DEBUG_OPTIMIZE
00889     fprintf (stderr, "optimize_direction_thread: i=%u e=%lg\n", i, e);
  
```

```

00890 #endif
00891 }
00892 #if DEBUG_OPTIMIZE
00893     fprintf (stderr, "optimize_direction_thread: end\n");
00894 #endif
00895     g_thread_exit (NULL);
00896     return NULL;
00897 }

```

Here is the call graph for this function:

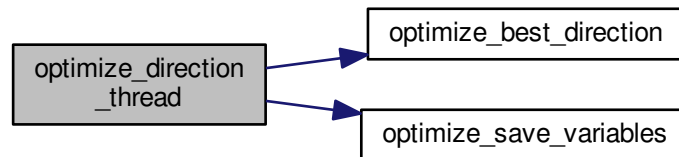

#### 4.19.2.5 optimize\_estimate\_direction\_coordinates()

```

double optimize_estimate_direction_coordinates (
    unsigned int variable,
    unsigned int estimate )

```

Function to estimate a component of the direction search vector.

##### Parameters

<i>variable</i>	Variable number.
<i>estimate</i>	Estimate number.

Definition at line 936 of file [optimize.c](#).

```

00938 {
00939     double x;
00940     #if DEBUG_OPTIMIZE
00941         fprintf (stderr, "optimize_estimate_direction_coordinates: start\n");
00942     #endif
00943     x = optimize->direction[variable];
00944     if (estimate >= (2 * variable) && estimate < (2 * variable + 2))
00945     {
00946         if (estimate & 1)
00947             x += optimize->step[variable];
00948         else
00949             x -= optimize->step[variable];
00950     }
00951     #if DEBUG_OPTIMIZE
00952         fprintf (stderr,
00953             "optimize_estimate_direction_coordinates: direction%u=%lg\n",
00954             variable, x);
00955         fprintf (stderr, "optimize_estimate_direction_coordinates: end\n");
00956     #endif
00957     return x;
00958 }

```

#### 4.19.2.6 optimize\_estimate\_direction\_random()

```
double optimize_estimate_direction_random (
    unsigned int variable,
    unsigned int estimate )
```

Function to estimate a component of the direction search vector.

##### Parameters

<i>variable</i>	Variable number.
<i>estimate</i>	Estimate number.

Definition at line 909 of file [optimize.c](#).

```
00911 {
00912     double x;
00913     #if DEBUG_OPTIMIZE
00914     fprintf (stderr, "optimize_estimate_direction_random: start\n");
00915     #endif
00916     x = optimize->direction[variable]
00917         + (1. - 2. * gsl_rng_uniform (optimize->rng)) * optimize->
00918         step[variable];
00919     #if DEBUG_OPTIMIZE
00919     fprintf (stderr, "optimize_estimate_direction_random: direction%u=%lg\n",
00920             variable, x);
00921     fprintf (stderr, "optimize_estimate_direction_random: end\n");
00922     #endif
00923     return x;
00924 }
```

#### 4.19.2.7 optimize\_genetic\_objective()

```
double optimize_genetic_objective (
    Entity * entity )
```

Function to calculate the objective function of an entity.

##### Parameters

<i>entity</i>	entity data.
---------------	--------------

##### Returns

objective function value.

Definition at line 1103 of file [optimize.c](#).


```
01104 {
01105     unsigned int j;
```

```

01106     double objective;
01107     char buffer[64];
01108     #if DEBUG_OPTIMIZE
01109     fprintf (stderr, "optimize_genetic_objective: start\n");
01110     #endif
01111     for (j = 0; j < optimize->nvariables; ++j)
01112     {
01113         optimize->value[entity->id * optimize->nvariables + j]
01114         = genetic_get_variable (entity, optimize->genetic_variable + j);
01115     }
01116     objective = optimize_norm (entity->id);
01117     g_mutex_lock (mutex);
01118     for (j = 0; j < optimize->nvariables; ++j)
01119     {
01120         snprintf (buffer, 64, "%s ", format[optimize->precision[j]]);
01121         fprintf (optimize->file_variables, buffer,
01122                 genetic_get_variable (entity, optimize->genetic_variable + j));
01123     }
01124     fprintf (optimize->file_variables, "%.14le\n", objective);
01125     g_mutex_unlock (mutex);
01126     #if DEBUG_OPTIMIZE
01127     fprintf (stderr, "optimize_genetic_objective: end\n");
01128     #endif
01129     return objective;
01130 }

```

Here is the call graph for this function:



#### 4.19.2.8 optimize\_input()

```

void optimize_input (
    unsigned int simulation,
    char * input,
    GMappedFile * template )

```

Function to write the simulation input file.

##### Parameters

<i>simulation</i>	Simulation number.
<i>input</i>	Input file name.
<i>template</i>	Template of the input file name.

Definition at line 104 of file [optimize.c](#).

```

00105 {
00106     unsigned int i;
00107     char buffer[32], value[32], *buffer2, *buffer3, *content;
00108     FILE *file;

```

```

00109     gsize length;
00110     GRegex *regex;
00111
00112     #if DEBUG_OPTIMIZE
00113     fprintf (stderr, "optimize_input: start\n");
00114     #endif
00115
00116     // Checking the file
00117     if (!template)
00118         goto optimize_input_end;
00119
00120     // Opening template
00121     content = g_mapped_file_get_contents (template);
00122     length = g_mapped_file_get_length (template);
00123     #if DEBUG_OPTIMIZE
00124     fprintf (stderr, "optimize_input: length=%lu\ncontent:\n%s", length, content);
00125     #endif
00126     file = g_fopen (input, "w");
00127
00128     // Parsing template
00129     for (i = 0; i < optimize->nvariables; ++i)
00130     {
00131         #if DEBUG_OPTIMIZE
00132         fprintf (stderr, "optimize_input: variable=%u\n", i);
00133         #endif
00134         snprintf (buffer, 32, "@variable%u@", i + 1);
00135         regex = g_regex_new (buffer, 0, 0, NULL);
00136         if (i == 0)
00137         {
00138             buffer2 = g_regex_replace_literal (regex, content, length, 0,
00139                                               optimize->label[i], 0, NULL);
00140             #if DEBUG_OPTIMIZE
00141             fprintf (stderr, "optimize_input: buffer2\n%s", buffer2);
00142             #endif
00143         }
00144         else
00145         {
00146             length = strlen (buffer3);
00147             buffer2 = g_regex_replace_literal (regex, buffer3, length, 0,
00148                                               optimize->label[i], 0, NULL);
00149             g_free (buffer3);
00150         }
00151         g_regex_unref (regex);
00152         length = strlen (buffer2);
00153         snprintf (buffer, 32, "@value%u@", i + 1);
00154         regex = g_regex_new (buffer, 0, 0, NULL);
00155         snprintf (value, 32, format[optimize->precision[i]],
00156                 optimize->value[simulation * optimize->
00157                                nvariables + i]);
00158         #if DEBUG_OPTIMIZE
00159         fprintf (stderr, "optimize_input: value=%s\n", value);
00160         #endif
00161         buffer3 = g_regex_replace_literal (regex, buffer2, length, 0, value,
00162                                           0, NULL);
00163         g_free (buffer2);
00164         g_regex_unref (regex);
00165     }
00166
00167     // Saving input file
00168     fwrite (buffer3, strlen (buffer3), sizeof (char), file);
00169     g_free (buffer3);
00170     fclose (file);
00171
00172 optimize_input_end:
00173     #if DEBUG_OPTIMIZE
00174     fprintf (stderr, "optimize_input: end\n");
00175     #endif
00176     return;
00177 }

```

#### 4.19.2.9 optimize\_merge()

```

void optimize_merge (
    unsigned int nsaveds,
    unsigned int * simulation_best,
    double * error_best )

```

Function to merge the 2 optimization results.



## Parameters

<i>nsaveds</i>	Number of saved results.
<i>simulation_best</i>	Array of best simulation numbers.
<i>error_best</i>	Array of best objective function values.

Definition at line 592 of file [optimize.c](#).

```

00594 {
00595     unsigned int i, j, k, s[optimize->nbest];
00596     double e[optimize->nbest];
00597     #if DEBUG_OPTIMIZE
00598     fprintf (stderr, "optimize_merge: start\n");
00599     #endif
00600     i = j = k = 0;
00601     do
00602     {
00603         if (i == optimize->nsaveds)
00604         {
00605             s[k] = simulation_best[j];
00606             e[k] = error_best[j];
00607             ++j;
00608             ++k;
00609             if (j == nsaveds)
00610                 break;
00611         }
00612         else if (j == nsaveds)
00613         {
00614             s[k] = optimize->simulation_best[i];
00615             e[k] = optimize->error_best[i];
00616             ++i;
00617             ++k;
00618             if (i == optimize->nsaveds)
00619                 break;
00620         }
00621         else if (optimize->error_best[i] > error_best[j])
00622         {
00623             s[k] = simulation_best[j];
00624             e[k] = error_best[j];
00625             ++j;
00626             ++k;
00627         }
00628         else
00629         {
00630             s[k] = optimize->simulation_best[i];
00631             e[k] = optimize->error_best[i];
00632             ++i;
00633             ++k;
00634         }
00635     }
00636     while (k < optimize->nbest);
00637     optimize->nsaveds = k;
00638     memcpy (optimize->simulation_best, s, k * sizeof (unsigned int));
00639     memcpy (optimize->error_best, e, k * sizeof (double));
00640     #if DEBUG_OPTIMIZE
00641     fprintf (stderr, "optimize_merge: end\n");
00642     #endif
00643 }

```

## 4.19.2.10 optimize\_norm\_euclidian()

```

double optimize_norm_euclidian (
    unsigned int simulation )

```

Function to calculate the Euclidian error norm.

**Parameters**

<i>simulation</i>	simulation number.
-------------------	--------------------

**Returns**


Euclidian error norm.

Definition at line 301 of file [optimize.c](#).

```

00302 {
00303     double e, ei;
00304     unsigned int i;
00305     #if DEBUG_OPTIMIZE
00306     fprintf (stderr, "optimize_norm_euclidian: start\n");
00307     #endif
00308     e = 0.;
00309     for (i = 0; i < optimize->nexperiments; ++i)
00310     {
00311         ei = optimize_parse (simulation, i);
00312         e += ei * ei;
00313     }
00314     e = sqrt (e);
00315     #if DEBUG_OPTIMIZE
00316     fprintf (stderr, "optimize_norm_euclidian: error=%lg\n", e);
00317     fprintf (stderr, "optimize_norm_euclidian: end\n");
00318     #endif
00319     return e;
00320 }
```

Here is the call graph for this function:

**4.19.2.11 optimize\_norm\_maximum()**

```

double optimize_norm_maximum (
    unsigned int simulation )
```

Function to calculate the maximum error norm.

**Parameters**

<i>simulation</i>	simulation number.
-------------------	--------------------

**Returns**

Maximum error norm.


Definition at line 330 of file [optimize.c](#).

```

00331 {
00332     double e, ei;
00333     unsigned int i;
00334     #if DEBUG_OPTIMIZE
00335     fprintf (stderr, "optimize_norm_maximum: start\n");
00336     #endif
00337     e = 0.;
00338     for (i = 0; i < optimize->nexperiments; ++i)
00339     {
00340         ei = fabs (optimize_parse (simulation, i));
00341         e = fmax (e, ei);
00342     }
00343     #if DEBUG_OPTIMIZE
00344     fprintf (stderr, "optimize_norm_maximum: error=%lg\n", e);
00345     fprintf (stderr, "optimize_norm_maximum: end\n");
00346     #endif
00347     return e;
00348 }

```

Here is the call graph for this function:



#### 4.19.2.12 optimize\_norm\_p()

```

double optimize_norm_p (
    unsigned int simulation )

```

Function to calculate the P error norm.

##### Parameters

<i>simulation</i>	simulation number.
-------------------	--------------------

##### Returns

P error norm.

Definition at line 358 of file [optimize.c](#).

```

00359 {
00360     double e, ei;
00361     unsigned int i;
00362     #if DEBUG_OPTIMIZE
00363     fprintf (stderr, "optimize_norm_p: start\n");
00364     #endif
00365     e = 0.;
00366     for (i = 0; i < optimize->nexperiments; ++i)
00367     {
00368         ei = fabs (optimize_parse (simulation, i));


```

```

00369     e += pow (ei, optimize->p);
00370 }
00371 e = pow (e, 1. / optimize->p);
00372 #if DEBUG_OPTIMIZE
00373 fprintf (stderr, "optimize_norm_p: error=%lg\n", e);
00374 fprintf (stderr, "optimize_norm_p: end\n");
00375 #endif
00376 return e;
00377 }

```

Here is the call graph for this function:



#### 4.19.2.13 optimize\_norm\_taxicab()

```

double optimize_norm_taxicab (
    unsigned int simulation )

```

Function to calculate the taxicab error norm.

##### Parameters

<i>simulation</i>	simulation number.
-------------------	--------------------

##### Returns

Taxicab error norm.


Definition at line 387 of file [optimize.c](#).

```

00388 {
00389     double e;
00390     unsigned int i;
00391     #if DEBUG_OPTIMIZE
00392     fprintf (stderr, "optimize_norm_taxicab: start\n");
00393     #endif
00394     e = 0.;
00395     for (i = 0; i < optimize->nexperiments; ++i)
00396         e += fabs (optimize_parse (simulation, i));
00397     #if DEBUG_OPTIMIZE
00398     fprintf (stderr, "optimize_norm_taxicab: error=%lg\n", e);
00399     fprintf (stderr, "optimize_norm_taxicab: end\n");
00400     #endif
00401     return e;
00402 }

```

Here is the call graph for this function:



#### 4.19.2.14 optimize\_parse()

```
double optimize_parse (
    unsigned int simulation,
    unsigned int experiment )
```

Function to parse input files, simulating and calculating the \ objective function.

##### Parameters

<i>simulation</i>	Simulation number.
<i>experiment</i>	<a href="#">Experiment</a> number.

##### Returns

Objective function value.

Definition at line 190 of file [optimize.c](#).

```
00191 {
00192     unsigned int i;
00193     double e;
00194     char buffer[512], input[MAX_NINPUTS][32], output[32], result[32], *buffer2,
00195           *buffer3, *buffer4;
00196     FILE *file_result;
00197
00198     #if DEBUG_OPTIMIZE
00199         fprintf (stderr, "optimize_parse: start\n");
00200         fprintf (stderr, "optimize_parse: simulation=%u experiment=%u\n",
00201                 simulation, experiment);
00202     #endif
00203
00204     // Opening input files
00205     for (i = 0; i < optimize->ninputs; ++i)
00206     {
00207         snprintf (&input[i][0], 32, "input-%u-%u-%u", i, simulation, experiment);
00208         #if DEBUG_OPTIMIZE
00209             fprintf (stderr, "optimize_parse: i=%u input=%s\n", i, &input[i][0]);
00210         #endif
00211         optimize_input (simulation, &input[i][0], optimize->
00212                         file[i][experiment]);
00213     }
00214     for (; i < MAX_NINPUTS; ++i)
00215         strcpy (&input[i][0], "");
00216     #if DEBUG_OPTIMIZE
00217         fprintf (stderr, "optimize_parse: parsing end\n");
00218     #endif
00219
00220     // Performing the simulation
00221     snprintf (output, 32, "output-%u-%u", simulation, experiment);
```

```

00221  buffer2 = g_path_get_dirname (optimize->simulator);
00222  buffer3 = g_path_get_basename (optimize->simulator);
00223  buffer4 = g_build_filename (buffer2, buffer3, NULL);
00224  snprintf (buffer, 512, "\"%s\" %s %s %s %s %s %s %s %s %s",
00225           buffer4, input[0], input[1], input[2], input[3], input[4],
00226           input[5], input[6], input[7], output);
00227  g_free (buffer4);
00228  g_free (buffer3);
00229  g_free (buffer2);
00230  #if DEBUG_OPTIMIZE
00231  fprintf (stderr, "optimize_parse: %s\n", buffer);
00232  #endif
00233  system (buffer);
00234
00235  // Checking the objective value function
00236  if (optimize->evaluator)
00237  {
00238      snprintf (result, 32, "result-%u-%u", simulation, experiment);
00239      buffer2 = g_path_get_dirname (optimize->evaluator);
00240      buffer3 = g_path_get_basename (optimize->evaluator);
00241      buffer4 = g_build_filename (buffer2, buffer3, NULL);
00242      snprintf (buffer, 512, "\"%s\" %s %s %s",
00243              buffer4, output, optimize->experiment[experiment], result);
00244      g_free (buffer4);
00245      g_free (buffer3);
00246      g_free (buffer2);
00247      #if DEBUG_OPTIMIZE
00248      fprintf (stderr, "optimize_parse: %s\n", buffer);
00249      fprintf (stderr, "optimize_parse: result=%s\n", result);
00250      #endif
00251      system (buffer);
00252      file_result = g_fopen (result, "r");
00253      e = atof (fgets (buffer, 512, file_result));
00254      fclose (file_result);
00255  }
00256  else
00257  {
00258      #if DEBUG_OPTIMIZE
00259      fprintf (stderr, "optimize_parse: output=%s\n", output);
00260      #endif
00261      strcpy (result, "");
00262      file_result = g_fopen (output, "r");
00263      e = atof (fgets (buffer, 512, file_result));
00264      fclose (file_result);
00265  }
00266
00267  // Removing files
00268  #if !DEBUG_OPTIMIZE
00269  for (i = 0; i < optimize->ninputs; ++i)
00270  {
00271      if (optimize->file[i][0])
00272      {
00273          snprintf (buffer, 512, RM " %s", &input[i][0]);
00274          system (buffer);
00275      }
00276  }
00277  snprintf (buffer, 512, RM " %s %s", output, result);
00278  system (buffer);
00279  #endif
00280
00281  // Processing pending events
00282  if (show_pending)
00283      show_pending ();
00284
00285  #if DEBUG_OPTIMIZE
00286  fprintf (stderr, "optimize_parse: end\n");
00287  #endif
00288
00289  // Returning the objective function
00290  return e * optimize->weight[experiment];
00291 }

```

Here is the call graph for this function:



#### 4.19.2.15 optimize\_save\_variables()

```
void optimize_save_variables (
    unsigned int simulation,
    double error )
```

Function to save in a file the variables and the error.

##### Parameters

<i>simulation</i>	Simulation number.
<i>error</i>	Error value.

Definition at line 440 of file [optimize.c](#).

```
00441 {
00442     unsigned int i;
00443     char buffer[64];
00444     #if DEBUG_OPTIMIZE
00445     fprintf (stderr, "optimize_save_variables: start\n");
00446     #endif
00447     for (i = 0; i < optimize->nvariables; ++i)
00448     {
00449         snprintf (buffer, 64, "%s ", format[optimize->precision[i]]);
00450         fprintf (optimize->file_variables, buffer,
00451             optimize->value[simulation * optimize->
00452                 nvariables + i]);
00453         fprintf (optimize->file_variables, "%.14le\n", error);
00454         fflush (optimize->file_variables);
00455     #if DEBUG_OPTIMIZE
00456     fprintf (stderr, "optimize_save_variables: end\n");
00457     #endif
00458 }
```

#### 4.19.2.16 optimize\_step\_direction()

```
void optimize_step_direction (
    unsigned int simulation )
```

Function to do a step of the direction search method.

## Parameters

<i>simulation</i>	Simulation number.
-------------------	--------------------

Definition at line 967 of file `optimize.c`.


```

00968 {
00969     GThread *thread[nthreads_direction];
00970     ParallelData data[nthreads_direction];
00971     unsigned int i, j, k, b;
00972     #if DEBUG_OPTIMIZE
00973     fprintf (stderr, "optimize_step_direction: start\n");
00974     #endif
00975     for (i = 0; i < optimize->nestimates; ++i)
00976     {
00977         k = (simulation + i) * optimize->nvariables;
00978         b = optimize->simulation_best[0] * optimize->
nvariables;
00979     #if DEBUG_OPTIMIZE
00980         fprintf (stderr, "optimize_step_direction: simulation=%u best=%u\n",
00981                 simulation + i, optimize->simulation_best[0]);
00982     #endif
00983         for (j = 0; j < optimize->nvariables; ++j, ++k, ++b)
00984         {
00985             #if DEBUG_OPTIMIZE
00986             fprintf (stderr,
00987                     "optimize_step_direction: estimate=%u best%u=%.14le\n",
00988                     i, j, optimize->value[b]);
00989             #endif
00990             optimize->value[k]
00991             = optimize->value[b] + optimize_estimate_direction (j,
i);
00992             optimize->value[k] = fmin (fmax (optimize->value[k],
00993                                             optimize->rangeminabs[j]),
00994                                       optimize->rangemaxabs[j]);
00995             #if DEBUG_OPTIMIZE
00996             fprintf (stderr,
00997                     "optimize_step_direction: estimate=%u variable%u=%.14le\n",
00998                     i, j, optimize->value[k]);
00999             #endif
01000         }
01001     }
01002     if (nthreads_direction == 1)
01003         optimize_direction_sequential (simulation);
01004     else
01005     {
01006         for (i = 0; i <= nthreads_direction; ++i)
01007         {
01008             optimize->thread_direction[i]
01009             = simulation + optimize->nstart_direction
01010             + i * (optimize->nend_direction - optimize->
nstart_direction)
01011             / nthreads_direction;
01012             #if DEBUG_OPTIMIZE
01013             fprintf (stderr,
01014                     "optimize_step_direction: i=%u thread_direction=%u\n",
01015                     i, optimize->thread_direction[i]);
01016             #endif
01017         }
01018         for (i = 0; i < nthreads_direction; ++i)
01019         {
01020             data[i].thread = i;
01021             thread[i] = g_thread_new
01022             (NULL, (void (*)(void *)) optimize_direction_thread, &data[i]);
01023         }
01024         for (i = 0; i < nthreads_direction; ++i)
01025             g_thread_join (thread[i]);
01026     }
01027     #if DEBUG_OPTIMIZE
01028     fprintf (stderr, "optimize_step_direction: end\n");
01029     #endif
01030 }

```



Here is the call graph for this function:

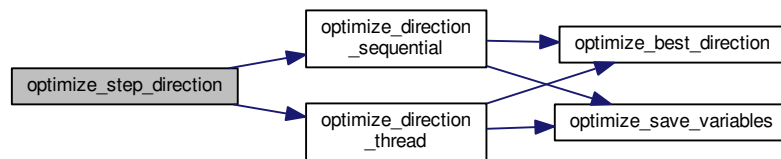

#### 4.19.2.17 optimize\_thread()

```
void* optimize_thread (
    ParallelData * data )
```

Function to optimize on a thread.

##### Parameters

<i>data</i>	Function data.
-------------	----------------

##### Returns


NULL

Definition at line 546 of file `optimize.c`.

```

00547 {
00548     unsigned int i, thread;
00549     double e;
00550     #if DEBUG_OPTIMIZE
00551     fprintf (stderr, "optimize_thread: start\n");
00552     #endif
00553     thread = data->thread;
00554     #if DEBUG_OPTIMIZE
00555     fprintf (stderr, "optimize_thread: thread=%u start=%u end=%u\n", thread,
00556             optimize->thread[thread], optimize->thread[thread + 1]);
00557     #endif
00558     for (i = optimize->thread[thread]; i < optimize->thread[thread + 1]; ++i)
00559     {
00560         e = optimize_norm (i);
00561         g_mutex_lock (mutex);
00562         optimize_best (i, e);
00563         optimize_save_variables (i, e);
00564         if (e < optimize->threshold)
00565             optimize->stop = 1;
00566         g_mutex_unlock (mutex);
00567         if (optimize->stop)
00568             break;
00569     #if DEBUG_OPTIMIZE
00570     fprintf (stderr, "optimize_thread: i=%u e=%lg\n", i, e);
00571     #endif
00572     }
00573     #if DEBUG_OPTIMIZE
00574     fprintf (stderr, "optimize_thread: end\n");
00575     #endif
00576     g_thread_exit (NULL);
00577     return NULL;
00578 }
```

Here is the call graph for this function:

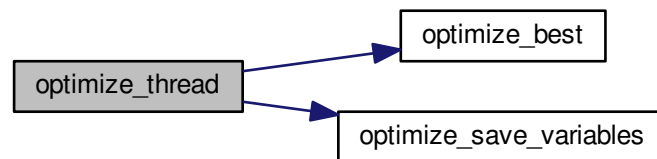

## 4.20 optimize.h

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burquete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #ifndef OPTIMIZE__H
00033 #define OPTIMIZE__H 1
00034
00035 typedef struct
00036 {
00037     GMappedFile **file[MAX_NINPUTS];
00038     char **experiment;
00039     char **label;
00040     gsl_rng *rng;
00041     GeneticVariable *genetic_variable;
00042     FILE *file_result;
00043     FILE *file_variables;
00044     char *result;
00045     char *variables;
00046     char *simulator;
00047     char *evaluator;
00048     double *value;
00049     double *rangemin;
00050     double *rangemax;
00051     double *rangeminabs;
00052     double *rangemaxabs;
00053     double *error_best;
00054     double *weight;
00055     double *step;
00056     double *direction;
00057     double *value_old;
  
```

```

00072 double *error_old;
00074 unsigned int *precision;
00075 unsigned int *nsweeps;
00076 unsigned int *nbits;
00078 unsigned int *thread;
00080 unsigned int *thread_direction;
00083 unsigned int *simulation_best;
00084 double tolerance;
00085 double mutation_ratio;
00086 double reproduction_ratio;
00087 double adaptation_ratio;
00088 double relaxation;
00089 double calculation_time;
00090 double p;
00091 double threshold;
00092 unsigned long int seed;
00094 unsigned int nvariables;
00095 unsigned int nexperiments;
00096 unsigned int ninputs;
00097 unsigned int nsimulations;
00098 unsigned int nsteps;
00100 unsigned int nestimates;
00102 unsigned int algorithm;
00103 unsigned int nstart;
00104 unsigned int nend;
00105 unsigned int nstart_direction;
00107 unsigned int nend_direction;
00109 unsigned int niterations;
00110 unsigned int nbest;
00111 unsigned int nsaveds;
00112 unsigned int stop;
00113 #if HAVE_MPI
00114 int mpi_rank;
00115 #endif
00116 } Optimize;
00117
00122 typedef struct
00123 {
00124     unsigned int thread;
00125 } ParallelData;
00126
00127 // Global variables
00128 extern int ntasks;
00129 extern unsigned int nthreads;
00130 extern unsigned int nthreads_direction;
00131 extern GMutex mutex[1];
00132 extern void (*optimize_algorithm) ();
00133 extern double (*optimize_estimate_direction) (unsigned int variable,
00134                                              unsigned int estimate);
00135 extern double (*optimize_norm) (unsigned int simulation);
00136 extern Optimize optimize[1];
00137
00138 // Public functions
00139 void optimize_input (unsigned int simulation, char *input,
00140                    GMappedFile * template);
00141 double optimize_parse (unsigned int simulation, unsigned int experiment);
00142 double optimize_norm_euclidian (unsigned int simulation);
00143 double optimize_norm_maximum (unsigned int simulation);
00144 double optimize_norm_p (unsigned int simulation);
00145 double optimize_norm_taxicab (unsigned int simulation);
00146 void optimize_print ();
00147 void optimize_save_variables (unsigned int simulation, double error);
00148 void optimize_best (unsigned int simulation, double value);
00149 void optimize_sequential ();
00150 void *optimize_thread (ParallelData * data);
00151 void optimize_merge (unsigned int nsaveds, unsigned int *simulation_best,
00152                    double *error_best);
00153 #if HAVE_MPI
00154 void optimize_synchronize ();
00155 #endif
00156 void optimize_sweep ();
00157 void optimize_MonteCarlo ();
00158 void optimize_best_direction (unsigned int simulation, double value);
00159 void optimize_direction_sequential (unsigned int simulation);
00160 void *optimize_direction_thread (ParallelData * data);
00161 double optimize_estimate_direction_random (unsigned int variable,
00162                                           unsigned int estimate);
00163 double optimize_estimate_direction_coordinates (unsigned int
00164                                              variable,
00165                                              unsigned int estimate);
00166 void optimize_step_direction (unsigned int simulation);
00167 void optimize_direction ();
00168 double optimize_genetic_objective (Entity * entity);
00169 void optimize_genetic ();
00170 void optimize_save_old ();
00171 void optimize_merge_old ();
00172 void optimize_refine ();

```

```

00172 void optimize_step ();
00173 void optimize_iterate ();
00174 void optimize_free ();
00175 void optimize_open ();
00176
00177 #endif

```

## 4.21 utils.c File Reference


Source file to define some useful functions.

```

#include "config.h"
#include <stdio.h>
#include <unistd.h>
#include <libxml/parser.h>
#include <libintl.h>
#include <glib.h>
#include <json-glib/json-glib.h>
#include <gtk/gtk.h>
#include "utils.h"

```

Include dependency graph for utils.c:

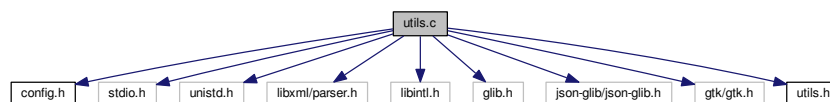

## Functions

- void [show\\_message](#) (char \*title, char \*msg, int type)  
*Function to show a dialog with a message.*
- void [show\\_error](#) (char \*msg)  
*Function to show a dialog with an error message.*
- int [xml\\_node\\_get\\_int](#) (xmlNode \*node, const xmlChar \*prop, int \*error\_code)  
*Function to get an integer number of a XML node property.*
- unsigned int [xml\\_node\\_get\\_uint](#) (xmlNode \*node, const xmlChar \*prop, int \*error\_code)  
*Function to get an unsigned integer number of a XML node property.*
- unsigned int [xml\\_node\\_get\\_uint\\_with\\_default](#) (xmlNode \*node, const xmlChar \*prop, unsigned int default\_value, int \*error\_code)  
*Function to get an unsigned integer number of a XML node property with a default value.*
- double [xml\\_node\\_get\\_float](#) (xmlNode \*node, const xmlChar \*prop, int \*error\_code)  
*Function to get a floating point number of a XML node property.*
- double [xml\\_node\\_get\\_float\\_with\\_default](#) (xmlNode \*node, const xmlChar \*prop, double default\_value, int \*error\_code)  
*Function to get a floating point number of a XML node property with a default value.*
- void [xml\\_node\\_set\\_int](#) (xmlNode \*node, const xmlChar \*prop, int value)  
*Function to set an integer number in a XML node property.*
- void [xml\\_node\\_set\\_uint](#) (xmlNode \*node, const xmlChar \*prop, unsigned int value)  
*Function to set an unsigned integer number in a XML node property.*
- void [xml\\_node\\_set\\_float](#) (xmlNode \*node, const xmlChar \*prop, double value)

- Function to set a floating point number in a XML node property.*
- int [json\\_object\\_get\\_int](#) (JsonObject \*object, const char \*prop, int \*error\_code)
- Function to get an integer number of a JSON object property.*
- unsigned int [json\\_object\\_get\\_uint](#) (JsonObject \*object, const char \*prop, int \*error\_code)
- Function to get an unsigned integer number of a JSON object property.*
- unsigned int [json\\_object\\_get\\_uint\\_with\\_default](#) (JsonObject \*object, const char \*prop, unsigned int default\_value, int \*error\_code)
- Function to get an unsigned integer number of a JSON object property with a default value.*
- double [json\\_object\\_get\\_float](#) (JsonObject \*object, const char \*prop, int \*error\_code)
- Function to get a floating point number of a JSON object property.*
- double [json\\_object\\_get\\_float\\_with\\_default](#) (JsonObject \*object, const char \*prop, double default\_value, int \*error\_code)
- Function to get a floating point number of a JSON object property with a default value.*
- void [json\\_object\\_set\\_int](#) (JsonObject \*object, const char \*prop, int value)
- Function to set an integer number in a JSON object property.*
- void [json\\_object\\_set\\_uint](#) (JsonObject \*object, const char \*prop, unsigned int value)
- Function to set an unsigned integer number in a JSON object property.*
- void [json\\_object\\_set\\_float](#) (JsonObject \*object, const char \*prop, double value)
- Function to set a floating point number in a JSON object property.*
- int [cores\\_number](#) ()
- Function to obtain the cores number.*
- void [process\\_pending](#) ()
- Function to process events on long computation.*
- unsigned int [gtk\\_array\\_get\\_active](#) (GtkRadioButton \*array[], unsigned int n)
- Function to get the active GtkRadioButton.*

## Variables

- GtkWidget \* [main\\_window](#)
- Main GtkWidget.*
- char \* [error\\_message](#)
- Error message.*
- void(\* [show\\_pending](#) )() = NULL
- Pointer to the function to show pending events.*

### 4.21.1 Detailed Description

Source file to define some useful functions.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [utils.c](#).

## 4.21.2 Function Documentation

### 4.21.2.1 cores\_number()

```
int cores_number ( )
```

Function to obtain the cores number.

#### Returns

Cores number.

Definition at line [530](#) of file [utils.c](#).

```
00531 {
00532     #ifdef G_OS_WIN32
00533         SYSTEM_INFO sysinfo;
00534         GetSystemInfo (&sysinfo);
00535         return sysinfo.dwNumberOfProcessors;
00536     #else
00537         return (int) sysconf (_SC_NPROCESSORS_ONLN);
00538     #endif
00539 }
```

### 4.21.2.2 gtk\_array\_get\_active()

```
unsigned int gtk_array_get_active (
    GtkRadioButton * array[],
    unsigned int n )
```

Function to get the active GtkRadioButton.

#### Parameters

<i>array</i>	Array of GtkRadioButtons.
<i>n</i>	Number of GtkRadioButtons.

#### Returns

Active GtkRadioButton.

Definition at line [565](#) of file [utils.c](#).

```
00566 {
00567     unsigned int i;
00568     for (i = 0; i < n; ++i)
00569         if (gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON (array[i])))
00570             break;
00571     return i;
00572 }
```

#### 4.21.2.3 json\_object\_get\_float()

```
double json_object_get_float (
    JsonObject * object,
    const char * prop,
    int * error_code )
```

Function to get a floating point number of a JSON object property.

##### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>error_code</i>	Error code.

##### Returns

Floating point number value.

Definition at line 420 of file [utils.c](#).

```
00421 {
00422     const char *buffer;
00423     double x = 0.;
00424     buffer = json_object_get_string_member (object, prop);
00425     if (!buffer)
00426         *error_code = 1;
00427     else
00428     {
00429         if (sscanf (buffer, "%lf", &x) != 1)
00430             *error_code = 2;
00431         else
00432             *error_code = 0;
00433     }
00434     return x;
00435 }
```

#### 4.21.2.4 json\_object\_get\_float\_with\_default()

```
double json_object_get_float_with_default (
    JsonObject * object,
    const char * prop,
    double default_value,
    int * error_code )
```

Function to get a floating point number of a JSON object property with a default value.

##### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.


### Returns

Floating point number value.

Definition at line 453 of file [utils.c](#).

```
00455 {  
00456     double x;  
00457     if (json_object_get_member (object, prop))  
00458         x = json_object_get_float (object, prop, error_code);  
00459     else  
00460     {  
00461         x = default_value;  
00462         *error_code = 0;  
00463     }  
00464     return x;  
00465 }
```

Here is the call graph for this function:



#### 4.21.2.5 json\_object\_get\_int()

```
int json_object_get_int (  
    JsonObject * object,  
    const char * prop,  
    int * error_code )
```

Function to get an integer number of a JSON object property.

### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>error_code</i>	Error code.

### Returns

Integer number value.

Definition at line 330 of file [utils.c](#).



```
00331 {
00332     const char *buffer;
00333     int i = 0;
00334     buffer = json_object_get_string_member (object, prop);
00335     if (!buffer)
00336         *error_code = 1;
00337     else
00338     {
00339         if (sscanf (buffer, "%d", &i) != 1)
00340             *error_code = 2;
00341         else
00342             *error_code = 0;
00343     }
00344     return i;
00345 }
```

#### 4.21.2.6 json\_object\_get\_uint()

```
int json_object_get_uint (
    JsonObject * object,
    const char * prop,
    int * error_code )
```

Function to get an unsigned integer number of a JSON object property.

##### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>error_code</i>	Error code.

##### Returns

Unsigned integer number value.

Definition at line 360 of file [utils.c](#).

```
00361 {
00362     const char *buffer;
00363     unsigned int i = 0;
00364     buffer = json_object_get_string_member (object, prop);
00365     if (!buffer)
00366         *error_code = 1;
00367     else
00368     {
00369         if (sscanf (buffer, "%u", &i) != 1)
00370             *error_code = 2;
00371         else
00372             *error_code = 0;
00373     }
00374     return i;
00375 }
```

#### 4.21.2.7 json\_object\_get\_uint\_with\_default()

```
int json_object_get_uint_with_default (
    JsonObject * object,
    const char * prop,
    unsigned int default_value,
    int * error_code )
```

Function to get an unsigned integer number of a JSON object property with a default value.

##### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.


##### Returns

Unsigned integer number value.

Definition at line 393 of file [utils.c](#).

```
00395 {
00396     unsigned int i;
00397     if (json_object_get_member (object, prop))
00398         i = json_object_get_uint (object, prop, error_code);
00399     else
00400     {
00401         i = default_value;
00402         *error_code = 0;
00403     }
00404     return i;
00405 }
```

Here is the call graph for this function:



#### 4.21.2.8 json\_object\_set\_float()

```
void json_object_set_float (
    JsonObject * object,
    const char * prop,
    double value )
```

Function to set a floating point number in a JSON object property.

## Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>value</i>	Floating point number value.

Definition at line 517 of file [utils.c](#).

```
00518 {  
00519     char buffer[64];  
00520     snprintf (buffer, 64, "%.14lg", value);  
00521     json_object_set_string_member (object, prop, buffer);  
00522 }
```

#### 4.21.2.9 json\_object\_set\_int()

```
void json_object_set_int (  
    JsonObject * object,  
    const char * prop,  
    int value )
```

Function to set an integer number in a JSON object property.

## Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>value</i>	Integer number value.

Definition at line 479 of file [utils.c](#).

```
00480 {  
00481     char buffer[64];  
00482     snprintf (buffer, 64, "%d", value);  
00483     json_object_set_string_member (object, prop, buffer);  
00484 }
```

#### 4.21.2.10 json\_object\_set\_uint()

```
void json_object_set_uint (  
    JsonObject * object,  
    const char * prop,  
    unsigned int value )
```

Function to set an unsigned integer number in a JSON object property.

## Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>value</i>	Unsigned integer number value.

Definition at line 498 of file [utils.c](#).

```
00499 {  
00500     char buffer[64];  
00501     snprintf (buffer, 64, "%u", value);  
00502     json_object_set_string_member (object, prop, buffer);  
00503 }
```

#### 4.21.2.11 show\_error()

```
void show_error (  
    char * msg )
```

Function to show a dialog with an error message.

## Parameters

<i>msg</i>	Error message.
------------	----------------

Definition at line 103 of file [utils.c](#).

```
00104 {  
00105     show_message (_("ERROR!"), msg, ERROR_TYPE);  
00106 }
```

Here is the call graph for this function:



#### 4.21.2.12 show\_message()

```
void show_message (  
    char * title,  
    char * msg,  
    int type )
```

Function to show a dialog with a message.

**Parameters**

<i>title</i>	Title.
<i>msg</i>	Message.
<i>type</i>	Message type.

Definition at line 73 of file [utils.c](#).

```

00074 {
00075     #if HAVE_GTK
00076         GtkMessageDialog *dlg;
00077
00078         // Creating the dialog
00079         dlg = (GtkMessageDialog *) gtk_message_dialog_new
00080             (main_window, GTK_DIALOG_MODAL, type, GTK_BUTTONS_OK, "%s", msg);
00081
00082         // Setting the dialog title
00083         gtk_window_set_title (GTK_WINDOW (dlg), title);
00084
00085         // Showing the dialog and waiting response
00086         gtk_dialog_run (GTK_DIALOG (dlg));
00087
00088         // Closing and freeing memory
00089         gtk_widget_destroy (GTK_WIDGET (dlg));
00090
00091     #else
00092         printf ("%s: %s\n", title, msg);
00093     #endif
00094 }
```

**4.21.2.13 xml\_node\_get\_float()**

```

double xml_node_get_float (
    xmlNode * node,
    const xmlChar * prop,
    int * error_code )
```

Function to get a floating point number of a XML node property.

**Parameters**

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>error_code</i>	Error code.

**Returns**

Floating point number value.

Definition at line 213 of file [utils.c](#).

```

00214 {
00215     double x = 0.;
00216     xmlChar *buffer;
00217     buffer = xmlGetProp (node, prop);
00218     if (!buffer)
00219         *error_code = 1;
```

```

00220     else
00221     {
00222         if (sscanf ((char *) buffer, "%lf", &x) != 1)
00223             *error_code = 2;
00224         else
00225             *error_code = 0;
00226         xmlFree (buffer);
00227     }
00228     return x;
00229 }

```

#### 4.21.2.14 xml\_node\_get\_float\_with\_default()

```

double xml_node_get_float_with_default (
    xmlNode * node,
    const xmlChar * prop,
    double default_value,
    int * error_code )

```

Function to get a floating point number of a XML node property with a default value.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.

##### Returns

Floating point number value.


Definition at line 247 of file [utils.c](#).

```

00249 {
00250     double x;
00251     if (xmlHasProp (node, prop))
00252         x = xml_node_get_float (node, prop, error_code);
00253     else
00254     {
00255         x = default_value;
00256         *error_code = 0;
00257     }
00258     return x;
00259 }

```

Here is the call graph for this function:



#### 4.21.2.15 xml\_node\_get\_int()

```
int xml_node_get_int (  
    xmlNode * node,  
    const xmlChar * prop,  
    int * error_code )
```

Function to get an integer number of a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>error_code</i>	Error code.

##### Returns

Integer number value.

Definition at line 121 of file [utils.c](#).

```
00122 {  
00123     int i = 0;  
00124     xmlChar *buffer;  
00125     buffer = xmlGetProp (node, prop);  
00126     if (!buffer)  
00127         *error_code = 1;  
00128     else  
00129     {  
00130         if (sscanf ((char *) buffer, "%d", &i) != 1)  
00131             *error_code = 2;  
00132         else  
00133             *error_code = 0;  
00134         xmlFree (buffer);  
00135     }  
00136     return i;  
00137 }
```

#### 4.21.2.16 xml\_node\_get\_uint()

```
int xml_node_get_uint (  
    xmlNode * node,  
    const xmlChar * prop,  
    int * error_code )
```

Function to get an unsigned integer number of a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>error_code</i>	Error code.



**Returns**

Unsigned integer number value.

Definition at line 152 of file [utils.c](#).

```

00153 {
00154     unsigned int i = 0;
00155     xmlChar *buffer;
00156     buffer = xmlGetProp (node, prop);
00157     if (!buffer)
00158         *error_code = 1;
00159     else
00160     {
00161         if (sscanf ((char *) buffer, "%u", &i) != 1)
00162             *error_code = 2;
00163         else
00164             *error_code = 0;
00165         xmlFree (buffer);
00166     }
00167     return i;
00168 }
```

**4.21.2.17 xml\_node\_get\_uint\_with\_default()**

```

int xml_node_get_uint_with_default (
    xmlNode * node,
    const xmlChar * prop,
    unsigned int default_value,
    int * error_code )
```

Function to get an unsigned integer number of a XML node property with a default value.

**Parameters**

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.

**Returns**


Unsigned integer number value.

Definition at line 186 of file [utils.c](#).

```

00188 {
00189     unsigned int i;
00190     if (xmlHasProp (node, prop))
00191         i = xml_node_get_uint (node, prop, error_code);
00192     else
00193     {
00194         i = default_value;
00195         *error_code = 0;
00196     }
00197     return i;
00198 }
```

Here is the call graph for this function:



#### 4.21.2.18 xml\_node\_set\_float()

```
void xml_node_set_float (
    xmlNode * node,
    const xmlChar * prop,
    double value )
```

Function to set a floating point number in a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>value</i>	Floating point number value.

Definition at line 310 of file [utils.c](#).

```
00311 {
00312     xmlChar buffer[64];
00313     snprintf ((char *) buffer, 64, "%.14lg", value);
00314     xmlSetProp (node, prop, buffer);
00315 }
```

#### 4.21.2.19 xml\_node\_set\_int()

```
void xml_node_set_int (
    xmlNode * node,
    const xmlChar * prop,
    int value )
```

Function to set an integer number in a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>value</i>	Integer number value.

Definition at line 272 of file [utils.c](#).

```
00273 {
00274     xmlChar buffer[64];
00275     snprintf ((char *) buffer, 64, "%d", value);
00276     xmlSetProp (node, prop, buffer);
00277 }
```

#### 4.21.2.20 xml\_node\_set\_uint()

```
void xml_node_set_uint (
    xmlNode * node,
    const xmlChar * prop,
    unsigned int value )
```

Function to set an unsigned integer number in a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>value</i>	Unsigned integer number value.

Definition at line 291 of file [utils.c](#).

```
00292 {
00293     xmlChar buffer[64];
00294     snprintf ((char *) buffer, 64, "%u", value);
00295     xmlSetProp (node, prop, buffer);
00296 }
```

## 4.22 utils.c

```
00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
```

```

00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #define _GNU_SOURCE
00033 #include "config.h"
00034 #include <stdio.h>
00035 #include <unistd.h>
00036 #include <libxml/parser.h>
00037 #include <libintl.h>
00038 #include <glib.h>
00039 #include <json-glib/json-glib.h>
00040 #ifdef G_OS_WIN32
00041 #include <windows.h>
00042 #endif
00043 #if HAVE_GTK
00044 #include <gtk/gtk.h>
00045 #endif
00046 #include "utils.h"
00047
00048 #if HAVE_GTK
00049 GtkWidget *main_window;
00050 #endif
00051
00052 char *error_message;
00053 void (*show_pending) () = NULL;
00054
00055 void
00056 show_message (char *title, char *msg, int type)
00057 {
00058     #if HAVE_GTK
00059     GtkMessageDialog *dlg;
00060
00061     // Creating the dialog
00062     dlg = (GtkMessageDialog *) gtk_message_dialog_new
00063         (main_window, GTK_DIALOG_MODAL, type, GTK_BUTTONS_OK, "%s", msg);
00064
00065     // Setting the dialog title
00066     gtk_window_set_title (GTK_WINDOW (dlg), title);
00067
00068     // Showing the dialog and waiting response
00069     gtk_dialog_run (GTK_DIALOG (dlg));
00070
00071     // Closing and freeing memory
00072     gtk_widget_destroy (GTK_WIDGET (dlg));
00073
00074     #else
00075     printf ("%s: %s\n", title, msg);
00076     #endif
00077 }
00078
00079 void
00080 show_error (char *msg)
00081 {
00082     show_message (_("ERROR!"), msg, ERROR_TYPE);
00083 }
00084
00085 int
00086 xml_node_get_int (xmlNode * node, const xmlChar * prop, int *error_code)
00087 {
00088     int i = 0;
00089     xmlChar *buffer;
00090     buffer = xmlGetProp (node, prop);
00091     if (!buffer)
00092         *error_code = 1;
00093     else
00094     {
00095         if (sscanf ((char *) buffer, "%d", &i) != 1)
00096             *error_code = 2;
00097         else
00098             *error_code = 0;
00099         xmlFree (buffer);
00100     }
00101     return i;
00102 }
00103
00104 unsigned int
00105 xml_node_get_uint (xmlNode * node, const xmlChar * prop, int *error_code)
00106 {
00107     unsigned int i = 0;
00108     xmlChar *buffer;
00109     buffer = xmlGetProp (node, prop);
00110     if (!buffer)
00111         *error_code = 1;
00112     else
00113     {
00114         if (sscanf ((char *) buffer, "%u", &i) != 1)

```

```

00162         *error_code = 2;
00163     else
00164         *error_code = 0;
00165     xmlFree (buffer);
00166 }
00167 return i;
00168 }
00169
00185 unsigned int
00186 xml_node_get_uint_with_default (xmlNode * node, const xmlChar * prop,
00187                                unsigned int default_value, int *error_code)
00188 {
00189     unsigned int i;
00190     if (xmlHasProp (node, prop))
00191         i = xml_node_get_uint (node, prop, error_code);
00192     else
00193     {
00194         i = default_value;
00195         *error_code = 0;
00196     }
00197     return i;
00198 }
00199
00212 double
00213 xml_node_get_float (xmlNode * node, const xmlChar * prop, int *error_code)
00214 {
00215     double x = 0.;
00216     xmlChar *buffer;
00217     buffer = xmlGetProp (node, prop);
00218     if (!buffer)
00219         *error_code = 1;
00220     else
00221     {
00222         if (sscanf ((char *) buffer, "%lf", &x) != 1)
00223             *error_code = 2;
00224         else
00225             *error_code = 0;
00226         xmlFree (buffer);
00227     }
00228     return x;
00229 }
00230
00246 double
00247 xml_node_get_float_with_default (xmlNode * node, const xmlChar * prop,
00248                                 double default_value, int *error_code)
00249 {
00250     double x;
00251     if (xmlHasProp (node, prop))
00252         x = xml_node_get_float (node, prop, error_code);
00253     else
00254     {
00255         x = default_value;
00256         *error_code = 0;
00257     }
00258     return x;
00259 }
00260
00271 void
00272 xml_node_set_int (xmlNode * node, const xmlChar * prop, int value)
00273 {
00274     xmlChar buffer[64];
00275     snprintf ((char *) buffer, 64, "%d", value);
00276     xmlSetProp (node, prop, buffer);
00277 }
00278
00290 void
00291 xml_node_set_uint (xmlNode * node, const xmlChar * prop, unsigned int value)
00292 {
00293     xmlChar buffer[64];
00294     snprintf ((char *) buffer, 64, "%u", value);
00295     xmlSetProp (node, prop, buffer);
00296 }
00297
00309 void
00310 xml_node_set_float (xmlNode * node, const xmlChar * prop, double value)
00311 {
00312     xmlChar buffer[64];
00313     snprintf ((char *) buffer, 64, "%.14lg", value);
00314     xmlSetProp (node, prop, buffer);
00315 }
00316
00329 int
00330 json_object_get_int (JsonObject * object, const char *prop, int *error_code)
00331 {
00332     const char *buffer;
00333     int i = 0;
00334     buffer = json_object_get_string_member (object, prop);

```

```

00335     if (!buffer)
00336         *error_code = 1;
00337     else
00338     {
00339         if (sscanf (buffer, "%d", &i) != 1)
00340             *error_code = 2;
00341         else
00342             *error_code = 0;
00343     }
00344     return i;
00345 }
00346
00359 unsigned int
00360 json_object_get_uint (JsonObject * object, const char *prop, int *error_code)
00361 {
00362     const char *buffer;
00363     unsigned int i = 0;
00364     buffer = json_object_get_string_member (object, prop);
00365     if (!buffer)
00366         *error_code = 1;
00367     else
00368     {
00369         if (sscanf (buffer, "%u", &i) != 1)
00370             *error_code = 2;
00371         else
00372             *error_code = 0;
00373     }
00374     return i;
00375 }
00376
00392 unsigned int
00393 json_object_get_uint_with_default (JsonObject * object, const char *prop,
00394                                   unsigned int default_value, int *error_code)
00395 {
00396     unsigned int i;
00397     if (json_object_get_member (object, prop))
00398         i = json_object_get_uint (object, prop, error_code);
00399     else
00400     {
00401         i = default_value;
00402         *error_code = 0;
00403     }
00404     return i;
00405 }
00406
00419 double
00420 json_object_get_float (JsonObject * object, const char *prop, int *error_code)
00421 {
00422     const char *buffer;
00423     double x = 0.;
00424     buffer = json_object_get_string_member (object, prop);
00425     if (!buffer)
00426         *error_code = 1;
00427     else
00428     {
00429         if (sscanf (buffer, "%lf", &x) != 1)
00430             *error_code = 2;
00431         else
00432             *error_code = 0;
00433     }
00434     return x;
00435 }
00436
00452 double
00453 json_object_get_float_with_default (JsonObject * object, const char *prop,
00454                                     double default_value, int *error_code)
00455 {
00456     double x;
00457     if (json_object_get_member (object, prop))
00458         x = json_object_get_float (object, prop, error_code);
00459     else
00460     {
00461         x = default_value;
00462         *error_code = 0;
00463     }
00464     return x;
00465 }
00466
00478 void
00479 json_object_set_int (JsonObject * object, const char *prop, int value)
00480 {
00481     char buffer[64];
00482     snprintf (buffer, 64, "%d", value);
00483     json_object_set_string_member (object, prop, buffer);
00484 }
00485

```

```


00497 void
00498 json_object_set_uint (JsonObject * object, const char *prop, unsigned int value)
00499 {
00500     char buffer[64];
00501     snprintf (buffer, 64, "%u", value);
00502     json_object_set_string_member (object, prop, buffer);
00503 }
00504
00516 void
00517 json_object_set_float (JsonObject * object, const char *prop, double value)
00518 {
00519     char buffer[64];
00520     snprintf (buffer, 64, "%.14lg", value);
00521     json_object_set_string_member (object, prop, buffer);
00522 }
00523
00529 int
00530 cores_number ()
00531 {
00532     #ifdef G_OS_WIN32
00533         SYSTEM_INFO sysinfo;
00534         GetSystemInfo (&sysinfo);
00535         return sysinfo.dwNumberOfProcessors;
00536     #else
00537         return (int) sysconf (_SC_NPROCESSORS_ONLN);
00538     #endif
00539 }
00540
00541 #if HAVE_GTK
00542
00547 void
00548 process_pending ()
00549 {
00550     while (gtk_events_pending ())
00551         gtk_main_iteration ();
00552 }
00553
00564 unsigned int
00565 gtk_array_get_active (GtkRadioButton * array[], unsigned int n)
00566 {
00567     unsigned int i;
00568     for (i = 0; i < n; ++i)
00569         if (gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON (array[i])))
00570             break;
00571     return i;
00572 }
00573
00574 #endif

```

## 4.23 utils.h File Reference

Header file to define some useful functions.

This graph shows which files directly or indirectly include this file:



### Macros

- `#define ERROR_TYPE GTK_MESSAGE_ERROR`  
Macro to define the error message type.
- `#define INFO_TYPE GTK_MESSAGE_INFO`  
Macro to define the information message type.

## Functions

- void [show\\_message](#) (char \*title, char \*msg, int type)  
*Function to show a dialog with a message.*
- void [show\\_error](#) (char \*msg)  
*Function to show a dialog with an error message.*
- int [xml\\_node\\_get\\_int](#) (xmlNode \*node, const xmlChar \*prop, int \*error\_code)  
*Function to get an integer number of a XML node property.*
- unsigned int [xml\\_node\\_get\\_uint](#) (xmlNode \*node, const xmlChar \*prop, int \*error\_code)  
*Function to get an unsigned integer number of a XML node property.*
- unsigned int [xml\\_node\\_get\\_uint\\_with\\_default](#) (xmlNode \*node, const xmlChar \*prop, unsigned int default\_value, int \*error\_code)  
*Function to get an unsigned integer number of a XML node property with a default value.*
- double [xml\\_node\\_get\\_float](#) (xmlNode \*node, const xmlChar \*prop, int \*error\_code)  
*Function to get a floating point number of a XML node property.*
- double [xml\\_node\\_get\\_float\\_with\\_default](#) (xmlNode \*node, const xmlChar \*prop, double default\_value, int \*error\_code)  
*Function to get a floating point number of a XML node property with a default value.*
- void [xml\\_node\\_set\\_int](#) (xmlNode \*node, const xmlChar \*prop, int value)  
*Function to set an integer number in a XML node property.*
- void [xml\\_node\\_set\\_uint](#) (xmlNode \*node, const xmlChar \*prop, unsigned int value)  
*Function to set an unsigned integer number in a XML node property.*
- void [xml\\_node\\_set\\_float](#) (xmlNode \*node, const xmlChar \*prop, double value)  
*Function to set a floating point number in a XML node property.*
- int [json\\_object\\_get\\_int](#) (JsonObject \*object, const char \*prop, int \*error\_code)  
*Function to get an integer number of a JSON object property.*
- unsigned int [json\\_object\\_get\\_uint](#) (JsonObject \*object, const char \*prop, int \*error\_code)  
*Function to get an unsigned integer number of a JSON object property.*
- unsigned int [json\\_object\\_get\\_uint\\_with\\_default](#) (JsonObject \*object, const char \*prop, unsigned int default\_value, int \*error\_code)  
*Function to get an unsigned integer number of a JSON object property with a default value.*
- double [json\\_object\\_get\\_float](#) (JsonObject \*object, const char \*prop, int \*error\_code)  
*Function to get a floating point number of a JSON object property.*
- double [json\\_object\\_get\\_float\\_with\\_default](#) (JsonObject \*object, const char \*prop, double default\_value, int \*error\_code)  
*Function to get a floating point number of a JSON object property with a default value.*
- void [json\\_object\\_set\\_int](#) (JsonObject \*object, const char \*prop, int value)  
*Function to set an integer number in a JSON object property.*
- void [json\\_object\\_set\\_uint](#) (JsonObject \*object, const char \*prop, unsigned int value)  
*Function to set an unsigned integer number in a JSON object property.*
- void [json\\_object\\_set\\_float](#) (JsonObject \*object, const char \*prop, double value)  
*Function to set a floating point number in a JSON object property.*
- int [cores\\_number](#) ()  
*Function to obtain the cores number.*
- void [process\\_pending](#) ()  
*Function to process events on long computation.*
- unsigned int [gtk\\_array\\_get\\_active](#) (GtkRadioButton \*array[], unsigned int n)  
*Function to get the active GtkRadioButton.*



## Variables

- GtkWidget \* [main\\_window](#)  
*Main GtkWidget.*
- char \* [error\\_message](#)  
*Error message.*
- void(\* [show\\_pending](#) )()  
*Pointer to the function to show pending events.*

### 4.23.1 Detailed Description

Header file to define some useful functions.

#### Authors

Javier Burguete.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [utils.h](#).

### 4.23.2 Function Documentation

#### 4.23.2.1 `cores_number()`

```
int cores_number ( )
```

Function to obtain the cores number.

#### Returns

Cores number.

Definition at line [530](#) of file [utils.c](#).

```
00531 {  
00532     #ifdef G_OS_WIN32  
00533         SYSTEM_INFO sysinfo;  
00534         GetSystemInfo (&sysinfo);  
00535         return sysinfo.dwNumberOfProcessors;  
00536     #else  
00537         return (int) sysconf (_SC_NPROCESSORS_ONLN);  
00538     #endif  
00539 }
```

#### 4.23.2.2 `gtk_array_get_active()`

```
unsigned int gtk_array_get_active (  
    GtkWidget * array[],  
    unsigned int n )
```

Function to get the active GtkWidget.

**Parameters**

<i>array</i>	Array of GtkRadioButtons.
<i>n</i>	Number of GtkRadioButtons.

**Returns**

Active GtkRadioButton.

Definition at line 565 of file [utils.c](#).

```
00566 {
00567     unsigned int i;
00568     for (i = 0; i < n; ++i)
00569         if (gtk_toggle_button_get_active (GTK_TOGGLE_BUTTON (array[i])))
00570             break;
00571     return i;
00572 }
```

**4.23.2.3 json\_object\_get\_float()**

```
double json_object_get_float (
    JsonObject * object,
    const char * prop,
    int * error_code )
```

Function to get a floating point number of a JSON object property.

**Parameters**

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>error_code</i>	Error code.

**Returns**

Floating point number value.

Definition at line 420 of file [utils.c](#).

```
00421 {
00422     const char *buffer;
00423     double x = 0.;
00424     buffer = json_object_get_string_member (object, prop);
00425     if (!buffer)
00426         *error_code = 1;
00427     else
00428     {
00429         if (sscanf (buffer, "%lf", &x) != 1)
00430             *error_code = 2;
00431         else
00432             *error_code = 0;
00433     }
00434     return x;
00435 }
```

## 4.23.2.4 json\_object\_get\_float\_with\_default()

```
double json_object_get_float_with_default (
    JsonObject * object,
    const char * prop,
    double default_value,
    int * error_code )
```

Function to get a floating point number of a JSON object property with a default value.

## Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.


## Returns

Floating point number value.

Definition at line [453](#) of file [utils.c](#).

```
00455 {
00456     double x;
00457     if (json_object_get_member (object, prop))
00458         x = json_object_get_float (object, prop, error_code);
00459     else
00460     {
00461         x = default_value;
00462         *error_code = 0;
00463     }
00464     return x;
00465 }
```

Here is the call graph for this function:



## 4.23.2.5 json\_object\_get\_int()

```
int json_object_get_int (
    JsonObject * object,
    const char * prop,
    int * error_code )
```

Function to get an integer number of a JSON object property.

**Parameters**

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>error_code</i>	Error code.

**Returns**

Integer number value.

Definition at line 330 of file [utils.c](#).

```
00331 {
00332     const char *buffer;
00333     int i = 0;
00334     buffer = json_object_get_string_member (object, prop);
00335     if (!buffer)
00336         *error_code = 1;
00337     else
00338     {
00339         if (sscanf (buffer, "%d", &i) != 1)
00340             *error_code = 2;
00341         else
00342             *error_code = 0;
00343     }
00344     return i;
00345 }
```

**4.23.2.6 json\_object\_get\_uint()**

```
unsigned int json_object_get_uint (
    JsonObject * object,
    const char * prop,
    int * error_code )
```

Function to get an unsigned integer number of a JSON object property.

**Parameters**

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>error_code</i>	Error code.

**Returns**

Unsigned integer number value.

Definition at line 360 of file [utils.c](#).

```
00361 {
00362     const char *buffer;
00363     unsigned int i = 0;
00364     buffer = json_object_get_string_member (object, prop);
```

```

00365     if (!buffer)
00366         *error_code = 1;
00367     else
00368     {
00369         if (sscanf (buffer, "%u", &i) != 1)
00370             *error_code = 2;
00371         else
00372             *error_code = 0;
00373     }
00374     return i;
00375 }

```

#### 4.23.2.7 json\_object\_get\_uint\_with\_default()

```

unsigned int json_object_get_uint_with_default (
    JsonObject * object,
    const char * prop,
    unsigned int default_value,
    int * error_code )

```

Function to get an unsigned integer number of a JSON object property with a default value.

##### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.

##### Returns

Unsigned integer number value.


Definition at line 393 of file [utils.c](#).

```

00395 {
00396     unsigned int i;
00397     if (json_object_get_member (object, prop))
00398         i = json_object_get_uint (object, prop, error_code);
00399     else
00400     {
00401         i = default_value;
00402         *error_code = 0;
00403     }
00404     return i;
00405 }

```

Here is the call graph for this function:



#### 4.23.2.8 json\_object\_set\_float()

```
void json_object_set_float (
    JsonObject * object,
    const char * prop,
    double value )
```

Function to set a floating point number in a JSON object property.

##### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>value</i>	Floating point number value.

Definition at line 517 of file [utils.c](#).

```
00518 {
00519     char buffer[64];
00520     snprintf (buffer, 64, "%.14lg", value);
00521     json_object_set_string_member (object, prop, buffer);
00522 }
```

#### 4.23.2.9 json\_object\_set\_int()

```
void json_object_set_int (
    JsonObject * object,
    const char * prop,
    int value )
```

Function to set an integer number in a JSON object property.

##### Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>value</i>	Integer number value.

Definition at line 479 of file [utils.c](#).

```
00480 {
00481     char buffer[64];
00482     snprintf (buffer, 64, "%d", value);
00483     json_object_set_string_member (object, prop, buffer);
00484 }
```

## 4.23.2.10 json\_object\_set\_uint()

```
void json_object_set_uint (
    JsonObject * object,
    const char * prop,
    unsigned int value )
```

Function to set an unsigned integer number in a JSON object property.

## Parameters

<i>object</i>	JSON object.
<i>prop</i>	JSON property.
<i>value</i>	Unsigned integer number value.

Definition at line [498](#) of file [utils.c](#).

```
00499 {
00500     char buffer[64];
00501     snprintf (buffer, 64, "%u", value);
00502     json_object_set_string_member (object, prop, buffer);
00503 }
```

## 4.23.2.11 show\_error()

```
void show_error (
    char * msg )
```

Function to show a dialog with an error message.

## Parameters

<i>msg</i>	Error message.
------------	----------------

Definition at line [103](#) of file [utils.c](#).

```
00104 {
00105     show_message (_("ERROR!"), msg, ERROR_TYPE);
00106 }
```

Here is the call graph for this function:



#### 4.23.2.12 show\_message()

```
void show_message (  
    char * title,  
    char * msg,  
    int type )
```

Function to show a dialog with a message.

##### Parameters

<i>title</i>	Title.
<i>msg</i>	Message.
<i>type</i>	Message type.

Definition at line 73 of file [utils.c](#).

```
00074 {  
00075 #if HAVE_GTK  
00076     GtkMessageDialog *dlg;  
00077  
00078     // Creating the dialog  
00079     dlg = (GtkMessageDialog *) gtk_message_dialog_new  
00080         (main_window, GTK_DIALOG_MODAL, type, GTK_BUTTONS_OK, "%s", msg);  
00081  
00082     // Setting the dialog title  
00083     gtk_window_set_title (GTK_WINDOW (dlg), title);  
00084  
00085     // Showing the dialog and waiting response  
00086     gtk_dialog_run (GTK_DIALOG (dlg));  
00087  
00088     // Closing and freeing memory  
00089     gtk_widget_destroy (GTK_WIDGET (dlg));  
00090  
00091 #else  
00092     printf ("%s: %s\n", title, msg);  
00093 #endif  
00094 }
```

#### 4.23.2.13 xml\_node\_get\_float()

```
double xml_node_get_float (  
    xmlNode * node,  
    const xmlChar * prop,  
    int * error_code )
```

Function to get a floating point number of a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>error_code</i>	Error code.



### Returns

Floating point number value.

Definition at line 213 of file [utils.c](#).

```
00214 {
00215     double x = 0.;
00216     xmlChar *buffer;
00217     buffer = xmlGetProp (node, prop);
00218     if (!buffer)
00219         *error_code = 1;
00220     else
00221     {
00222         if (sscanf ((char *) buffer, "%lf", &x) != 1)
00223             *error_code = 2;
00224         else
00225             *error_code = 0;
00226         xmlFree (buffer);
00227     }
00228     return x;
00229 }
```

#### 4.23.2.14 xml\_node\_get\_float\_with\_default()

```
double xml_node_get_float_with_default (
    xmlNode * node,
    const xmlChar * prop,
    double default_value,
    int * error_code )
```

Function to get a floating point number of a XML node property with a default value.

### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.


### Returns

Floating point number value.

Definition at line 247 of file [utils.c](#).

```
00249 {
00250     double x;
00251     if (xmlHasProp (node, prop))
00252         x = xml_node_get_float (node, prop, error_code);
00253     else
00254     {
00255         x = default_value;
00256         *error_code = 0;
00257     }
00258     return x;
00259 }
```

Here is the call graph for this function:



#### 4.23.2.15 xml\_node\_get\_int()

```

int xml_node_get_int (
    xmlNode * node,
    const xmlChar * prop,
    int * error_code )
  
```

Function to get an integer number of a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>error_code</i>	Error code.

##### Returns

Integer number value.

Definition at line [121](#) of file [utils.c](#).

```

00122 {
00123     int i = 0;
00124     xmlChar *buffer;
00125     buffer = xmlGetProp (node, prop);
00126     if (!buffer)
00127         *error_code = 1;
00128     else
00129     {
00130         if (sscanf ((char *) buffer, "%d", &i) != 1)
00131             *error_code = 2;
00132         else
00133             *error_code = 0;
00134         xmlFree (buffer);
00135     }
00136     return i;
00137 }
  
```

#### 4.23.2.16 xml\_node\_get\_uint()

```
unsigned int xml_node_get_uint (
    xmlNode * node,
    const xmlChar * prop,
    int * error_code )
```

Function to get an unsigned integer number of a XML node property.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>error_code</i>	Error code.

##### Returns

Unsigned integer number value.

Definition at line 152 of file [utils.c](#).

```
00153 {
00154     unsigned int i = 0;
00155     xmlChar *buffer;
00156     buffer = xmlGetProp (node, prop);
00157     if (!buffer)
00158         *error_code = 1;
00159     else
00160     {
00161         if (sscanf ((char *) buffer, "%u", &i) != 1)
00162             *error_code = 2;
00163         else
00164             *error_code = 0;
00165         xmlFree (buffer);
00166     }
00167     return i;
00168 }
```

#### 4.23.2.17 xml\_node\_get\_uint\_with\_default()

```
unsigned int xml_node_get_uint_with_default (
    xmlNode * node,
    const xmlChar * prop,
    unsigned int default_value,
    int * error_code )
```

Function to get an unsigned integer number of a XML node property with a default value.

##### Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>default_value</i>	default value.
<i>error_code</i>	Error code.

**Returns**

Unsigned integer number value.


Definition at line 186 of file [utils.c](#).

```

00188 {
00189     unsigned int i;
00190     if (xmlHasProp (node, prop))
00191         i = xml_node_get_uint (node, prop, error_code);
00192     else
00193     {
00194         i = default_value;
00195         *error_code = 0;
00196     }
00197     return i;
00198 }

```

Here is the call graph for this function:

**4.23.2.18 xml\_node\_set\_float()**

```

void xml_node_set_float (
    xmlNode * node,
    const xmlChar * prop,
    double value )

```

Function to set a floating point number in a XML node property.

**Parameters**

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>value</i>	Floating point number value.

Definition at line 310 of file [utils.c](#).

```

00311 {
00312     xmlChar buffer[64];
00313     snprintf ((char *) buffer, 64, "%.14lg", value);
00314     xmlSetProp (node, prop, buffer);
00315 }

```

## 4.23.2.19 xml\_node\_set\_int()

```
void xml_node_set_int (
    xmlNode * node,
    const xmlChar * prop,
    int value )
```

Function to set an integer number in a XML node property.

## Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>value</i>	Integer number value.

Definition at line 272 of file [utils.c](#).

```
00273 {
00274     xmlChar buffer[64];
00275     snprintf ((char *) buffer, 64, "%d", value);
00276     xmlSetProp (node, prop, buffer);
00277 }
```

## 4.23.2.20 xml\_node\_set\_uint()

```
void xml_node_set_uint (
    xmlNode * node,
    const xmlChar * prop,
    unsigned int value )
```

Function to set an unsigned integer number in a XML node property.

## Parameters

<i>node</i>	XML node.
<i>prop</i>	XML property.
<i>value</i>	Unsigned integer number value.

Definition at line 291 of file [utils.c](#).

```
00292 {
00293     xmlChar buffer[64];
00294     snprintf ((char *) buffer, 64, "%u", value);
00295     xmlSetProp (node, prop, buffer);
00296 }
```

## 4.24 utils.h

```
00001 /*
```

```

00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #ifndef UTILS__H
00033 #define UTILS__H 1
00034
00035 #if HAVE_GTK
00036 #define ERROR_TYPE GTK_MESSAGE_ERROR
00037 #define INFO_TYPE GTK_MESSAGE_INFO
00038 extern GtkWidget *main_window;
00039 #else
00040 #define ERROR_TYPE 0
00041 #define INFO_TYPE 0
00042 #endif
00043
00044 extern char *error_message;
00045 extern void (*show_pending) ();
00046
00047 // Public functions
00048 void show_message (char *title, char *msg, int type);
00049 void show_error (char *msg);
00050 int xml_node_get_int (xmlNode * node, const xmlChar * prop, int *error_code);
00051 unsigned int xml_node_get_uint (xmlNode * node, const xmlChar * prop,
00052                                int *error_code);
00053 unsigned int xml_node_get_uint_with_default (xmlNode * node,
00054                                             const xmlChar * prop,
00055                                             unsigned int default_value,
00056                                             int *error_code);
00057 double xml_node_get_float (xmlNode * node, const xmlChar * prop,
00058                           int *error_code);
00059 double xml_node_get_float_with_default (xmlNode * node, const xmlChar * prop,
00060                                         double default_value, int *error_code);
00061 void xml_node_set_int (xmlNode * node, const xmlChar * prop, int value);
00062 void xml_node_set_uint (xmlNode * node, const xmlChar * prop,
00063                        unsigned int value);
00064 void xml_node_set_float (xmlNode * node, const xmlChar * prop, double value);
00065 int json_object_get_int (JsonObject * object, const char *prop,
00066                        int *error_code);
00067 unsigned int json_object_get_uint (JsonObject * object, const char *prop,
00068                                   int *error_code);
00069 unsigned int json_object_get_uint_with_default (JsonObject * object,
00070                                                const char *prop,
00071                                                unsigned int default_value,
00072                                                int *error_code);
00073 double json_object_get_float (JsonObject * object, const char *prop,
00074                              int *error_code);
00075 double json_object_get_float_with_default (JsonObject * object,
00076                                           const char *prop,
00077                                           double default_value,
00078                                           int *error_code);
00079 void json_object_set_int (JsonObject * object, const char *prop, int value);
00080 void json_object_set_uint (JsonObject * object, const char *prop,
00081                          unsigned int value);
00082 void json_object_set_float (JsonObject * object, const char *prop,
00083                          double value);
00084 int cores_number ();
00085 #if HAVE_GTK
00086 void process_pending ();
00087 unsigned int gtk_array_get_active (GtkRadioButton * array[], unsigned int n);

```


```
00100 #endif
00101
00102 #endif
```

## 4.25 variable.c File Reference

Source file to define the variable data.

```
#include "config.h"
#include <stdio.h>
#include <libxml/parser.h>
#include <libintl.h>
#include <glib.h>
#include <json-glib/json-glib.h>
#include "utils.h"
#include "variable.h"
```

Include dependency graph for variable.c:



### Macros

- `#define DEBUG_VARIABLE 0`  
Macro to debug variable functions.

### Functions

- void `variable_new` (`Variable *variable`)  
Function to create a new `Variable` struct.
- void `variable_free` (`Variable *variable`, unsigned int type)  
Function to free the memory of a `Variable` struct.
- void `variable_error` (`Variable *variable`, char \*message)  
Function to print a message error opening an `Variable` struct.
- int `variable_open_xml` (`Variable *variable`, xmlNode \*node, unsigned int algorithm, unsigned int nsteps)  
Function to open the variable file.
- int `variable_open_json` (`Variable *variable`, JsonNode \*node, unsigned int algorithm, unsigned int nsteps)  
Function to open the variable file.

### Variables

- const char \* `format` [`NPRECISIONS`]  
Array of C-strings with variable formats.
- const double `precision` [`NPRECISIONS`]  
Array of variable precisions.

### 4.25.1 Detailed Description

Source file to define the variable data.

#### Authors

Javier Burguete and Borja Latorre.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [variable.c](#).

### 4.25.2 Function Documentation

#### 4.25.2.1 `variable_error()`

```
void variable_error (
    Variable * variable,
    char * message )
```

Function to print a message error opening an [Variable](#) struct.

#### Parameters

<i>variable</i>	<a href="#">Variable</a> struct.
<i>message</i>	Error message.

Definition at line 110 of file [variable.c](#).

```
00111 {
00112     char buffer[64];
00113     if (!variable->name)
00114         snprintf (buffer, 64, "%s: %s", _("Variable"), message);
00115     else
00116         snprintf (buffer, 64, "%s %s: %s", _("Variable"), variable->name, message);
00117     error_message = g_strdup (buffer);
00118 }
```

#### 4.25.2.2 `variable_free()`

```
void variable_free (
    Variable * variable,
    unsigned int type )
```

Function to free the memory of a [Variable](#) struct.



## Parameters

<i>variable</i>	Variable struct.
<i>type</i>	Type of input file.

Definition at line 87 of file [variable.c](#).

```
00088 {
00089     #if DEBUG_VARIABLE
00090         fprintf (stderr, "variable_free: start\n");
00091     #endif
00092     if (type == INPUT_TYPE_XML)
00093         xmlFree (variable->name);
00094     else
00095         g_free (variable->name);
00096     #if DEBUG_VARIABLE
00097         fprintf (stderr, "variable_free: end\n");
00098     #endif
00099 }
```

## 4.25.2.3 variable\_new()

```
void variable_new (
    Variable * variable )
```

Function to create a new [Variable](#) struct.

## Parameters

<i>variable</i>	Variable struct.
-----------------	------------------

Definition at line 67 of file [variable.c](#).

```
00068 {
00069     #if DEBUG_VARIABLE
00070         fprintf (stderr, "variable_new: start\n");
00071     #endif
00072     variable->name = NULL;
00073     #if DEBUG_VARIABLE
00074         fprintf (stderr, "variable_new: end\n");
00075     #endif
00076 }
```

## 4.25.2.4 variable\_open\_json()

```
int variable_open_json (
    Variable * variable,
    JsonNode * node,
    unsigned int algorithm,
    unsigned int nsteps )
```

Function to open the variable file.

## Parameters

<i>variable</i>	Variable struct.
<i>node</i>	XML node.
<i>algorithm</i>	Algorithm type.
<i>nsteps</i>	Number of steps to do the direction search method.

## Returns

1 on success, 0 on error.

Definition at line 301 of file [variable.c](#).

```

00303 {
00304     JsonObject *object;
00305     const char *label;
00306     int error_code;
00307     #if DEBUG_VARIABLE
00308     fprintf (stderr, "variable_open_json: start\n");
00309     #endif
00310     object = json_node_get_object (node);
00311     label = json_object_get_string_member (object, LABEL_NAME);
00312     if (!label)
00313     {
00314         variable_error (variable, _("no name"));
00315         goto exit_on_error;
00316     }
00317     variable->name = g_strdup (label);
00318     if (json_object_get_member (object, LABEL_MINIMUM))
00319     {
00320         variable->rangemin
00321         = json_object_get_float (object, LABEL_MINIMUM, &error_code);
00322         if (error_code)
00323         {
00324             variable_error (variable, _("bad minimum"));
00325             goto exit_on_error;
00326         }
00327         variable->rangeminabs
00328         = json_object_get_float_with_default (object,
00329         LABEL_ABSOLUTE_MINIMUM,
00330         -G_MAXDOUBLE, &error_code);
00331         if (error_code)
00332         {
00333             variable_error (variable, _("bad absolute minimum"));
00334             goto exit_on_error;
00335         }
00336         if (variable->rangemin < variable->rangeminabs)
00337         {
00338             variable_error (variable, _("minimum range not allowed"));
00339             goto exit_on_error;
00340         }
00341     }
00342     else
00343     {
00344         variable_error (variable, _("no minimum range"));
00345         goto exit_on_error;
00346     }
00347     if (json_object_get_member (object, LABEL_MAXIMUM))
00348     {
00349         variable->rangemax
00350         = json_object_get_float (object, LABEL_MAXIMUM, &error_code);
00351         if (error_code)
00352         {
00353             variable_error (variable, _("bad maximum"));
00354             goto exit_on_error;
00355         }
00356         variable->rangemaxabs
00357         = json_object_get_float_with_default (object,
00358         LABEL_ABSOLUTE_MAXIMUM,
00359         G_MAXDOUBLE, &error_code);
00360         if (error_code)
00361         {
00362             variable_error (variable, _("bad absolute maximum"));
00363             goto exit_on_error;
00364         }
00365         if (variable->rangemax > variable->rangemaxabs)
00366         {


```

```

00365         variable_error (variable, _("maximum range not allowed"));
00366         goto exit_on_error;
00367     }
00368     if (variable->rangemax < variable->rangemin)
00369     {
00370         variable_error (variable, _("bad range"));
00371         goto exit_on_error;
00372     }
00373 }
00374 else
00375 {
00376     variable_error (variable, _("no maximum range"));
00377     goto exit_on_error;
00378 }
00379 variable->precision
00380 = json_object_get_uint_with_default (object,
00381 LABEL_PRECISION,
00382                                     DEFAULT_PRECISION, &error_code);
00383 if (error_code || variable->precision >= NPRECISIONS)
00384 {
00385     variable_error (variable, _("bad precision"));
00386     goto exit_on_error;
00387 }
00388 if (algorithm == ALGORITHM_SWEEP)
00389 {
00390     if (json_object_get_member (object, LABEL_NSWEEPS))
00391     {
00392         variable->nsweeps
00393         = json_object_get_uint (object, LABEL_NSWEEPS, &error_code);
00394         if (error_code || !variable->nsweeps)
00395         {
00396             variable_error (variable, _("bad sweeps"));
00397             goto exit_on_error;
00398         }
00399     }
00400     else
00401     {
00402         variable_error (variable, _("no sweeps number"));
00403         goto exit_on_error;
00404     }
00405     #if DEBUG_VARIABLE
00406     fprintf (stderr, "variable_open_json: nsweeps=%u\n", variable->nsweeps);
00407     #endif
00408     if (algorithm == ALGORITHM_GENETIC)
00409     {
00410         // Obtaining bits representing each variable
00411         if (json_object_get_member (object, LABEL_NBITS))
00412         {
00413             variable->nbits
00414             = json_object_get_uint (object, LABEL_NBITS, &error_code);
00415             if (error_code || !variable->nbits)
00416             {
00417                 variable_error (variable, _("invalid bits number"));
00418                 goto exit_on_error;
00419             }
00420         }
00421         else
00422         {
00423             variable_error (variable, _("no bits number"));
00424             goto exit_on_error;
00425         }
00426     }
00427     else if (nsteps)
00428     {
00429         variable->step = json_object_get_float (object,
00430 LABEL_STEP, &error_code);
00431         if (error_code || variable->step < 0.)
00432         {
00433             variable_error (variable, _("bad step size"));
00434             goto exit_on_error;
00435         }
00436     }
00437     #if DEBUG_VARIABLE
00438     fprintf (stderr, "variable_open_json: end\n");
00439     #endif
00440     return 1;
00441 exit_on_error:
00442     variable_free (variable, INPUT_TYPE_JSON);
00443     #if DEBUG_VARIABLE
00444     fprintf (stderr, "variable_open_json: end\n");
00445     #endif
00446     return 0;
00447 }

```

Here is the call graph for this function:



#### 4.25.2.5 variable\_open\_xml()

```

int variable_open_xml (
    Variable * variable,
    xmlNode * node,
    unsigned int algorithm,
    unsigned int nsteps )
  
```

Function to open the variable file.

##### Parameters

<i>variable</i>	Variable struct.
<i>node</i>	XML node.
<i>algorithm</i>	Algorithm type.
<i>nsteps</i>	Number of steps to do the direction search method.

##### Returns

1 on success, 0 on error.

Definition at line 135 of file [variable.c](#).

```

00137 {
00138     int error_code;
00139
00140     #if DEBUG_VARIABLE
00141     fprintf (stderr, "variable_open_xml: start\n");
00142     #endif
00143
00144     variable->name = (char *) xmlGetProp (node, (const xmlChar *) LABEL_NAME);
00145     if (!variable->name)
00146     {
00147         variable_error (variable, _("no name"));
00148         goto exit_on_error;
00149     }
00150     if (xmlHasProp (node, (const xmlChar *) LABEL_MINIMUM))
00151     {
00152         variable->rangemin
00153             = xml_node_get_float (node, (const xmlChar *) LABEL_MINIMUM,
00154                                   &error_code);
00155         if (error_code)
00156         {
00157             variable_error (variable, _("bad minimum"));
00158             goto exit_on_error;
00159         }
00160     }
00161 }
  
```

```

00159     }
00160     variable->rangeminabs = xml_node_get_float_with_default
00161     (node, (const xmlChar *) LABEL_ABSOLUTE_MINIMUM, -G_MAXDOUBLE,
00162     &error_code);
00163     if (error_code)
00164     {
00165         variable_error (variable, _("bad absolute minimum"));
00166         goto exit_on_error;
00167     }
00168     if (variable->rangemin < variable->rangeminabs)
00169     {
00170         variable_error (variable, _("minimum range not allowed"));
00171         goto exit_on_error;
00172     }
00173 }
00174 else
00175 {
00176     variable_error (variable, _("no minimum range"));
00177     goto exit_on_error;
00178 }
00179 if (xmlHasProp (node, (const xmlChar *) LABEL_MAXIMUM))
00180 {
00181     variable->rangemax
00182     = xml_node_get_float (node, (const xmlChar *) LABEL_MAXIMUM,
00183     &error_code);
00184     if (error_code)
00185     {
00186         variable_error (variable, _("bad maximum"));
00187         goto exit_on_error;
00188     }
00189     variable->rangemaxabs = xml_node_get_float_with_default
00190     (node, (const xmlChar *) LABEL_ABSOLUTE_MAXIMUM, G_MAXDOUBLE,
00191     &error_code);
00192     if (error_code)
00193     {
00194         variable_error (variable, _("bad absolute maximum"));
00195         goto exit_on_error;
00196     }
00197     if (variable->rangemax > variable->rangemaxabs)
00198     {
00199         variable_error (variable, _("maximum range not allowed"));
00200         goto exit_on_error;
00201     }
00202     if (variable->rangemax < variable->rangemin)
00203     {
00204         variable_error (variable, _("bad range"));
00205         goto exit_on_error;
00206     }
00207 }
00208 else
00209 {
00210     variable_error (variable, _("no maximum range"));
00211     goto exit_on_error;
00212 }
00213 variable->precision
00214 = xml_node_get_uint_with_default (node, (const xmlChar *)
00215 LABEL_PRECISION,
00216                                     DEFAULT_PRECISION, &error_code);
00217 if (error_code || variable->precision >= NPRECISIONS)
00218 {
00219     variable_error (variable, _("bad precision"));
00220     goto exit_on_error;
00221 }
00222 if (algorithm == ALGORITHM_SWEEP)
00223 {
00224     if (xmlHasProp (node, (const xmlChar *) LABEL_NSWEEPS))
00225     {
00226         variable->nsweeps
00227         = xml_node_get_uint (node, (const xmlChar *) LABEL_NSWEEPS,
00228         &error_code);
00229         if (error_code || !variable->nsweeps)
00230         {
00231             variable_error (variable, _("bad sweeps"));
00232             goto exit_on_error;
00233         }
00234     }
00235     else
00236     {
00237         variable_error (variable, _("no sweeps number"));
00238         goto exit_on_error;
00239     }
00240 #if DEBUG_VARIABLE
00241     fprintf (stderr, "variable_open_xml: nsweeps=%u\n", variable->nsweeps);
00242 #endif
00243 }
00244 if (algorithm == ALGORITHM_GENETIC)
00245 {

```

```

00245     // Obtaining bits representing each variable
00246     if (xmlHasProp (node, (const xmlChar *) LABEL_NBITS))
00247     {
00248         variable->nbits
00249         = xml_node_get_uint (node, (const xmlChar *) LABEL_NBITS,
00250                             &error_code);
00251         if (error_code || !variable->nbits)
00252         {
00253             variable_error (variable, _("invalid bits number"));
00254             goto exit_on_error;
00255         }
00256     }
00257     else
00258     {
00259         variable_error (variable, _("no bits number"));
00260         goto exit_on_error;
00261     }
00262 }
00263 else if (nsteps)
00264 {
00265     variable->step
00266     = xml_node_get_float (node, (const xmlChar *)
00267 LABEL_STEP, &error_code);
00267     if (error_code || variable->step < 0.)
00268     {
00269         variable_error (variable, _("bad step size"));
00270         goto exit_on_error;
00271     }
00272 }
00273
00274 #if DEBUG_VARIABLE
00275 fprintf (stderr, "variable_open_xml: end\n");
00276 #endif
00277 return 1;
00278 exit_on_error:
00279     variable_free (variable, INPUT_TYPE_XML);
00280 #if DEBUG_VARIABLE
00281 fprintf (stderr, "variable_open_xml: end\n");
00282 #endif
00283 return 0;
00284 }

```

Here is the call graph for this function:



## 4.25.3 Variable Documentation

### 4.25.3.1 format

```
const char* format[NPRECISIONS]
```

**Initial value:**

```

= {
    "%.01f", "%.11f", "%.21f", "%.31f", "%.41f", "%.51f", "%.61f", "%.71f",
    "%.81f", "%.91f", "%.101f", "%.111f", "%.121f", "%.131f", "%.141f"
}

```

Array of C-strings with variable formats.

Definition at line 50 of file [variable.c](#).

## 4.25.3.2 precision

```
const double precision[NPRECISIONS]
```

## Initial value:

```
= {
    1., 0.1, 0.01, 1e-3, 1e-4, 1e-5, 1e-6, 1e-7, 1e-8, 1e-9, 1e-10, 1e-11,
    1e-12, 1e-13, 1e-14
}
```

Array of variable precisions.

Definition at line 55 of file [variable.c](#).

## 4.26 variable.c

```
00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burquete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013     1. Redistributions of source code must retain the above copyright notice,
00014        this list of conditions and the following disclaimer.
00015
00016     2. Redistributions in binary form must reproduce the above copyright notice,
00017        this list of conditions and the following disclaimer in the
00018        documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #define _GNU_SOURCE
00033 #include "config.h"
00034 #include <stdio.h>
00035 #include <libxml/parser.h>
00036 #include <libintl.h>
00037 #include <glib.h>
00038 #include <json-glib/json-glib.h>
00039 #include "utils.h"
00040 #include "variable.h"
00041
00042 #define DEBUG_VARIABLE 0
00043
00044 const char *format[NPRECISIONS] = {
00045     "%.01f", "%.11f", "%.21f", "%.31f", "%.41f", "%.51f", "%.61f", "%.71f",
00046     "%.81f", "%.91f", "%.101f", "%.111f", "%.121f", "%.131f", "%.141f"
00047 };
00048
00049 const double precision[NPRECISIONS] = {
00050     1., 0.1, 0.01, 1e-3, 1e-4, 1e-5, 1e-6, 1e-7, 1e-8, 1e-9, 1e-10, 1e-11,
00051     1e-12, 1e-13, 1e-14
00052 };
00053
00054 void
00055 variable_new (Variable * variable)
00056 {
00057     #if DEBUG_VARIABLE
```

```

00070     fprintf (stderr, "variable_new: start\n");
00071 #endif
00072     variable->name = NULL;
00073 #if DEBUG_VARIABLE
00074     fprintf (stderr, "variable_new: end\n");
00075 #endif
00076 }
00077
00086 void
00087 variable_free (Variable * variable, unsigned int type)
00088 {
00089 #if DEBUG_VARIABLE
00090     fprintf (stderr, "variable_free: start\n");
00091 #endif
00092     if (type == INPUT_TYPE_XML)
00093         xmlFree (variable->name);
00094     else
00095         g_free (variable->name);
00096 #if DEBUG_VARIABLE
00097     fprintf (stderr, "variable_free: end\n");
00098 #endif
00099 }
00100
00109 void
00110 variable_error (Variable * variable, char *message)
00111 {
00112     char buffer[64];
00113     if (!variable->name)
00114         snprintf (buffer, 64, "%s: %s", _("Variable"), message);
00115     else
00116         snprintf (buffer, 64, "%s %s: %s", _("Variable"), variable->name, message);
00117     error_message = g_strdup (buffer);
00118 }
00119
00134 int
00135 variable_open_xml (Variable * variable, xmlNode * node,
00136                   unsigned int algorithm, unsigned int nsteps)
00137 {
00138     int error_code;
00139
00140 #if DEBUG_VARIABLE
00141     fprintf (stderr, "variable_open_xml: start\n");
00142 #endif
00143
00144     variable->name = (char *) xmlGetProp (node, (const xmlChar *) LABEL_NAME);
00145     if (!variable->name)
00146     {
00147         variable_error (variable, _("no name"));
00148         goto exit_on_error;
00149     }
00150     if (xmlHasProp (node, (const xmlChar *) LABEL_MINIMUM))
00151     {
00152         variable->rangemin
00153             = xml_node_get_float (node, (const xmlChar *) LABEL_MINIMUM,
00154                                   &error_code);
00155         if (error_code)
00156         {
00157             variable_error (variable, _("bad minimum"));
00158             goto exit_on_error;
00159         }
00160         variable->rangeminabs = xml_node_get_float_with_default
00161             (node, (const xmlChar *) LABEL_ABSOLUTE_MINIMUM, -G_MAXDOUBLE,
00162             &error_code);
00163         if (error_code)
00164         {
00165             variable_error (variable, _("bad absolute minimum"));
00166             goto exit_on_error;
00167         }
00168         if (variable->rangemin < variable->rangeminabs)
00169         {
00170             variable_error (variable, _("minimum range not allowed"));
00171             goto exit_on_error;
00172         }
00173     }
00174     else
00175     {
00176         variable_error (variable, _("no minimum range"));
00177         goto exit_on_error;
00178     }
00179     if (xmlHasProp (node, (const xmlChar *) LABEL_MAXIMUM))
00180     {
00181         variable->rangemax
00182             = xml_node_get_float (node, (const xmlChar *) LABEL_MAXIMUM,
00183                                   &error_code);
00184         if (error_code)
00185         {
00186             variable_error (variable, _("bad maximum"));

```



```

00187         goto exit_on_error;
00188     }
00189     variable->rangemaxabs = xml_node_get_float_with_default
00190     (node, (const xmlChar *) LABEL_ABSOLUTE_MAXIMUM, G_MAXDOUBLE,
00191     &error_code);
00192     if (error_code)
00193     {
00194         variable_error (variable, _("bad absolute maximum"));
00195         goto exit_on_error;
00196     }
00197     if (variable->rangemax > variable->rangemaxabs)
00198     {
00199         variable_error (variable, _("maximum range not allowed"));
00200         goto exit_on_error;
00201     }
00202     if (variable->rangemax < variable->rangemin)
00203     {
00204         variable_error (variable, _("bad range"));
00205         goto exit_on_error;
00206     }
00207 }
00208 else
00209 {
00210     variable_error (variable, _("no maximum range"));
00211     goto exit_on_error;
00212 }
00213 variable->precision
00214 = xml_node_get_uint_with_default (node, (const xmlChar *)
LABEL_PRECISION,
                                DEFAULT_PRECISION, &error_code);
00215 if (error_code || variable->precision >= NPRECISIONS)
00216 {
00217     variable_error (variable, _("bad precision"));
00218     goto exit_on_error;
00219 }
00220 if (algorithm == ALGORITHM_SWEEP)
00221 {
00222     if (xmlHasProp (node, (const xmlChar *) LABEL_NSWEEPS))
00223     {
00224         variable->nsweeps
00225         = xml_node_get_uint (node, (const xmlChar *) LABEL_NSWEEPS,
00226         &error_code);
00227         if (error_code || !variable->nsweeps)
00228         {
00229             variable_error (variable, _("bad sweeps"));
00230             goto exit_on_error;
00231         }
00232     }
00233 }
00234 else
00235 {
00236     variable_error (variable, _("no sweeps number"));
00237     goto exit_on_error;
00238 }
00239 #if DEBUG_VARIABLE
00240     fprintf (stderr, "variable_open_xml: nsweeps=%u\n", variable->nsweeps);
00241 #endif
00242 }
00243 if (algorithm == ALGORITHM_GENETIC)
00244 {
00245     // Obtaining bits representing each variable
00246     if (xmlHasProp (node, (const xmlChar *) LABEL_NBITS))
00247     {
00248         variable->nbits
00249         = xml_node_get_uint (node, (const xmlChar *) LABEL_NBITS,
00250         &error_code);
00251         if (error_code || !variable->nbits)
00252         {
00253             variable_error (variable, _("invalid bits number"));
00254             goto exit_on_error;
00255         }
00256     }
00257 }
00258 else
00259 {
00260     variable_error (variable, _("no bits number"));
00261     goto exit_on_error;
00262 }
00263 else if (nsteps)
00264 {
00265     variable->step
00266     = xml_node_get_float (node, (const xmlChar *)
LABEL_STEP, &error_code);
00267     if (error_code || variable->step < 0.)
00268     {
00269         variable_error (variable, _("bad step size"));
00270         goto exit_on_error;
00271     }

```

```

00272     }
00273
00274 #if DEBUG_VARIABLE
00275     fprintf (stderr, "variable_open_xml: end\n");
00276 #endif
00277     return 1;
00278 exit_on_error:
00279     variable_free (variable, INPUT_TYPE_XML);
00280 #if DEBUG_VARIABLE
00281     fprintf (stderr, "variable_open_xml: end\n");
00282 #endif
00283     return 0;
00284 }
00285
00300 int
00301 variable_open_json (Variable * variable, JsonNode * node,
00302                    unsigned int algorithm, unsigned int nsteps)
00303 {
00304     JsonObject *object;
00305     const char *label;
00306     int error_code;
00307 #if DEBUG_VARIABLE
00308     fprintf (stderr, "variable_open_json: start\n");
00309 #endif
00310     object = json_node_get_object (node);
00311     label = json_object_get_string_member (object, LABEL_NAME);
00312     if (!label)
00313     {
00314         variable_error (variable, _("no name"));
00315         goto exit_on_error;
00316     }
00317     variable->name = g_strdup (label);
00318     if (json_object_get_member (object, LABEL_MINIMUM))
00319     {
00320         variable->rangemin
00321             = json_object_get_float (object, LABEL_MINIMUM, &error_code);
00322         if (error_code)
00323         {
00324             variable_error (variable, _("bad minimum"));
00325             goto exit_on_error;
00326         }
00327         variable->rangeminabs
00328             = json_object_get_float_with_default (object,
00329 LABEL_ABSOLUTE_MINIMUM,
00329                                         -G_MAXDOUBLE, &error_code);
00330         if (error_code)
00331         {
00332             variable_error (variable, _("bad absolute minimum"));
00333             goto exit_on_error;
00334         }
00335         if (variable->rangemin < variable->rangeminabs)
00336         {
00337             variable_error (variable, _("minimum range not allowed"));
00338             goto exit_on_error;
00339         }
00340     }
00341     else
00342     {
00343         variable_error (variable, _("no minimum range"));
00344         goto exit_on_error;
00345     }
00346     if (json_object_get_member (object, LABEL_MAXIMUM))
00347     {
00348         variable->rangemax
00349             = json_object_get_float (object, LABEL_MAXIMUM, &error_code);
00350         if (error_code)
00351         {
00352             variable_error (variable, _("bad maximum"));
00353             goto exit_on_error;
00354         }
00355         variable->rangemaxabs
00356             = json_object_get_float_with_default (object,
00357 LABEL_ABSOLUTE_MAXIMUM,
00357                                         G_MAXDOUBLE, &error_code);
00358         if (error_code)
00359         {
00360             variable_error (variable, _("bad absolute maximum"));
00361             goto exit_on_error;
00362         }
00363         if (variable->rangemax > variable->rangemaxabs)
00364         {
00365             variable_error (variable, _("maximum range not allowed"));
00366             goto exit_on_error;
00367         }
00368         if (variable->rangemax < variable->rangemin)
00369         {
00370             variable_error (variable, _("bad range"));

```

```


00371         goto exit_on_error;
00372     }
00373 }
00374 else
00375 {
00376     variable_error (variable, _("no maximum range"));
00377     goto exit_on_error;
00378 }
00379 variable->precision
00380 = json_object_get_uint_with_default (object,
LABEL_PRECISION,
00381                                     DEFAULT_PRECISION, &error_code);
00382 if (error_code || variable->precision >= NPRECISIONS)
00383 {
00384     variable_error (variable, _("bad precision"));
00385     goto exit_on_error;
00386 }
00387 if (algorithm == ALGORITHM_SWEEP)
00388 {
00389     if (json_object_get_member (object, LABEL_NSWEEPS))
00390     {
00391         variable->nsweeps
00392         = json_object_get_uint (object, LABEL_NSWEEPS, &error_code);
00393         if (error_code || !variable->nsweeps)
00394         {
00395             variable_error (variable, _("bad sweeps"));
00396             goto exit_on_error;
00397         }
00398     }
00399     else
00400     {
00401         variable_error (variable, _("no sweeps number"));
00402         goto exit_on_error;
00403     }
00404 #if DEBUG_VARIABLE
00405     fprintf (stderr, "variable_open_json: nsweeps=%u\n", variable->nsweeps);
00406 #endif
00407 }
00408 if (algorithm == ALGORITHM_GENETIC)
00409 {
00410     // Obtaining bits representing each variable
00411     if (json_object_get_member (object, LABEL_NBITS))
00412     {
00413         variable->nbits
00414         = json_object_get_uint (object, LABEL_NBITS, &error_code);
00415         if (error_code || !variable->nbits)
00416         {
00417             variable_error (variable, _("invalid bits number"));
00418             goto exit_on_error;
00419         }
00420     }
00421     else
00422     {
00423         variable_error (variable, _("no bits number"));
00424         goto exit_on_error;
00425     }
00426 }
00427 else if (nsteps)
00428 {
00429     variable->step = json_object_get_float (object,
LABEL_STEP, &error_code);
00430     if (error_code || variable->step < 0.)
00431     {
00432         variable_error (variable, _("bad step size"));
00433         goto exit_on_error;
00434     }
00435 }
00436
00437 #if DEBUG_VARIABLE
00438 fprintf (stderr, "variable_open_json: end\n");
00439 #endif
00440 return 1;
00441 exit_on_error:
00442 variable_free (variable, INPUT_TYPE_JSON);
00443 #if DEBUG_VARIABLE
00444 fprintf (stderr, "variable_open_json: end\n");
00445 #endif
00446 return 0;
00447 }

```

## 4.27 variable.h File Reference

Header file to define the variable data.

This graph shows which files directly or indirectly include this file:



## Data Structures

- struct [Variable](#)

*Struct to define the variable data.*

## Enumerations

- enum [Algorithm](#) { [ALGORITHM\\_MONTE\\_CARLO](#) = 0, [ALGORITHM\\_SWEEP](#) = 1, [ALGORITHM\\_GENETIC](#) = 2 }

*Enum to define the algorithms.*

## Functions

- void [variable\\_new](#) ([Variable](#) \*variable)  
*Function to create a new [Variable](#) struct.*
- void [variable\\_free](#) ([Variable](#) \*variable, unsigned int type)  
*Function to free the memory of a [Variable](#) struct.*
- void [variable\\_error](#) ([Variable](#) \*variable, char \*message)  
*Function to print a message error opening an [Variable](#) struct.*
- int [variable\\_open\\_xml](#) ([Variable](#) \*variable, xmlNode \*node, unsigned int algorithm, unsigned int nsteps)  
*Function to open the variable file.*
- int [variable\\_open\\_json](#) ([Variable](#) \*variable, JsonNode \*node, unsigned int algorithm, unsigned int nsteps)  
*Function to open the variable file.*

## Variables

- const char \* [format](#) [[NPRECISIONS](#)]  
*Array of C-strings with variable formats.*
- const double [precision](#) [[NPRECISIONS](#)]  
*Array of variable precisions.*

### 4.27.1 Detailed Description

Header file to define the variable data.

#### Authors

Javier Burguete.

#### Copyright

Copyright 2012-2017, all rights reserved.

Definition in file [variable.h](#).

### 4.27.2 Enumeration Type Documentation

#### 4.27.2.1 Algorithm

enum [Algorithm](#)

Enum to define the algorithms.

#### Enumerator

ALGORITHM_MONTE_CARLO	Monte-Carlo algorithm.
ALGORITHM_SWEEP	Sweep algorithm.
ALGORITHM_GENETIC	Genetic algorithm.

Definition at line [45](#) of file [variable.h](#).

```
00046 {  
00047     ALGORITHM_MONTE_CARLO = 0,  
00048     ALGORITHM_SWEEP = 1,  
00049     ALGORITHM_GENETIC = 2  
00050 };
```

### 4.27.3 Function Documentation

#### 4.27.3.1 variable\_error()

```
void variable_error (  
    Variable * variable,  
    char * message )
```

Function to print a message error opening an [Variable](#) struct.

## Parameters

<i>variable</i>	<a href="#">Variable</a> struct.
<i>message</i>	Error message.

Definition at line 110 of file [variable.c](#).

```

00111 {
00112     char buffer[64];
00113     if (!variable->name)
00114         snprintf (buffer, 64, "%s: %s", _("Variable"), message);
00115     else
00116         snprintf (buffer, 64, "%s %s: %s", _("Variable"), variable->name, message);
00117     error_message = g_strdup (buffer);
00118 }
```

4.27.3.2 `variable_free()`

```

void variable_free (
    Variable * variable,
    unsigned int type )
```

Function to free the memory of a [Variable](#) struct.

## Parameters

<i>variable</i>	<a href="#">Variable</a> struct.
<i>type</i>	Type of input file.

Definition at line 87 of file [variable.c](#).

```

00088 {
00089     #if DEBUG_VARIABLE
00090         fprintf (stderr, "variable_free: start\n");
00091     #endif
00092     if (type == INPUT_TYPE_XML)
00093         xmlFree (variable->name);
00094     else
00095         g_free (variable->name);
00096     #if DEBUG_VARIABLE
00097         fprintf (stderr, "variable_free: end\n");
00098     #endif
00099 }
```

4.27.3.3 `variable_new()`

```

void variable_new (
    Variable * variable )
```

Function to create a new [Variable](#) struct.

## Parameters

<i>variable</i>	<a href="#">Variable</a> struct.
-----------------	----------------------------------

Definition at line 67 of file [variable.c](#).

```

00068 {
00069     #if DEBUG_VARIABLE
00070         fprintf (stderr, "variable_new: start\n");
00071     #endif
00072     variable->name = NULL;
00073     #if DEBUG_VARIABLE
00074         fprintf (stderr, "variable_new: end\n");
00075     #endif
00076 }
```

## 4.27.3.4 variable\_open\_json()

```

int variable_open_json (
    Variable * variable,
    JsonNode * node,
    unsigned int algorithm,
    unsigned int nsteps )
```

Function to open the variable file.

## Parameters

<i>variable</i>	<a href="#">Variable</a> struct.
<i>node</i>	XML node.
<i>algorithm</i>	Algorithm type.
<i>nsteps</i>	Number of steps to do the direction search method.

## Returns

1 on success, 0 on error.

Definition at line 301 of file [variable.c](#).

```

00303 {
00304     JsonObject *object;
00305     const char *label;
00306     int error_code;
00307     #if DEBUG_VARIABLE
00308         fprintf (stderr, "variable_open_json: start\n");
00309     #endif
00310     object = json_node_get_object (node);
00311     label = json_object_get_string_member (object, LABEL_NAME);
00312     if (!label)
00313     {
00314         variable_error (variable, _("no name"));
00315         goto exit_on_error;
00316     }
00317     variable->name = g_strdup (label);
00318     if (json_object_get_member (object, LABEL_MINIMUM))
00319     {
00320         variable->rangemin
```

```

00321         = json_object_get_float (object, LABEL_MINIMUM, &error_code);
00322     if (error_code)
00323     {
00324         variable_error (variable, _("bad minimum"));
00325         goto exit_on_error;
00326     }
00327     variable->rangeminabs
00328     = json_object_get_float_with_default (object,
00329     LABEL_ABSOLUTE_MINIMUM,
00329                                     -G_MAXDOUBLE, &error_code);
00330     if (error_code)
00331     {
00332         variable_error (variable, _("bad absolute minimum"));
00333         goto exit_on_error;
00334     }
00335     if (variable->rangemin < variable->rangeminabs)
00336     {
00337         variable_error (variable, _("minimum range not allowed"));
00338         goto exit_on_error;
00339     }
00340 }
00341 else
00342 {
00343     variable_error (variable, _("no minimum range"));
00344     goto exit_on_error;
00345 }
00346 if (json_object_get_member (object, LABEL_MAXIMUM))
00347 {
00348     variable->rangemax
00349     = json_object_get_float (object, LABEL_MAXIMUM, &error_code);
00350     if (error_code)
00351     {
00352         variable_error (variable, _("bad maximum"));
00353         goto exit_on_error;
00354     }
00355     variable->rangemaxabs
00356     = json_object_get_float_with_default (object,
00357     LABEL_ABSOLUTE_MAXIMUM,
00357                                     G_MAXDOUBLE, &error_code);
00358     if (error_code)
00359     {
00360         variable_error (variable, _("bad absolute maximum"));
00361         goto exit_on_error;
00362     }
00363     if (variable->rangemax > variable->rangemaxabs)
00364     {
00365         variable_error (variable, _("maximum range not allowed"));
00366         goto exit_on_error;
00367     }
00368     if (variable->rangemax < variable->rangemin)
00369     {
00370         variable_error (variable, _("bad range"));
00371         goto exit_on_error;
00372     }
00373 }
00374 else
00375 {
00376     variable_error (variable, _("no maximum range"));
00377     goto exit_on_error;
00378 }
00379 variable->precision
00380 = json_object_get_uint_with_default (object,
00381     LABEL_PRECISION,
00381     DEFAULT_PRECISION, &error_code);
00382 if (error_code || variable->precision >= NPRECISIONS)
00383 {
00384     variable_error (variable, _("bad precision"));
00385     goto exit_on_error;
00386 }
00387 if (algorithm == ALGORITHM_SWEEP)
00388 {
00389     if (json_object_get_member (object, LABEL_NSWEEPS))
00390     {
00391         variable->nsweeps
00392         = json_object_get_uint (object, LABEL_NSWEEPS, &error_code);
00393         if (error_code || !variable->nsweeps)
00394         {
00395             variable_error (variable, _("bad sweeps"));
00396             goto exit_on_error;
00397         }
00398     }
00399     else
00400     {
00401         variable_error (variable, _("no sweeps number"));
00402         goto exit_on_error;
00403     }
00404 }
00404 #if DEBUG_VARIABLE

```



```

00405     fprintf (stderr, "variable_open_json: nsweeps=%u\n", variable->nsweeps);
00406 #endif
00407 }
00408 if (algorithm == ALGORITHM_GENETIC)
00409 {
00410     // Obtaining bits representing each variable
00411     if (json_object_get_member (object, LABEL_NBITS))
00412     {
00413         variable->nbits
00414         = json_object_get_uint (object, LABEL_NBITS, &error_code);
00415         if (error_code || !variable->nbits)
00416         {
00417             variable_error (variable, _("invalid bits number"));
00418             goto exit_on_error;
00419         }
00420     }
00421     else
00422     {
00423         variable_error (variable, _("no bits number"));
00424         goto exit_on_error;
00425     }
00426 }
00427 else if (nsteps)
00428 {
00429     variable->step = json_object_get_float (object,
00430 LABEL_STEP, &error_code);
00431     if (error_code || variable->step < 0.)
00432     {
00433         variable_error (variable, _("bad step size"));
00434         goto exit_on_error;
00435     }
00436 }
00437 #if DEBUG_VARIABLE
00438     fprintf (stderr, "variable_open_json: end\n");
00439 #endif
00440     return 1;
00441 exit_on_error:
00442     variable_free (variable, INPUT_TYPE_JSON);
00443 #if DEBUG_VARIABLE
00444     fprintf (stderr, "variable_open_json: end\n");
00445 #endif
00446     return 0;
00447 }

```

Here is the call graph for this function:



#### 4.27.3.5 variable\_open\_xml()

```

int variable_open_xml (
    Variable * variable,
    xmlNode * node,
    unsigned int algorithm,
    unsigned int nsteps )

```

Function to open the variable file.

## Parameters

<i>variable</i>	Variable struct.
<i>node</i>	XML node.
<i>algorithm</i>	Algorithm type.
<i>nsteps</i>	Number of steps to do the direction search method.

## Returns

1 on success, 0 on error.

Definition at line 135 of file [variable.c](#).

```

00137 {
00138     int error_code;
00139
00140     #if DEBUG_VARIABLE
00141     fprintf (stderr, "variable_open_xml: start\n");
00142     #endif
00143
00144     variable->name = (char *) xmlGetProp (node, (const xmlChar *) LABEL_NAME);
00145     if (!variable->name)
00146     {
00147         variable_error (variable, _("no name"));
00148         goto exit_on_error;
00149     }
00150     if (xmlHasProp (node, (const xmlChar *) LABEL_MINIMUM))
00151     {
00152         variable->rangemin
00153         = xml_node_get_float (node, (const xmlChar *) LABEL_MINIMUM,
00154                               &error_code);
00155         if (error_code)
00156         {
00157             variable_error (variable, _("bad minimum"));
00158             goto exit_on_error;
00159         }
00160         variable->rangeminabs = xml_node_get_float_with_default
00161         (node, (const xmlChar *) LABEL_ABSOLUTE_MINIMUM, -G_MAXDOUBLE,
00162         &error_code);
00163         if (error_code)
00164         {
00165             variable_error (variable, _("bad absolute minimum"));
00166             goto exit_on_error;
00167         }
00168         if (variable->rangemin < variable->rangeminabs)
00169         {
00170             variable_error (variable, _("minimum range not allowed"));
00171             goto exit_on_error;
00172         }
00173     }
00174     else
00175     {
00176         variable_error (variable, _("no minimum range"));
00177         goto exit_on_error;
00178     }
00179     if (xmlHasProp (node, (const xmlChar *) LABEL_MAXIMUM))
00180     {
00181         variable->rangemax
00182         = xml_node_get_float (node, (const xmlChar *) LABEL_MAXIMUM,
00183                               &error_code);
00184         if (error_code)
00185         {
00186             variable_error (variable, _("bad maximum"));
00187             goto exit_on_error;
00188         }
00189         variable->rangemaxabs = xml_node_get_float_with_default
00190         (node, (const xmlChar *) LABEL_ABSOLUTE_MAXIMUM, G_MAXDOUBLE,
00191         &error_code);
00192         if (error_code)
00193         {
00194             variable_error (variable, _("bad absolute maximum"));
00195             goto exit_on_error;
00196         }
00197         if (variable->rangemax > variable->rangemaxabs)
00198         {
00199             variable_error (variable, _("maximum range not allowed"));
00200             goto exit_on_error;

```

```

00201     }
00202     if (variable->rangemax < variable->rangemin)
00203     {
00204         variable_error (variable, _("bad range"));
00205         goto exit_on_error;
00206     }
00207 }
00208 else
00209 {
00210     variable_error (variable, _("no maximum range"));
00211     goto exit_on_error;
00212 }
00213 variable->precision
00214 = xml_node_get_uint_with_default (node, (const xmlChar *)
LABEL_PRECISION,
                                DEFAULT_PRECISION, &error_code);
00215 if (error_code || variable->precision >= NPRECISIONS)
00216 {
00217     variable_error (variable, _("bad precision"));
00218     goto exit_on_error;
00219 }
00220 if (algorithm == ALGORITHM_SWEEP)
00221 {
00222     if (xmlHasProp (node, (const xmlChar *) LABEL_NSWEEPS))
00223     {
00224         variable->nsweeps
00225         = xml_node_get_uint (node, (const xmlChar *) LABEL_NSWEEPS,
                                &error_code);
00226         if (error_code || !variable->nsweeps)
00227         {
00228             variable_error (variable, _("bad sweeps"));
00229             goto exit_on_error;
00230         }
00231     }
00232     else
00233     {
00234         variable_error (variable, _("no sweeps number"));
00235         goto exit_on_error;
00236     }
00237 }
00238 #if DEBUG_VARIABLE
00239 fprintf (stderr, "variable_open_xml: nsweeps=%u\n", variable->nsweeps);
00240 #endif
00241 if (algorithm == ALGORITHM_GENETIC)
00242 {
00243     // Obtaining bits representing each variable
00244     if (xmlHasProp (node, (const xmlChar *) LABEL_NBITS))
00245     {
00246         variable->nbits
00247         = xml_node_get_uint (node, (const xmlChar *) LABEL_NBITS,
                                &error_code);
00248         if (error_code || !variable->nbits)
00249         {
00250             variable_error (variable, _("invalid bits number"));
00251             goto exit_on_error;
00252         }
00253     }
00254     else
00255     {
00256         variable_error (variable, _("no bits number"));
00257         goto exit_on_error;
00258     }
00259 }
00260 else if (nsteps)
00261 {
00262     variable->step
00263     = xml_node_get_float (node, (const xmlChar *)
LABEL_STEP, &error_code);
00264     if (error_code || variable->step < 0.)
00265     {
00266         variable_error (variable, _("bad step size"));
00267         goto exit_on_error;
00268     }
00269 }
00270 #if DEBUG_VARIABLE
00271 fprintf (stderr, "variable_open_xml: end\n");
00272 #endif
00273 return 1;
00274 exit_on_error:
00275 variable_free (variable, INPUT_TYPE_XML);
00276 #if DEBUG_VARIABLE
00277 fprintf (stderr, "variable_open_xml: end\n");
00278 #endif
00279 return 0;
00280 }

```

Here is the call graph for this function:



## 4.28 variable.h

```

00001 /*
00002 MPCOTool:
00003 The Multi-Purposes Calibration and Optimization Tool. A software to perform
00004 calibrations or optimizations of empirical parameters.
00005
00006 AUTHORS: Javier Burguete and Borja Latorre.
00007
00008 Copyright 2012-2017, AUTHORS.
00009
00010 Redistribution and use in source and binary forms, with or without modification,
00011 are permitted provided that the following conditions are met:
00012
00013 1. Redistributions of source code must retain the above copyright notice,
00014    this list of conditions and the following disclaimer.
00015
00016 2. Redistributions in binary form must reproduce the above copyright notice,
00017    this list of conditions and the following disclaimer in the
00018    documentation and/or other materials provided with the distribution.
00019
00020 THIS SOFTWARE IS PROVIDED BY AUTHORS ``AS IS'' AND ANY EXPRESS OR IMPLIED
00021 WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF
00022 MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT
00023 SHALL AUTHORS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
00024 SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
00025 PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
00026 BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN
00027 CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING
00028 IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY
00029 OF SUCH DAMAGE.
00030 */
00031
00032 #ifndef VARIABLE__H
00033 #define VARIABLE__H 1
00034
00035 enum Algorithm
00036 {
00037     ALGORITHM_MONTE_CARLO = 0,
00038     ALGORITHM_SWEEP = 1,
00039     ALGORITHM_GENETIC = 2
00040 };
00041
00042 typedef struct
00043 {
00044     char *name;
00045     double rangemin;
00046     double rangemax;
00047     double rangeminabs;
00048     double rangemaxabs;
00049     double step;
00050     unsigned int precision;
00051     unsigned int nsweeps;
00052     unsigned int nbits;
00053 } Variable;
00054
00055 extern const char *format[NPRECISIONS];
00056 extern const double precision[NPRECISIONS];
00057
00058 // Public functions
00059 void variable_new (Variable * variable);
00060 void variable_free (Variable * variable, unsigned int type);
00061 void variable_error (Variable * variable, char *message);
00062 int variable_open_xml (Variable * variable, xmlNode * node,
  
```

```
00077         unsigned int algorithm, unsigned int nsteps);
00078 int variable_open_json (Variable * variable, JsonNode * node,
00079         unsigned int algorithm, unsigned int nsteps);
00080
00081 #endif
```



# Index

Algorithm  
variable.h, 275

config.h, 19  
INPUT\_TYPE, 22

cores\_number  
utils.c, 228  
utils.h, 247

DirectionMethod  
input.h, 69

ErrorNorm  
input.h, 69

Experiment, 5  
experiment.c, 24  
experiment\_error, 25  
experiment\_free, 26  
experiment\_new, 26  
experiment\_open\_json, 27  
experiment\_open\_xml, 29  
template, 31

experiment.h, 35  
experiment\_error, 36  
experiment\_free, 36  
experiment\_new, 37  
experiment\_open\_json, 38  
experiment\_open\_xml, 40

experiment\_error  
experiment.c, 25  
experiment.h, 36

experiment\_free  
experiment.c, 26  
experiment.h, 36

experiment\_new  
experiment.c, 26  
experiment.h, 37

experiment\_open\_json  
experiment.c, 27  
experiment.h, 38

experiment\_open\_xml  
experiment.c, 29  
experiment.h, 40

format  
variable.c, 268

gtk\_array\_get\_active  
interface.h, 144  
utils.c, 228  
utils.h, 247

INPUT\_TYPE  
config.h, 22

Input, 6

input.c, 42  
input\_error, 43  
input\_open, 44  
input\_open\_json, 45  
input\_open\_xml, 50

input.h, 67  
DirectionMethod, 69  
ErrorNorm, 69  
input\_error, 70  
input\_open, 70  
input\_open\_json, 71  
input\_open\_xml, 77

input\_error  
input.c, 43  
input.h, 70

input\_open  
input.c, 44  
input.h, 70

input\_open\_json  
input.c, 45  
input.h, 71

input\_open\_xml  
input.c, 50  
input.h, 77

input\_save  
interface.c, 86  
interface.h, 145

input\_save\_direction\_json  
interface.c, 87

input\_save\_direction\_xml  
interface.c, 88

input\_save\_json  
interface.c, 89

input\_save\_xml  
interface.c, 92

interface.c, 83  
input\_save, 86  
input\_save\_direction\_json, 87  
input\_save\_direction\_xml, 88  
input\_save\_json, 89  
input\_save\_xml, 92  
window\_get\_algorithm, 94  
window\_get\_direction, 95  
window\_get\_norm, 96  
window\_new, 96  
window\_read, 105

- window\_save, 107
  - window\_template\_experiment, 109
- interface.h, 141
  - gtk\_array\_get\_active, 144
  - input\_save, 145
  - window\_get\_algorithm, 146
  - window\_get\_direction, 146
  - window\_get\_norm, 147
  - window\_new, 148
  - window\_read, 157
  - window\_save, 159
  - window\_template\_experiment, 161
- json\_object\_get\_float
  - utils.c, 228
  - utils.h, 248
- json\_object\_get\_float\_with\_default
  - utils.c, 229
  - utils.h, 248
- json\_object\_get\_int
  - utils.c, 230
  - utils.h, 249
- json\_object\_get\_uint
  - utils.c, 231
  - utils.h, 250
- json\_object\_get\_uint\_with\_default
  - utils.c, 231
  - utils.h, 251
- json\_object\_set\_float
  - utils.c, 232
  - utils.h, 252
- json\_object\_set\_int
  - utils.c, 233
  - utils.h, 252
- json\_object\_set\_uint
  - utils.c, 233
  - utils.h, 252
- main.c, 164
- Optimize, 7
  - thread\_direction, 10
- optimize.c, 166
  - optimize\_best, 169
  - optimize\_best\_direction, 170
  - optimize\_direction\_sequential, 170
  - optimize\_direction\_thread, 171
  - optimize\_estimate\_direction\_coordinates, 172
  - optimize\_estimate\_direction\_random, 174
  - optimize\_genetic\_objective, 174
  - optimize\_input, 175
  - optimize\_merge, 178
  - optimize\_norm\_euclidian, 178
  - optimize\_norm\_maximum, 179
  - optimize\_norm\_p, 180
  - optimize\_norm\_taxicab, 181
  - optimize\_parse, 182
  - optimize\_save\_variables, 184
  - optimize\_step\_direction, 184
  - optimize\_thread, 186
- optimize.h, 205
  - optimize\_best, 207
  - optimize\_best\_direction, 208
  - optimize\_direction\_sequential, 209
  - optimize\_direction\_thread, 210
  - optimize\_estimate\_direction\_coordinates, 211
  - optimize\_estimate\_direction\_random, 212
  - optimize\_genetic\_objective, 212
  - optimize\_input, 213
  - optimize\_merge, 214
  - optimize\_norm\_euclidian, 215
  - optimize\_norm\_maximum, 216
  - optimize\_norm\_p, 217
  - optimize\_norm\_taxicab, 218
  - optimize\_parse, 219
  - optimize\_save\_variables, 221
  - optimize\_step\_direction, 221
  - optimize\_thread, 223
- optimize\_best
  - optimize.c, 169
  - optimize.h, 207
- optimize\_best\_direction
  - optimize.c, 170
  - optimize.h, 208
- optimize\_direction\_sequential
  - optimize.c, 170
  - optimize.h, 209
- optimize\_direction\_thread
  - optimize.c, 171
  - optimize.h, 210
- optimize\_estimate\_direction\_coordinates
  - optimize.c, 172
  - optimize.h, 211
- optimize\_estimate\_direction\_random
  - optimize.c, 174
  - optimize.h, 212
- optimize\_genetic\_objective
  - optimize.c, 174
  - optimize.h, 212
- optimize\_input
  - optimize.c, 175
  - optimize.h, 213
- optimize\_merge
  - optimize.c, 178
  - optimize.h, 214
- optimize\_norm\_euclidian
  - optimize.c, 178
  - optimize.h, 215
- optimize\_norm\_maximum
  - optimize.c, 179
  - optimize.h, 216
- optimize\_norm\_p
  - optimize.c, 180
  - optimize.h, 217
- optimize\_norm\_taxicab
  - optimize.c, 181
  - optimize.h, 218



- optimize\_parse
  - optimize.c, [182](#)
  - optimize.h, [219](#)
- optimize\_save\_variables
  - optimize.c, [184](#)
  - optimize.h, [221](#)
- optimize\_step\_direction
  - optimize.c, [184](#)
  - optimize.h, [221](#)
- optimize\_thread
  - optimize.c, [186](#)
  - optimize.h, [223](#)
- Options, [11](#)
- ParallelData, [11](#)
- precision
  - variable.c, [268](#)
- Running, [12](#)
- show\_error
  - utils.c, [234](#)
  - utils.h, [253](#)
- show\_message
  - utils.c, [234](#)
  - utils.h, [254](#)
- template
  - experiment.c, [31](#)
- thread\_direction
  - Optimize, [10](#)
- utils.c, [226](#)
  - cores\_number, [228](#)
  - gtk\_array\_get\_active, [228](#)
  - json\_object\_get\_float, [228](#)
  - json\_object\_get\_float\_with\_default, [229](#)
  - json\_object\_get\_int, [230](#)
  - json\_object\_get\_uint, [231](#)
  - json\_object\_get\_uint\_with\_default, [231](#)
  - json\_object\_set\_float, [232](#)
  - json\_object\_set\_int, [233](#)
  - json\_object\_set\_uint, [233](#)
  - show\_error, [234](#)
  - show\_message, [234](#)
  - xml\_node\_get\_float, [236](#)
  - xml\_node\_get\_float\_with\_default, [237](#)
  - xml\_node\_get\_int, [237](#)
  - xml\_node\_get\_uint, [238](#)
  - xml\_node\_get\_uint\_with\_default, [239](#)
  - xml\_node\_set\_float, [240](#)
  - xml\_node\_set\_int, [240](#)
  - xml\_node\_set\_uint, [241](#)
- utils.h, [245](#)
  - cores\_number, [247](#)
  - gtk\_array\_get\_active, [247](#)
  - json\_object\_get\_float, [248](#)
  - json\_object\_get\_float\_with\_default, [248](#)
  - json\_object\_get\_int, [249](#)
  - json\_object\_get\_uint, [250](#)
  - json\_object\_get\_uint\_with\_default, [251](#)
  - json\_object\_set\_float, [252](#)
  - json\_object\_set\_int, [252](#)
  - json\_object\_set\_uint, [252](#)
  - show\_error, [253](#)
  - show\_message, [254](#)
  - xml\_node\_get\_float, [254](#)
  - xml\_node\_get\_float\_with\_default, [255](#)
  - xml\_node\_get\_int, [256](#)
  - xml\_node\_get\_uint, [256](#)
  - xml\_node\_get\_uint\_with\_default, [257](#)
  - xml\_node\_set\_float, [258](#)
  - xml\_node\_set\_int, [258](#)
  - xml\_node\_set\_uint, [259](#)
- Variable, [12](#)
- variable.c, [261](#)
  - format, [268](#)
  - precision, [268](#)
  - variable\_error, [262](#)
  - variable\_free, [262](#)
  - variable\_new, [263](#)
  - variable\_open\_json, [263](#)
  - variable\_open\_xml, [266](#)
- variable.h, [273](#)
  - Algorithm, [275](#)
  - variable\_error, [275](#)
  - variable\_free, [276](#)
  - variable\_new, [276](#)
  - variable\_open\_json, [277](#)
  - variable\_open\_xml, [279](#)
- variable\_error
  - variable.c, [262](#)
  - variable.h, [275](#)
- variable\_free
  - variable.c, [262](#)
  - variable.h, [276](#)
- variable\_new
  - variable.c, [263](#)
  - variable.h, [276](#)
- variable\_open\_json
  - variable.c, [263](#)
  - variable.h, [277](#)
- variable\_open\_xml
  - variable.c, [266](#)
  - variable.h, [279](#)
- Window, [13](#)
- window\_get\_algorithm
  - interface.c, [94](#)
  - interface.h, [146](#)
- window\_get\_direction
  - interface.c, [95](#)
  - interface.h, [146](#)
- window\_get\_norm
  - interface.c, [96](#)
  - interface.h, [147](#)
- window\_new

- interface.c, [96](#)
  - interface.h, [148](#)
- window\_read
  - interface.c, [105](#)
  - interface.h, [157](#)
- window\_save
  - interface.c, [107](#)
  - interface.h, [159](#)
- window\_template\_experiment
  - interface.c, [109](#)
  - interface.h, [161](#)
- xml\_node\_get\_float
  - utils.c, [236](#)
  - utils.h, [254](#)
- xml\_node\_get\_float\_with\_default
  - utils.c, [237](#)
  - utils.h, [255](#)
- xml\_node\_get\_int
  - utils.c, [237](#)
  - utils.h, [256](#)
- xml\_node\_get\_uint
  - utils.c, [238](#)
  - utils.h, [256](#)
- xml\_node\_get\_uint\_with\_default
  - utils.c, [239](#)
  - utils.h, [257](#)
- xml\_node\_set\_float
  - utils.c, [240](#)
  - utils.h, [258](#)
- xml\_node\_set\_int
  - utils.c, [240](#)
  - utils.h, [258](#)
- xml\_node\_set\_uint
  - utils.c, [241](#)
  - utils.h, [259](#)