

Jorge Luis Carrera 5-8-2017 CS380


Github link: https://github.com/jcarreracpp/CS380-EX6 Exercise 6


I viewed the code that handled user login for www.sqllabcollabtive.com and focused on any section that included \$user. I eventually was able to come up with an input that logged me in as ted by bypassing the password check, the input was ted');# .

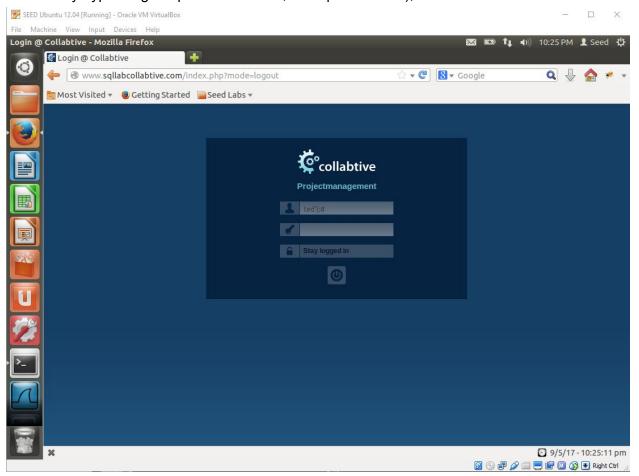

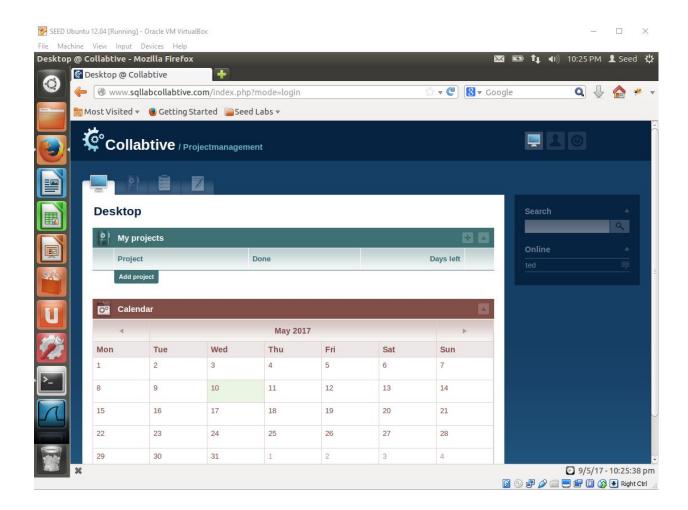

I tested out a similar input for the admin account and it also processed.

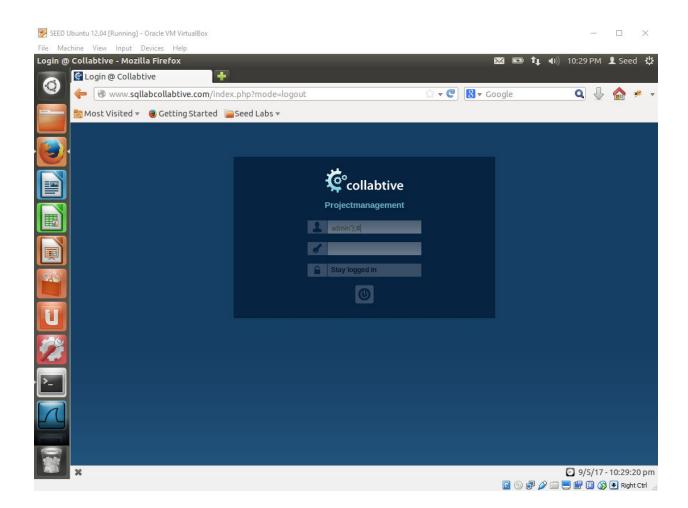

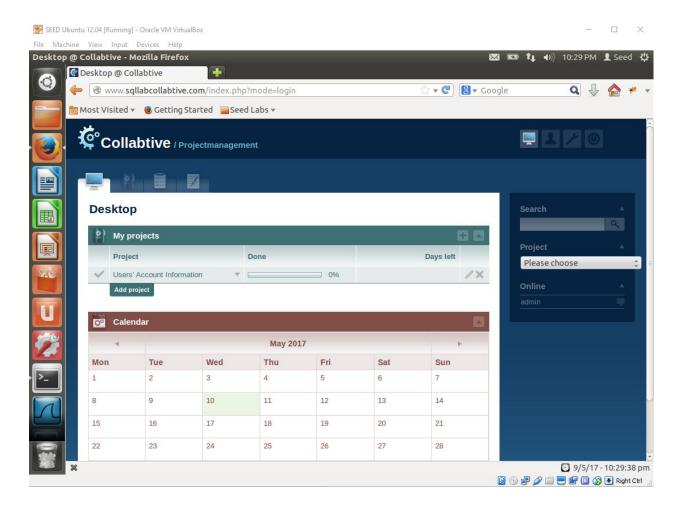

I also found a way to enter the site without formally addressing a name, and just inputting SQL commands to bypass the username/password checking. The end result was logging into the admin page.

