


מודלים לפיתוח מערכות תוכנה Software Systems Modeling

קורס 12003
סמסטר ב' תשע"ו

1. מבוא

ד"ר ראובן יגל
robi@post.jce.ac.il

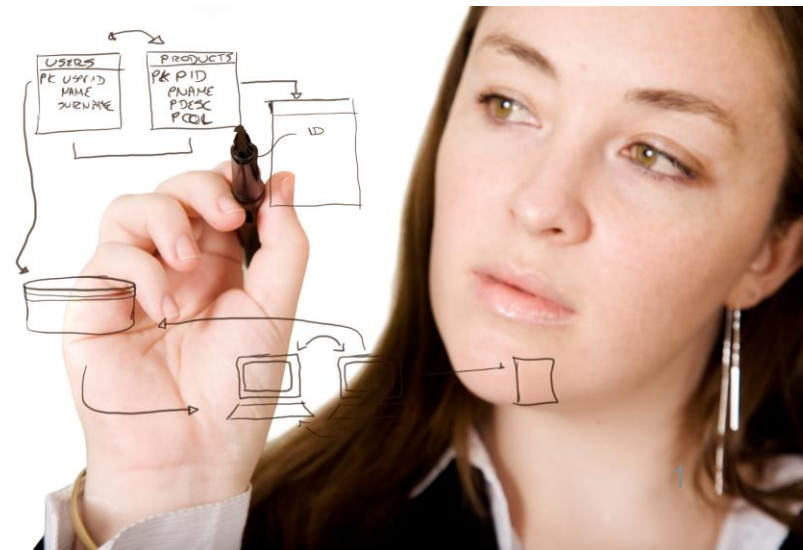

השבוע

- על הקורס
 - לוגיסטיקה – סילבוס
- מבוא למודלים
- בקרת תצורה
- תרגיל 1 – git
- לקראת ההמשך, מבוא ל-UML

המרצה

אתם?

- רקע וניסיון
- במודלים?
- מה מעניין אתכם במודלים לתוכנה?

הקורס



הקורס

- בבניה!
- מבוסס מקורות שונים
- כולל למידה עצמית והתנסות
- מוזמנים להיות שותפים!
- מאגר הקורס וסילבוס

– <https://github.com/jce-il/sw-modeling-2016b>

תכנית (נתון לשינויים)

- Intro
- UML
- OCL
- Modeling Tools
- Version Control / Git – Practical & Modeling
- SW Design & Architecture
- SW Process Modeling
- SW V&V (Testing) Modeling
- Project – modeling in OSS

מקורות להיום

- Design & Motivation
 - Edinburgh: [Software Design Methods and Processes](#), A. Ireland
- Modeling
 - [RIT Class](#), Wei Le
- Practiacd Git
 - Gitimmersion.com, Jim Weirich

מבוא למודלים

- Are Models Useful?
- From Coursera: Model Thinking
<https://www.coursera.org/course/modelthinking>
 - [One to many and many to one](#) 1:55m
- [Designing vs Modeling?](#)
- Edinburgh, RIT

Outline

- Motivations and challenges
- Process
- Strategies
- Quality
- ~~Roadmap~~

The Nature of Software

- Software lies at the nerve centre of most engineered artifacts and business processes, *i.e. from consumer electronics to financial modelling, and from automotives to medical applications*
- A single defect in millions of lines of code can result in a system failure (safety critical systems are an exception)
- Typically 50% of project costs are allocated to software design, of which 50% are spent on testing

The Nature of Software

- Software is among the most **complex** of engineered artifacts
- Software is flexible, so is expected to **conform** to standards imposed by other components, *e.g. hardware, external agents etc*
- Flexibility also increases the rate at which software is **changed** during its lifetime
- The **invisibility** of software makes it harder to contextualize compared to other engineering sectors, *e.g. construction industry*

Brooks 1987

© Andrew Ireland

The Economic Motive

“... the national annual cost estimates of an inadequate infrastructure for software testing are estimated to be \$59.5 billion.”

Federal Study, US Dept of Commerce, May 2002

“Worse - and spreading the effect of software flaws far beyond the original customer – several devastating computer viruses have taken advantage of bugs and defects in common operating systems ...”

CNET Networks Inc, Aug 2002

The Economic Motive

- US Internal Revenue Service - a failed \$4-billion modernization effort in 1997, followed by an equally troubled \$8-billion update.
- FBI - \$170-million virtual case-file management system was terminated in 2005.
- Moody's Corp: financial research & analysis credit-worthiness ratings:
“Moody's awarded incorrect triple-A ratings to billions of dollars worth of a type of complex debt product due to a bug in its computer models”




Financial Times 2008

The Security Motive

- The recent UK defence spending review identified Cyber Security as a priority area, giving rise to the Office of Cyber Security
- US Government formed a new branch of the military: the US Cyber Command (May 2010)
- Malware that can bring down real-world infrastructure is a clear and present danger, e.g. *Stuxnet malware, which targets Siemens pump controller software, was responsible for damaging centrifuges within Iran's nuclear programme in 2010*

The Role of Design

Activity	Sub Activity	Description
Prioritize requirements	Review candidate requirement	Results in the concept CANDIDATE REQUIREMENT
Prioritize requirements	Assess relative value of candidate requirement	Results in a value for the attribute relative value in the concept CANDIDATE REQUIREMENT
Prioritize requirements	Estimate relative cost of implementing each candidate requirement	Results in a value for the attribute relative cost in the concept CANDIDATE REQUIREMENT
Prioritize requirements	Calculate value and cost, plot these on a cost-value diagram	Results in the concept COST-VALUE DIAGRAM
Prioritize requirements	Analyze, discuss and prioritize candidate requirements	Results in a value for the attribute prioritization in the concept CANDIDATE REQUIREMENT
Select requirement		Concept SELECTED REQUIREMENT is created, which is a CANDIDATE REQUIREMENT
Define release requirement document		Concept RELEASE REQUIREMENTS DOCUMENT is created, which contains a.o. at least one SELECTED REQUIREMENT
Validate release requirement		Results in a modification of the concept RELEASE REQUIREMENTS DOCUMENT, because the requirements in this document are validated.
Prepare Launch		Concept LAUNCH PREPARATION PACKAGE is created, which contains a.o. the RELEASE REQUIREMENTS DOCUMENT.

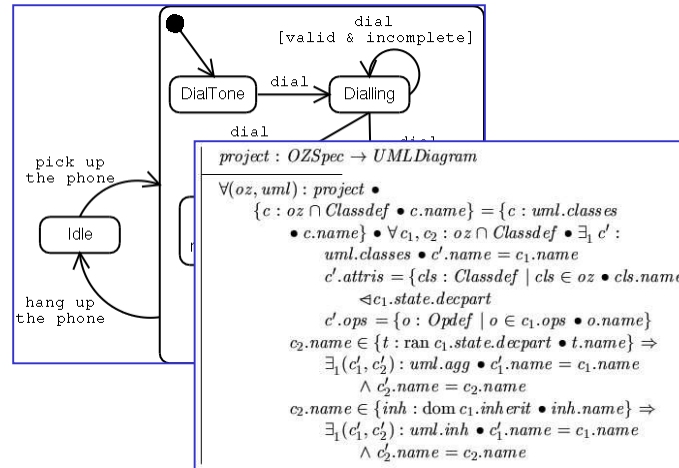

```

#pragma once
//endit // _MSC_VER > 1000
//endit // AFXWIN.H
//error include "afxwin.h"
//endit
#include "Resource.h"
// CDMotionApp
// See DMOtion.cpp for the implementation of this class
class CDMotionApp : public CWinApp
{
public:
    CDMotionApp();
    // Overrides
    // ClassWizard generated virtual function overrides
    //{{AFX_VIRTUAL(CDMotionApp)
public:
    virtual BOOL InitInstance();
    //{{AFX_VIRTUAL
// Implementation
//{{AFX_MSG(CDMotionApp)
afx_msg void OnAppStart();
// NOTE - the ClassWizard will add and remove
// DO NOT EDIT what you see in these
MSG
    
```

Requirements

Design Models

Code

Design should play a pivotal role:

- *Clarify and refine requirements*
- *Early defect detection and elimination*

The Nature of Design

- A creative process involving:
 - Multiple perspectives (models)
 - Multiple layers of abstraction (models)
- An evolutionary process involving:
 - Incremental developments
 - Backtracking over designs
 - Requirements reformulation, elaboration and volatility

Process

- **Architectural design**: deciding on the subsystems and their relationships
- **Subsystem design**: provide an abstract specification for each subsystem
- **Interface design**: define the interface for each subsystem
- **Component design**: decomposition of subsystems into components
- **Data structure design**: data structuring decisions
- **Algorithm design**: algorithmic decisions

Strategies

- Two broad strategies for tackling software design
- **Function-oriented design:**
 - Software is structured around a centralized system state
 - System state is shared between a collection of **functions** (subroutines)
- **Object-oriented design:**
 - Software is structured around a collection of **objects**, where each object is responsible for its own state
 - Object organized into a class hierarchy, exploiting inheritance

Quality

- Cohesion:

- A measure of how well the parts of a component fit together, *i.e. how functionally related the parts are*
- For example, strong cohesion exists when all parts of a component contribute different aspects of related functions
- Strong cohesion promotes understanding and reasoning, and thus provides dividends with respect to maintenance and reuse via **separation of concerns**
- Cohesion provides a measure as to how self-contained an object class is – however, inheritance reduces cohesion

Quality

- Coupling:

- A measure of how strongly components are interconnected
- Tightly coupled components share data (common coupling) or exchange control information (control coupling)
- Loose coupling is achieved by not having shared data, or at least restricting access, *e.g. data communicated by parameters*
- Loose coupling promotes **separation of concerns**
- Object-oriented design promotes loose coupling, however, inheritance increases coupling, *i.e. a class is coupled with its super-class*

Quality

- Understandability:
 - Understandability of a design is very important for maintenance and change
 - Cohesion, coupling and complexity impact on the understandability of a design
- Adaptability:
 - Understandability, strong cohesion and loose coupling enhance the adaptability of a design
 - Traceability is also an important ingredient, *i.e. traceability between design representations as well as between requirements, design and code*


The Cost of Failure

- Consider converting 64-bits of data into 16-bits:

Arithmetic Overflow Error




The Cost of Failure

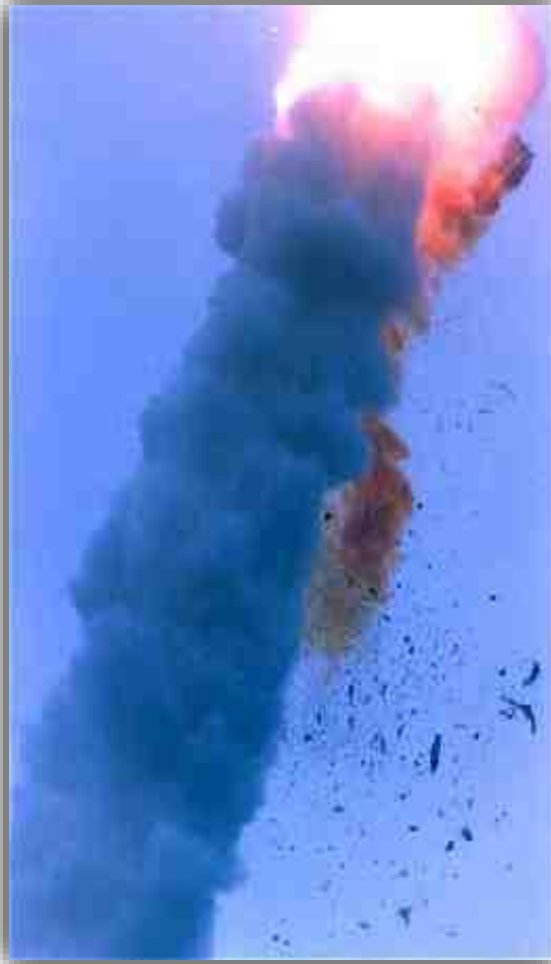

Ariane 5


- Developed by European Space Agency
- Unmanned rocket with a cargo of scientific satellites (\$500 million)
- In 1996, just 39 seconds into its maiden flight an overflow error occurred resulting the Ariane 5 control software initiating a *self-destruction operation!*

The Cost of Failure

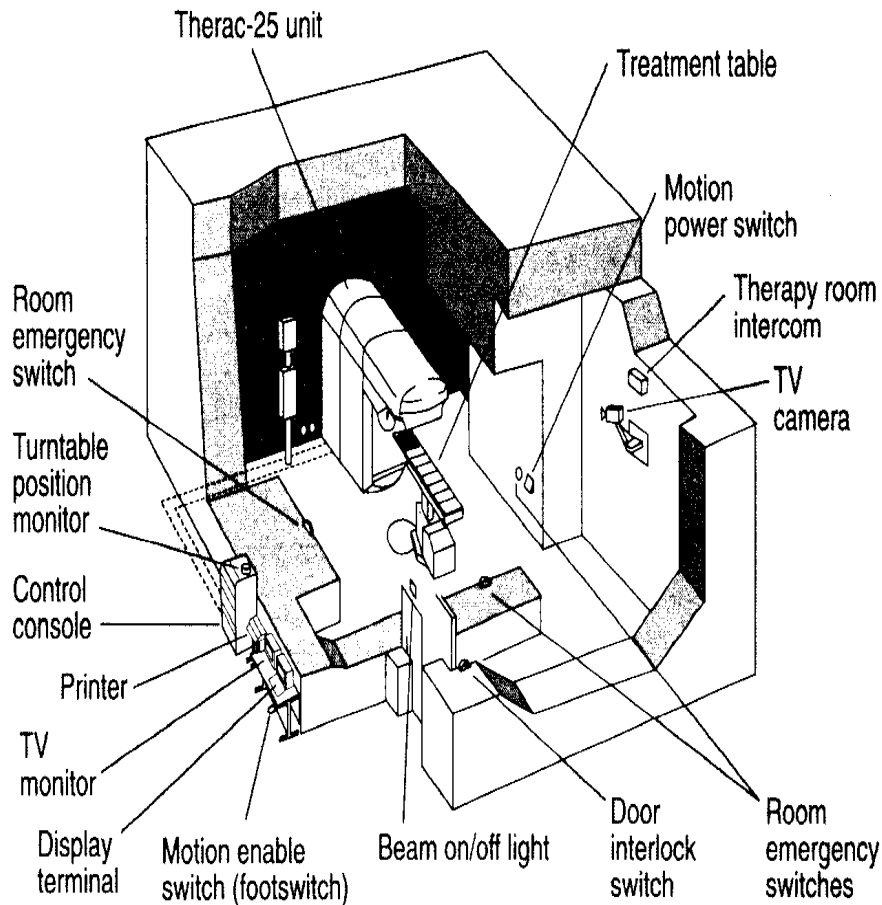

Therac-25: a computer-controlled radiation therapy machine, built by Atomic Energy of Canada Ltd (AECL) used in US and Canadian hospitals & clinics during the 1980's. The Therac-25 was the successor to the Therac-6 and Therac-20 models. Unlike its predecessors the Therac-25 relied more on software control mechanisms

The Cost of Failure

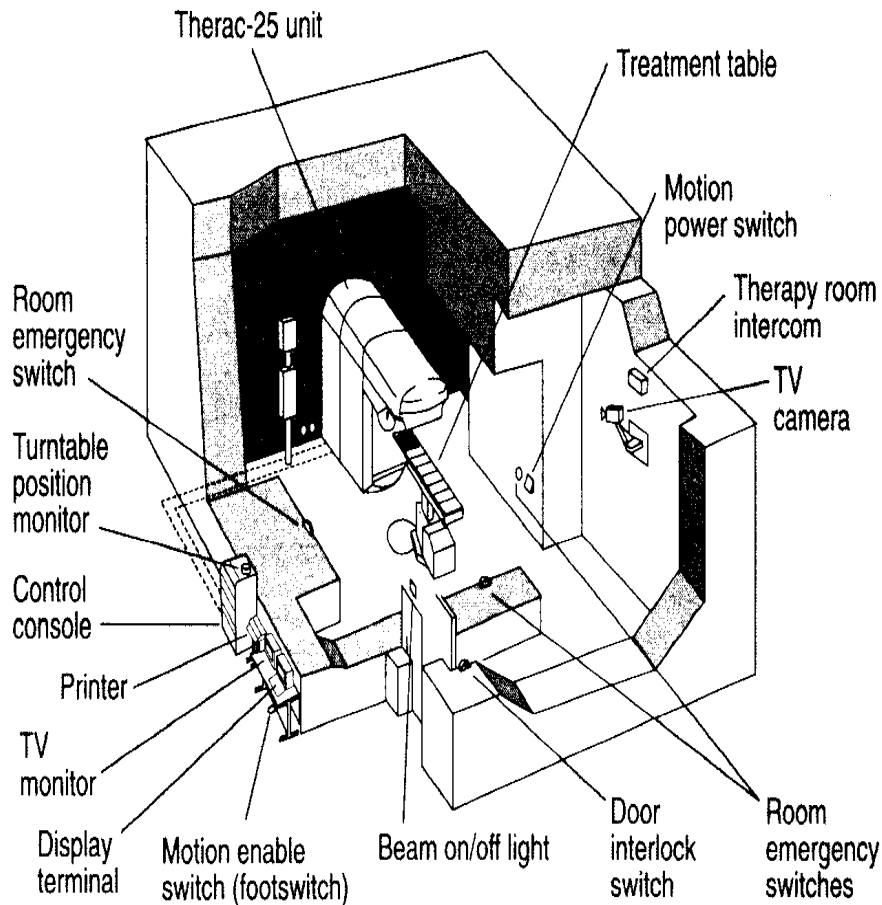

- Therac-25 delivers two kinds of electron beams: **low energy** and **high energy**.
- A raw high energy beam is dangerous to living tissue so magnets are used to spread the beam energy so as to produce a safe therapeutic concentration.

The Cost of Failure

- Among the parameters a Therac-25 operator was able to set are the beam energy levels & beam modes. The latter effects the setting of the magnets.
- Operators have two ways of setting the system parameters:
 - data entry procedure
 - screen based editing
- A problem arose when the values established via the data entry procedure are edited during the magnet set-up phase, *i.e. screen display did not reflect actual settings.*

The Cost of Failure

- This problem resulted in high-powered electron beams striking patients with 100 times (approx) the intended dose of radiation
- Several patients showed the symptoms of radiation poisoning, 3 patients died later from radiation poisoning
- Aside: Therac-25 (March 1983) excluded the possibility of software defects since ***extensive testing had been undertaken!***

Course Road-Map

- Architectural design
- Function-oriented design
- Object-oriented design
- Component-based design
- Verification and Validation
- Dynamic Analysis (CS)
- Unit Testing & JUnit (CS)
- Static Analysis (CS)

Summary

- Learning outcomes:
 - Motivations for software design
 - The nature of software design – *process, strategies and quality*
- Recommended reading:
 - D. Budgen, “Software Design”, Addison-Wesley 2003
 - I. Sommerville, “Software Engineering”, Addison-Wesley 2007
 - F.P. Brooks, “No Silver Bullet: Essence and Accidents of Software Engineering”, IEEE Computer, 1987

Overview

What is a model?

Why software modeling?

What to model?

How to obtain a model?

Why modeling?

- Modeling is a tool for design, verification and testing
- Modeling and simulation
- Not only software, but any systems
- address more challenging problems, such as parallel computing and distributed systems.

Why Software Modeling?

- Schedule and divide tasks
- Collaboration and communication (contract)
- Decomposing complexity for coding
- Checking for software (correctness, security)
- Refactoring code
- Reuse and automatic coding


.....

Other Questions


- Is Software modeling in real use?
- What about process development modeling?
- Modeling in Agile?

What is a model?

- Engineering model: abstraction
A reduced representation of some system that highlights the properties of interest from a given viewpoint

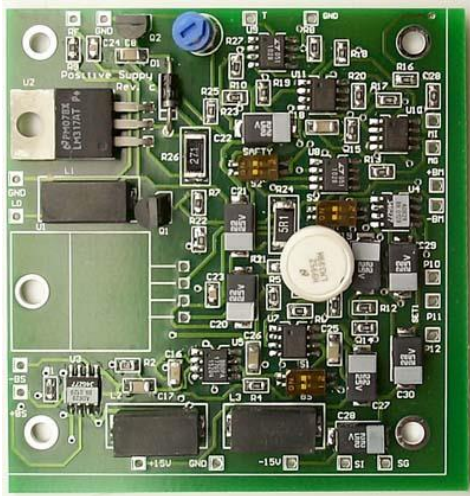

system

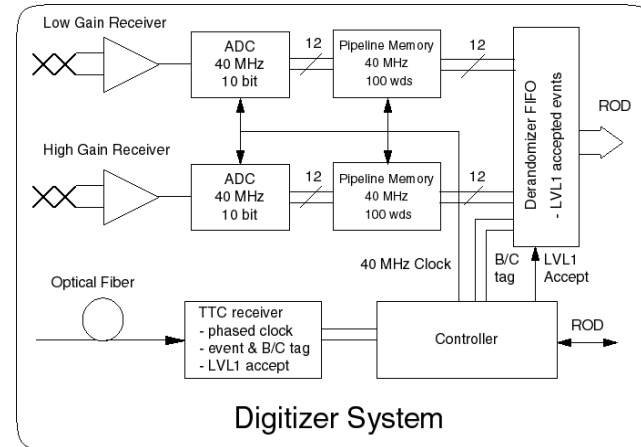


Functional Model

- ◆ We don't see everything at once
- ◆ We use a representation (notation) that is easily understood for the purpose on hand

Intuitive Understanding

- A *model* is a description of something
 - “a pattern for something to be made” (Merriam-Webster)

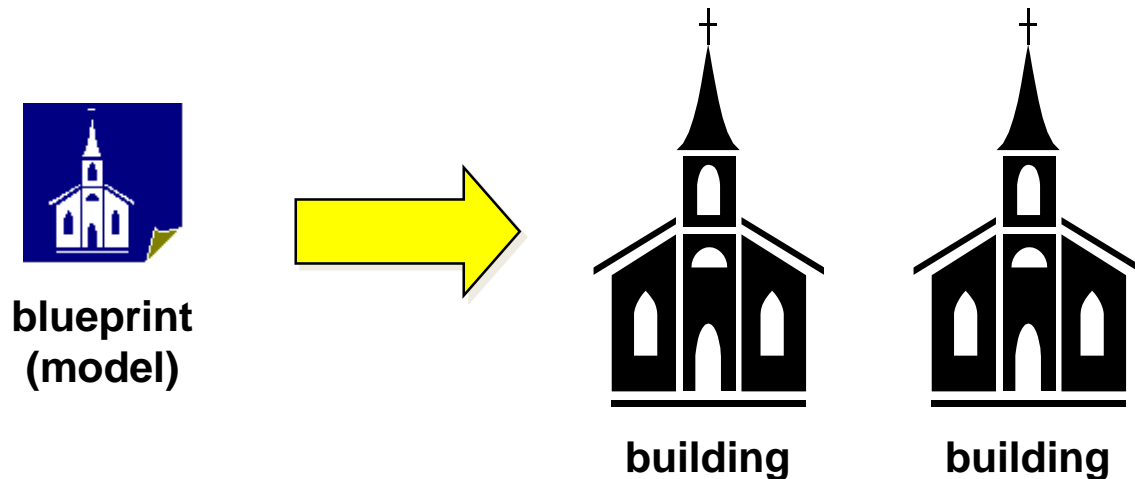

- model \neq thing that is modeled
 - The Map is Not The Territory

Levels of Abstraction and Reasons

- Business model
 - Requirement
 - Design and Algorithm
 - Architecture
 - Code
-
- Tracibility

Modeling Maturity Level

- Level 0: No specification
- Level 1: Textual
- Level 2: Text with Diagrams
- Level 3: Models with Text
- Level 4: Precise Models
- Level 5: Models only

What to Model?

- Structures, Behaviors, Requirement

- Overall architecture of the system
- System dependencies
- Complexity
- Flow of information through a system
- Business requirements
- Database organization and structure
- Security features (attack models)
- Configuration and environment

....

How to Obtain Models?

- Manually construct
- Automatically transform from one model to another
- Automatically recover from the code

.....

Challenges

Create Software Models

- Modeling languages:
https://en.wikipedia.org/wiki/Modeling_language
 - General purpose and domain-specific languages
 - Formalism
 - Level of abstraction
- Models for software running in different platforms
 - Model-driven architecture
 - Views: PIM (computation), CIM (environment), PSM
- Models for software consistently changing at runtime (agent)
- Modularity, separate concerns

Manage Software Models

- Find information from the models (query)
- Correctness of the models:
 - Model consistencies
 - Model checking models
- Transformations
 - Decomposition
 - Composition
 - Between models
- Evolutions of models

Use Software Models

- Generate code
- Monitor runtime software behavior
(interacting with environments, adaptation)
- Testing (model-based testing criteria and test input generation)

UML Modeling - Overview

UML Modeling

- A language: syntax and semantics
- Capture ideas, relations, decisions, requirements in a well-defined notations

AgileData.org: ... all developers should have a basic understanding of the industry-standard [Unified Modeling Language \(UML\)](#). A good starting point is to understand what I consider to be the [core UML diagrams](#) – [use case diagrams](#), [sequence diagrams](#), and [class diagrams](#) – although as I argued in [An Introduction to Agile Modeling and Agile Documentation](#) you must be willing to learn more models over time.

UML Diagrams

- Structural : relations of objects (class diagram, component diagram)
- Behavioral : sequence of actions (activity diagram, sequence diagram)

סיכום

- הקורס
- מבוא
 - מוטיבציה
 - מידול
- UML