

Cast Vote Records and Ranked-Choice Counting

A congressional election recounted from the ballots themselves, and what the winner's majority is a majority of

Democracy's Data

Last updated 31 August 2026

An election result is a set of totals, because the ballot is secret and a total is what remains once the ballots are put away. Alaska does not put them away. Since adopting ranked-choice voting, the state has published its **cast vote record**: one row per scanned ballot, showing every ranking the voter marked. No name and no address, but the actual choices, one ballot at a time. Nothing else in American election data comes this close to the individual act.

The claim you have heard about ranked-choice voting is its promise: rank as many candidates as you like, support your real first choice, and the eventual winner will hold a majority. Every part of that is checkable against the ballots of one congressional election.

What does a ballot-level record let you see that no total can — and when the winner's majority arrives, what is it a majority of?

01 The test

The contest is the November 2024 race for Alaska's single seat in the U.S. House: Mary Peltola, the Democratic incumbent, against Nick Begich, with two minor candidates. The data is the State of Alaska, Division of Elections cast vote record for that election, the JSON export the state's voting equipment writes, published at a stable address (<https://www.elections.alaska.gov/results/24GENR/>). Beside it sits the state's official round-by-round report, a PDF, typed into tables by hand and used below to grade a recount.

Why this source, of all sources: it is the bottom rung of the ladder of election data, the only public American election file in which a row is one ballot. The levels-of-aggregation chapter walks that ladder rung by rung. Everything this brief measures (how many rankings voters used, which candidates shared a ballot, where eliminated candidates' votes went) is a property of single pieces of paper. A total has already destroyed it.

02 The data

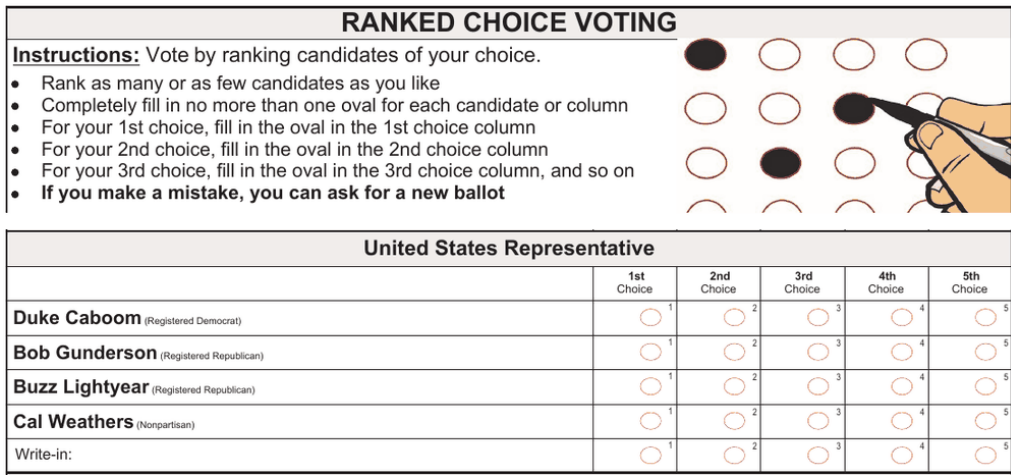


Figure 1. The instrument: Alaska’s own demonstration ranked-choice ballot, cropped to the instructions and the House contest. Candidates run down the side, ranking columns across, and the offer sits at the top: rank as many or as few as you like. Every row of the file below is one of these grids, flattened. State of Alaska, Division of Elections, retrieved 10 August 2026.

The export is large and raw: 2,028 ballot files, 1.58 GB uncompressed, one session per scanned ballot, with marks nested inside contests nested inside cards. One session is kept verbatim in this brief’s data, with four identifying fields masked. Its envelope:

Field	Value
TabulatorId	MASKED
BatchId	MASKED
RecordId	MASKED
CountingGroupId	1
ImageMask	MASKED
SessionType	ScannedVote
VotingSessionIdentifier	
UniqueVotingIdentifier	
Original.PrecinctPortionId	MASKED
Original.BallotTypeId	37
Original.IsCurrent	true
...	13 contests on this ballot, one after another

The ballot carries 13 contests and this brief wants one. Here it is, complete:

Field	Value
Id	7

Field	Value
ManifestationId	662
Undervotes	0
Overvotes	0
Marks.CandidateId	517
Marks.ManifestationId	5017
Marks.PartyId	15
Marks.Rank	1
Marks.MarkDensity	98
Marks.IsAmbiguous	false
Marks.IsVote	true
Marks.OutstackConditionIds	[]
CandidateId	552
ManifestationId	5023
PartyId	7
Rank	2
MarkDensity	92
IsAmbiguous	false
IsVote	true
OutstackConditionIds	[]
CandidateId	520
ManifestationId	5025
PartyId	3
Rank	3
MarkDensity	92
IsAmbiguous	false
IsVote	true
OutstackConditionIds	[]

Nothing in that record is readable on its own. `CandidateId` is a number whose meaning lives in a separate file, `CandidateManifest.json`, listing 209 candidates across every contest:

Rank	CandidateId	Who that is
1	517	Begich, Nick
2	552	Hafner, Eric
3	520	Howe, John Wayne

Turning 2,028 such files into a table took five judgments, each a rule somebody chose. **Keep one contest** of the 13 on each ballot. **Believe IsVote, not the ink**: each mark carries its darkness (`MarkDensity`) and the scanner's verdict, and the build takes the verdict

rather than second-guessing it with its own threshold. **Decide what two marks in one column mean:** the build writes `OVERVOTE` at that rank, then sorts the ranks and closes single gaps. Alaska's tabulator applies further rules about skipped ranks that this reconstruction does not, and that honest difference is measured below. **Translate numbers into names** through the manifest.

Then destroy what is left. Ballots with identical rankings are collapsed to one row with a count, and precinct and tabulator identifiers are dropped before anything reaches disk. That last step is for privacy, not tidiness. A record with no name on it is not the same as a record nobody can identify; a distinctive ranking in a small precinct can narrow down who cast it. The collapse cannot be run backwards, which is the point of it.

What ships is three tables. `sequences.csv` has one row per distinct ranking: a `ballots` count, then `rank1` through `rank4`, one candidate name per column the voter used. `official_rounds.csv` holds the state's votes per candidate per round, and `official_transfers.csv` records where each eliminated candidate's ballots were `transferred_to` — both typed from the PDF report. The single ballot above becomes one line among 926:

Ballots	1st ranking	2nd ranking	3rd ranking
593	Begich, Nick	Hafner, Eric	Howe, John Wayne

And the commonest lines in the file are the shortest ones:

Ballots	1st ranking	2nd ranking	3rd ranking
121,602	Begich, Nick		
86,278	Peltola, Mary S.		
17,294	Peltola, Mary S.	Hafner, Eric	
12,205	Begich, Nick	Howe, John Wayne	
10,674	Peltola, Mary S.	Hafner, Eric	Howe, John Wayne

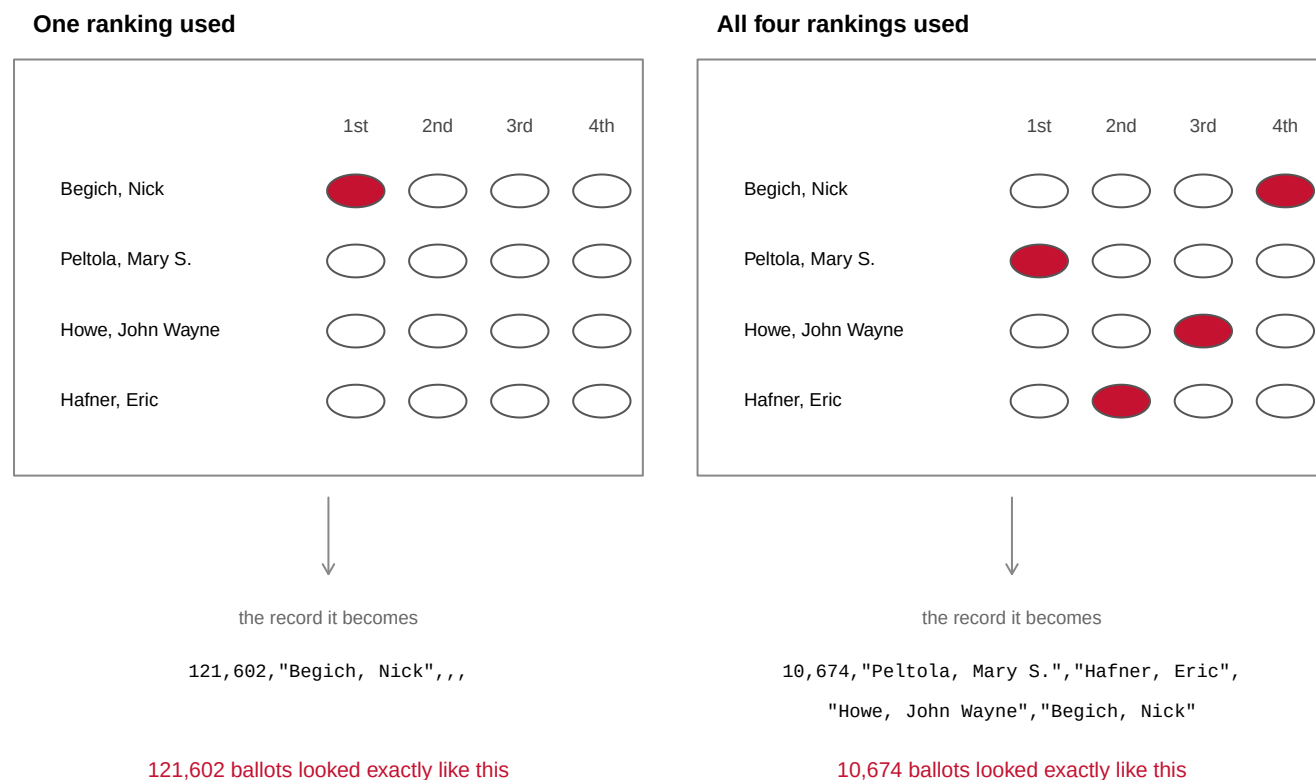


Figure 2. Two ballots, and the two records they become. On the left, the commonest marked grid in the election: one ranking used, 121,602 ballots identical to it. On the right, the commonest grid that used all 4 columns, cast 10,674 times. Everything a cast vote record knows about a voter is the few characters underneath each grid.

Before you read on, commit to two answers. Alaska's ballot offered 4 rankings. First: **what share of the voters in this race used exactly one?** Second: **whose supporters stop after one ranking more often** – the front-runner's, or the smallest candidate's? Write both down.

03 What it says about democracy

Quantity	Value
Ballots in the cast vote record	340,778
Distinct ranking sequences any Alaskan produced	926
Ballots per distinct sequence, on average	368
Sequences used by exactly one ballot	363

340,778 ballots collapse to 926 distinct patterns, and most voters used one of the first few:

Candidates ranked	Ballots	% of all ballots
0	10,150	3.0
1	215,501	63.2
2	48,026	14.1
3	18,995	5.6
4	40,409	11.9
5	7,697	2.3

Set aside 10,150 ballots that left this contest blank. Of the 330,628 that voted in it, 215,501 ranked exactly one candidate: 65.2%. **Given 4 rankings, two-thirds of Alaskans used one.** Neither the system's advocates nor its opponents advertise that number. Hold the obvious explanation, a confusing ballot, because the file can test it, and the test comes out the other way.

First, the count. Instant-runoff fits in three sentences. Count everyone's top continuing choice. If nobody has a majority, eliminate the lowest candidate and read those ballots' next choice. Repeat.

Round	Continuing ballots	Leader	Leader's %	Eliminated after this round
1	330,018	Begich, Nick	48.39	Write-in
2	329,614	Begich, Nick	48.49	Hafner, Eric
3	328,300	Begich, Nick	48.76	Howe, John Wayne
4	322,000	Begich, Nick	51.22	—

Begich, Nick wins with 51.22% — a congressional election recounted from the ballots as this page renders. Now check it against the state:


Round	Candidate	Official votes	Official %
Round 3	Begich, Nick	164,861	51.22
Round 3	Peltola, Mary S.	156,985	48.78

Quantity	Value
Ballots continuing in our final round	322,000
Ballots continuing in the state's final round	321,846
Difference	154
As a share of the count	0.048%

The percentages match Alaska's official result to two decimal places. The counts do not: this recount carries 154 more ballots into the final round, because the state's tabulator applies printed rules about write-ins, skipped ranks and overvotes that the three-sentence version does not. **The rules are not in the data. They live in a separate document, and they change the count** — here by 0.048%, in a closer race by the winner.

Eliminated candidate	Transferred to	Ballots
Hafner, Eric	Begich, Nick	267
Hafner, Eric	Howe, John Wayne	661
Hafner, Eric	Peltola, Mary S.	1,313
Hafner, Eric	Exhausted	1,300
Hafner, Eric	Overvotes	17
Howe, John Wayne	Begich, Nick	4,817
Howe, John Wayne	Peltola, Mary S.	2,724
Howe, John Wayne	Exhausted	6,295
Howe, John Wayne	Overvotes	35

When John Wayne Howe was eliminated, his 13,871 ballots split, and the largest single destination was **nowhere**: 6,295 of them, 45.4%, were exhausted, because those voters had ranked nobody else. Their ballots left the count before the decisive round. That is the trade at the heart of ranked-choice voting: it lets you express more than one preference, and it does not make you.

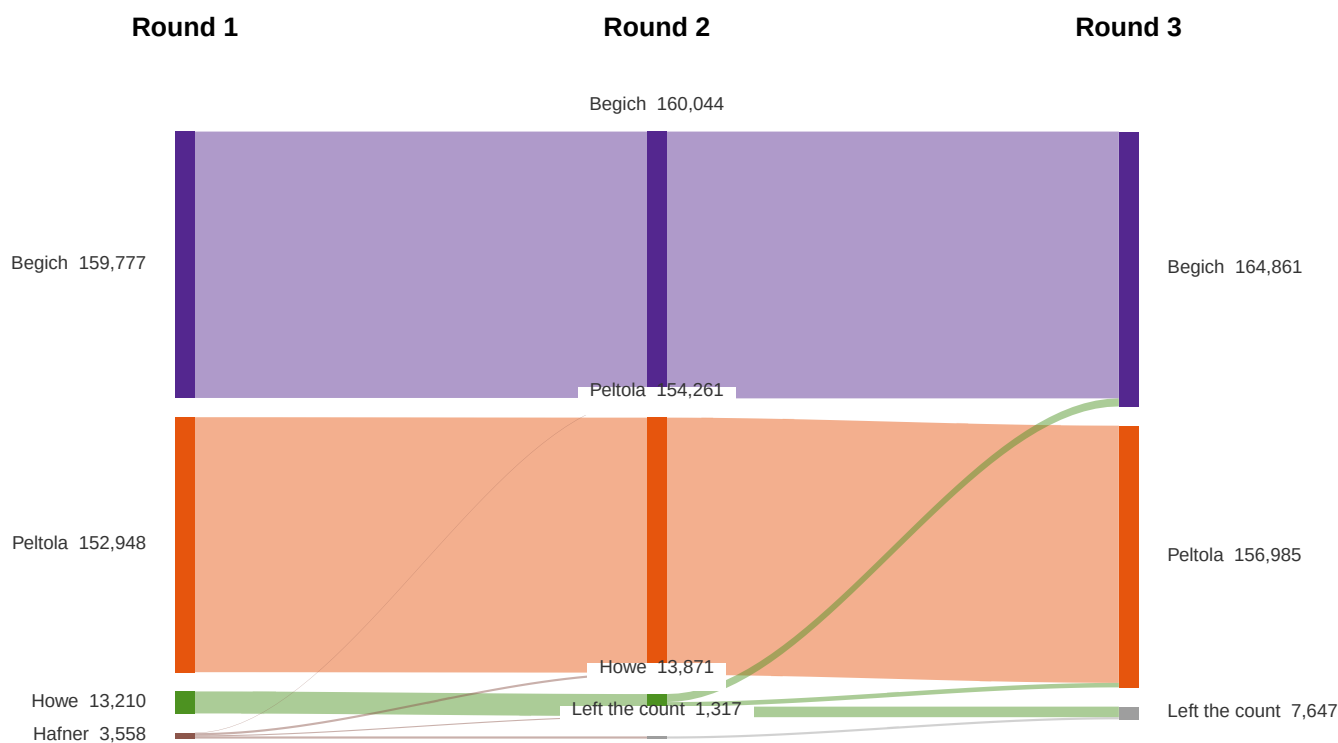

Alaska's official rounds, all to the same scale. The gray band is 7,647 ballots (2.3% of 329,493) that ran out of rankings: 7,595 exhausted plus 52 overvotes.

Figure 3. Alaska's official count, all three rounds drawn to one scale. A flow of bands, because the count is a process: each column is a round, each band is ballots moving to the next. Every band is drawn to the same scale, so the gray one is exactly as wide as it truly is. The gray band is the 7,647 ballots that leave: 2.3% of the 329,493 that started, made of 7,595 exhausted ballots plus 52 overvotes.

Two smaller things only ballot-level data can show. 17,434 ballots ranked one major candidate first and the other second — 5.3% of everyone who voted in the race, one voter in

twenty taking the cross-divide offer the system is supposed to reward:

First ranking	Second ranking	Ballots
Peltola, Mary S.	Begich, Nick	10,771
Begich, Nick	Peltola, Mary S.	6,663

And 3,790 ballots named the same candidate twice; the tabulator skips the duplicate, the ballots count normally, and no total would ever show the behavior:

Candidate named at both rank 1 and rank 2	Ballots
Begich, Nick	2,455
Peltola, Mary S.	1,049
Howe, John Wayne	147
OVERVOTE	90

Now the prediction. If two-thirds of voters stopping after one ranking is confusion, the rate should be roughly flat across candidates, because confusion has no reason to prefer a front-runner. Split the bullet voters by who they ranked first:

First choice	Voters	% who ranked only that candidate
Begich, Nick	159,703	76.1
Peltola, Mary S.	152,887	56.4
Howe, John Wayne	13,146	43.4
Hafner, Eric	3,537	35.4

76.1% of Begich's voters ranked nobody else, against 35.4% of Hafner's, and the rate falls cleanly with candidate size. That is not confusion's flat signature. It is arithmetic voters appear to have done. If your candidate is the front-runner, a second ranking will almost never be read. If your candidate polls at one percent, the second ranking is the only part of your ballot that will do anything.

A second reading, which this file cannot rule out, is campaign instruction — “rank one and stop” is a documented tactic. Either way the conclusion is the same: **these ballots show the campaigns' strategies, not just the voters' preferences.**

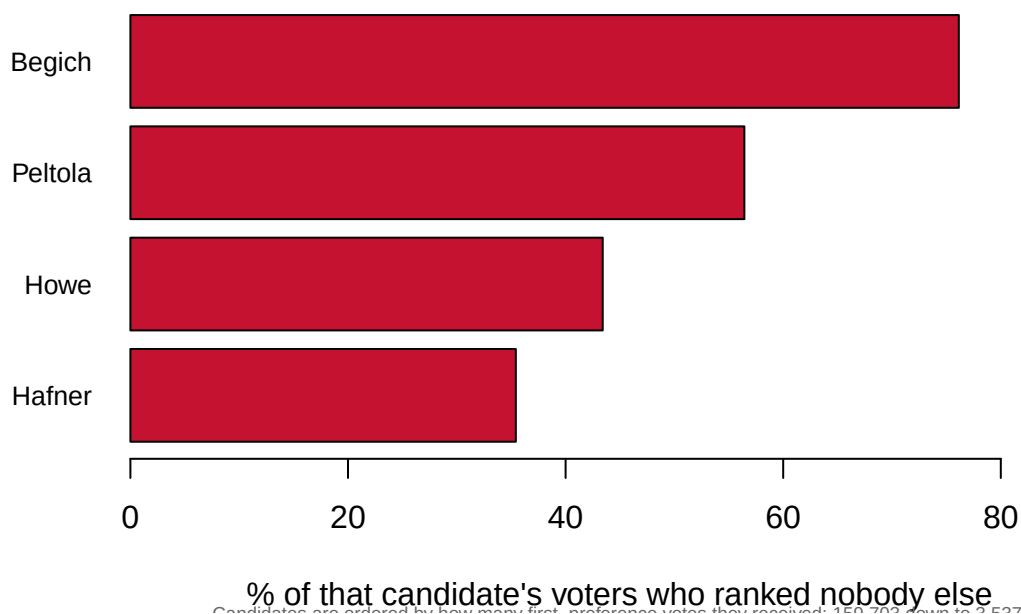


Figure 4. Bullet voting is not spread evenly across candidates. One bar per candidate, ordered by first-preference votes (159,703 down to 3,537), because the claim is a gradient and ordered bars make it visible at a glance. The share who ranked nobody else falls from 76.1% to 35.4%.

Which leaves the finding in the subtitle:

Quantity	Value
Ballots in the cast vote record	340,778
Continuing in our first round	330,018
Continuing in the final round	322,000
Winner's final-round total	164,935
As a share of continuing ballots	51.22%
As a share of all ballots cast	48.4%

The winner's 51.22% is a majority of the 322,000 ballots still in the count, not of the 340,778 people who cast one. Measured against every ballot, the figure is 48.4% — a plurality. The majority is partly manufactured by shrinking the denominator, the bottom number the winner's votes are divided by, and Burnett and Kogan (2015) found the same shrinkage across four earlier ranked-choice elections. The fair answer is a question: what would the alternative denominator mean? Under plurality the winner's share here would also have sat under half, with no second round for anyone's ballot to survive into, and a voter who declines to rank anyone else has made a choice. Figure 4 says those voters were disproportionately the ones with the least to gain from a second ranking.

04 What this brief cannot tell you

It is not the certified count. Alaska says so plainly: ballots counted by hand are not in the export and write-in names are not resolved, so 340,778 is not this contest's official turnout.

It holds choices, not reasons. Whether bullet voting is a calculation voters made or an instruction they followed cannot be separated from these rows; that would take survey data, and the ballot's anonymity is deliberate. Where surveys exist, Donovan, Tolbert and Gracey (2016, 2019) find ranked-choice voters mostly say they understand the system, which also cuts against the confusion reading. No demographics attach to any ranking.

It is one race, in one state, in one year – a state that adopted ranked-choice voting by initiative, whose voters are not a sample of anything. Whether the system changes who runs and how they campaign is a question about candidates, not ballots.

And the file cannot say who cast what. The published collapse to 926 sequences was chosen so that it cannot be undone, which protects voters and closes some questions permanently.

05 What you should have learned

- A cast vote record is the only American election data where a row is a ballot: 340,778 ballots collapse to 926 distinct ranking patterns, and 65.2% of voters used exactly one of 4 offered rankings.
- The ballots do not count themselves. A three-sentence recount reproduces Alaska's official percentages to two decimals while differing by 154 ballots, because the binding rules live in a document, not in the data.
- 7,647 ballots (2.3% of the count) left before the decisive round: 7,595 exhausted plus 52 overvotes.
- Bullet voting runs from 76.1% among the front-runner's voters to 35.4% among the smallest candidate's: a gradient that fits strategy or instruction, not confusion.
- The winner's 51.22% majority is a majority of continuing ballots; of all ballots cast, it is 48.4%.

06 Extensions

None of these is answered above, and every one can be answered from the tables the Sources section hands over.

- `sequences.csv` has one row per distinct ranking with a `ballots` count. Count the ballots whose `rank1` and `rank2` name different parties' candidates. How porous was the partisan divide, really?
- `sequences.csv` again: find the sequences containing `OVERVOTE`. How many ballots carried one, and at which rank do overvotes cluster?
- `official_transfers.csv` records where each eliminated candidate's ballots went. Compare the destinations against what the parties involved would predict. Were any transfers surprising?
- `official_rounds.csv` shows the count at each stage. Work out who led in round one and who won. Then decide whether the first-round leader has a complaint.

Two stretch ideas point past the spreadsheet. Maine and several cities publish cast vote records for their own ranked-choice races; fetch one and compute its exhaustion rate against Alaska's 2.3%. And compare both against the four elections in Burnett and Kogan (2015): is exhaustion shrinking as voters gain experience with the system?

07 Sources

Data

- State of Alaska, Division of Elections, 2024 General Election **cast vote record**, published as a Dominion JSON export. <https://www.elections.alaska.gov/results/24GENR/>
- Official round-by-round results and transfer detail from the state's **RCV Detailed Report**, <https://www.elections.alaska.gov/results/24GENR/RCV-USRep.pdf>
- The ballot in Figure 1 is the State of Alaska's own **sample ranked-choice ballot**, retrieved 10 August 2026. <https://www.elections.alaska.gov/doc/GenRCVsampleBallot11.9.21.pdf>
- The committed file contains no individual ballots: 340,778 records were collapsed to 926 ranking sequences with counts, and precinct and tabulator identifiers were dropped, before anything was saved.

The data itself

Every figure above is drawn from these tables. They are plain CSV, they open in a spreadsheet, and they are yours to take further.

`official_rounds.csv`, `official_transfers.csv`, `sequences.csv`

Academic literature

- Burnett, C. M. and Kogan, V. (2015). "Ballot (and Voter)'Exhaustion' Under Instant Runoff Voting: An Examination of Four Ranked-Choice Elections." *Electoral Studies* 37: 41-49.
- Donovan, T., Tolbert, C. and Gracey, K. (2016). "Campaign Civility Under Preferential and Plurality Voting." *Electoral Studies* 42: 157-163.
- Donovan, T., Tolbert, C. and Gracey, K. (2019). "Self-Reported Understanding of Ranked-Choice Voting." *Social Science Quarterly* 100(5): 1768-1776.

REBUILD THIS DATA YOURSELF, WITH AN AI ASSISTANT

I want to rebuild a public dataset from its original source, without any starting files. Please do the following and show your work.

THE SOURCE. State of Alaska, Division of Elections, cast vote record export for the 2024 general election:

https://www.elections.alaska.gov/results/24GENR/CVR_Export_20241130154411.zip

No account or key is needed. The zip is about 44 MB and expands to about 1.58 GB of JSON. Inside, one "session" per scanned ballot, each

carrying cards, contests, and marks; every mark names a candidate and a rank. The U.S. Representative contest carries the Id 7, and a manifest file inside the zip maps candidate Ids to names. This is the closest thing to a public record of individual votes that exists in the United States. The state's own round-by-round result for the same race is a small PDF beside it, RCV-USRep.pdf, on the same site. Two warnings from Alaska itself: ballots counted by hand are not in the export, and write-in names are not shown, so the file will not reproduce the certified totals exactly – and is not supposed to.

HOW TO FETCH IT. The download itself is plain. The size is the difficulty:

read the JSON files one at a time from inside the zip rather than expanding all of it into memory at once.

WHAT TO BUILD.

1. Every ballot's ranking in the U.S. Representative race, collapsed to distinct ranking sequences with a count of how many ballots cast each. Nothing identifying any voter survives the collapse.
2. Your own instant-runoff count from those sequences, eliminating the last-place candidate each round, next to the state's official round-by-round result.

CHECK YOUR WORK. The copy this book used was fetched in August 2026.

If your rebuild matches it, you should find:

- 2,043 JSON files of ballots inside the archive
 - 340,778 ballots rank someone in this race, collapsing to 926 distinct ranking sequences
 - the official final round: Begich 164,861 votes to Peltola's 156,985 – 51.22 against 48.78 percent
 - your own count reproduces those percentages exactly, while the raw vote counts sit about 150 ballots apart in 322,000; the official tabulator applies exhaustion rules the simple count does not
- This is an archived election, so the file should not change; the timestamp in its name would change if the state ever reposted it.