

# ESPN Page


[https://www.espnqa.com/?src=com&\\_adblock=true&espn=cloud](https://www.espnqa.com/?src=com&_adblock=true&espn=cloud)

## Log In procedure

### Main Page


<User button> - <a href="#" id="global-user-trigger">Log In</a>

Selector: #global-user-trigger

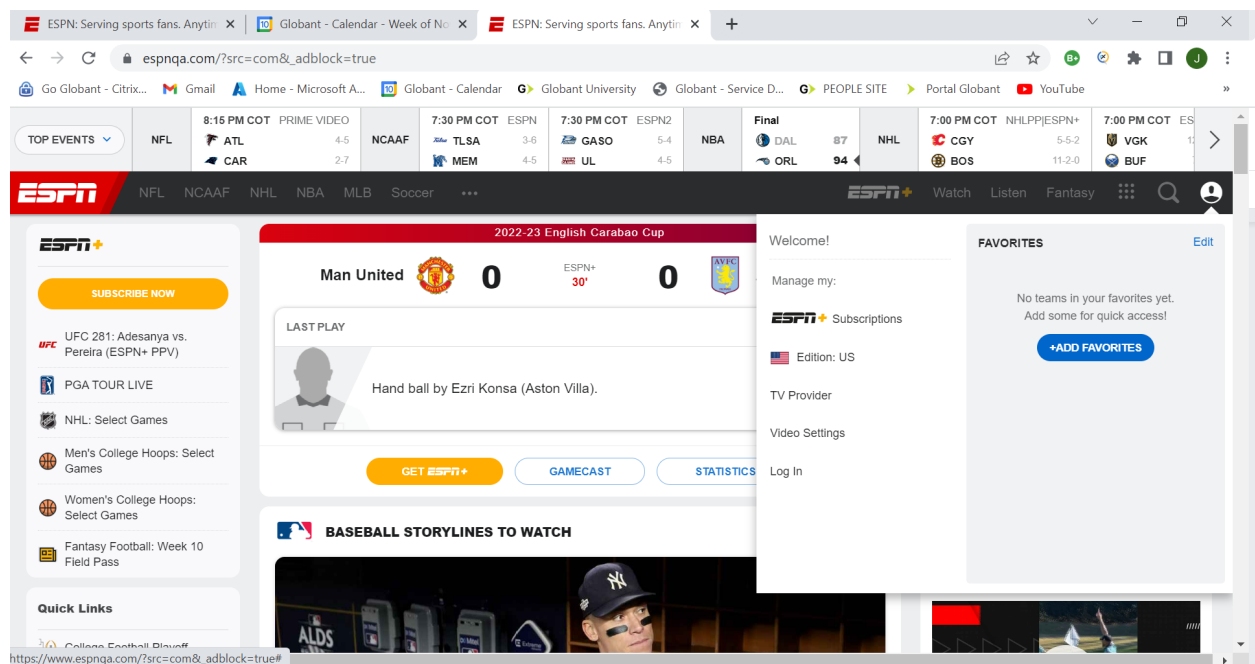






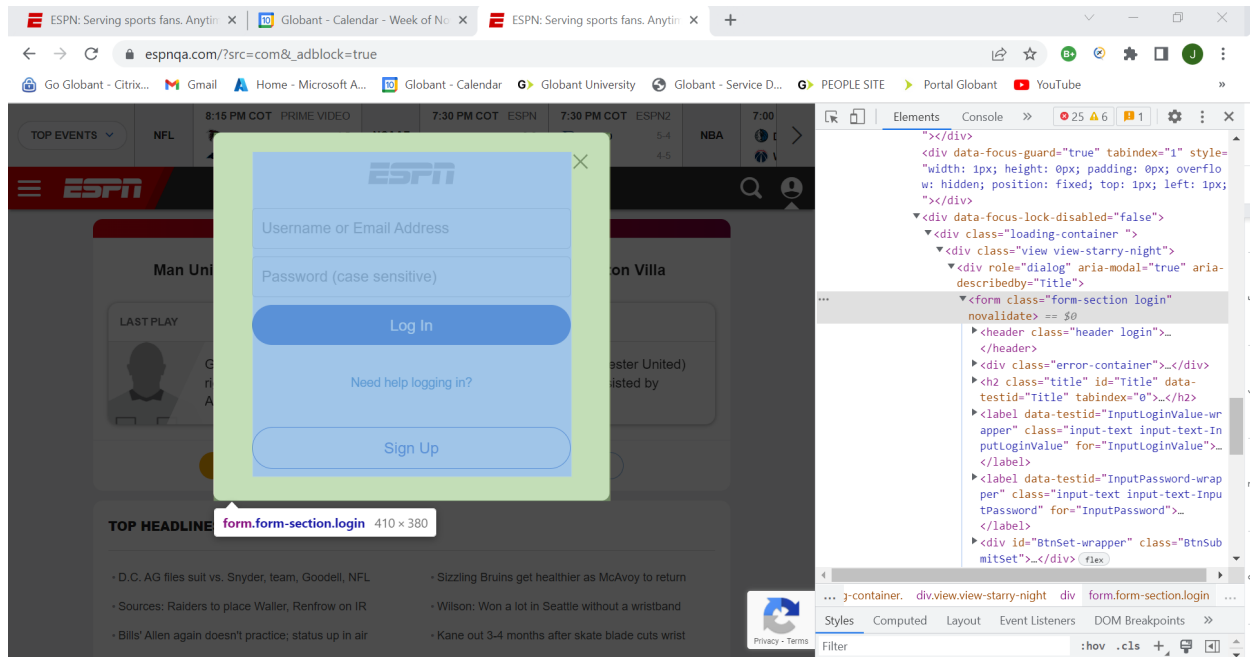

## Log In Form

<Username or Email Address form division> - <id="InputLoginValue">  
Selector: #InputLoginValue

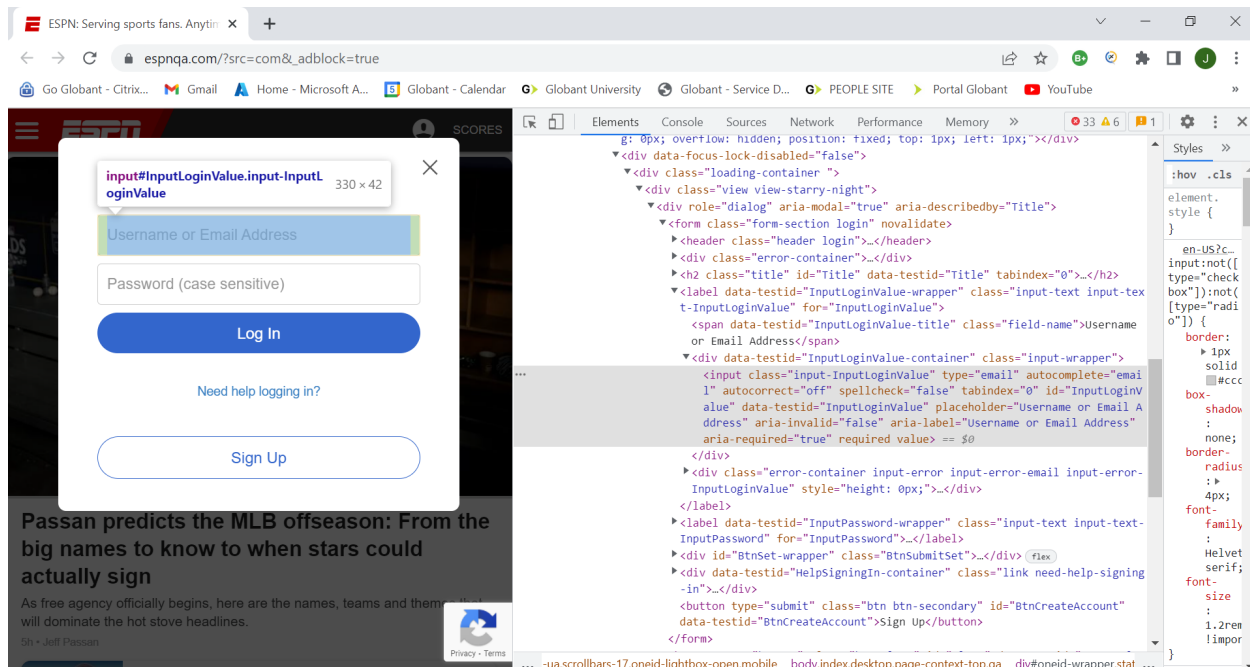

## Log In Form

<Password form division> - <id="InputPassword">

Selector: #InputPassword

The screenshot shows a web browser window displaying the ESPN login page. The URL is `espnqa.com/?src=com&_adblock=true`. The login form is a modal dialog with the ESPN logo at the top. It contains two input fields: "Username or Email Address" and "Password (case sensitive)". The password field is highlighted with a blue selection bar. An accessibility inspector is open over the password field, showing the following details:

- Element: `input#InputPassword.input-InputPassword` (330 x 42)
- Background: ☐ #FFFFFF
- Padding: 0px 9px
- ACCESSIBILITY:
  - Name: Password (case sensitive)
  - Role: textbox
  - Keyboard-focusable: ☒

The browser's developer tools are open on the right, showing the DOM tree. The selected element is the password input field, with the following HTML structure:

```
<input class="input-InputLoginValue" type="email" autocomplete="email" autocorrect="off" spellcheck="false" tabindex="0" id="InputLoginValue" data-testid="InputLoginValue" placeholder="Username or Email Address" aria-invalid="false" aria-label="Username or Email Address" aria-required="true" required value>
</div>
<div class="error-container input-error input-error-email input-error-InputLoginValue" style="height: 0px;">...</div>
</label>
<label data-testid="InputPassword-wrapper" class="input-text input-text-InputPassword" for="InputPassword">
  <span data-testid="InputPassword-title" class="field-name">Password (case sensitive)</span>
  <div data-testid="InputPassword-container" class="input-wrapper">
    <input class="input-InputPassword" type="password" autocomplete="current-password" autocorrect="off" spellcheck="false" tabindex="0" id="InputPassword" data-testid="InputPassword" placeholder="Password (case sensitive)" aria-invalid="false" aria-label="Password (case sensitive)" aria-required="true" required value="">
    </div>
    <div class="error-container input-error input-error-password input-error-InputPassword" style="height: 0px;">...</div>
  </label>
  <div id="BtnSet-wrapper" class="BtnSubmitSet">...</div>
  <div data-testid="HelpSigningIn-container" class="link need-help-signing-in">...</div>
  <button type="submit" class="btn btn-secondary" id="BtnCreateAccount">...</button>
```

## Log In Form

<Log in button> - <id="BtnSubmit">

Selector: #BtnSubmit


The screenshot displays the ESPN website's login form. The form is a white modal box with the ESPN logo at the top. It contains two input fields: "Username or Email Address" and "Password (case sensitive)". Below these fields is a blue "Log In" button. A CSS inspection tool is open over the "Log In" button, showing its properties: Color: #FFFFFF, Font: 16px Helvetica, Arial, sans-serif, Background: #3366CC, Margin: 0px 0px 8px 0px, and Padding: 0px 18px. The tool also shows accessibility information: Contrast: 5.36 (passing), Name: Log In, Role: button, and Keyboard-focusable: true. On the right side of the browser window, the "Elements" panel shows the HTML structure of the login form. The "Log In" button is identified by the selector `button#BtnSubmit.btn.btn-submit`. The "Styles" panel at the bottom shows the default styles for the button, including `type="submit", class="btn btn-submit", id="BtnSubmit", data-testid="BtnSubmit", and type="submit".`


## Log Out procedure

For the log out procedure, the user has to log in first. The locators described above are used during the first part of the log out. The following locators are used for the log out procedure once the user is already logged in.

### Main Page

<User button> - <a href="#" id="global-user-trigger" data-route="false">Log In</a>  
Selector: #global-user-trigger

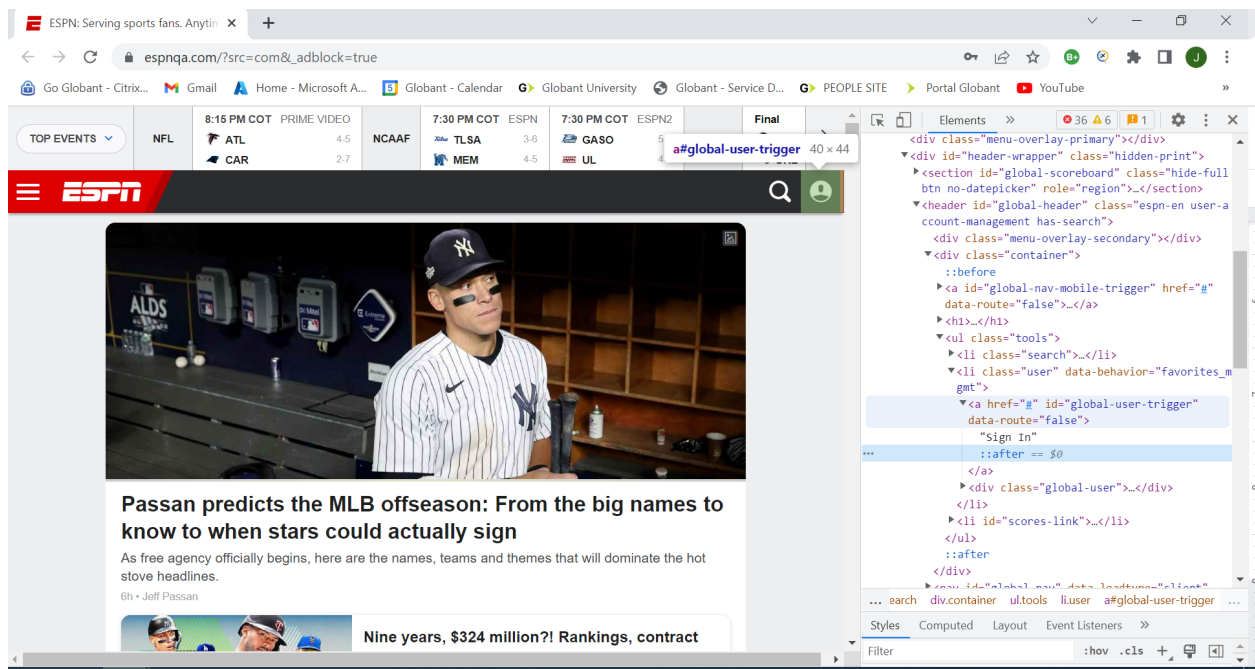

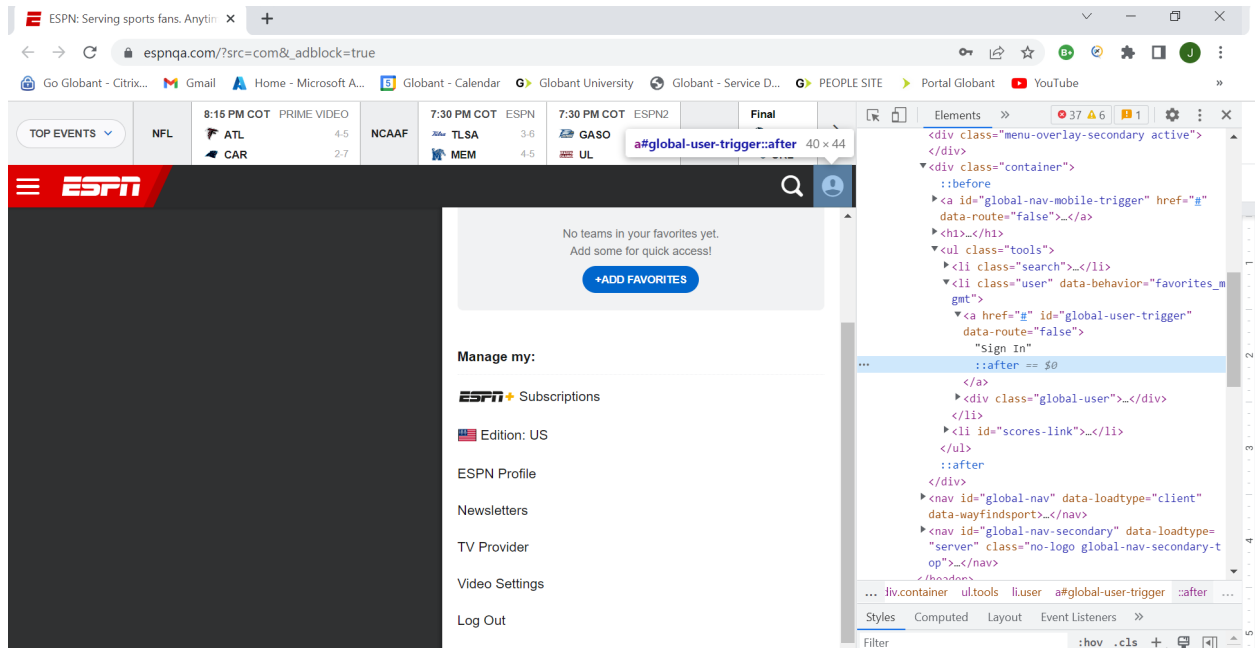


## Global user iframe

<List item "Log Out"> - <class="small">

Selector: #global-viewport > div.global-user > div > ul.account-management > li:nth-child(9) > a

Selector (XPath): //\*[@id="global-viewport"]/div[3]/div/ul[1]/li[9]/a

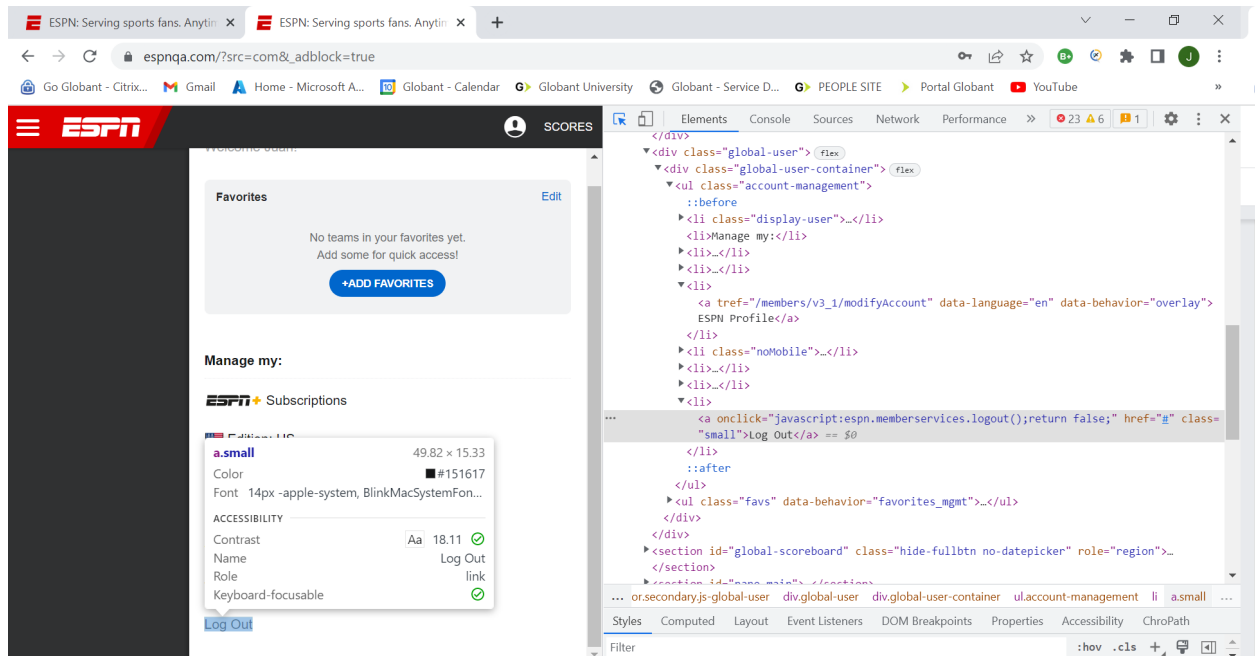





## Delete account procedure

For the delete account procedure, the user has to log in first. The locators described above during the log in procedure are used during the first part of the delete account procedure. The following locators are used for the delete account procedure once the user is already logged in.

### Main Page

<User button> - `<a href="#" id="global-user-trigger" data-route="false">Log In</a>`  
Selector: `#global-user-trigger`

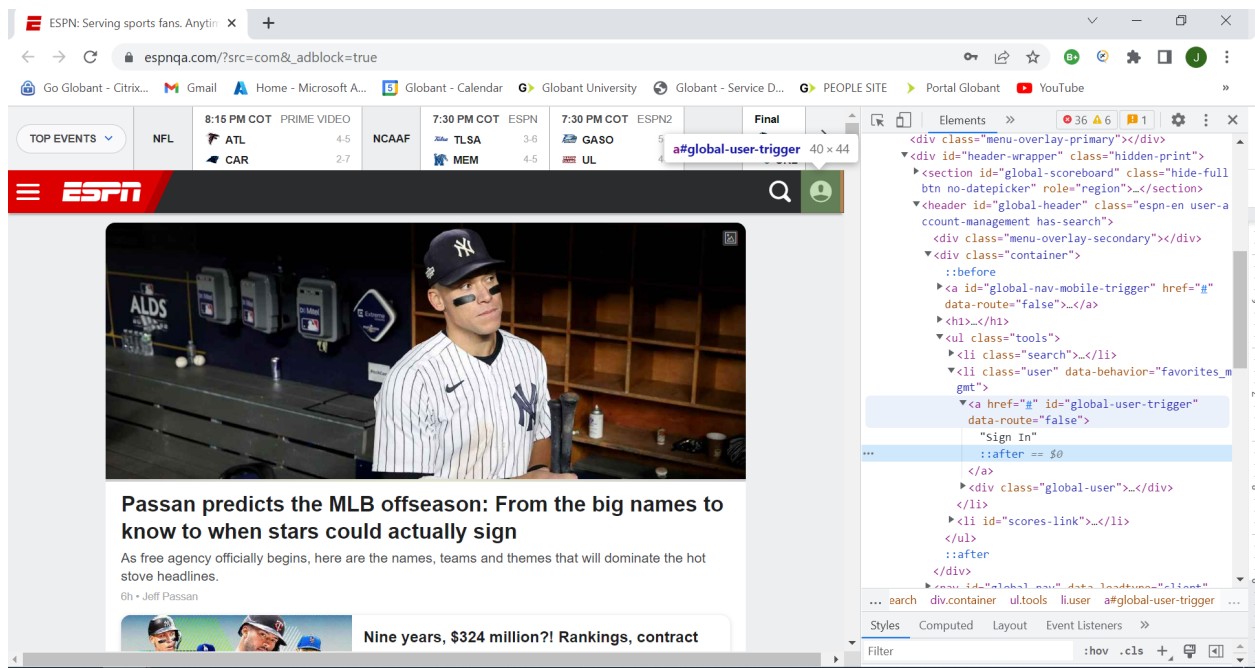

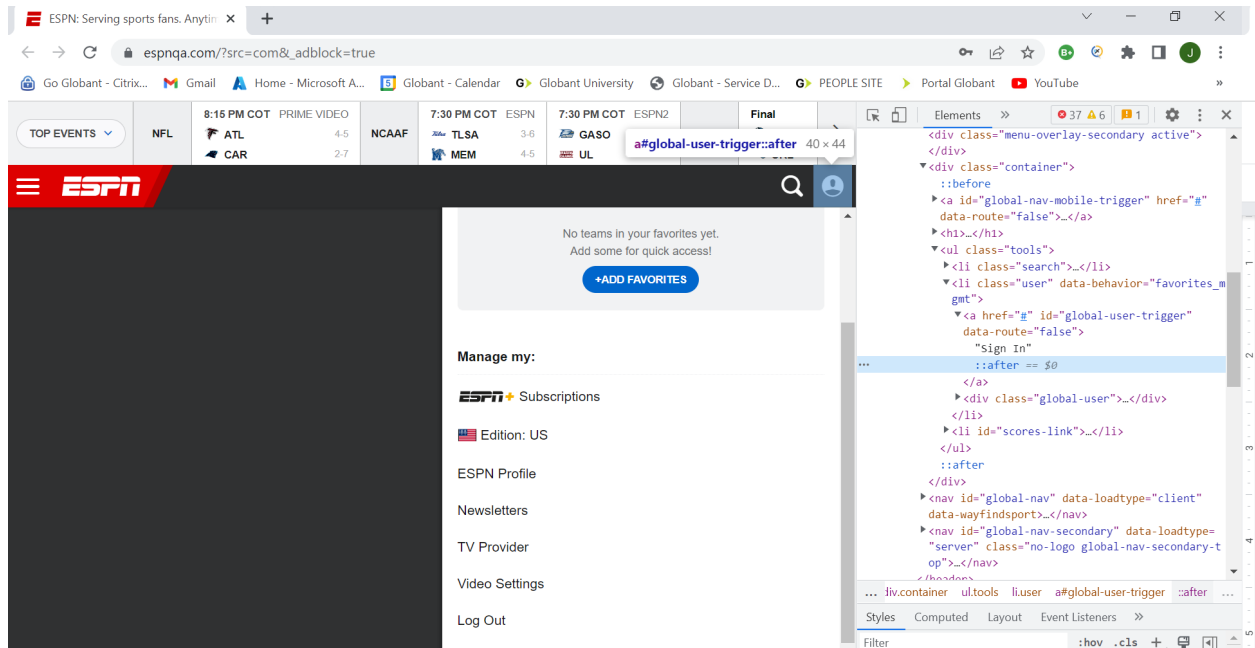


## Global user iframe

<List item "ESPN profile"> - <li><a href="/members/v3\_1/modifyAccount"></a>

Selector: #global-viewport > div.global-user > div > ul.account-management > li:nth-child(5) > a

Selector (XPath): //\*[@id="global-viewport"]/div[3]/div[1]/li[5]/a


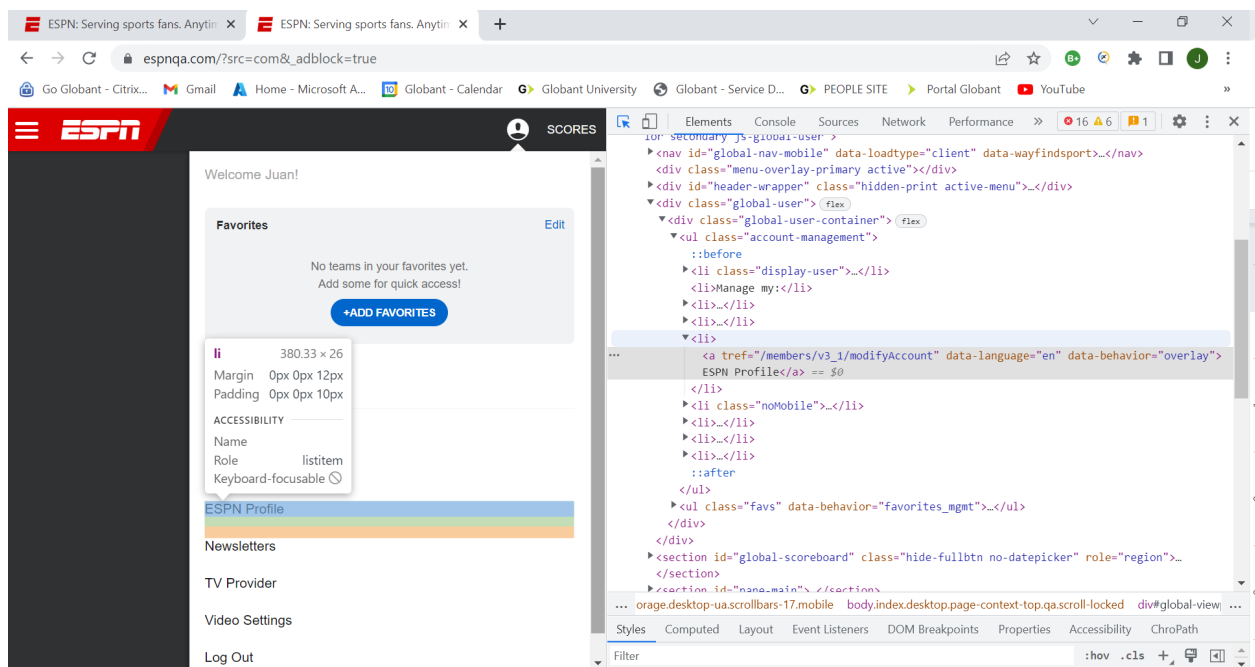


## Update profile Form

<Update profile form> - <form class =“form-section update profile” novalidate>

Selector: #root > div:nth-child(3) > div > div > div:nth-child(1) > form

Selector (XPath): //\*[@id="root"]/div[3]/div/div/div[1]/form

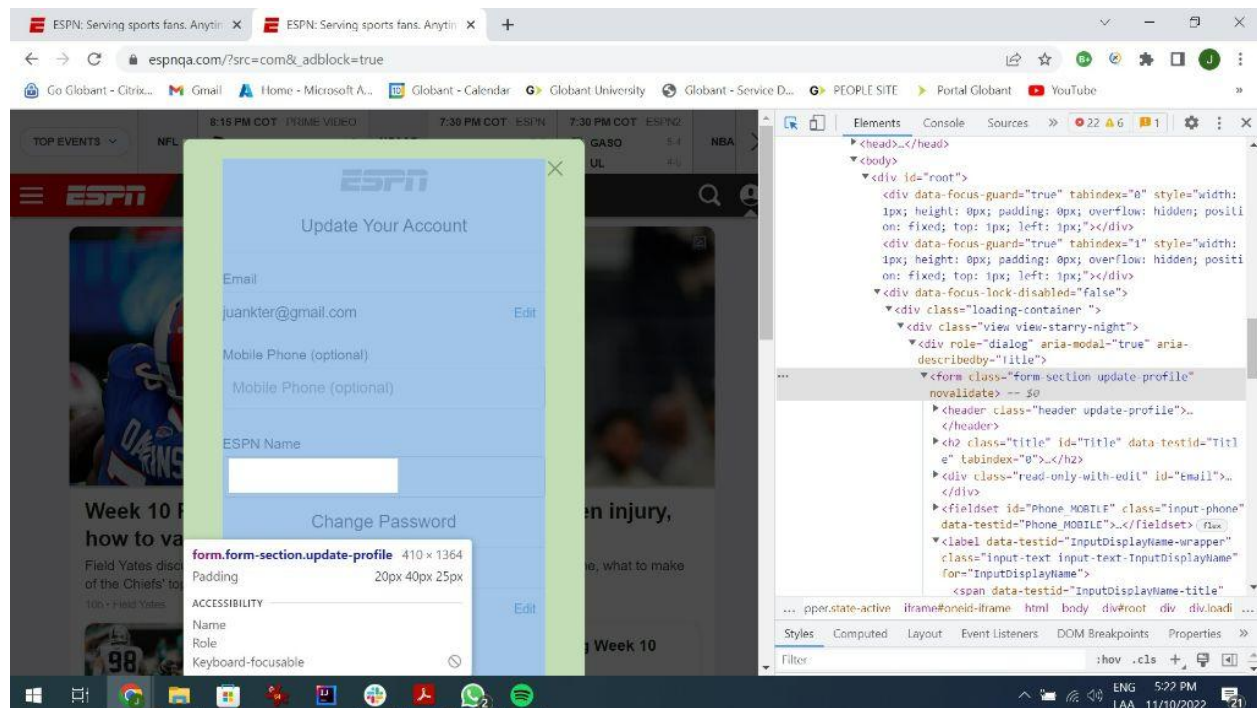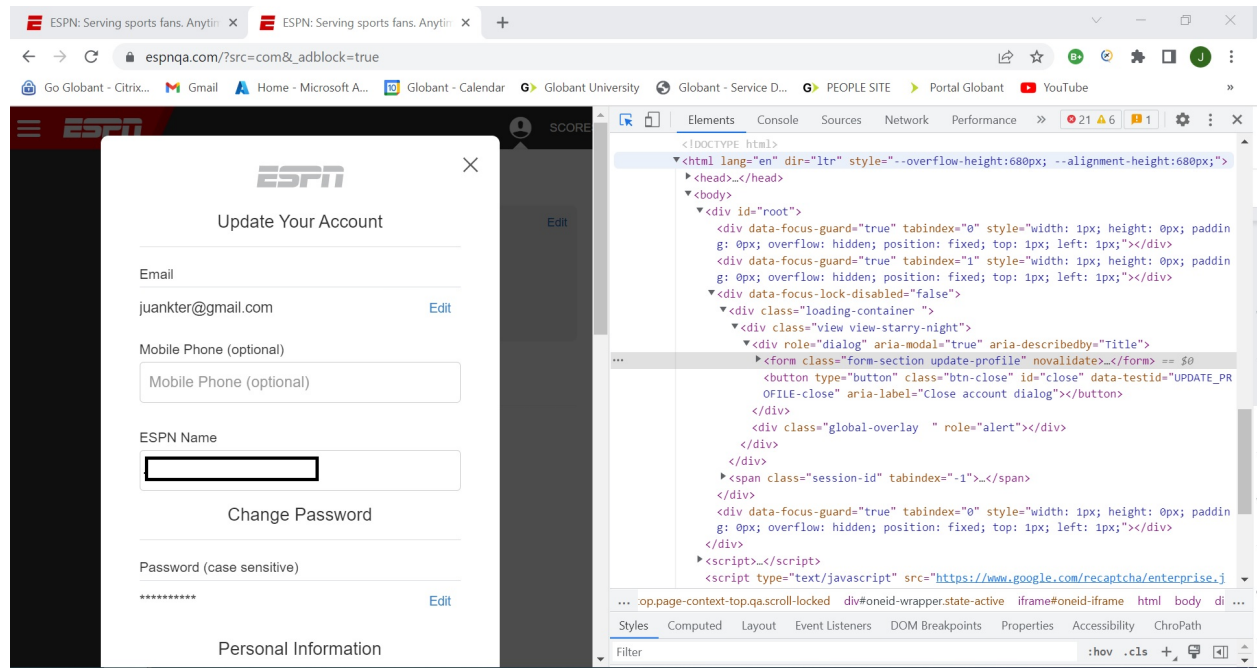

## Update profile Form

<Delete Account link> <class id = "AccountDeleteLink">

Selector: #AccountDeleteLink

The screenshot shows the ESPN profile update form. The 'Delete Account' link is highlighted in the DOM inspector. The HTML structure for the link is as follows:

```
<a href="#" class id="AccountDeleteLink" data-testid="AccountDeleteLink" aria-label="Delete Account" aria-labelledby="Delete Account">Delete Account</a>
```

The screenshot shows the ESPN profile update form. The 'Delete Account' link is highlighted in the DOM inspector. The accessibility panel is open, showing the following information:

- Color: #3B81C3
- Font: 13px Helvetica, Arial, sans-serif
- Contrast: 4.1
- Name: Delete Account
- Role: link
- Keyboard-focusable: ✓

The HTML structure for the link is as follows:

```
<a href="#" class id="AccountDeleteLink" data-testid="AccountDeleteLink" aria-label="Delete Account" aria-labelledby="Delete Account">Delete Account</a>
```