

Example: GET / index.html HTTP/1.1
Host: www.codingschool.com
Accept Language: en-us

Common HTTP methods:


GET → retrieve data

POST → send/create data

PUT → replace/update data

DELETE → delete data

(HTTP) Request

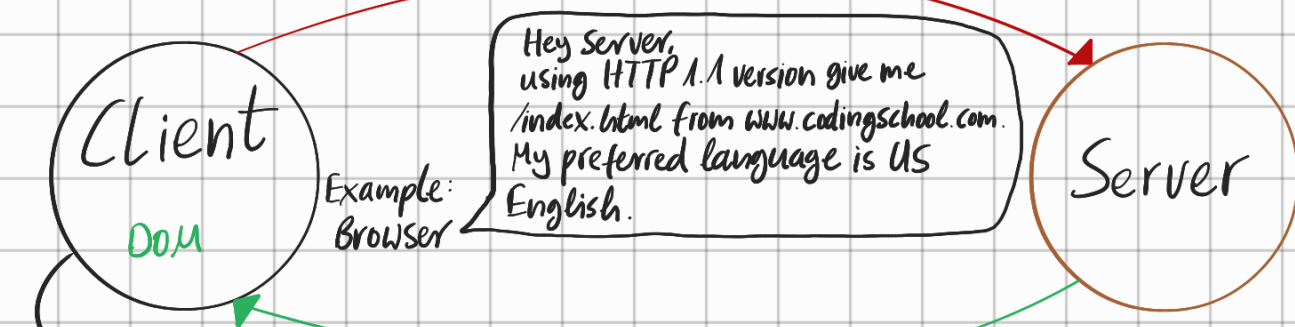

Usually the application the user interacts with, i.e. Web browser, Mobile App, Desktop application.

Browser reads the HTML Document in the Response to construct the DOM & render the Webpage after collecting all HTML elements.

(HTTP) Response

means the request was successful

HTTP version	Status code	Status message
HTTP/1.1	200	OK

Date: 1 Jan 2021 09:00
Content-Type: text/html

```
<!DOCTYPE html>
<html>
  <head>
    <link rel='stylesheet' href='style.css'>
  </head>
  <body>
    <img src='cat.jpg'>
    <script src='app.js'></script>
  </body>
</html>
```

GET/style.css HTTP/1.1

Different Server

GET/cat.jpg HTTP/1.1
Host: www.example.com

Server

GET/app.js HTTP/1.1

Different Server


These additional requests are often send parallel to increase speed.

```

<!DOCTYPE html>
<html>
  ...
</html>

```

Render

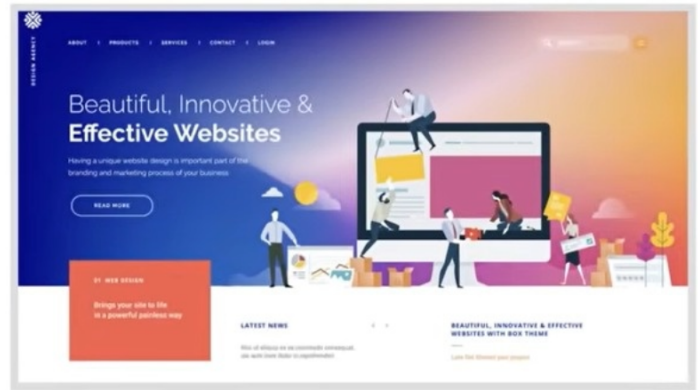

Statuses:

200 → OK

301 → Moved Permanently

400 → Bad Request

401 → Unauthorized

403 → Forbidden

404 → Not Found

500 → Internal Server Error

Content Types:

text/html → HTML

text/plain → Plain Text

Application/json → JSON

image/png → PNG image

image/jpeg → JPEG image

Document Object model

HTML

```

<!DOCTYPE html>
<html>
  <body>
    <h1>Hello</h1>
    <p>This is a paragraph.</p>
    <button id='login'>
      Login
    </button>
  </body>
</html>

```

DOM (tree of objects)

Document

Root element:
<html>

Element:
<body>

Element:
<h1>

Text:
"Hello"

Element:
<p>

Text:
"This is a paragraph."

Element:
<button>

id:
"login"

Text:
"Login"

Each HTML element becomes an object/node that JavaScript can interact with.