

C-lyrics - A Word Cloud for Lyrics

Software Design Document

Justine Cocchi
jcocchi@usc.edu

Kelsey Fargas
kfargas@usc.edu

Mark Krant
mkrant@usc.edu

Milad Gueramian
gueramia@usc.edu

Jeff Kang
kangjr@usc.edu

Séb Arnold
arnolds@usc.edu

13 March 2015

Contents

Executive Summary	4
1 Introduction	5
1.1 Purpose	5
1.2 Overview	5
1.3 References	5
1.4 Definitions And Acronyms	5
2 System Architecture	9
2.1 Data Flow Diagram	10
2.2 First Level Decomposition	11
3 System Design	12
3.1 UML Class Diagrams	12
3.1.1 Server Side Class Diagram	12
3.1.2 Client Side Class Diagram	12
3.2 UML Component Diagrams	14
3.3 UML Use Case Diagrams	16
3.4 UML State Machine Diagrams	17
3.5 UML Sequence Diagrams	19
4 Design Evaluation	20
4.1 Validation	20
4.2 Justification of Design Choices	20
4.2.1 Data Flow Diagram Evaluation	20
4.2.2 UML Class Diagram Evaluation	21
4.2.3 UML Component Diagram Evaluation	22
4.2.4 UML Use Case Diagram Evaluation	22
4.2.5 UML State Machine Diagram Evaluation	22
4.2.6 UML Sequence Diagram Evaluation	22

C-Lyrics - A Word Cloud for Lyrics	3
------------------------------------	---

5. Appendices	23
5.1 Design Process	23
5.2 Meeting Documentation	23

Executive Summary

C-lyrics is a public website that will generate a word cloud for any given artist based on the most frequently used words that appear across all of the artist's published songs. This product will interface with the EchoNest API which will serve as the database from which we find and analyze the songs. By clicking on a specific word in the word cloud the user can see a list of all of the songs that word appears in and how frequently it occurs in each song. Furthermore, the user can click on any listed song title to see the complete lyrics for that song with the original word that was selected from the word cloud highlighted every time it appears.

C-lyrics is intended for use by the general public. There will be no login required and there is no stored history of previous searches. Because of this we will have very low memory requirements and can run the product off of one server. The user can access C-lyrics using any device running any OS, assuming it has an internet connection. After typing in the artist name and selecting the submit button, the word cloud will be generated and will be able to be shared via Facebook.

1 Introduction

1.1 Purpose

This Software Design Document describes the architecture and design of the C-lyrics software system. The intended audience is the development team, consisting of the six members whose names are on the cover of this document.

1.2 Overview

This document provides a layout of the different components, classes, state machines, architectures, designs, and other diagrams related to the C-lyrics software design. Each diagram is clearly explained in section 2 and 3 and justifications for the particular design choices or component configuration choices are given in section 4. Metrics of quality are also discussed. In section 5, the appendices show the staff allocation plans from meeting notes in order to comply with standards set out in the Project Management Plan. Note that the figures used to illustrate diagrams for this document were made using the Gliffy tool [5].

1.3 References

- [1] IEEE. IEEE Std 830-1998 IEEE Recommended Practice for Software Requirements Specifications. IEEE Computer Society, 1998.
- [2] “word cloud”. Oxforddictionaries.com (January 31, 2015)
- [3] EchoNest API [documentation](#) (January 29, 2015)
- [4] A document to remind us the definitions of each UML symbol [UML Cheatsheet](#) (February 17, 2015)
- [5] Gliffy, a tool to create flowcharts and diagrams. Gliffy.com (February 17, 2015)

1.4 Definitions And Acronyms

Term	Definition
AJAX	Asynchronous JavaScript And XML. Technology allowing the transfer of data from between the front- and back-end without reloading the web page.

API (EchoNest)	API will refer to the EchoNest API. EchoNest is a free API that allows developers to retrieve lyrics and artist information in web pages and other programs.
Autocomplete	Autocomplete refers to the functionality addition to the Search Bar, allowing users to enter minimal characters and choose artists that are most similar to the string and display a picture of those artists next to their name.
Autocomplete Delay	A feature designed for the search bar when a user is typing. The delay refers to the suspending action while the user is typing, making the request to the server for autocomplete.
Backend	References the PHP backend page
Back to home button	A button redirecting the user to the homepage.
Back to songs button	A button redirecting the user to the songs list page.
Commonly Used Web Browser	Browsers such as Firefox, Safari, Chrome, Explorer, and Quora which come on mobile phones, tablets and personal computers.
Customer/Client	Dr. William G. Halfond and Sonal Mahajan
GitHub	A web service that provides software version control tools. www.github.com
Stakeholders	The client and the development team
LOC	acronym: for Lines of Code
KSLOC	a metric that stands for: 1,000(K) Source Lines of Code
Desktop Platform	A screen whose width exceeds 560px

Development Team	All of the individuals whose names appear on the cover of this document. These persons have collectively put this document together and will collectively implement the software product described in subsequent sections.
Facebook	Online social network service where the generated word cloud image may be shared amongst users.
FR	Functional Requirement
Google Doc	An online service provided by Google Inc. where an editable document can be accessed and change simultaneously by the members who have been given access to the document. In the case of the development team, google doc is the shared resource which contains the source of this SRS document.
Home Page	The first page of the website visited by the user. It contains the Word Cloud as well as the Search Bar.
Lyrics Page	The third page of the website, it contains the lyrics for one song, which is chosen by the user on the Songs Page. It will have two Navigation Buttons that can take the user to either the Home Page or back to the Songs Page.
Mobile Platform	A screen whose width is less than or equal to 560px
MVC	The Model-View-Controller Software Pattern
Navigation Buttons	Refers to any button that takes the user to previously visited pages of the website.
Design Document	Refers to this document.
Prototype	A small prototype of the software including the barebones of the graphical display. Used during the second meeting with the client, screenshots available in the appendices.

Search Bar	The initial search bar on the first page of the website. Here, users can type in artist or band names to generate a word cloud.
Share Button	The standard, embeddable Facebook share button.
Software or Product	The application software delivered from the supplier to the customer.
Song List	This will be the culmination of all songs found that contain the search word indicated by the user.
Songs Page	The second page of the website. It contains the Song List as well as a Navigation Button back to the Home Page. The user navigates to the Songs page by clicking on a word in the Word Cloud on the Home page.
Submit Button	The button adjacent to the Search Bar. When the user enters an artist name into the Search Bar and is ready to generate the Word Cloud, he or she must click on the Submit Button to begin the process.
add_to_cloud	a boolean variable that represents if the user has pressed the Add to Cloud Button
back_to_cloud	a boolean variable that represents if the user has pressed the Back to Cloud Button
back_to_songs	a boolean variable that represents if the user has pressed the Back to Songs Button
click_word	a boolean variable that represents if the user has clicked a word in the WC
Error Message Visualization State	represents when the user enters an invalid artist name in the Search Bar and presses the Submit Button, causing an error message to appear
Home State	represents when the user first accesses C-Lyrics before a WC is generated on the Home Page

Lyrics State	represents the lyrics of the song that was selected in the Songs Page state and the user being on the Lyrics Page
searchbar__Text	the user's input in the search bar which is limited to alphanumerical characters
select_song	a boolean variable that represents if the user has selected a song from the Songs List Page
share	a boolean variable that represents if the user has pressed the Share button
Song State	represents the user selecting a word from the WC and being on the Songs Page
submit	a boolean variable that represents if the user has pressed the Submit Button
type_artist	a boolean variable that represents if the user typed in a valid artist name to the Search Bar
Word Cloud Visualization State	represents when the user is on the Home Page and a WC is displayed
Supplier	The team developing the product for the customer.
System	The set of machines running the software making it accessible to the user.
User	A person who interacts with C-lyrics software
Word Cloud (WC)	A word cloud (otherwise known as a tag cloud) is, according to the Oxford Dictionary, an image composed of words used in a particular text or subject, in which the size of each word indicates its frequency or importance [2].

2 System Architecture

This system architecture diagram displays the communication paths of C-Lyrics. There are three logical entities in our architecture: the browser, the server, and the external API. The clients exclusively interact with the front end browser running

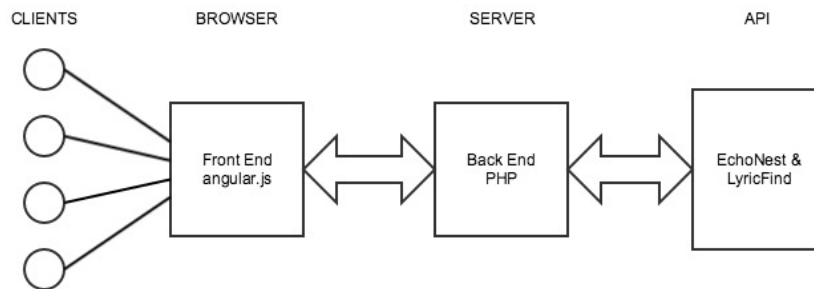


Figure 1: System Architecture

angular.js. The front end then makes requests to the server which communicates with the API to obtain artist data. These data are then communicated back through the server and displayed on the front end which then communicates with the clients.

2.1 Data Flow Diagram

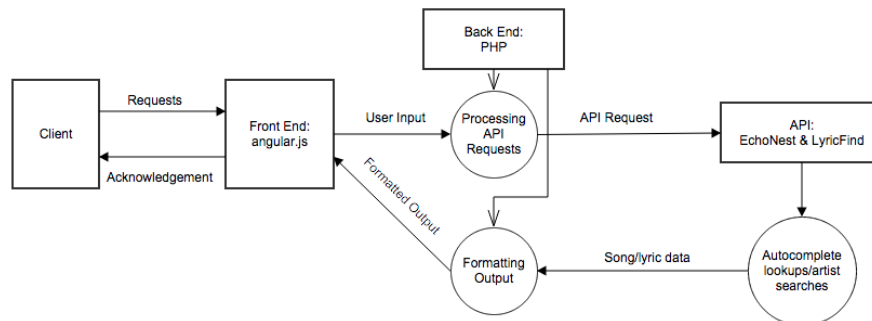


Figure 2: Data Flow Diagram

Above is the data flow diagram for C-Lyrics. Data in the form of requests are sent to the front end (Browser) as user input. This input is sent to the server and processed into API requests by the back end PHP. The input can be of various types (i.e. artist searches, word selections, song selections, etc.) and the processed API request goes to the external API and returns the relevant song/lyric data. This data is formatted by the backend into the proper form of output (song list, word cloud, etc.) which is then displayed by the front end browser. The client then receives the output as acknowledgement.

2.2 First Level Decomposition

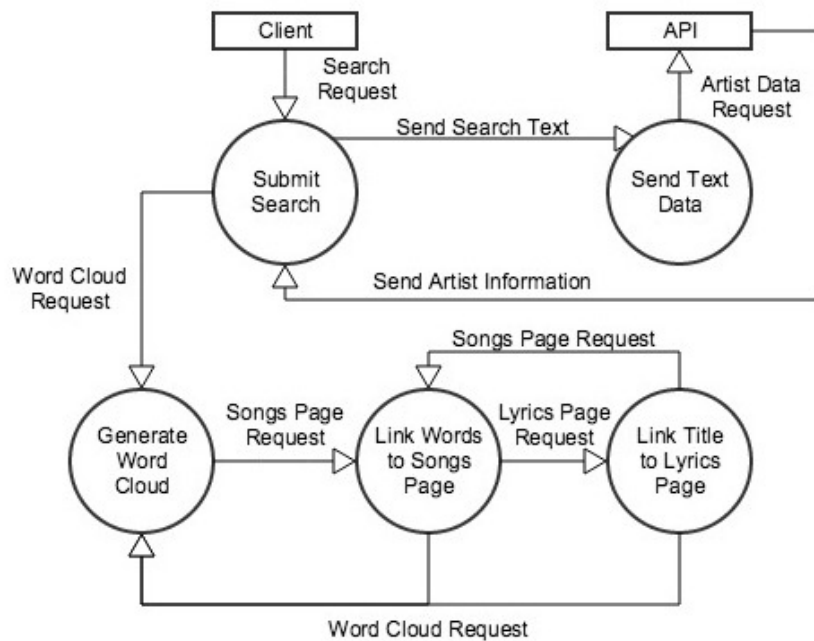


Figure 3: First Level Decomposition

Above is the First Level Decomposition diagram for C-Lyrics. This will show the system's major processes, again, data flow, as well as data stores at a high level of abstraction. The flow of data is shown as the way the client will have interaction with the processes. The client sends a search request when they submit a search. The text from that search will then be sent over to the API and initiate an artist data request, then having the API acknowledge that request and then send a Word Cloud Generator request to generate the Word Cloud. A songs page request will be initiated to the link words to songs page processes. Here, the user has two options of sending a back to WC request, or generate lyrics page request. The WC request will bring the client back to the generate WC process. The generate lyrics page request will link to the title songs page process. Again, the user has two options of either sending a back to WC request or back to songs page request that will either link them back to the generated WC process or the Songs Page process.

3 System Design

3.1 UML Class Diagrams

3.1.1 Server Side Class Diagram

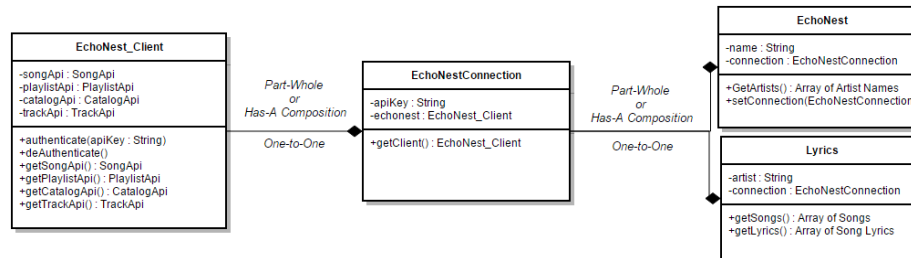


Figure 4: Server Side Class Diagram

The PHP class diagram illustrates the connection between the `EchoNest_Client`, which is an instance of the EchoNest API, the `EchoNestConnection`, along with the subclasses `Lyrics` and `Autocomplete`.


The `EchoNestConnection` class will act as the parent class that has a single, static connection to the EchoNest API. Both the `Lyrics` and `Autocomplete` will inherit from the `EchoNestConnection` to query the API.

The class `Autocomplete` will satisfy the functional requirement of Search Bar autocompletion. Before the user clicks on the Submit button to generate the word cloud, the front end will send the current user input to the `getsuggestions.php` file containing an instance of the `Autocomplete` class. The `Autocomplete` class will then process the input by using the `getSuggestions` function, which returns a list of artists that contain the user input to the `getsuggestions` page in json format. The list of artist names will be sent back to the front end to be used as autocompletion suggestions in the Search Bar.

Once the user clicks on the Submit button, the front end will send the final artist name to the `getlyrics.php` file containing the instance of the `Lyrics` class. The song lyrics for every song by that artist will be generated by the `querySongs` function and returned to the `getlyrics.php` page in json format. The front end will then parse the json data returned on `getlyrics` and generate the Word Cloud according to requirements stated in the SRS document.

3.1.2 Client Side Class Diagram

The class diagram exposes the principal relationships between the main components of the application. The diagram includes some specific annotations according to the UML standard. The only slight modification made to the

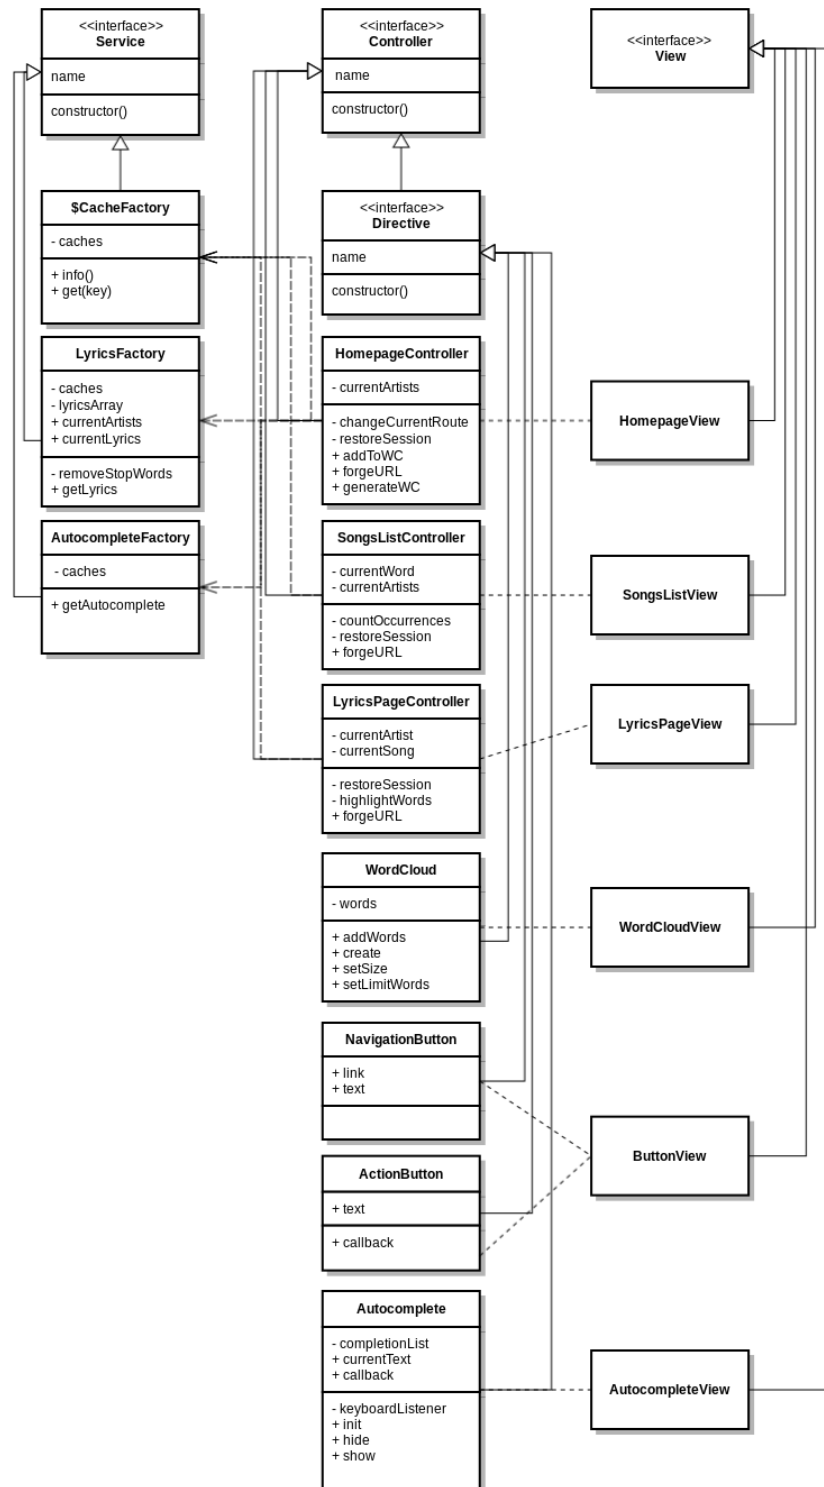

Team 6
Figure 5: Client Side Class Diagram

standard occurs with standard dotted lines; the meaning is that the two connected components are “semi-codependent” - they work separately, but it really makes sense to match them together. Note that the diagram also includes some components defined by AngularJS, as those components really help to make sense of the overall design choice.

The layout of the diagram also shows how AngularJS enforces the MVC pattern. Models are on the left, views on the right and controllers in the middle. A “closed” arrow means inheritance, whereas an open one involves dependency. Also note that a plus is the sign for a publicly accessible method or attribute, whereas a minus is private.

An interesting pattern choice is that the `HomeController` is the only component having access to the services and factories. It might appear differently to the user, for example if he loads a songs page he previously loaded. The page should still be displayed as it is in the cache of the browser. However, strictly speaking the user will first be redirected to the Homepage which will interact with the cache and present the data to the requested page.

One last detail, the HTML template files were considered as classes despite the fact that they do not inherit from any interface or class, in the strict meaning of the word. Several reasons motivated this choice:

- There is no classical inheritance in JavaScript, as it is a prototype-based language. As the classical UML diagram was extended to incorporate prototypes and the general AngularJS structure, it felt natural to include the views as well.
- All templates and views are processed by AngularJS, as if they were pieces of code. In addition they all have to respect a certain structure defined in the framework, which could be regarded as the equivalent of a Java interface.
- The diagrams added valuable information regarding the code and components structure and how different parts interact with each other.

3.2 UML Component Diagrams

The diagram below illustrates the various components in the C-Lyrics system. These components are key features the user will interact with during their experience with the C-Lyrics system. It demonstrates the three interfaces that the user interacts with, such as the Home Page, the Songs List Page, and the Lyrics Page, as well as which components each interface has access to. Additionally, the diagram lays out which components each of the back end communication outlets interacts with.

Note that components are completely stand alone and are not inter-dependent, despite the fact that several might appear on the same page. This is due to the reuse of components policy.

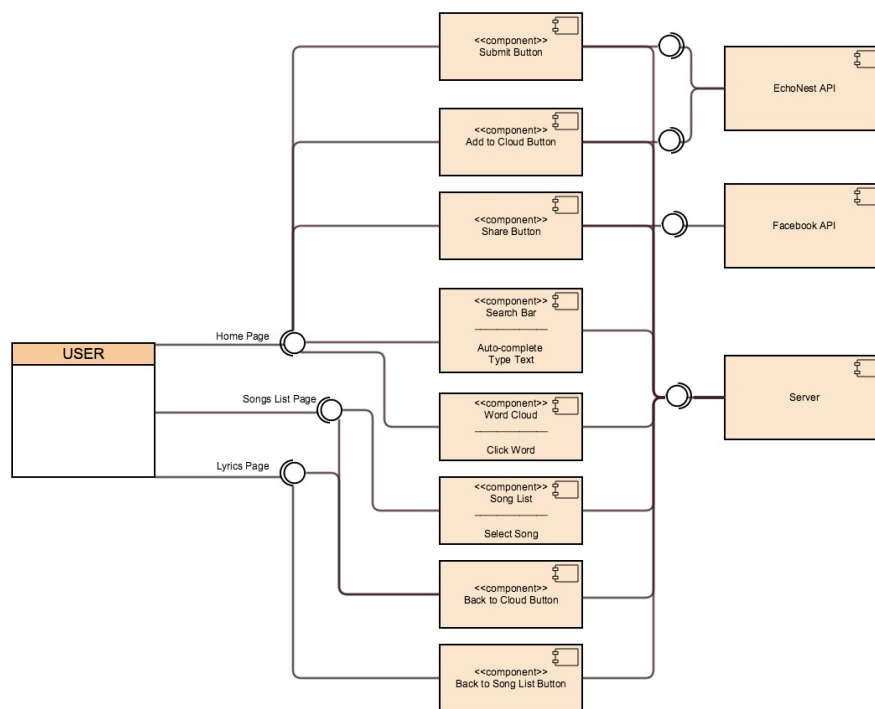


Figure 6: Component Diagrams

3.3 UML Use Case Diagrams

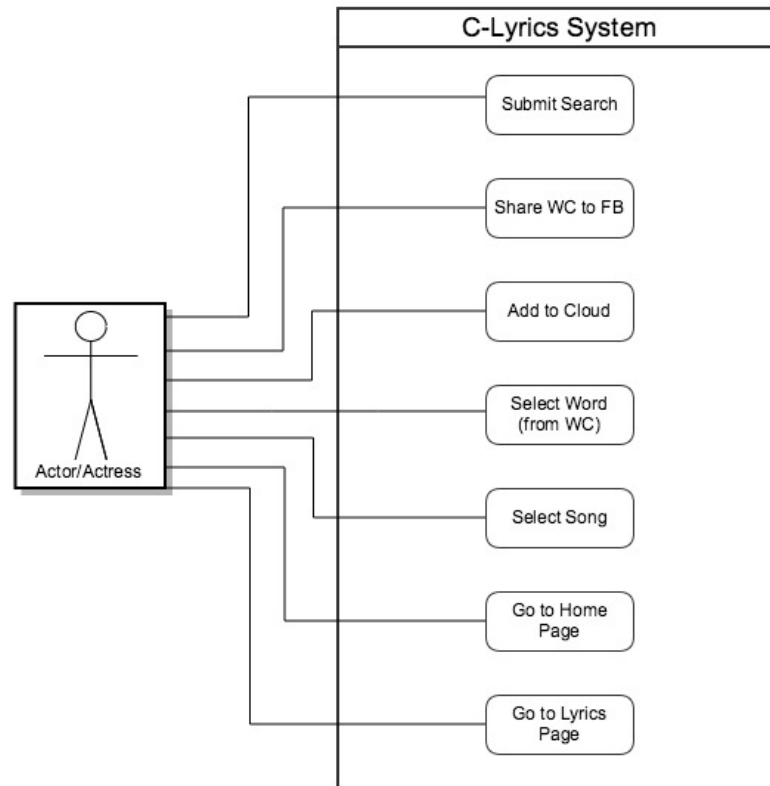


Figure 7: Use Case Diagrams

In the figure above, a use case diagram is used to represent all interactions a user, noted as “Actor/Actress”, will have with the C-Lyrics system. The interactions a user will have are as follows:

- **Submit Search:** A user will interface with the Home Page and can submit their search in the Search Bar to the C-Lyrics system.
- **Share Word Cloud (WC) to Facebook (FB):** A user will interface with the Home Page and can share their generated WC to FB.
- **Add to Cloud:** A user will type in the Search bar and add to their initial search. This will generate a new WC that can be displayed to the user.
- **Select Word:** A user will select any chosen word from the generated WC that can lead them to interface with the Songs Page.
- **Select Song:** On the Songs Page interface, a user can select any song from the generated songs list, which will lead them to interface with the Lyrics

Page.

- Go to Home Page: A user that will interface with either the Songs Page or Lyrics Page can be directed back to the Home Page.
- Go to Songs Page: A user that will interface with the Lyrics Page can be directed back to the Songs Page.

3.4 UML State Machine Diagrams

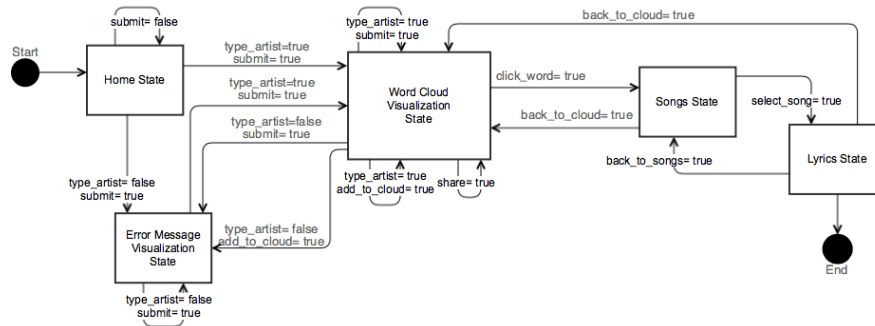


Figure 8: State Machine Diagrams

In the state machine diagram above, there are five possible states once the C-Lyrics system is started. In order to move to another state the conditions listed must be fulfilled, each condition is represented as a boolean variable for simplicity. When the user interacts with the C-Lyrics system, the value of various variables changes depending on the action performed. Below is an in-depth description of each of the five states.

- Home State
 - This is the beginning state for the system and represents when the user first accesses C-Lyrics. In this state there is no WC displayed, only the Search Bar and the Submit Button are on the screen. The only actions the user can take from this state are to type in the Search Bar and to press the Submit Button.
 - While the Submit Button is not pressed, submit = false and the state will not change. If the user presses the Submit Button making submit = true then the state will change dependent on the value of the type_artist variable.
 - The type_artist variable represents the truth value of what the user typed into the search bar. If the user entered a valid artist name, meaning the artist was found by the API, then type_artist will be true, otherwise it will be false. If type_artist is false then the state

will change to Error Message Visualization State, but if it is true then the state will change to Word Cloud Visualization State.

- Error Message Visualization State
 - This state represents when the user enters an invalid artist name in the Search Bar and presses the Submit Button, causing an error message to appear. The only actions the user can take from this state are to type in a new artist name to the Search Bar and to press the Submit Button.
 - The state will change to Error Message Visualization State every time `type_artist = false` and either `submit = true` or `add_to_cloud = true`.
 - The the only way to exit this state is when the `type_artist` and `submit` variables are both true.
- Word Cloud Visualization State
 - This state represents when the user is on the Home Page and a WC is displayed. From this state the user can perform multiple actions some of which will not lead to a state change, as described in the bullet points below, and some of which will lead to a state change.
 - If the user types an artist name and both `type_artist` and `submit` are true then the user will stay in this state, but a new WC with the new artist's information will be displayed. However, if the user types an artist name and `type_artist = false` but `submit = true` then the state will change to Error Message Visualization State.
 - If the user types an artist name and both `type_artist` and `add_to_cloud` are true then the user will also stay in this state, but the word cloud will be modified to include the information from the second artist. However, if the user types an artist name and `type_artist = false` but `add_to_cloud = true` then the state will change to Error Message Visualization State.
 - If the user presses the share button making `share = true`, then the user will stay in this state, but will be able to share the image to Facebook via the Facebook API.
 - The state will change to Songs State when the user clicks a word in the word cloud making `click_word = true`.
- Songs State
 - This state represents the list of songs that the selected word appears in by any given artist. The user can either select a specific song title or press the Back to Cloud button from this state, both of these actions will lead to a different state.
 - If the user selects a song then `select_song = true` and the state will change to Lyrics State
 - If the user presses the Back to Cloud Button making `back_to_cloud = true` then the state will change to Word Cloud Visualization State.

- Lyrics State
 - This state represents the lyrics of the song that was selected in the Songs Page state. The only actions the user can take from this state are pressing the Back to Cloud Button and the Back to Songs Button.
 - If the user presses the Back to Songs Button making `back_to_songs = true` then the state will change to Songs Page.
 - If the user presses the Back to Cloud Button making `back_to_cloud = true` then the state will change to Word Cloud Visualization State.

3.5 UML Sequence Diagrams

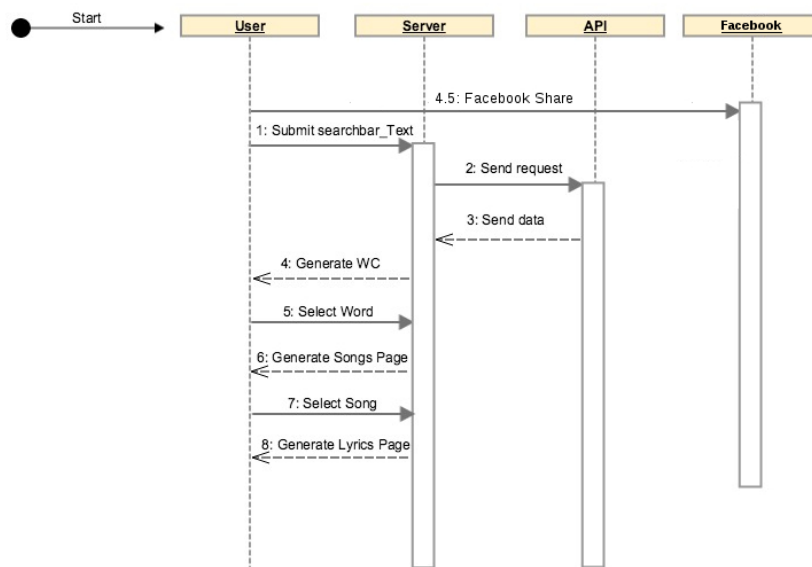


Figure 9: Sequence Diagrams

In the figure below, a sequence diagram is used to represent one of the processes, namely the Select Songs feature, within C-Lyrics. This sequence diagram shows how the process will interact with the server and the EchoNest API in order to arrive at the Select Songs feature. Several terms used in the diagram can be referenced in section 1.4. The diagram is as follows:

- The user will submit their search to the server.
- The server will send a request to the API.
- The API will receive the request based on the information given from the user, and send all data on that search to the server.

- The server will then generate a Word Cloud (WC) and display it back to the user
- (Optional) The user can share the generated cloud on Facebook. On Facebook's website the user might receive a confirmation, but C-Lyrics does not receive any kind of data from Facebook.
- The user can select a word on the WC.
- The server will take in the request from the user and generate the second interface, the Songs Page.
- The user can select a song from the Songs Page list.
- The server will take in the request from the user and generate the third interface, the Lyrics Page.

4 Design Evaluation

4.1 Validation

The following list of requirements comes from the Functional Requirements (FR) section of the SRS. Next to each requirement is a reference to where in this design document that requirement is satisfied.

- FR1. Web Application-Search Bar: sections 3.1.1, 3.1.2, and 3.5, front and back end search bar functionality
- FR2. Web Application-Word Cloud: sections 3.1.1, 3.1.2 and 3.4 (state machine)
- FR3. Web Application-Song List: sections 2.1.1 and 3.4
- FR4. Web Application-Lyrics: sections 3.1.1, 3.1.2, 3.2 and 3.4
- FR5. Access Through Web: sections 2.1 and 2.2, 3.5
- FR6. Web Application-Share: sections 3.1.1, 3.3, 3.4, 3.5
- FR7. Web Application-Add to Cloud section 3.1.3

4.2 Justification of Design Choices

4.2.1 Data Flow Diagram Evaluation

The initial level of discourse chosen for the abstraction of our data flow design is of the application as a whole (step-wise refinement). The data is viewed as travelling from module to module and from function to function. Each module encapsulates smaller modules and functionalities which are hidden from the user of the application. The design exhibits both strong coupling and cohesivity making it strong in modularity. For example, the front and back end display communicational cohesion as well as procedural and sequential cohesion. The front and back end also display data, control and common coupling as the data

passed from the user is simple text. This data coupling and communicational cohesion is also present between the front end, back end and API. The backend and API design is of high quality since the API is essentially a black box whose functionality is a secret that neither the front end or back end are aware of, thus reducing coupling between these elements and the API.

4.2.2 UML Class Diagram Evaluation

These design principles for the php backend create optimal abstraction because of the separation of the API client and the classes making the queries. The Lyrics and Autocomplete php classes each have one purpose and are broken down to their simplest levels, which only return the type of requested data in json format. This reduces the complexity of each class and reduces the number of lines of code, following Object Oriented Principles of class simplicity. Both classes use communicational cohesion and external coupling by operating on the same instance of `EchoNest_Client` in `EchoNestConnection`. In itself, the backend is a black box for the user. The Lyrics and Autocomplete classes do not rely on each other, only on the parent class, and can work independently, reducing the risk of any problems associated with coupling.

By using the AngularJS framework, the design strongly enforces an MVC pattern. This allows to clearly decouple some parts of the application in order to gain flexibility and modularity. This schema is underlined by the different columns of the figure, where the system's communication, logic and visual interface are separated.

By using directives, the systems allows for reusability of components as well as a template-directive hierarchy. For example, the `ActionButton` class will be used for both the submit button and the add to cloud button. In addition, the visual template used (`ButtonView`) is also shared by the `NavigationButton` class, which in turns will be used for both the back to cloud button and the return button.

Finally, this design provides an easy way to extend the application. In the case where some new functionality should be implemented, the problem could be approached in two ways. Either the client would like to enhance the current web pages, in which case few modifications to the controller, template and a new factory should provide enough flexibility for the implementation. Another approach would be to add a new web page to the application which would mean creating a new template and controller. In both cases, the offered level abstraction by the system allows to easily implement one's own features in the system. In addition, the use of existing components is simplified as for each of them understanding their interface only requires to understand their public methods. This approach of hiding unnecessary information is also greatly simplified thanks to the use of AngularJS.

4.2.3 UML Component Diagram Evaluation

The component diagram, as seen in section 3.2, is an abstraction of all of the main parts of the C-Lyrics system and how they interact with the user through each interface as well as how they interact with the back end of our system through either the server or chosen APIs. The features chosen to break into components by following the communicational cohesion model, features that interact with the same data are coupled together. Furthermore, the diagram follows the common coupling model because any component that shares data through a given interface or back end communication outlet is linked together. These methods of cohesion and coupling lend themselves to proper information hiding because only components that need to share data have access to it. There is no hierarchy in this diagram, but its intra-modular approach is a very simple way to display the components of C-Lyrics and how they are connected.

4.2.4 UML Use Case Diagram Evaluation

The purpose of a class diagram is to create a high level representation of the interaction a user will have with the C-Lyrics system. The class diagram, referenced in section 3.3, represents this well by abstracting all key functions the system offers and allowing the user to visualize what types of interactions are possible. Hidden information that is not needed for function understanding is implied by these abstractions.

4.2.5 UML State Machine Diagram Evaluation

While runtime complexities make our system difficult to accurately represent as a finite state machine, the main functions of our system can be abstracted to fit the finite state machine model as explained in section 3.4. The modularity of each state is based on logical cohesion, each state is defined by its functionality within the system as the whole, and control coupling, the actions performed in one state directly drive the transition between states. Although the diagram is not laid out in any specific hierarchy, there are four hierarchical levels in the state machine. The highest level is the Home State followed by the Word Cloud Visualization and the Error Message Visualization states, followed by the Song State and finally the Lyrics State.

4.2.6 UML Sequence Diagram Evaluation

The sequence diagram that can be found in section 3.5 demonstrates one of the processes that a user will go through while using C-Lyrics. The select song functionality was chosen against other functionalities because this process best portrays the capabilities of the C-Lyrics system, demonstrating the natural direction of requests and generating pages. The class diagram also represents

modularity, specifically procedural cohesion that shows the order in which a process is being done. Multiple types of coupling are also utilized including content coupling, having certain processes as predecessors for others which can directly affect a process, and common coupling, in which all data received from the EchoNest API is shared with the interfaces. Although the sequence diagram does not have a hierarchical level, it demonstrates the process flow for the selected features as an intra-modular approach.. One process follows another and will be completed once the predecessor has finished the request and displayed the request back to the person.

5. Appendices

5.1 Design Process

From past experience, the development team continued the practice of meeting multiple times as a full group in order to discuss the design of C-lyrics. An object oriented approach was agreed upon and rough sketches and diagrams were drawn to represent data flow with respect to object oriented policies. The development team also implemented a top down design methodology and from the onset of the design process applied this method to the system architecture design. Given the relatively small list of functional requirements and low inter modular complexity, the top down approach is justified.

5.2 Meeting Documentation

Based on the Project Management Plan, we followed our consistent current group process. We agreed to meet as a group through various communication channels and also established physical meeting times and locations. At each of our meetings we conducted planning and task division.

February 17, 2015 Met in New Annenberg room 305 to discuss design processes and gather information. Also did preliminary task division and abstract discussion of architecture and diagrams.

Preliminary System Architecture Design Tentative Staff Allocation:

- Mark: PHP related design and class diagram(s) given his past experience
- Sebastien: Java Script for front end design, given his past experience and familiarity with C-lyrics as lead prototype designer
- Kelsey and Justine: other UML components, given vast experience making diagrams and charts
- Milad: unassigned

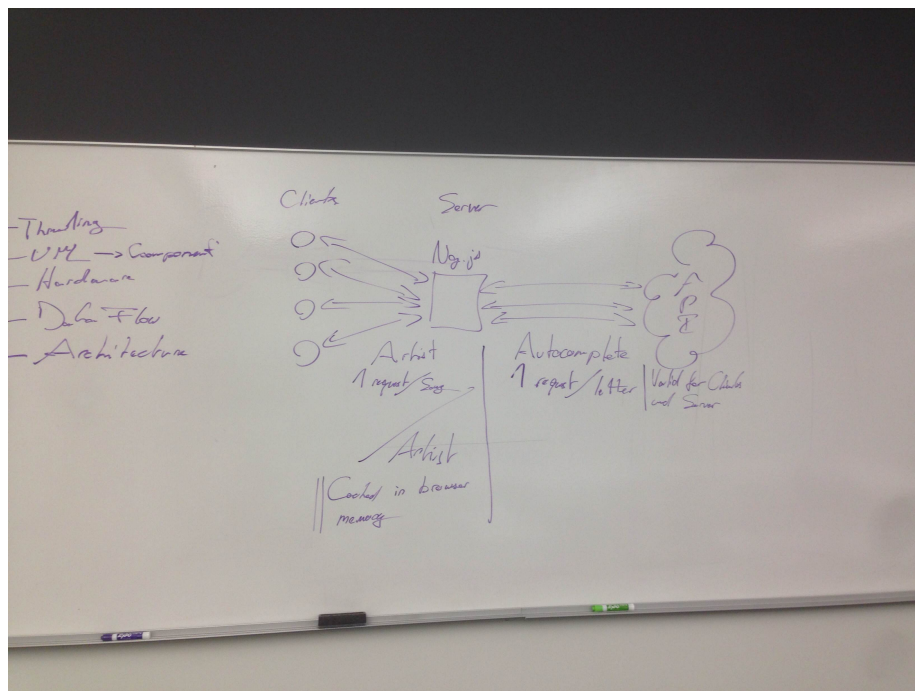


Figure 10: Whiteboard Notes

February 18, 2015 Met in Leavey Library with all members of the group. Exchanged information via gmail.com. Every member contributed simultaneously to the development of a Google Document holding the rough draft of this document. Different members proof read the work of others to check grammar. Tasks were divided as follows:

- Justine and Kelsey: System Design and Evaluations
- Mark: PHP Class Diagram and Evaluation
- Sebastien: Angular JS Class Diagram and Evaluation
- Jeff: Architecture and Data Flow Diagrams, Appendix
- Milad: Introduction, Data Flow Diagram Evaluation, Appendix