

# Monash University: Assessment Cover Sheet

<b>Student name</b>	Piahana	Jerome	
<b>School/Campus</b>	Clayton	<b>Student's I.D. number</b>	24157198
<b>Unit name</b>	FIT3179 Data visualisation - S2 2023		
<b>Lecturer's name</b>	Bernie Jenny	<b>Tutor's name</b>	Shaoshang Dai
<b>Assignment name</b>	Data Visualisation II Report	<b>Group Assignment: No</b> <b>Note, each student must attach a coversheet</b>	
<b>Lab/Tute Class:</b> 02 On Campus	<b>Lab/Tute Time:</b> Tuesday 8-8pm	<b>Word Count:</b> 1107	
<b>Due date:</b> 15-10-2023	<b>Submit Date:</b> 18/10/2023	<b>Extension granted</b> <input checked="" type="checkbox"/>	

If an extension of work is granted, specify date and provide the signature of the lecturer/tutor. Alternatively, attach an email printout or handwritten and signed notice from your lecturer/tutor verifying an extension has been granted.

Extension granted until (date): ...../...../..... Signature of lecturer/tutor: .....

Late submissions policy	Days late	Penalty applied
Penalties apply to late submissions and may vary between faculties. Please refer to your faculty's late assessment policy for details.		

**Patient/client confidentiality:** Where a patient/client case study is undertaken a signed [Consent Form](#) must be obtained.

## Intentional plagiarism or collusion amounts to cheating under Part 7 of the Monash University (Council) Regulations

**Plagiarism:** Plagiarism means to take and use another person's ideas and or manner of expressing them and to pass these off as one's own by failing to give appropriate acknowledgement. This includes material from any source, staff, students or the Internet - published and unpublished works.

**Collusion:** Collusion means unauthorised collaboration on assessable written, oral or practical work with another person. Where there are reasonable grounds for believing that intentional plagiarism or collusion has occurred, this will be reported to the Associate Dean (Education) or nominee, who may disallow the work concerned by prohibiting assessment or refer the matter to the Faculty Discipline Panel for a hearing.

### Student Statement:

- I have read the university's Student Academic Integrity [Policy](#) and [Procedures](#)
- I understand the consequences of engaging in plagiarism and collusion as described in Part 7 of the Monash University (Council) [Regulations](#) (academic misconduct).
- I have taken proper care to safeguard this work and made all reasonable efforts to ensure it could not be copied.
- No part of this assignment has been previously submitted as part of another unit/course.
- I acknowledge and agree that the assessor of this assignment may, for the purposes of assessment, reproduce the assignment and:
  - i. provide it to another member of faculty and any external marker; and/or
  - ii. submit to a text matching/originality checking software; and/or
  - iii. submit it to a text matching/originality checking software which may then retain a copy of the assignment on its database for the purpose of future plagiarism checking.
- I certify that I have not plagiarised the work of others or participated in unauthorised collaboration or otherwise breached the academic integrity requirements in the Student Academic Integrity [Policy](#).

Date: 18/10/2023 Signature:  \*

### Privacy Statement:

For information about how the University deals with your personal information go to <http://privacy.monash.edu.au/guidelines/collection-personal-information.html#enrol>

---

# DATA VISUALISATION II

---

Jerome Piahana

URL: [HTTPS://JCPIA1.GITHUB.IO/FIT3139 DATA VIS 2/](https://jcpi1.github.io/fit3139_data_vis_2/)

Word Count:1,107

## Domain, Why and Who:

The domain selected for this visualisation is the analysis of bushfires in Australia, and the amount of land they have burned from 1899-2022. Bushfires have been a significant concern in Australia due to their frequency, intensity, and the vast areas they affect. This visualisation targets the general Australian public, aiming to provide insight into the distribution, frequency, and severity of these fires across different states.


## What:

The dataset used for this visualisation is sourced from Digital Atlas Australia, an initiative of the Australian Government. Specifically, it is the "Historical Bushfire Boundaries" dataset, curated by Geoscience Australia (GA) as part of the Australian Research Data Commons (ARDC) Bushfire Data Challenge Project. This initiative was a collaborative partnership between the ARDC, Geoscience Australia, and the Emergency Management Spatial Information Network, aiming to harmonise and present a nationally consistent historical bushfire boundary data derived from various authoritative state and territory agencies.


Key highlights of the dataset:

- Represents historical bushfire boundaries, covering both bushfires and prescribed burns, from the early 1899 to 2022.
- Each state's data attributes have been modified by Geoscience Australia to ensure the dataset adhered with the nationally approved data dictionary for fire history.
- Data collection is reflective of the information provided by participating state agencies, and it might not encapsulate the entire fire history within a state.
- Notably, the Northern Australia Fire Information (NAFI) data is intentionally excluded from this dataset, and there wasn't any other data available for the Northern Territory, hence, it couldn't be included in the visualisation.

## Why and How:

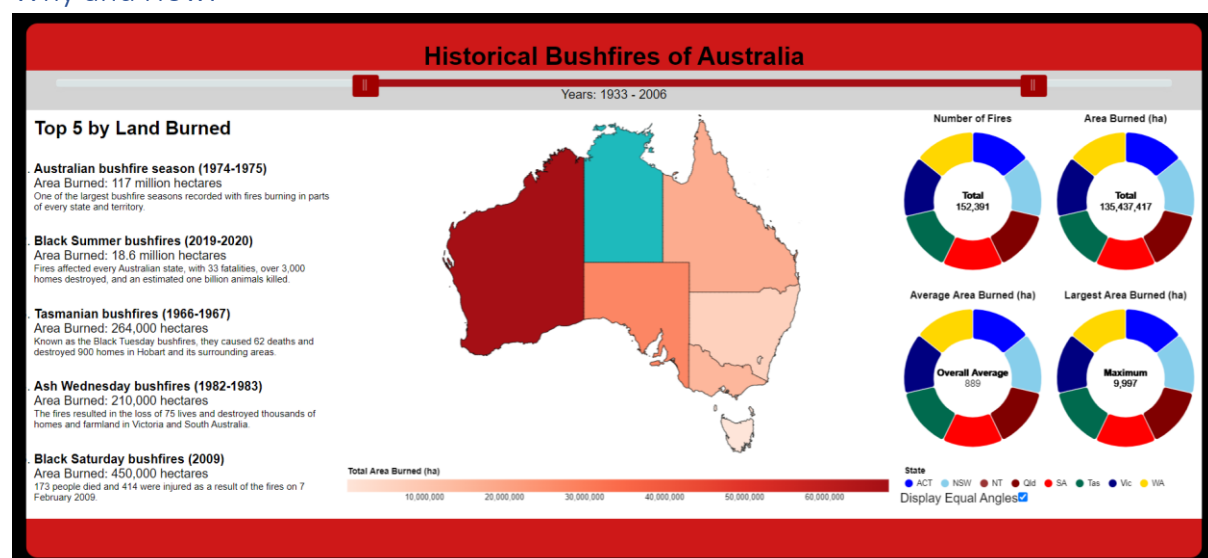

**Chloropleth Map:** The core of the visualisation is a choropleth map of Australia, which provides a geographical representation of data across states. It offers an instant visual cue about the amount of land (in hectares) was burned by bush fires in each period.

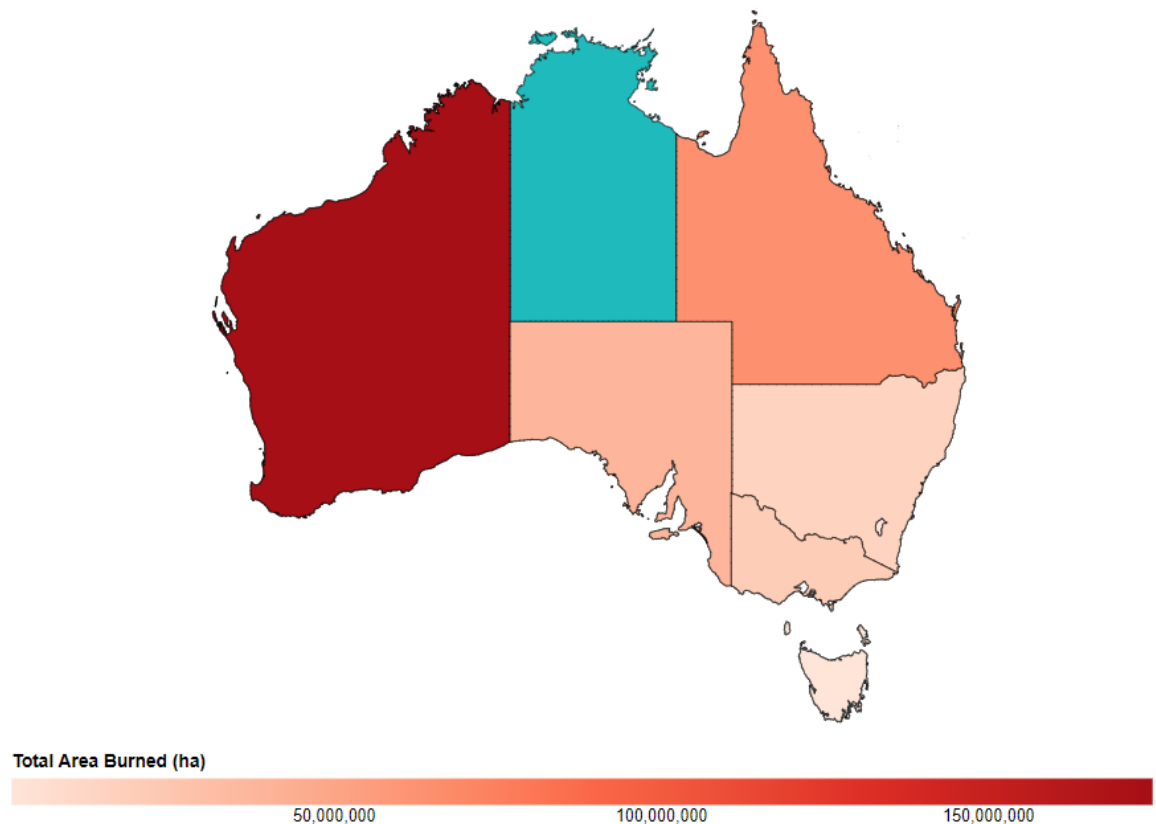

Colourbrewer2.org was used to choose the legend colours. The '5-Class Reds' theme was chosen because it is intuitive for fire to be associated with the colour red. The 5 classes of red were chosen to ensure there would be enough colour range to show differences between data which was similar, but not so large that the darkest red colour would become aesthetically unappealing.

The base map was made to be a cool, pastel blue/green to contrast the red marks of states which did have data.


Black stroke marks were applied to the state boundaries to really contrast it from the white background of the visualisation, giving it an animated look and making it more appealing to look at.

**Interactive Slider:** An interactive slider allows users to filter data between specific years, providing a temporal dimension to the analysis. Users can track the progression or regression of bushfires over time.



The red was chosen to be the same colour as the maximum value of the choropleth map legend, and the background was chosen to neutral colours so that it blends into the background, pushing the slider into the foreground.

**Donut Charts:** Four donut charts complement the map by offering statistical breakdowns. These charts provide visual proportionality that the choropleth cannot.

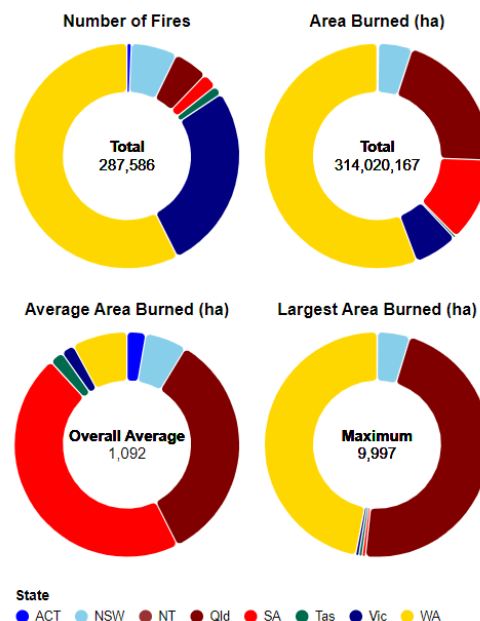


The colours were chosen to be the official colour of each state.

Values in the middle of each donut provide a total of the statistic being presented, which is the nationwide value.

Padding and rounding the corners between arcs was applied to better show separation between arcs. Arc outlines (stroke) was omitted because it would make smaller arcs harder to read.

A checkbox was included to set the arc angles to equal. The point of this is to allow the user to hover over the state and read the values via a tooltip.

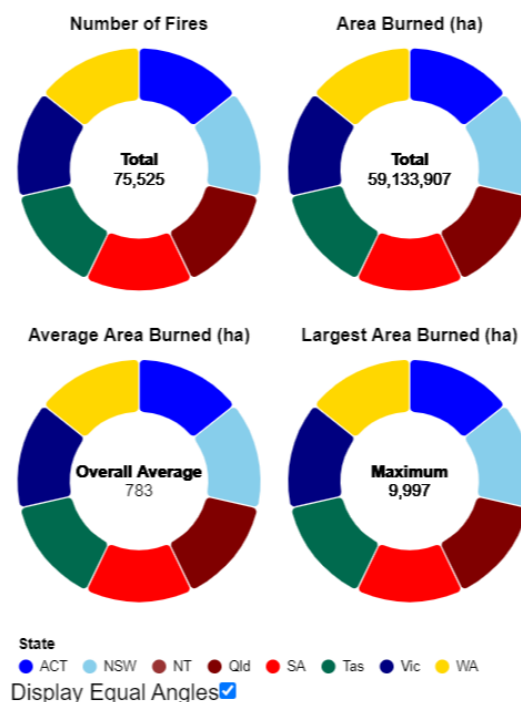

**List of Top 5 Bushfires:** This list serves to highlight the most devastating bushfires in order of total land burned, helping users grasp the severity of certain incidents. The intention of this was for the user to be able to set the range slider to the years shown in the list and see how the area burned in compared to the rest of the states over that time period, however this is not currently possible due to the dataset being incomplete.

## Top 5 by Land Burned

### Australian bushfire season (1974-1975)

Area Burned: 117 million hectares

One of the largest bushfire seasons recorded with fires burning in parts of every state and territory.

### Black Summer bushfires (2019-2020)

Area Burned: 18.6 million hectares

Fires affected every Australian state, with 33 fatalities, over 3,000 homes destroyed, and an estimated one billion animals killed.

### Tasmanian bushfires (1966-1967)

Area Burned: 264,000 hectares

Known as the Black Tuesday bushfires, they caused 62 deaths and destroyed 900 homes in Hobart and its surrounding areas.

### Ash Wednesday bushfires (1982-1983)

Area Burned: 210,000 hectares

The fires resulted in the loss of 75 lives and destroyed thousands of homes and farmland in Victoria and South Australia.

### Black Saturday bushfires (2009)

Area Burned: 450,000 hectares

173 people died and 414 were injured as a result of the fires on 7 February 2009.

## Design

**Layout:** The layout is structured with the choropleth map as the central focus because it is the largest and most visually appealing visualisation, immediately drawing the users' eyes to the centre. The donut chart to the right, where more detailed statistics are shown. Text is placed on the left because it is natural to justify text to the left, and that would both align it to the left border and provide more whitespace around the choropleth map in the centre. The slider spans the length of the header so that it is aesthetically pleasing and provides the user more precise control. Legends span their respective visualisations and are aligned with each other. The layout is made horizontally symmetrical, and elements are aligned with each other as best as possible.

**Colour:** Red colours are chosen to represent the intensity of bushfires, with a gradient indicating the severity. The consistent application of these colours across the whole visualisation ensures coherence and is aesthetically appealing. The use of neutral colour for the slider and the white background pushes the text and visualisations into the foreground and provide a sense of space around them.

**Figure-ground:** The primary data, represented by the choropleth map, stands out prominently against a neutral background, with the pastel blue/green base map contrasting sharply against the fiery reds of the bushfire data. The black strokes outlining state boundaries against the white background further enhance this relationship, imparting an animated quality to the map.

The donut charts and textual data are distinctly set against the backdrop, with the state colours in the donut charts emphasizing the data. Interactive elements, like the slider, are designed in neutral

colours to blend with the background while remaining easily interactable, ensuring they support rather than overshadow the primary data.


**Typography:** Whilst the typefaces used aren't inherently bad for this visualisation, they could be improved by using consistent font usage across all elements, from map labels to legends, which can unify the design. Additionally, colour contrast considerations can ensure textual elements remain both readable and aesthetically harmonious.

**Storytelling:** The combined elements of the map, charts, and list weave a narrative about bushfires in Australia. Annotations and interactive elements further guide the user through the visualisation, enabling a comprehensive understanding. The list of top 5 bush fires, along with their period and amount of land burned, encourages users to interact with the slider to dig deeper.

## References:

[1] Digital Atlas Australia, "Historical Bushfire Boundaries," Digital Atlas Australia, [Online]. Available: <https://digital.atlas.gov.au/datasets/digitalatlas::historical-bushfire-boundaries-2/about>. [Accessed: 18-10-2023].


## 1. Ideas

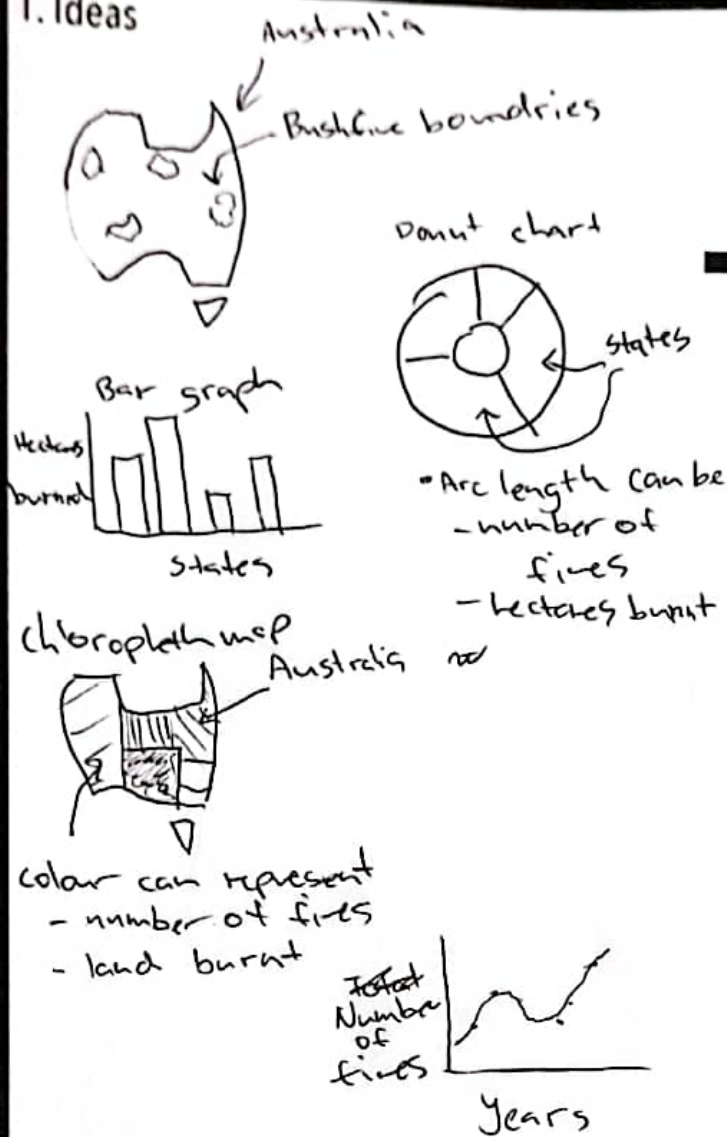

## 2. Filter

sheet (1)

Choropleth map



can be used  
to compare quantity  
of data

## 3. Categorize

categorical

- Year
- Bushfire boundary
- States

Quantitative

- Hectares burnt
- NO. of fires
- Average ~~fires~~ hectares burnt (Australia wide)
- % of land burnt

## 4. Combine and Refine

Choropleth + boundaries




- shows two types of info qualitative boundaries & quantitative colour hue (for hectares burnt)

## 5. Question

should the area burnt per state be normalised to the area of the state its in?



## Layout

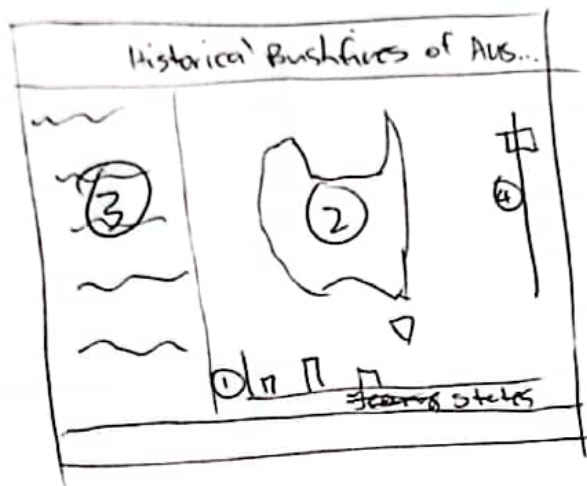

- (1) No. of fires for each state
- (2) choropleth map of hectares burned
- (3) some fun facts or information
- (4) slider to select year

Title:

Author:

Date:

Sheet: 2

Task:

## Operations

slider to pick year

tooltips to give more information

## Focus

Choropleth map

showing number of hectares burned per state

~~Bar chart~~

Bar chart

showing count of fires per state.

slider

to filter year

~~Detail~~

## Discussion

### Pros


- easy to implement
- simple, clean layout

### Cons

Bar chart is a bit ugly

- Bar chart takes a lot of space but doesn't give much information
- doesn't show proportionality as well as donut charts

## Layout

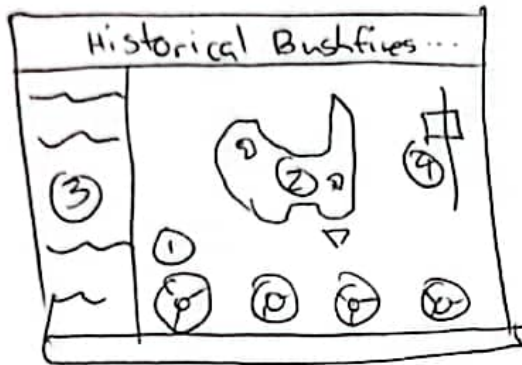

- ① Donut charts showing data for each state: eg - area burned  
- no. fires
- ② ~~the~~ Map showing bushfire boundaries
- ③ fun facts or information
- ④ slider to select year

Title:

Author:

Date:

Sheet: 3

Task:

## Operations

- slider to pick year
- tooltips to give more information

## Focus

Bushfire boundary map  
- showing boundaries of bushfires in that year

Donut chart

- showing secondary metrics

Slider

- to select a year for which the boundaries will be shown

## Discussion


### Pros

- Bushfire boundaries look awesome.
- Very detailed
- Donut charts show proportionality well

### Cons

- large amount of data require. (slow to load)

## Layout

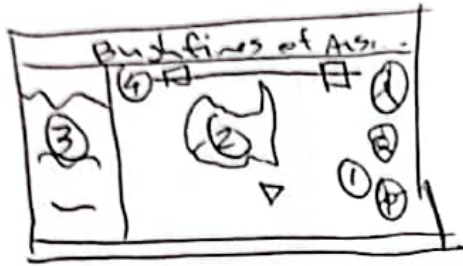

- ① Donut charts showing data for each state
- ② choropleth map
- ③ - fun facts or info
- ④ slider to select year range

Title:

Author:

Date:

Sheet: 4

Task:

## Operations

- slider picks a year range to look at
- Hover over elements for a more detailed tooltip.

## Focus

choropleth map  
showing number of hectares  
burned per state

Donut chart

showing secondary metrics

slider to filter year

## Discussion


### Pros

- easier to implement
- less data required
- shows a larger range of data

### Cons

- Not as cool as mapping fire boundaries

## Layout

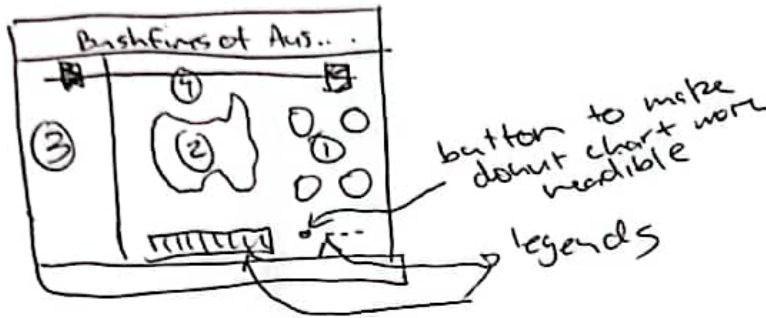

- ① donut charts
- ② chloropleth map of Australia
- ③ Top 5 bushfires
- ④ slider to select period of years to filter data

Title:

Author:

Date:

Sheet: 5

Task:

## Operations

- slider filters data in both chloropleth map & donut charts.
- button allows user to put pie charts into equal angle mode. This shows all states, even when the data is really small.
- Tooltips when hovering over map or chart elements

## Focus

- chloropleth map is main focus, presenting the main data, which is number of hectares burned per state.
- Donut charts show secondary stats for more interstate comparison metrics.
- Top 5 bushfires, listed with their start year & end year, along with the amount of land burnt encourages users to ~~look~~ interact with ~~these~~ the slider to look at those years.

## Discussion Detail

### Dependencies

- Ability to code in HTML, CSS, JS, JSON
- Vega-lite

### ETA

- 5 days.