/newbot

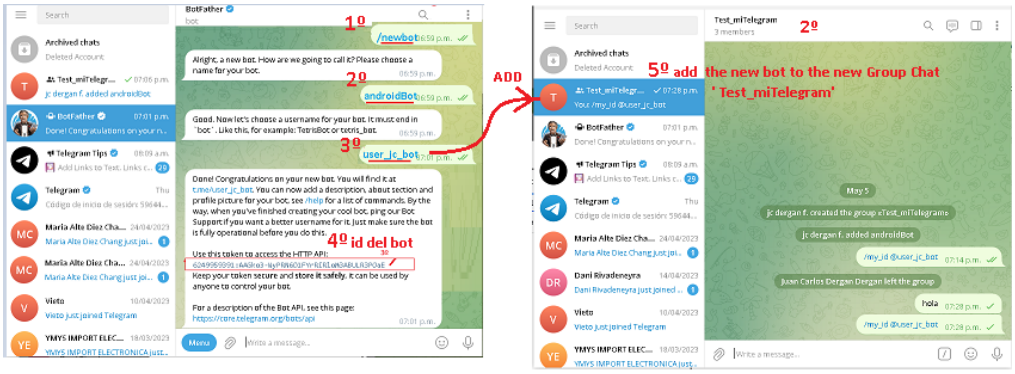

In [1]:

```
# Python Program to Automate Sending Messages on Telegram Groups:
# Here is the High Level Steps Description:
# Step 1: Create a Telegram Group In Which You will send Messages, add all the members.('Test_miTelegram')
# Step 2: goto to BotFather: /newbot (creat a bot), Add all the members and creTelegram Bot & add bot in the Telegram group (the new bot --> 'user_jc_bot')
# Step 3: Chat ID = -884531886 (id del grupo de Test_miTelegram)
# Step 4: unimos el Tocken y ChatID al tipo de url de comando: '/getUpdates' o '/sendMessage'
#         (el Tocken te lo da BotFather al crear el /newbot  name:'androidBot'   username:'user_jc_bot')
# Step 5: comando '/getUpdates', con este comando sustraigo el "id_grpChat"
#         https://api.telegram.org/bot6249959391:AAGko3-WyPRN6O1FYrRiRloM3ABULR3POaE/getUpdates
# Step 6: comando '/sendMessage', con este comando envio al servidor de telegram.
#         https://api.telegram.org/bot6249959391:AAGko3-WyPRN6O1FYrRiRloM3ABULR3POaE/sendMessage?chat_id=-884531886&text="Este es 1er Mensaje q envio al Te
```

Request Data from the New Group

Ejemplos de Interseccion, Union y Diferencia de Conjuntos


```
https://api.telegram.org/bot6249959391:AAGko3-WyPRN6O1FYrRiRloM3ABULR3POaE/getUpdates
{
"ok":true,
"result":[
        {
          "update_id":127682907,
          "message":{
                "message_id":4,
                "from":{"id":1360215944,"is_bot":false,"first_name":"jc","last_name":"dergan f.","username":"J_Carlos_Dergan"},
                "chat":{"id":-884531886,"title":"Test_miTelegram","type":"group","all_members_are_administrators":true},
                "date":1683332908,
                "text":"/my_id @user_jc_bot",
                "entities":[ {"offset":0,"length":6,"type":"bot_command"}, {"offset":7,"length":12,"type":"mention"}]
                }
        }
      ]
}
```


data['result'][0]['message']['chat']['id']

In [11]:

```
# sustraemos el Tocken y el id_grpChat (q es el id unico del grupo del chat, q se crea al crear el chabot
# de la cuenta de juan  carlos dergan)
# por SEGURIDAD ESTA DATA SOLO ESTA DISPONIBLE POR 2 DIAS, luego es EMPTY
import time
import requests
id_grpChat = -1
tocken = '6249959391:AAGko3-WyPRN6O1FYrRiRloM3ABULR3POaE'
url_tocken = f'https://api.telegram.org/bot{tocken}/getUpdates'
response = requests.get(url_tocken)
if response.status_code == 200:
  content_type = response.headers.get('Content-Type')
  print(content_type)                                   # es del tipo application/json
  if content_type == "application/json":
    data = response.json()                              # el tipo de dato devuelto por elservidor es josn
    # print(data,"\n")
    # for k,v in data.items():
    #  print("k=",k,"   v=",v)
    print("Consulta (True/False) :", data['ok'])

    if len(data['result']) > 0:
      lst_result = data['result']
      print(lst_result)
      id_grpChat = lst_result[0]['message']['chat']['id']
      print("Id del Grupo de Chat :", id_grpChat)
    else:
      print("data['result'] = is empty")


# print(data)
# {'ok': True, 'result': [{'update_id': 127682907, 'message': {'message_id': 4, 'from': {'id': 1360215944, 'is_bot': False, 'first_name': 'jc', 'last_name'
```

```
application/json
Consulta (True/False) : True
data['result'] = is empty
```

Send text to telegram Group

Ejemplos de Interseccion, Union y Diferencia de Conjuntos


```
https://api.telegram.org/bot6249959391:AAGko3-WyPRN6O1FYrRiRloM3ABULR3POaE/sendMessage?chat_id=-884531886&text=%22Este%20es%20ler%20Mensaje%20q%20envio%20al%20Telegram%E2%80%9D
{
"ok":true,
"result":{
        "message_id":5,
        "from":{"id":6249959391,
        "is_bot":true,
        "first_name":"androidBot",
        "username":"user_jc_bot"},
        "chat":{
                "id":-884531886,
                "title":"Test_miTelegram",
                "type":"group",
                "all_members_are_administrators":true
        },
        "date":1683335007,
        "text":"\"Este es ler Mensaje q envio al Telegram\u201d"
      }
}
```

In [9]:

```python
# como ya tengo el id del grupo del chat = "id_grpChat"
# si existe :. podemos enviar los datos al Telegram
if id_grpChat != -1:
  mnsgs_enviar = [
    'My wife told me to stop impersonating a flamingo. I had to put my foot down. ',
    'I went to buy some camo pants but couldn’t find any.',
    'I failed math so many times at school, I can’t even count.'
  ]
  for msgTxt in mnsgs_enviar:
    print(msgTxt)
    telegram_url= f'https://api.telegram.org/bot{tocken}/sendMessage?chat_id={id_grpChat}&text="{msgTxt}"'
    #requests.get(telegram_url)
    response = requests.get(telegram_url)
    if response.status_code == 200:
      content_type = response.headers.get('Content-Type')
      print("Type Fromat from Serv :" + content_type)                                    # es del tipo application/json
      if content_type == "application/json":
        data = response.json()                                  # el tipo de dato devuelto por elservidor es josn
        # print(data,"\n")
        # for k,v in data.items():
        #  print("k=",k,"   v=",v)
        print("Respta del Servidor(T/F)  'ok':", data['ok'])
        print("-------------------------------------\n")
        # lst_result = data['result']
        # {"ok":true,"result":{"message_id":22,"from":{"id":6249959391,"is_bot":true,"first_name":"androidBot","username":"user_jc_bot"},"chat":{"id":-8845

    time.sleep(5)
```

```
My wife told me to stop impersonating a flamingo. I had to put my foot down.
Type Fromat from Serv :application/json
Respta del Servidor(T/F)  'ok': True
-------------------------------------

I went to buy some camo pants but couldn’t find any.
Type Fromat from Serv :application/json
Respta del Servidor(T/F)  'ok': True
-------------------------------------

I failed math so many times at school, I can’t even count.
Type Fromat from Serv :application/json
Respta del Servidor(T/F)  'ok': True
-------------------------------------
```