



Accenture Duck Creek

EXAMPLE Platform® Configuration Settings





Copyright © 2000-2011 Duck Creek Technologies, Inc. All rights reserved.

The software contains proprietary information of Duck Creek Technologies. It is provided under a license agreement containing restrictions on use and disclosure and is also protected by copyright law. Reverse engineering of the software is prohibited.

Due to continued product development, this information may change without notice. The information and intellectual property contained herein is confidential between Duck Creek Technologies and the client and remains the exclusive property of Duck Creek Technologies. If you find any problems in the documentation, please report them to us in writing. Duck Creek Technologies does not warrant that this document is error-free.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means—electronic, mechanical, photocopying, recording or otherwise—without the prior written permission of Duck Creek Technologies, Inc.

Duck Creek Technologies. <http://www.duckcreektech.com>

EXAMPLE Platform® Configuration Settings

This document contains descriptions, defaults, and valid values of all EXAMPLE Platform® user-configurable settings. You can use the Edit Configuration Utility (EditConfig.exe in the GlobalRootPath/Util directory) to manually alter these settings.



Improperly adjusting EXAMPLE Platform® configuration settings can lead to unintended behaviors or can even prevent EXAMPLE Platform® products from functioning. Use caution when changing these settings.

Authentication\Web.config Settings

The Authentication\Web.config file contains a number of Authentication settings. To modify these settings, open the Duck Creek Technologies, Inc. Edit Configuration Utility ([GlobalRootPath]\Util\EditConfig.exe). With this utility, you can configure a variety of Authentication options.

Key	Default Value
<i>minRequiredPasswordLength</i>	8
<i>minRequiredNonalphanumericCharacters</i>	1
<i>enablePasswordReset</i>	False
<i>enablePasswordRetrieval</i>	True
<i>requiresQuestionAndAnswer</i>	True
<i>requiresUniqueEmail</i>	False
<i>passwordFormat</i>	Encrypted
<i>maxInvalidPasswordAttempts</i>	5
<i>passwordAttemptWindow</i>	10
<i>CAPTCHA</i>	DCTLogin.aspx
<i>DisableCreatedUser</i>	True
<i>EnablePermissions</i>	False
<i>PermissionsServer</i>	http://[servername/virtualDirectoryname]/dctserver.aspx
<i>PermissionsUID</i>	admin
<i>PermissionsPWD</i>	admin
<i>NewUserEntity</i>	1
<i>NewUserRole</i>	3

<i>ReusePasswordOK</i>	False
<i>slidingExpiration</i>	True
<i>deny users</i>	?
<i>compilation debug</i>	False

CAPTCHA

Setting to determine if a CAPTCHA challenge-response is required at login.

Default	Valid
DCTLogin.aspx	DCTLoginCaptcha.aspx

compilation debug

Setting to determine if debugging symbols are inserted into the compiled page. Because this setting affects performance, the value should be set to True only during development.

Default	Valid
False	• False – Does not insert debugging symbols into the compiled page. • True – Inserts debugging symbols into the compiled page.

deny users

Setting to allow only authenticated users.

Default	Valid
?	• ? — Deny non-authenticated or anonymous users. • * — Allow non-authenticated or anonymous users.

DisableCreatedUser

Setting to control whether a user can create an account or if administrator approval is required.

Default	Valid
True	• True — Allows a user to create an account. • False — Accounts must be approved by an administrator.

enablePasswordReset

Boolean value indicating whether users can use the ResetPassword method to overwrite the current password with a new, randomly generated password.

Default	Valid
False	• True — Enable password reset. • False — Disable password reset.

enablePasswordRetrieval

Boolean value indicating whether users can retrieve their password using the GetPassword method.

Default	Valid
False	• True — Enable password retrieval. • False — Disable password retrieval.

EnablePermissions

Setting to determine if users should be created with EXAMPLE UserAdmin™ roles and privileges.

Default	Valid
False	• False — Permissions are not created in EXAMPLE UserAdmin™ • True — Permissions are created in EXAMPLE UserAdmin™

maxInvalidPasswordAttempts

Specifies number of login attempts before locking the user.

Default	Valid
5	Any positive integer.

minRequiredNonalphanumericCharacters

Specifies the minimum number of non-alpha characters (#\$%^&) required in a user password.

Default	Valid
1	Any positive integer.

minRequiredPasswordLength

Specifies the minimum length of characters required in a user password.

Default	Valid
8 — DCTASAdmin#	Any positive integer.

NewUserEntity

Setting for assigning EXAMPLE UserAdmin™ privileges to user created in EXAMPLE Authentication Server™.

Default	Valid
1	Any value from the DCT_PLT_EntityRoles table

NewUserRole

Setting for assigning EXAMPLE UserAdmin™ role to a user created in EXAMPLE Authentication Server™.

Default	Valid
3	Any value from the DCT_PLT_Roles table.

passwordAttemptWindow

Specifies the number of minutes to allow login attempts before locking a user.

Default	Valid
10	Any positive integer.

passwordFormat

Specifies whether password format is clear, encrypted or hashed.

Default	Valid
Encrypted	• Clear —passwords are stored in plain text. • Encrypted — passwords can be decrypted for retrieval. • Hashed — passwords use a one-way algorithm and cannot be retrieved.

PermissionsPWD

Value for password for login when set permissions is enabled.

Default	Valid
admin	admin

PermissionsServer

Location of server used to set permissions.

Default	Valid
http://[servername/virtualDirectoryname]/dctserver.aspx	URL of existing server.

PermissionsUID

Value for login when set permissions is enabled.

Default	Valid
admin	admin

requiresQuestionAndAnswer

Boolean value indicating whether a user must supply a password question and answer to retrieve a password using GetPassword, or reset a password using ResetPassword.

Default	Valid
False	• True — Require password question and answer. • False — Does not require password question and answer.

requiresUniqueEmail

Boolean value indicating if a user must supply a unique e-mail address. If a user already exists in the data source, null is returned and a status value of duplicate.

Default	Valid
True	• True — Require unique e-mail address. • False — Do not require unique e-mail address.

ReusePasswordOK

Setting for allowing a user to use the same password again when resetting or recovering a password.

Default	Valid
False	• False — New password must be different than previous password. • True — New password can be the same as the previous password.

slidingExpiration

Setting to restart the timeout period each time there is browser activity.

Default	Valid
True	• True — Restart timeout period. • False — Do not restart timeout period.

timeout

Value, in minutes, to wait before timing out a login session.

Default	Valid
20	Any positive integer.

DCTReset.exe.config Settings

Key	Default Value
<i>WebConfigPath</i>	C:\Program Files\Duck Creek Technologies\Web
<i>RequestUrl</i>	http://localhost:8080/DuckCreek/dctserver.aspx
<i>WebSiteName</i>	Duck Creek
<i>LoggingLevel</i>	Info

LoggingLevel

Defines the level of logging that DCTReset.exe will use.

Default	Valid
Info	• Error — Log errors only. • Warning — Log errors and warnings. • Info — Log errors, warnings, and the results of the recycled application pool. • Debug — Log errors, warnings, results of the recycled application pool, and detailed messages describing the progress of the service. Because this setting can fill a log quickly, Duck Creek Technologies, Inc. recommends that this setting be used only for troubleshooting specific problems and for relatively short periods of time.

RequestUrl

URL of the EXAMPLE Server® responsible for working with the Web site specified by the *WebSiteName* setting to ensure that the correct application pool is recycled.

Default	Valid
http://localhost/DuckCreek:8080/DCTServer.aspx	Any valid URL to an existing EXAMPLE Server®.

WebConfigPath

When DCTReset.exe is run on Windows XP and with IIS5, it will go to the path entered, locate the DCTReset.exe.config file, and then change the date on the file. This causes the application pool to be recycled.

Default	Valid
C:\Program Files\Duck Creek Technologies\Web	Any valid path to the DCTReset.exe.config file

WebSiteName

This setting is used with the *RequestUrl* setting to correctly identify the application pool under which the Web site is running and to recycle it to the Windows Event Viewer.

Default	Valid
DuckCreek	Any Web site entered during the installation.

Express\Web.config Settings

The EXAMPLE Express® Web.config file contains a number of EXAMPLE Express® configuration settings. To modify these settings, use the Edit Configuration Utility (located at *Global Root Directory\Util\EditConfig.exe*).

Key	Default Value
<i>XSLTDir</i>	Skins\AvantGarde
<i>EXAMPLEServerURL</i>	http://localhost:80/DuckCreek40/dctserver.aspx
<i>ServerConfig</i>	C:\Program Files\Duck Creek Technologies 4.0\Express\App_Data\OnDemand.Config
<i>ContentFactory</i>	C:\Program Files\Duck Creek Technologies 4.0\Express\App_Data\ContentMap.xml
<i>PostActionFactory</i>	C:\Program Files\Duck Creek Technologies 4.0\Express\App_Data\PostActionMap.xml
<i>MenuMapFactory</i>	N/A
<i>ApplicationLayoutFactory</i>	C:\Program Files\Duck Creek Technologies 4.0\Express\App_Data\ApplicationLayoutMap.xml
<i>TimeOut</i>	360000
<i>EventLog</i>	Errors
<i>CarrierName</i>	Demo National Insurance
<i>MailTo</i>	support@mycompany.com
<i>SMTPServer</i>	null
<i>SMTPServerPort</i>	25
<i>LogoutURL</i>	null
<i>DebugMode</i>	0
<i>DebugOutputDir</i>	C:\Program Files\Duck Creek Technologies 4.0\Express

<i>SecureLogin</i>	0
<i>ProxyMode</i>	0
<i>NewQuoteManuScriptID</i>	NewQuoteSelectionPortfolio
<i>GetPolicyAdminManuScriptID</i>	null
<i>PolicyAdminManuScriptID</i>	null
<i>UserDetailsManuScriptID</i>	N/A
<i>AgencyDetailsManuScriptID</i>	N/A
<i>MessageDetailsManuScriptID</i>	null
<i>ClientDetailsManuScriptID</i>	null
<i>TaskDetailManuScriptID</i>	Carrier_TaskDetailEditing
<i>PartySearchManuScriptID</i>	null
<i>AddPartyManuScriptID</i>	null
<i>InstantShred</i>	0
<i>AutoSave</i>	1
<i>UploadDir</i>	C:\Program Files\Duck Creek Technologies 4.0\Express\Upload
<i>FormsTempPath</i>	C:\Program Files\Duck Creek Technologies 4.0\Express\Temp
<i>ProcessAsyncFormWaitTime</i>	1
<i>GetPageWaitTime</i>	0
<i>RefreshClientOnLoad</i>	Quote
<i>ExitInterviewField</i>	null
<i>GuestUserName</i>	null
<i>GuestPassword</i>	null
<i>ConsumerAgencyID</i>	null
<i>ConsumerAccessRole</i>	null
<i>ConsumerAccessManuScriptID</i>	null
<i>PrintJobAsyncMode</i>	2
<i>PrintPreviewDownloadMode</i>	0

<i>PrintJobAutoRefresh</i>	1
<i>PassPhrase</i>	N/A
<i>SaltValue</i>	N/A
<i>InitVector</i>	N/A
<i>ServerDomain</i>	N/A
<i>SelectAgencyLimit</i>	15
<i>BypassSSLHostAuthentication</i>	0
HomeBlockListBulletins	0
HomeBlockListMessages	0
HomeBlockListMRU	0
<i>NewQuoteLimitRequests</i>	0
<i>PerformanceLogging</i>	0
<i>XmlNamespaceUri</i>	null
AddFieldInfo	This setting reserved for future use.
<i>SSOErrorMsg</i>	You do not have access to Example Express. Please contact your administrator or login.

AddPartyManuScriptID

Reserved for future use.

AgencyDetailsManuScriptID

Obsolete for EXAMPLE Platform® 4.0. This functionality is now available for use in EXAMPLE UserAdmin™. See the *AgencyDetailsManuScriptID* configuration setting in the UserAdmin\Web.config file.

ApplicationLayoutFactory

Fully-qualified directory path to the ApplicationLayoutMap.xml file (and any custom ApplicationLayoutMap files). The path specifies the directory to use, and the file name (minus the file extension) specifies the base term to use to determine custom ApplicationLayoutMap files.

Default	Valid
C:\Program Files\Duck Creek Technologies 4.0\Express\App_Data\ApplicationLayoutMap.xml	Valid path, including file name, to the ApplicationLayoutMap.xml file.

AutoSave

Boolean value indicating whether the interview process should automatically save changes upon page change. The system creates a history only when a save action is performed.



AutoSave saves quote information but does not initiate shredding. Shredding occurs only upon user-initiated save. If a user exits a quote without explicitly saving, the quote may be saved to the ExampleData database but not to the shredding database. This can prevent a 1-to-1 correlation between the two databases.



For Duck Creek Templates™ or EXAMPLE TransACT® 2.1 to function properly, AutoSave must be enabled (1).

Default	Valid
1	• 0 — Do not save quote on page change. • 1 — Save quote on page change.

BypassSSLHostAuthentication

Boolean value indicating whether to ignore SSL certificate validation errors between machines running EXAMPLE Express® and EXAMPLE Server®. This setting is only meaningful if the EXAMPLE Server® URL uses https: protocol.

Default	Valid
0	• 0 — Do not ignore certificate validation errors. • 1 — Ignore certificate validation errors.

CarrierName

Descriptive name of the carrier. This value is used in the EXAMPLE Express® browser window title bar, captions, and other locations, depending upon your custom skin.

Default	Valid
Demo National Insurance	Any text string.

ClientDetailsManuScriptID

ID of the ManuScript to use when editing or viewing client details.

Default	Valid
null	Valid ID of a ManuScript in an accessible catalog.

ConsumerAccessManuScriptID

ID of the ManuScript to use for guest and consumer quotes.

Default	Valid
null	Valid ID of a Manuscript in an accessible catalog.

ConsumerAccessRole

ID of the default role assigned to Consumer Access users. These roles must be created manually.

Default	Valid
null	Any valid role ID.

ConsumerAgencyID

ID of the default entity assigned to Consumer Access users. These entities must be created manually.

Default	Valid
null	Any valid Entity ID.

ContentFactory

Fully-qualified directory path to the ContentMap.xml file (and any custom ContentMap files). The path specifies the directory to use, and the file name (minus the file extension) specifies the base term to use to determine custom ContentMap files.

Default	Valid
C:\Program Files\Duck Creek Technologies 4.0\Express\App_Data\ContentMap.xml	Valid path, including file name, to the ContentMap.xml file.

DebugMode

Integer setting (0,1,2,3) used to log the XML content of each request to the EXAMPLE Express® system. Debug is turned on if the value of the setting is greater than 0. Each request is sent to the debugContent.xml file located in the EXAMPLE Express® directory or to the directory indicated by the *DebugOutputDir* configuration setting. As a result, Duck Creek Technologies, Inc. recommends setting this value to 0 on a runtime system.

This setting also determines whether to enable the **Go Back** button on the EXAMPLE Express® error screen.

Default	Valid
---------	-------

0	• 0 — Do not store EXAMPLE Express® debug information. • 1 — Save EXAMPLE Express® debug information to the debugContent.xml file. Enable the Go Back button on the EXAMPLE Express® error screen. • 2 — Save EXAMPLE Express® debug information to the debugContent.xml file, appending the <ManuScript.getPageRs> response (with session information). Enable the Go Back button on the EXAMPLE Express® error screen. • 3 — Save EXAMPLE Express® debug information to the directory specified by the <i>DebugOutputDir</i> configuration setting. Enable the Go Back button on the EXAMPLE Express® error screen.
---	---

DebugOutputDir

Location for the debug content file.

Default	Valid
C:\Program Files\Duck Creek Technologies 4.0\Express	Any valid file path.

EventLog

Enables use of the Application Event Log in EXAMPLE Express®, which logs exception conditions and registers when the user receives a notification message.

Default	Valid
Errors	• null — Do not log errors or notifications. • Errors — Log errors thrown in the EXAMPLE Express® system. • All — Log errors and notifications.

EXAMPLEServerURL

URL of the EXAMPLE Server® to be used by the EXAMPLE Express® system. Specify the DCTServer.aspx target if requests to the EXAMPLE Server® are to use HTTP.

If the EXAMPLE Express® system resides on the same machine as the EXAMPLE Server®, this setting can be left blank to indicate that the communication with the EXAMPLE Server® is to be local. This increases performance of each request but requires the EXAMPLE Express® installation to co-exist on the same server with the EXAMPLE Server®.

Default	Valid
http://localhost:80/DuckCreek40/dctserver.aspx	URL of an existing EXAMPLE Server®.

ExitInterviewField

Defines a ManuScript field to execute when a user completes an interview process in EXAMPLE Express®. For more information about the Exit Interview Field, see *Setting up the Exit Interview Field* in the *EXAMPLE Express® Reference Guide*.

Default	Valid
null	Name of a Manuscript field. The name must be identical in all Manuscripts that may be accessed.

FormsTempPath

UNC path accessible from both EXAMPLE Server® and EXAMPLE Express® machines that has both read and write permissions. This allows the transfer of temporary data between EXAMPLE Server® and EXAMPLE Express®.



Duck Creek Technologies, Inc. recommends that this path reside on the EXAMPLE Express® machine in an unclustered environment, or in a shared storage location in a clustered environment.

Default	Valid
C:\Program Files\Duck Creek Technologies 4.0\Express\Temp	Any valid path.

GetPageWaitTime

Number of milliseconds for EXAMPLE Express® to wait on asynchronous requests before loading a page. This setting increases the wait time on any request to EXAMPLE Server® for page information whether or not the request is asynchronous, so use with caution.

Default	Valid
0	Any positive integer or 0.

GetPolicyAdminManuscriptID

Boolean value indicating whether to look for a PolicyAdminManuscriptID field in the active Manuscript. If the field contains a valid Manuscript ID, EXAMPLE Express® will use the specified Manuscript for Policy Administration. Otherwise, EXAMPLE Express® will use the Manuscript ID specified by the *PolicyAdminManuscriptID* setting.

Default	Valid
null	• 0 — Use the Manuscript ID found in the <i>PolicyAdminManuscriptID</i> setting. • 1 — Use the Manuscript ID found in the specified PolicyAdminManuscriptID field.

GuestPassword

Password for guest access to EXAMPLE Express®.

Default	Valid
null	Text string.

GuestUserName

Username for guest access to EXAMPLE Express®.

Default	Valid
null	Text string.

InitVector

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string. Should be 16 characters long for maximum encryption strength.

InstantShred

Boolean value that indicates whether information entered into EXAMPLE Express® should be immediately shredded.

Default	Valid
0	• 0 — Write information to the queue for later shredding. • 1 — Immediately shred data to the database (if <i>UseShredding</i> is also set to 1). This option uses the <OnlineData.storePolicyRq> request or the <OnlineData.storeTransactionRq> request to shred the data.

LogoutURL

This setting determines the page to which EXAMPLE Express® sends a user upon logging out.

Default	Valid
null	• null — Send the user to the EXAMPLE Express® Login page. • Valid URL — Send the user to the specified URL.

MailTo

E-mail address to which support issues should be directed. If a user selects to send a support e-mail from EXAMPLE Express®, the e-mail is sent to the recipient specified by this setting.

Default	Valid
support@mycompany.com	Any valid e-mail address.

MenuMapFactory

Obsolete as of EXAMPLE Platform® 4.0.

MessageDetailsManuScriptID

ID of the Manuscript to use for editing or viewing message details.

Default	Valid
null	Valid ID of a Manuscript in an accessible catalog.

NewQuoteLimitRequests

Boolean value indicating whether to run listAgencies and associated requests on the New Quote page when the *NewQuoteManuscriptID* setting is not set to *null*. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
0	0 — Run listAgencies and associated requests on the New Quote page. 1 — Do not run listAgencies and associated requests on the New Quote page.

NewQuoteManuscriptID

ID of the New Quote Selection Manuscript to use when starting a new quote. The New Quote Selection Manuscripts enables a user-friendly interface for determining which Manuscript to use for a new quote.

Default	Valid
NewQuoteSelectionPortfolio	Valid ID of a Manuscript in an accessible catalog.

PartySearchManuscriptID

Reserved for future use.

PassPhrase

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string.

PerformanceLogging

Boolean value indicating whether EXAMPLE Express® should render performance data on the page. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
0	0 — Do not render performance data on the page. 1 — Render performance data on the page.

PolicyAdminManuScriptID



This setting is only for use with EXAMPLE TransACT® 1.8. If using EXAMPLE TransACT® 2.1, leave this setting blank.

ID of the TransACT Master ManuScript to use for EXAMPLE TransACT® 1.8.

Default	Valid
null	Valid ID of a ManuScript in an accessible catalog.

PostActionFactory

Fully-qualified directory path to the PostAction.xml file (and any custom PostActionMap files). The path specifies the directory to use, and the file name (minus the file extension) specifies the base term to use to determine custom PostActionMap files.

Default	Valid
C:\Program Files\Duck Creek Technologies .40\Express\App_Data\PostActionMap.xml	Valid path, including file name, to the PostActionMap.xml file.

PrintJobAsyncMode

Controls the asynchronous behavior for the previewAsyncPrintJob and the initAsyncPrintJob Express Actions.

Default	Valid
2	• 2 — Asynchronous with a semaphore. • 3 — Place the request in the Asynchronous queue. • 4 — Place the request in the Asynchronous queue and flag it to Auto Close so the session closes when the request completes.

PrintJobAutoRefresh

Boolean value indicating whether EXAMPLE Express® should automatically regenerate the forms list (while saving previous user selections) when the user loads the Policy Forms page.

Default	Valid
1	• 0 — Do not automatically regenerate the forms list. • 1 — Automatically regenerate the forms list.

PrintPreviewDownloadMode

This setting determines whether the preview of a form opens a pop-up window with a preview of the form or an Open/Save dialog box.



If the value of this setting is 1, the EXAMPLE Express® Web site must be in the client browser's list of trusted sites for the form to download properly.

Default	Valid
0	• 0 — Opens the form in a pop-up window. • 1 — Opens an Open/Save dialog box.

ProcessAsyncFormWaitTime

Value specifying whether EXAMPLE Express® should process requests asynchronously and what the delay time should be (in milliseconds) between checks to see if asynchronous requests have been completed.

Default	Valid
1	• 0 — Process all requests synchronously. • Any positive integer — Process requests asynchronously, and wait this number in milliseconds between checks for request completion.

ProxyMode

Boolean value that, if pertaining to an EXAMPLE Express® proxy, allows responses to successfully return to the client.

Default	Valid
0	• 0 — EXAMPLE Express® responses may not successfully return to the client. • 1 — EXAMPLE Express® responses will successfully return to the client.

RefreshClientOnLoad

Setting that causes the <OnlineData.loadPolicyRq> request to overwrite client information in the policy data with values from the client record.

A setting of 1 or 0 turns the client information refresh on or off globally. The value for this setting can be a comma-delimited list of the policy statuses that refresh the client information on load, usually *Quote*.

Default	Valid
Quote	• 0 — Do not refresh client information. • 1 — Refresh client information on each <OnlineData.loadPolicyRq> request made. • Comma-delimited list of policy statuses that should refresh client information.

SaltValue

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string.

SecureLogin

Boolean value indicating whether EXAMPLE Express® uses the secure socket layer when accessing the login or administration features of the system.

A value of true (1) for this configuration setting will force EXAMPLE Express® to use HTTPS for login and administration functions. All other pages will use HTTP. A value of true (1) requires that the Web server has a valid security certificate for the secure protocol.

Default	Valid
0	• 0 — Use current protocol for all requests. • 1 — Enter HTTPS upon login or administration requests.

SelectAgencyLimit

Specifies the threshold number of agencies required to display the agency list in *large list* mode. Out of the box, an agency list with a number of agencies less than or equal to the number specified for this setting will appear in a drop-down list in EXAMPLE Express®. An agency list with a number of agencies greater than the number specified in this setting will appear in a grid in EXAMPLE Express®.

Default	Valid
15	Any positive integer.

ServerConfig

Fully-qualified directory path to the OnDemand.config file.

Default	Valid
C:\Program Files\Duck Creek Technologies 4.0\Express\App_Data\OnDemand.Config	Valid path, including file name, to the OnDemand.config file.

ServerDomain

Domain name for Microsoft Windows domain user Single Sign On. If null, mixed mode authentication will not be used. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Text string.

SMTPServer

SMTP mail server used by EXAMPLE Express® or EXAMPLE Server® when generating e-mail messages. The SMTP mail service need not be on the same machine as EXAMPLE Express® or EXAMPLE Server®.

Default	Valid
null	• null — No e-mail service. • Fully qualified name of the SMTP Server to which to route service when sending an e-mail message.

SMTPServerPort

Port number to use for the SMTP Server during the agency sign-up process. If the setting is incorrect, an error message is displayed. No notification is sent to the address found in the *MailTo* setting to notify the administrator that an agency has requested sign up.

Default	Valid
25	Integers between 1 and 65535.

TaskDetailManuScriptID

ID of the Manuscript to use for editing or viewing task details.

Default	Valid
Carrier_TaskDetailEditing	Valid ID of a Manuscript in an accessible catalog.

Timeout

Number of milliseconds EXAMPLE Express® will wait for a response from EXAMPLE Server® before timing out.

To force EXAMPLE Express® to never time out when making calls to EXAMPLE Server®, set this value to -1.



The *executionTimeout* attribute of the ASP.NET <httpRuntime> element must be greater than or equal to the Express\Web.config *Timeout* value. If the *executionTimeout* attribute of the ASP.NET <httpRuntime> element is less than the Express\Web.config *Timeout* value, ASP.NET could time out before EXAMPLE Express® and not provide the user any indication that this happened. For more information on the <httpRuntime> element, see <http://msdn.microsoft.com/en-us/library/e1f13641.aspx>.

Default	Valid
360000	• Any positive integer — Number of milliseconds to wait before timing out of EXAMPLE Express®. • -1 — Disable EXAMPLE Express® timeout. • null — System will use a value of 90000 milliseconds

UploadDir

Global path to the directory where files are uploaded and downloaded. The specified path should be used for all servers in a cluster that are accessible from the EXAMPLE Express® server. It should be a shared or network path that all machines in a configuration can access. The path must have security access rights to allow the Web user to read and write files to the selected directory.

Default	Valid
C:\Program Files\Duck Creek Technologies 4.0\Express\Upload	Any valid file path.

UserDetailsManuScriptID

Obsolete for EXAMPLE Platform® 4.0. This functionality is now available for use in EXAMPLE UserAdmin™. See the *UserDetailsManuScriptID* configuration setting in the UserAdmin\Web.config file.

XmlNamespaceUri

Value to use for transformation. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default
null

XSLTDir

Relative path from the *GlobalRootPath*\Express directory to the appropriate custom skins directory (for example, "Skins\Custom").

Default	Valid
Skins\AvantGarde	Valid relative directory path.

SSOErrorMsg

Error message displayed when a user has been authenticated by a single-sign-on tool but does not have a valid EXAMPLE Server® authorization account.

Default	Valid
You do not have access to Example Express. Please contact your administrator or login.	Any text string

Server.config Settings

This section contains descriptions, defaults, and valid values of all EXAMPLE Server® user-configurable settings. You can use the Edit Configuration Utility in the Duck Creek root directory (by default C:\Program Files\Duck Creek Technologies\Util\EditConfig.exe) to manually alter these settings.

Improperly adjusting EXAMPLE Server® configuration settings can lead to unintended behaviors or can even prevent EXAMPLE Server® products from functioning. Use caution when changing these settings.

Server	
Key	Default Value
<i>RootPath</i>	C:\Program Files\Duck Creek Technologies
<i>GlobalRootPath</i>	C:\Program Files\Duck Creek Technologies
<i>RuntimeRoot</i>	C:\Program Files\Duck Creek Technologies\Shared\Bin
<i>ServerList</i>	null
<i>ConsumerAccess</i>	False
<i>CleanupInterval</i>	3600
<i>SemaphoreCleanupMode</i>	2
<i>TimeoutLength</i>	3600
<i>DatabaseProvider</i>	ODBC
<i>MaxMRUSize</i>	5
<i>ProcessorAffinityMask</i>	null
<i>DefaultCultureCode</i>	en-US
<i>ConnectionString</i>	DSN=ExampleData
<i>AutoUpdateExtendedColumns</i>	False
Consumer Access	
Key	Default Value
<i>AgencyEntityID</i>	0
<i>GuestUserAccount</i>	null
<i>PolicyHolderTemplateAccount</i>	null
<i>ConsumerKeyFormat</i>	ConsumerKeyLastName ConsumerKeyEmail ConsumerKeyZip
<i>PassPhrase</i>	dctP@ssphr@se
<i>SaltValue</i>	dctS@lty@lue
<i>InitVector</i>	DCT_IS_@_GR8_PLC
Data Access	
Key	Default Value

<i>TimeoutLength</i>	3000000000
<i>ConnectionString</i>	server=.;database=ExampleData;Integrated Security=true;
<i>ProviderName</i>	System.Data.SqlClient
<i>EnvironmentConfigEnabled</i>	1
Billing	
Key	Default Value
<i>PoliciesQueue</i>	.\PRIVATE\$\BillingIntegration
<i>QueueProcessingUserId</i>	admin
<i>InvoicePath</i>	C:\Program Files\Duck Creek Technologies\Invoices
<i>AgencyStatementsFolderRootPath</i>	C:\Program Files\Duck Creek Technologies\Statements
<i>AgencyStatementsFromEmailAddress</i>	null
<i>AgencyStatementsPassword</i>	password55
<i>ProcessElectronicPayment</i>	False
<i>ChgNotThresh</i>	0
<i>DirectBillCommissionStatementsFolderRootPath</i>	Any valid file location.
<i>EFTFrmReq</i>	1
<i>Use3rdPartyPayments</i>	False
<i>PaymentSiteURL</i>	Null
<i>ScheduledActivityDelay</i>	600000
Environment	
Key	Default Value
<i>CurrentProcessingDate</i>	null
<i>DefaultCultureCode</i>	en-US
<i>PolicySystemInUse</i>	null
<i>PartySystemInUse</i>	null
Session	
Key	Default Value

<i>AuthStore</i>	Database
<i>DataStore</i>	Database
<i>NameStore</i>	Database
<i>DSN</i>	DSN=ExampleData
<i>ValidUsersFile</i>	null
<i>PasswordExpirationInterval</i>	0
<i>AccountExpirationInterval</i>	0
<i>DomainServer</i>	null
<i>CacheMaxCount</i>	10
<i>AllowPasswordHash</i>	False
<i>ClearMessages</i>	True
<i>DBUserName</i>	Reserved for future use.
<i>DBPassword</i>	Reserved for future use.
<i>DBServer</i>	Reserved for future use.
<i>MaxStringsInterned</i>	int.MaxValue (2147483647)
<i>DBName</i>	Reserved for future use.
<i>PasswordExpirationGraceInterval</i>	0
OnlineData	
Key	Default Value
<i>ShredDSN</i>	null
<i>ShredMode</i>	null
<i>useShredding</i>	0
<i>useConditionalShredding</i>	0
<i>AttachmentURL</i>	null
<i>ReportDuplicatedTransactions</i>	True
Logging	
Key	Default Value

<i>CDATAPayload</i>	False
<i>CDATASession</i>	True
<i>ConnectionString</i>	DSN=ExampleData
<i>LogStoreType</i>	Database
<i>MessageQueue</i>	.\PRIVATE\$\EXAMPLELogs
<i>CurrentLog</i>	null
<i>Enabled</i>	True
Forms	
Key	Default Value
<i>Path</i>	C:\Program Files\Duck Creek Technologies\Forms
<i>CreateFolder</i>	1
<i>EmailTo</i>	null
<i>PublicRecalc</i>	True
<i>CollapseTableRows</i>	True
<i>AppendFormName</i>	True
<i>ReportRatingErrors</i>	False
<i>BlankPageText</i>	This page intentionally left blank.
<i>BlankPageTextAngle</i>	N/A
<i>BlankPageTextSize</i>	N/A
<i>WordDocumentEngine</i>	TXText
<i>ScaleRelativeToTarget</i>	True
Send	
Key	Default Value
<i>DefaultFilePath</i>	null
<i>DefaultQueue</i>	.\PRIVATE\$\SendQueue
<i>SMTPServer</i>	null
<i>SMTPServerPort</i>	null

<dsn/>	
Key	Default Value
<i>CacheConnections</i>	1
ManuScript	
Key	Default Value
<i>CacheCount</i>	50
<i>ShortCircuitCond</i>	True
<i>ClearIterContext</i>	False
<i>EmulateTrueInheritance</i>	True
<i>MaxStringsInterned</i>	int.MaxValue (2147483647)
<i>RuntimeOnly</i>	False
<i>ButtonContextCompatibility</i>	True
DataSet	
Key	Default Value
<i>CacheCount</i>	50
DataKey	
Key	Default Value
<i>CacheCount</i>	50
Async	
Key	Default Value
<i>MaxThreads</i>	8
<i>RequestUrl</i>	http://localhost/DuckCreek30/DCTServer.aspx
<i>DBConnectionString</i>	DSN=ExampleData
<i>DefaultSuccessNotification</i>	msmq=.\\PRIVATE\$\\AsyncSuccessQueue
<i>DefaultFailureNotification</i>	msmq=.\\PRIVATE\$\\AsyncFailureQueue
<i>DefaultThreadPriority</i>	4
<i>DefaultQueuePriority</i>	2

<i>TimeoutInSeconds</i>	720
<i>QueueCheckIntervalInMillis</i>	20000
<i>NotificationUrl</i>	null
<i>NotificationUserName</i>	null
<i>NotificationPwd</i>	null
<i>RequestPollIntervalInMillis</i>	5000
Debug	
Key	Default Value
<i>Path</i>	C:\Program Files\Duck Creek Technologies\Session
<i>SessionID</i>	null
<i>Mode</i>	none
<i>TSVDebug</i>	False
<i>DebugFilePath</i>	C:\Program Files\Duck Creek Technologies\Web\TSV
<i>WebServerRoot</i>	http://MachineName/VDirGoesHere/TSV
Security	
Key	Default Value
<i>UseRoleBasedSecurity</i>	False
<i>LockoutOnFailure</i>	False
<i>LoginAttemptsAllowed</i>	3
<i>LockoutNotification</i>	null
<i>EncryptionConfigPath</i>	C:\Program Files\Duck Creek Technologies\Shared\Encryption.config
<i>UpdateSecurityLevels</i>	True
<i>ContextIncludesSysPrivilege</i>	False
Regression	
Key	Default Value
<i>Path</i>	N/A
<i>Active</i>	N/A

<i>MasterDBConnection</i>	N/A
<i>RefreshFlag</i>	N/A
<i>SequentialIds</i>	N/A
<i>WebVDir</i>	N/A
<i>SqlScripts</i>	N/A
<i>Other</i>	N/A
<i>HelperRequests</i>	N/A
<i>Schemas</i>	N/A
<i>Attachments</i>	N/A
<i>Output</i>	N/A
<i>Catalogs</i>	N/A
TransACT	
Key	Default Value
<i>CacheCount</i>	10
<i>Debug</i>	none
<i>ReconcileReportDatesFile</i>	C:\Program Files\Duck Creek Technologies\Shared\CycleDates.xml (The <serv> installation places a blank XML file at this path.)
<i>ReconcileReportDSN</i>	Value entered during installation.
<i>IncludeRedundantRecordInRewrite</i>	0
<i>IncludeAutosave</i>	0
QualCorp	
Key	Default Value
<i>DebugFile</i>	null
PortfolioConfig	
Key	Default Value
<i>CacheCount</i>	10

AccountExpirationInterval

Default time, in days, before a user account expires. Use 0 for no expiration. When a user is added to the system, the expiration is calculated and stored in the accountExpiration field of the EXAMPLEUsers table in the ExampleData database.

Default	Valid
0	• Any positive integer — Number of days before a user account expires. • 0 — No user account expiration.

Active

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

AgencyEntityID

Default entity ID for consumer access.

Default	Valid
0	Any text string.

AgencyStatementsFolderRootPath

Default location for Agency Billing statements.

Default	Valid
C:\Program Files\Duck Creek Technologies\Statements	Any valid location.

AgencyStatementsFromEmailAddress

This setting is the email address used to send Agency Billing statements.

Default	Valid
null	Any valid email address.

AgencyStatementsPassword

This setting is the default password that allows a user to unlock the Excel spreadsheet containing an Agency Billing statement.

Default	Valid
password55	Any valid Excel password.

AllowPasswordHash

Determines whether EXAMPLE Server® will allow user passwords beginning with the pipe character (|). Passwords beginning with this character are not encrypted, and are therefore a security risk.

Default	Valid
False	• True — Allow user passwords beginning with the pipe character (). • False — Do not allow user passwords beginning with the pipe character ().

AppendFormName

Indication of whether to append the name of a form to the file name when saving.

Default	Valid
True	• True — Append form name to file name. • False — Do not append form name to file name.

Attachments

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

AttachmentURL

The UNC where attachments are stored. If null, GlobalRootPath\Attachments is used.

Default	Valid
null	Any valid directory path.

AuthStore

Type of user authentication for EXAMPLE Server® to use.

Default	Valid
Database	• None — Provide no authentication. • Windows — Validate usernames and passwords against Windows Users for authorization. • Database — Validate usernames and passwords against Database Users for authorization.

AutoUpdateExtendedColumns

Indication of whether to automatically update extended columns in the Quote table or to use the legacy UserDefinedData table.

Default	Valid
False	• True — Automatically update the Quote table. (Recommended) • False — Do not automatically update the Quote table, and use the UserDefinedData table instead. (Supports backward compatibility)

BlankPageText

This is the text that will appear on any added page.

Default	Valid
This page intentionally left blank.	Any Unicode character.

BlankPageTextAngle

This is the angle of the text on any added page.

Default	Valid
N/A	Typical values are between 0 and 90. Negative angles will flip the text.

BlankPageTextSize

This is the size of the text that will appear on any added page. Text will not wrap, so if the font size is too large, all of the text may not fit on the page.

Default	Valid
N/A	All integer values. (Typical values range from 8 to 72.)

ButtonContextCompatibility

This setting causes the *objectRef* attribute to be included in the <ManuScript.getPageRq> request that is automatically generated for custom actions. This setting allows custom actions to maintain iteration context.

Default	Valid
True	• False — Add the <i>objectRef</i> attribute • True — Do not add the <i>objectRef</i> attribute



The EXAMPLE Platform® does not allow fields containing preactions and post actions outside of the current context to iterate within the group to which the context is currently set.

CacheConnections

This setting defines how the external ODBC access features of EXAMPLE Server® treat database connections.

Default	Valid
1	• 0 — The server assumes database connections are pooled and obtains and releases a connection to the database on every access. • 1 — A connection to the database is held open until the ManuScript has completed execution.

CacheCount

The CacheCount setting applies to the following items:

- **Manuscript** — Number of Manuscripts to hold in memory at one time.
- **DataSet** — Number of DataSets to hold in memory at one time.
- **DataKey** — Number of DataKeys to hold in memory at one time.
- **PortfolioConfig** — Number of Portfolio catalog items to hold in memory at one time.
- **TransACT** — Number of TransACT catalog items to hold in memory at one time. (Defaults to 10.)

Be careful when increasing these settings. The larger the setting for each option, the greater the performance cost. These settings can be used to fine tune the memory usage of the EXAMPLE Server® Worker Process cached resources and should be set at the level they are most often accessed. They can be lowered to reduce memory usage, but if set too low, performance will also be reduced.

Default	Valid
50	Any positive integer or 0.

CacheMaxCount

This setting specifies the number of sessions to cache in memory. Used for performance tuning. As new sessions are created on a server, they are cached in memory to reduce the number of server calls. Caching these sessions reduces the time to reload data from the persistent store on each <Session.resumeRq> request.

Adjust this setting based on the number of active users and the memory availability on the system. As the number increases, more system memory is required.

Default	Valid
10	Any positive integer.

Catalogs

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

CDATAPayLoad

Boolean value (True or False) that specifies whether or not the payload of a request is stored in a CDATA field in the EXAMPLE Server® logs.

This setting is only valid when the LogstoreType is XML (file logging is enabled) and the *requestLogLevel* attribute of a request, as defined in the request map, has a value of 2.

Default	Valid
False	• True — Store request payloads in logs. • False — Do not store request payloads.

CDATA_{Session}

Boolean value (True or False) that specifies whether the resulting session data of a request is stored in a CDATA field in the EXAMPLE Server® logs.

This setting is only valid when the *LogstoreType* is *XML* (file logging is enabled) and the *sessionLogLevel* attribute of a request, as defined in the request map, has a value of 1.

Default	Valid
True	• True — Save session data in logs. • False — Do not save session data in logs.

ChgNotThresh

This setting specifies the threshold amount to determine if a debit change notice will be sent for an EFT account.

Default	Valid
0	Any amount.

CleanupInterval

Interval, in seconds, at which the session cleanup service checks for stale sessions. Sessions are considered stale after they are older than the value of the TimeoutLength setting. Used on a standalone EXAMPLE Server® and the EXAMPLE Server® running the session cleanup service in a cluster.

Default	Valid
3600	0-9999

ClearIterContext

Indication of whether to clear context when processing iterations. When enabled, this setting supports the processing of iterations within iterations, which may fail if the setting is disabled. Enabling this setting can slow Manuscript processing, and is not recommended.

Default	Valid
False	• True — Clear iteration context to support nested iterators. • False — Do not clear iteration context.

ClearMessages

Determines whether EXAMPLE Server® response messages are stored in the session data for the entire session or only until another request is sent to EXAMPLE Server®.

Default	Valid
---------	-------

True	• True — Clear contents of the <Messages> element in session data when initiating a new request. • False — Persist contents of the <Messages> element through all requests for the entire session.
------	---

CollapseTableRows

Supports backwards compatibility with the upgrade of TX Text Control version 13, so the Forms generator will ignore minimum height settings for table rows and collapse the table rows to fit only the text each row contains.

Default	Valid
True	• True — Collapse table rows to fit the contained text only. • False — Do not ignore the minimum height setting.

ConnectionString

Session section

Connection string to the database for storing logging or session information. Depending on your database settings, you may need to specify a user ID and password in addition to the DSN. (*DatabaseName;uid="user";pwd="password";*)

Default	Valid
DSN=ExampleData	Any DSN with the correct DB structure attached. (Example: DSN=ExampleData;uid=username;pwd=password)

DataAccess section

Defines the database connection string to the DataAccess component. The connection string is comprised of keywords separated by a semicolon. The valid keywords are:

- **Server** — Database server.
- **Database** — Name of the database.
- **Integrated Security** — The authentication credentials used when connecting to the database server. This is either true or false.

If Integrated Security is set to false, then these keywords must also be specified:

- **User ID** — The identity of the user for authentication and authorization purposes.
- **Password** — Password of the user.

Default	Valid
server=.;database=ExampleData;Integrated Security=true;	Semicolon-delimited list of above keywords.

ConsumerAccess

Boolean value (True or False) that turns Consumer Access on and off.

This setting, when set to *True*, allows a user to call the <OnlineData.MovePolicyRq>, <OnlineData.AddAgencyRq>, <OnlineData.AddAgencyUserRq>, and <OnlineData.SetAgencyGroupLinkRq> requests, which by default are only available to Administrators.

Default	Valid
False	• True — Enable Consumer Access settings. • False — Disable Consumer Access settings.

ConsumerKeyFormat

Keys required to create an account for a prospective customer. A pipe (|) separated list of fields from the database map section of the consumer access manuScripts.

Default	Valid
ConsumerKeyLastName ConsumerKeyEmail ConsumerKeyZip	Any ASCII text string.

ContextIncludesSysPrivilege

Determines whether EXAMPLE Server® responses that contain context information include both custom privileges (contexts) and system privileges.

Default	Valid
False	• True — Include system privileges, as well as custom privileges (contexts), in an EXAMPLE Server® response that contains context information. • False — Exclude system privileges from EXAMPLE Server® responses.

CreateFolder

Boolean flag (1 or 0) indicating whether to prompt for the creation of sub-folders in which to store generated forms.

Default	Valid
1	• 1 — Prompt user and create sub-folders on positive response. • 0 — Do not create sub-folders.

CurrentLog

MSMQ location to which logs are sent.

Default	Valid
null	Any valid MSMQ. (Example: msmq=.\PRIVATE\$\AsyncSuccessQueue)

CurrentProcessingDate

This setting is primarily for debugging purposes in Duck Creek Billing™, and should be left empty in a production environment. When the value is set to a date, Duck Creek Billing™ behaves as though the entered date is the current date. When left blank, Duck Creek Billing™ uses the current system date.

Default	Valid
null	Any valid date specified.

DatabaseProvider

Database protocol for use by EXAMPLE Server®. At this time, the only valid option is *ODBC*.

Default	Valid
ODBC	ODBC

DataStore

Method of data store to use for session data storage.

Default	Valid
Database	• File — Store session data as individual files in the GlobalRootPath\Session folder. • Database — Store session data in the session table of the database.

DBConnectionString

Connection string for the database that the Async Queue Manager uses. If left blank, the DB that is configured for the Session is used. Depending on your database settings, you may need to specify a user ID and password in addition to the DSN. (*DatabaseName;uid="user";pwd="password";*)

Default	Valid
DSN=ExampleData	Any valid DSN. (Example: DSN=ExampleData;uid=username;pwd=password)

DBName

This setting is reserved for future use.

DBPassword

This setting is reserved for future use.

DBServer

This setting is reserved for future use.

DBUserName

This setting is reserved for future use.

Debug

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

DebugFile

This setting is specific to integration partner QualCorp applications.

DebugFilePath

Location for the .tsv debug files which ExampleUtil.exe creates. The configured user must have write rights to this folder.

Default	Valid
C:\Program Files\Duck Creek Technologies\Web\TSV	Any valid directory path.

DefaultCultureCode

Determines the default value of the Culture property of new Manuscripts created in EXAMPLE Author®. The value of this setting is also used for Manuscript date and currency display purposes in EXAMPLE Author® if no Culture is defined in a Manuscript.



Date display in EXAMPLE Express® is determined by browser settings, not by this setting.

Default	Valid
en-US	Any ISO culture code supported by the EXAMPLE Platform®. Duck Creek Technologies, Inc. recommends changing this value using the Forms mode of Edit Configuration Utility, which contains a list of the currently supported cultures.

DefaultFailureNotification

Method of notification used to store default failure text if not specified in the request.

Default	Valid
---------	-------

msmq=.\\PRIVATE\$\\AsyncSuccessQueue	• file — Places the contents of the response in a session-specific XML file with the response status concatenated with the session ID as the file name. (Example: file=c:\\temp) • log — Places the notification into the Application Event log on the EXAMPLE Server®. (Example: log=ExampleServer) • dsn — Places the contents of the response into the specified database. The syntax of this item requires square brackets [] to delineate the items to avoid conflicts with semi-colons embedded in the connection string. The [connectstring] is required however [table] is optional. If [table] is not specified, the default table names are used. (Example: dsn=[DSN=ExampleData;uid=username;pwd=password]; dsn=[DSN=MyDB][DCTTable]) • msmq — Sends the notification to the specified MSMQ. This MSMQ cannot be transactional. Please consult with your operating system documentation to learn more about creating non-transactional queues. (Example: msmq=.\\PRIVATE\$\\MyQueue) For more information, see <i>Notification Syntax</i> in the <i>Guide to EXAMPLE Server®</i>. • email — Sends the notification to the specified e-mail address. The body of the e-mail message is summary information along with the XML response of the request. (Example: email=it@mycompany.com)
--------------------------------------	--

DefaultFilePath

The value of this setting is prepended to any relative path defined in a <Send.writeFileRq> request. If the request defines a specific path, this setting is ignored.

Default	Valid
null	Any valid directory path.

DefaultQueue

Microsoft Message Queue used to store files if not specified in a <Send.queueRq> request.

Default	Valid
null	Any valid MSMQ path. (Example: msmq=.\\PRIVATE\$\\AsyncSuccessQueue)

DefaultQueuePriority

Default queue priority if not specified in request. This should be left at 2 for most applications.

Default	Valid
---------	-------

2	• 0 — Immediate • 1 — High • 2 — Normal • 3 — Low • 4 — Minimal
---	--

DefaultSuccessNotification

Method of notification used to store default success text if not specified in the request.

Default	Valid
msmq=.\\PRIVATE\$\\AsyncSuccessQueue	• file — Places the contents of the response in a session-specific XML file with the response status concatenated with the session ID as the file name. (Example: file=c:\\temp) • log — Places the notification into the Application Event log on the EXAMPLE Server®. (Example: log=ExampleServer) • dsn — Places the contents of the response into the specified database. The syntax of this item requires square brackets [] to delineate the items to avoid conflicts with semi-colons embedded in the connection string. The [connectstring] is required however [table] is optional. If [table] is not specified, the default table names are used. (Example: dsn=[DSN=ExampleData;uid=username;pwd=password]; dsn=[DSN=MyDB][DCTTable]) • msmq — Sends the notification to the specified MSMQ. This MSMQ cannot be transactional. Please consult with your operating system documentation to learn more about creating non-transactional queues. (Example: msmq=.\\PRIVATE\$\\MyQueue) For more information, see <i>Notification Syntax</i> in the <i>Guide to EXAMPLE Server®</i>. • email — Sends the notification to the specified e-mail address. The body of the e-mail message is summary information along with the XML response of the request. (Example: email=it@mycompany.com)

DefaultThreadPriority

Default thread priority of asynchronous requests if not specified in request.

Default	Valid
---------	-------

4	• 0 — Highest • 1 — Above normal • 2 — Normal • 3 — Below normal • 4 — Lowest
---	--

DirectBillCommissionStatementsFolderRootPath

This setting specifies the location of the commission statements in Duck Creek Billing™.

Default	Valid
C:\Program Files\Duck Creek Technologies\DirectBillCommissionStatements	Any valid file location.

DomainServer

Name of the domain server that controls user accounts. This setting only applies if AuthStore = *Windows* and NameStore = *Database*.

Default	Valid
null	Name of existing domain server.

DSN

ODBC connection used by the system to connect to the EXAMPLE database. Depending on your database settings, you may need to specify a user ID and password in addition to the DSN. (*DatabaseName*;uid="*user*";pwd="*password*";)

Default	Valid
DSN=ExampleData	Any valid DSN. (Example: DSN=ExampleData;uid=username;pwd=password)

EFTFmReq

This setting specifies whether or not EFT invoices are generated for EFT accounts.

Default	Valid
1	• 1 — True • 2 — False

EmailTo

E-mail address used when e-mailing forms.

Default	Valid
null	Any valid e-mail address.

EmulateTrueInheritance

This setting determines the method EXAMPLE Server® uses to process Manuscript XML. Enabling this setting can reduce the amount of memory necessary to load a derived Manuscript into memory by reusing base Manuscript objects and XML definition. This setting will only affect Manuscripts that have been derived from other Manuscripts.

Default	Valid
True	• True — Enable true inheritance emulation. • False — Disable emulation, instead processing Manuscript XML by legacy methods.

Enabled

Boolean value that determines if logging is enabled.

Default	Valid
True	• True — Enable logging. • False — Disable logging.

EncryptionConfigPath

Full directory path to the Encryption.config file used for field-level encryption.

Default	Valid
\$Server.RootPath\$\Shared\Encryption.config	Any fully qualified directory path including the file name.

The field-level encryption feature uses information contained in the Encryption.config file to generate encryption keys. These encryption keys are then used to encrypt the values of public fields marked for encryption as indicated by selecting the **Encrypt data** check box on the Definition tab in EXAMPLE Author®.



If the Encryption.config file is lost, corrupted, or inappropriately altered, data encrypted by the EXAMPLE Platform® will be irrecoverable.

The Encryption.config file contains extremely sensitive data. Access to the file should be limited to security administrators and the user account assigned to the EXAMPLE Platform® worker process. Ensure that appropriate backup procedures are in place for this file.

The structure of the Encryption.config file is:

```
<configuration>
  <EncryptionKeySets>
    <Set passPhrase="passPhrase" saltValue="saltValue" initVector="initVector"
      keySize="128" active="1" id="1" />
  </EncryptionKeySets>
</configuration>
```

```

        <Set passPhrase="passPhrase" saltValue="saltValue" initVector="initVector"
        keySize="128" active="0" id="2" />
        ...
    </EncryptionKeySets>
</configuration>

```

Each <Set> element represents a separate set of data used to generate an encryption key. You can change the active encryption key by changing the *active* attribute on the desired <Set> element to *1*. Only one <Set> element can be active at a time. <Set> elements in the Encryption.config file contain the following attributes.

Attribute	Value
passPhrase	Any alphanumeric string.
saltValue	Any alphanumeric string.
initVector	Any alphanumeric string, should be 16 characters long for maximum encryption strength.
keySize	Size, in bits, of the generated encryption key. Larger keys increase encryption strength but also increase processing load. If this attribute is absent or contains no value, a default of 128 will be used. Valid options are: • 128 • 192 • 256
active	Indication of which <Set> element contains the active encryption data. Only one <Set> element can be active at any given time. Valid options are: • 1 — Active • 0 — Inactive
id	Numeric indicator. It is recommended that the value for this attribute be sequential through the list of <Set> elements.

EnvironmentConfigEnabled

Indication of whether to allow the data access component to pass configuration information contained in the Server.config file to stored procedures.

Default	Valid
1	• 1 — Include configuration information • 0 — Do not include configuration information.

FileLockTimeout

Prevents multiple threads from accessing the same file at a time for a specified amount of time.

Default	Valid
---------	-------

60 seconds	All integers from 0 to 2,100,000,000. Setting this key to 0 not recommended in a development environment.
------------	---



Duck Creek Templates™ customers should increase the *FileLockTimeout* setting to 300 seconds while loading large Manuscripts or DataService files to prevent an error from occurring.

GlobalRootPath

Base directory for any resources that may be shared between multiple servers in a server cluster (Manuscripts, forms, attachments, etc.). If EXAMPLE Server® is running in a clustered environment, each server in the cluster should have this setting set to the same globally available directory.



It is best practice to place this on a highly available high-bandwidth common storage medium when a cluster is used.

Default	Valid
C:\Program Files\Duck Creek Technologies	Any valid directory path or token.

GuestUserAccount

Account to use for guest or prospective customer access.

Default	Valid
null	Any text string.

HelperRequests

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

IncludeAutosave

Boolean value indicating whether to include transactions that are the result of an autosave in reconciliation reports. This setting can be overridden on a report-by-report basis using the *IncludeAutosave* attribute on several of the reconciliation report EXAMPLE Server® requests.

Default	Valid
0	• 1 — Include transactions that are the result of an autosave. • 0 — Do not include transactions that are the result of an autosave.

IncludeRedundantRecordInRewrite

Boolean value indicating whether to include redundant records resulting from Rewrite transactions in reconciliation reports. (When a Rewrite transaction is performed, two sets of quote and history records are created in the ExampleData database: one for the original policy that was cancelled, and one for the new policy created by the

Rewrite.) This setting can be overridden on a report-by-report basis using the *IncludeRedundantRecordInRewrite* attribute on several of the reconciliation report EXAMPLE Server® requests.

Default	Valid
0	• 1 — Include redundant records resulting from Rewrite transactions. • 0 — Do not include redundant records resulting from Rewrite transactions.

InitVector

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box ExpressWeb.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string. Should be 16 characters long for maximum encryption strength.

InvoicePath

Default path for the location of invoices created by Duck Creek Billing™.

Default	Valid
C:\Program Files\Duck Creek Technologies\Invoice	Any valid location.

LockoutNotification

Method of notification used to store default lockout text, if not specified in the request.

Default	Valid
null	• file — Places the contents of the response in a session-specific XML file with the response status concatenated with the session ID as the file name. (Example: file=c:\temp) • log — Places the notification into the Application Event log on the EXAMPLE Server®. (Example: log=ExampleServer) • dsn — Places the contents of the response into the specified database. The syntax of this item requires square brackets [] to delineate the items to avoid conflicts with semi-colons embedded in the connection string. The [connectstring] is required however [table] is optional. If [table] is not specified, the default table names are used. (Examples: dsn=[DSN=ExampleData;uid=username;pwd=password]; dsn=[DSN=MyDB][DCTTable]) • msmq — Sends the notification to the specified MSMQ. This MSMQ cannot be transactional. Please consult with your operating system documentation to learn more about creating non-transactional queues. (Example: msmq=.\PRIVATE\$\MyQueue) • email — Sends the notification to the specified e-mail address. The body of the e-mail message is summary information along with the XML response of the request. (Example: email=it@mycompany.com)

LockoutOnFailure

Boolean setting that determines whether a user is locked out after a number of unsuccessful login attempts equal to the value of LoginAttemptsAllowed.

Default	Valid
False	• True — Deny user access after appropriate number of failed login attempts. • False — Do not lock out users.  Users can log in even if locked out when the value of this setting is False.

LoginAttemptsAllowed

Number of times a user may unsuccessfully attempt to log in before being locked out. This setting only applies if LockoutOnFailure is *True*.

Default	Valid
3	Any positive integer.

LogStoreType

Method used for storing EXAMPLE Server® logs.

Default	Valid
Database	• None — Do not write logs. • XML — Write logs to an XML file in the GlobalRootPath\Logs folder. • Database — Store logs in the database specified by ConnectionString.

MasterDBConnection

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

MaxMRUSize

Number of policies (stored to the database) to maintain in a Most Recently Used list.

Default	Valid
5	Any positive integer or 0.

MaxStringsInterned

Determines the maximum number of string values that can be stored in the SessionInternTable.

Default	Valid
int.MaxValue (2147483647)	Any positive integer integer value or 0.

Leaving the value of this setting empty allows the interning of all strings.



To help prevent out of memory errors, customers processing large commercial lines policies should change the default setting in the Manuscript and Session sections of the Server.config file to the following:

- **ManuscriptMaxStringsInterned** — 100000
- **SessionMaxStringsInterned** — 50000

MaxThreads

Maximum number of threads that can process requests at the same time. This setting is used to fine tune performance.

Default	Valid
8	Any positive integer.

MessageQueue

Location of the message queue that logging uses for queueing EXAMPLE Server® log messages. This may be a local queue if the logging service is running locally or a remote queue for centralized logging on a cluster.

Default	Valid
.\PRIVATE\$\EXAMPLELogs	Any valid MSMQ path. (Example: msmq=.\PRIVATE\$\AsyncSuccessQueue)

Mode

Mode of debugging.

Default	Valid
none	• none — Turn off debugging. • random — Log all requests to unique files per request. • sessionid — Log only requests from specified SessionID. • last — Log only the last request.

NameStore

Type of data store for user-related information, such as full name and security levels.

Default	Valid
Database	• None — Provide no name store. Full names are unavailable, and all requests have full security clearance. • Database — Store the user data in the ExampleUsers table in database.

NotificationPwd

Password for the EXAMPLE Server® to which requests containing asynchronous success and failure notifications are sent.

Default	Valid
null	Text string.

NotificationUrl

URL of the EXAMPLE Server® to which requests containing asynchronous success and failure notifications are sent.

Default	Valid
null	Any valid URL.

NotificationUserName

User name for the EXAMPLE Server® to which requests containing asynchronous success and failure notifications are sent.

Default	Valid
null	Text string.

Other

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

Output

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

PartySystemInUse

This setting is reserved for future use.

PasswordExpirationGraceInterval

Once a user's password expires, they will not be able to log in to the EXAMPLE Platform®. This setting determines how long the user has to change their password after their password expires and before the user is locked out of the system. If the user account is locked out of the system, a system administrator must unlock it.

Default	Valid
0	• Any negative integer – The system does not lock out a user account when the password expires. • 0 – The system locks out a user account when the password expires. • Any positive integer – The system allows the user a grace period of this number of days to change their password after it expires.

PasswordExpirationInterval

Default time, in days, before user passwords expire. Use 0 for no expiration. When a password is changed, the expiration interval is calculated and stored in the passwordExpiration field in the EXAMPLEUsers table of the ExampleData database.

Default	Valid
0	• Any positive integer — number of days before passwords expire. • 0 — No password expiration.

PassPhrase

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string.

Path

- **Forms** — Fully qualified path of the folder that contains all original documents that can potentially be printed. This folder may also have subfolders with documents to be printed. This folder is the location that is used as a starting point for the paths specified in the Manuscript. (Defaults to C:\Program Files\Duck Creek Technologies\Forms.)
- **Debug** — Directory on the server machine where the request and response debug files are written. The configured user must have write access to this folder. (Defaults to \$Server.RootPath\$\Session.)
- **Regression** — This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

Default	Valid
(see above)	Any valid directory path.

PaymentSiteURL

This setting specifies the URL for the 3rd party payment processor.

Default	Valid
Null	Any valid URL.

PoliciesQueue

This setting specifies the name of the Message Queue where integration messages between policy and Duck Creek Billing are placed and processed.

Default	Valid
---------	-------

.\\PRIVATE\$\\BillingIntegration	Any valid message queue.
----------------------------------	--------------------------

PolicyHolderTemplateAccount

User name of the account to use as a template for creating new users. This account should not be used for any other purpose.

Default	Valid
null	Any ASCII text string.

PolicySystemInUse

This setting is used to pass the name of the policy system implementation.

Default	Valid
Null	Any ASCII text string.

ProcessElectronicPayment

This setting determines if electronic payment processing is allowed in Agency Billing.

Default	Valid
False	• False — Not allowed. • True — Allowed.

ProviderName

Indication of which database provider the data access component should run against. Current the EXAMPLE Platform® supports Microsoft SQL Server 2005.

Default	Valid
System.Data.SqlClient	System.Data.SqlClient

PublicRecalc

This setting defines how the <FormsEngine.initPrintJob> request calls the <ManuScript.getForms> request. Performance increases by using the values of public fields already stored in the session data rather than recalculating the fields.



PublicRecalc must enabled (1) for Commercial Lines Forms to function properly.

Default	Valid
---------	-------

True	• True — Recalculate public fields. • False — Use public field data from the session file.
------	---

QueueCheckIntervalInMillis

Interval, in milliseconds, at which the database is checked for different data, such as new row, removed row, or column changes. Setting this value too low can reduce performance.

Default	Valid
20000	Any positive integer.

QueueProcessingUserId

This setting is reserved for future use.

ReconcileReportDatesFile

Path to the report dates XML file (CycleDates.xml) that stores the dates and times reconciliation reports are run. The EXAMPLE Server® installation creates a blank XML file at this path.

Default	Valid
C:\Program Files\Duck Creek Technologies\Shared\CycleDates.xml	Any valid directory path, including the file name.

ReconcileReportDSN

DSN of the database containing the tables where reconciliation report data is stored.

Default	Valid
Value entered during installation.	Any valid DSN.

RefreshFlag

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

ReportDuplicatedTransactions

Determines whether transactions that have duplicated the policy are reported by the <SessionReconcile.GetTransactionReportRs> response.

Default	Valid
1	• 0 - Does not report transactions that have duplicated the policy. • 1 - Reports transactions that have duplicated the policy.

ReportRatingErrors

Indication of whether to hide EXAMPLE Forms™ pop-up errors in EXAMPLE Express®. Enabling this setting can be useful for debugging purposes.

Default	Valid
False	• True — Allow pop-up EXAMPLE Forms™ errors that occur in EXAMPLE Express® to display. • False — Hide EXAMPLE Forms™ errors.

RequestPollIntervalInMillis

Interval, in milliseconds, at which the Asynchronous Request Viewer polls the asynchronous queue for new requests. Setting this value too low can reduce performance.

Default	Valid
5000	Any positive integer.

RequestUrl

URL of the EXAMPLE Server® responsible for working with the Web site specified by the *WebSiteName* setting to ensure that the correct application pool is recycled.

Default	Valid
http://localhost/DuckCreek:8080/DCTServer.aspx	Any valid URL to an existing EXAMPLE Server®.

RootPath

Location of the shared components of the EXAMPLE Server®.



If the application or any of its components will be installed on a mapped drive, the UNC must be used as the reference to this location instead of the mapped drive letter (i.e. \\myserver\myshare\DuckCreek instead of X:\DuckCreek). This applies anywhere in the system where drive paths are used.

Default	Valid
C:\Program Files\Duck Creek Technologies	Any valid directory path or token.

RuntimeOnly

This setting is reserved for future use.

RuntimeRoot

Path to dynamically loaded .NET assemblies. This is the directory where custom .NET assemblies referenced by the RequestMap reside.

Default	Valid
---------	-------

\$Server.RootPath\$\shared\bin	Any valid directory path or token.
--------------------------------	------------------------------------

SaltValue

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string.

ScaleRelativeToTarget

Determines whether to scale watermark images to the size of the target page.

Default	Valid
True	• True – Scale the size of watermark images to the size of the target page. • False – Do not scale watermark images. Instead, maintain the original size and resolution.

ScheduledActivityDelay

The value in milliseconds for the processing delay for EFT out of cycle scheduled activity.

Default	Valid
600000	Any positive integer.

Schemas

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

SemaphoreCleanupMode

Determines the automatic cleanup behavior for records in the Semaphore table.

Default	Valid
2	• 0 — Delete any record older than the value of the Server.TimeoutLength setting. • 1 — Do not delete any records. • 2 — Delete only records that are older than the value of the Server.TimeoutLength setting and have a QueueStatus of Complete (4).

SequentialIds

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

ServerList

Relative path and file name of the XML file that defines the machines in an EXAMPLE Server® cluster.

Default	Valid
null	The file name and (optional) relative path to the appropriate file, with GlobalRootPath/Settings as the assumed root.

SessionID

Indicates the server should automatically turn on request and Manuscript debugging for all requests from this session ID. This setting is only applicable if Mode is *sessionid*.

Default	Valid
null	Any valid session ID.

ShortCircuitCond

This setting causes EXAMPLE Server® to cease the processing of compound conditions upon resolution, leaving unneeded conditions unexecuted. The setting applies to all Manuscripts the EXAMPLE Server® processes, unless overridden in an individual Manuscript.



Enabling this setting may pose a risk to processing in Manuscripts written without this setting enabled. It is possible that pre-effects or post-effects, for instance, are dependent on a condition late in a phrase. In this case, these effects may not execute if the conditional phrase ceases execution before the appropriate field is referenced.

Default	Valid
True	• True — Process compound conditions only to the point at which a resolution is reached. • False — Process each element of a compound condition, regardless of phrase resolution.

ShredDSN

DSN to the database into which data is shredded.

Default	Valid
null	Any valid DSN. (Example: DSN=ExampleData;uid=username;pwd=password)

ShredMode

This setting indicates the method of data shredding.

Default	Valid
---------	-------

null	• null — None. • Append — Add a new time-stamped record for the designated Policy ID. • Update — Delete all existing records associated with the designated Policy ID, and insert the new one. • Offset — To indicate that the content of the policy is to be Offset, populate the purpose column in the sessions table with the word <i>Offset</i>, and add a new record.
-------------	---

SMTPServer

SMTP mail server used by EXAMPLE Express® or EXAMPLE Server® when generating e-mail messages. The SMTP mail service need not be on the same machine as EXAMPLE Express® or EXAMPLE Server®.

Default	Valid
null	• null — No e-mail service. • Fully qualified name of the SMTP Server to which to route service when sending an e-mail message.

SMTPServerPort

Port to the SMTP mail server used by EXAMPLE Express® or EXAMPLE Server® when generating e-mail messages. The SMTP mail service need not be on the same machine as EXAMPLE Express® or EXAMPLE Server®.

Default	Valid
null	Appropriate port number for the SMTP server to which to route service when sending an e-mail message.

SqlScripts

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

TimeoutInSeconds

Value, in seconds, to wait before timing out an asynchronous request. If the request times out, failure notifications are sent.

Default	Valid
720	Any positive integer.

TimeoutLength

Session section

Age, in seconds, a session file must be in order to be considered stale by the Session Cleanup Service. Used on a standalone EXAMPLE Server® and each session file EXAMPLE Server® in a cluster.

Default	Valid
---------	-------

3600	Any positive integer.
------	-----------------------

DataAccess section

Time-out value, in milliseconds, used by the TransactionScope during database processing. The TransactionScope wraps all database transactions inside a single transaction, and for long running databases processing, the TransactionScope may time out if this setting is not large enough. The default value of 3000000000 is equal to five minutes.

Default	Valid
3000000000	Any positive integer.

TSVDebug

Boolean value indicating whether the debug process creates Tilde-Separated-Values (TSV) or XML files. Using TSV format reduces processing load.

Default	Valid
False	• True — Generate debug information in TSV format and store the file on the EXAMPLE Server®. • False — Generate debug information in XML format and return the information as the payload of a response.

UpdateSecurityLevels

Indication of whether individual user security access level is updated in database upon changing or reassigning security roles. This setting is intended for troubleshooting purposes only, and is not recommended for customer configuration.

Default	Valid
True	• True — Update database with new security level upon role change or reassignment. • False — Do not update database.

Use3rdPartyPayments

This setting specifies whether to allow 3rd party payments in Duck Creek Billing™.

Default	Valid
False	• False — Do not allow. • True — Allow.

useConditionalShredding

Used in conjunction with the UseShredding setting.

Default	Valid
False	• 1 — Shred policies only upon submission. • 0 — Shred every time a policy is saved withEXAMPLE Express®.

UseRoleBasedSecurity

This setting enables the new role-based security model. Before enabling, roles must be defined.



Enabling Role-Based Security requires migration of the database using the MigrationTool.exe application. Un-enabling does not migrate changes back to the old database.

Default	Valid
False	• True — Use the role-based security model. • False — Do not use the role-based security model.

useShredding

Turn shredding on or off.

Default	Valid
False	• 0 — Turn shredding off. • 1 — Call the <OnlineData.storePolicyRq>, <OnlineData.storeTransactionRq>, <OnlineData.deletePolicyRq>, <OnlineData.deletePoliciesRq>, and <OnlineData.purgePoliciesRq> requests as shredding methods.

ValidUsersFile

Relative path and file name of the XML file that defines the valid users in a limited-user installation of EXAMPLE Server®.

Default	Valid
null	The file name and (optional) relative path to the appropriate file, with GlobalRootPath as the assumed root.

WebServerRoot

Virtual directory (URL) that matches the DebugFilePath. This folder must be set up as a virtual directory and given read-access so the utilities can download the .tsv debug files when debugging Manuscripts in enterprise mode.

Default	Valid
http://MachineName/VDirGoesHere/TSV	Any valid URL.

WebVDir

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations. It is used to determine where email file attachments are stored.

Default	Valid
empty	Any file system path (for example, C:\temp)

WordDocumentEngine

Determines which third-party control renders .doc file forms.

Default	Valid
TXText	• TXText – Render .doc file forms with legacy third-party control. Ensures compatibility with forms configured to render with legacy control. • Aspose– Renders .doc file forms with new third-party control. Recommended setting for new implementations. For more information on this setting, see <i>FormsMigrationUtility.exe</i>.

TransACTConfig.xml

The TransACTConfig.xml file is a configuration file used by EXAMPLE Server® that facilitates interactions between EXAMPLE Server® and EXAMPLE TransACT®. This file contains various configuration options for EXAMPLE TransACT® that specify the locations of various pieces of data and the operations EXAMPLE TransACT® should perform on that data. The TransACTConfig.xml file is an essential part of EXAMPLE TransACT®.

Users can customize the TransACTConfig.xml file to tailor EXAMPLE TransACT® to their own policies and business processes. Almost all components of the file are customizable. In addition, users can have multiple TransACTConfig.xml files, each associated with its own line or lines of business.

Out of the box, the TransACTConfig.xml file is located in the *[GlobalRootPath]\Shared* folder. Because the TransACTCatalog.xml file points to the TransACTConfig.xml file's location, however, TransACTConfig.xml can be located anywhere on a user's computer. Currently, the TransACTConfig.xml file contains settings for both EXAMPLE TransACT® 2.1 and for EXAMPLE TransACT® 1.8. This document focuses almost exclusively on configuration settings for EXAMPLE TransACT® 2.1.

Hooking Up the TransACTConfig.xml File

For EXAMPLE TransACT® to be able to locate and use the TransACTConfig.xml file (or multiple TransACTConfig.xml files), the location and product associations of each TransACTConfig.xml file must be specified in the TransACTCatalog.xml file.



Duck Creek Technologies, Inc. recommends creating a separate TransACTConfig.xml file for each product. Doing so allows you to implement product-specific rule definition and reason codes.

Associating a Single TransACTConfig.xml File with All Products

To associate a single TransACTConfig.xml file with all products:

1. Open the Duck Creek Technologies, Inc. Edit Configuration utility.
2. In the **Virtual Directory** drop-down, click the appropriate virtual directory.
3. To the right of the virtual directory drop-down, beneath Mode, select **Form**.
4. On the **TransAct** tab, under **entries**, click **TransACTConfig**.
5. In the **keyValues** text box, enter an asterisk (*).
This indicates that all products will share the same TransACTConfig.xml file.
6. In the **url** text box, enter the location of the TransACTConfig.xml file to be used. (The TransACTConfig.xml file is originally installed in the *[GlobalRootPath]\Shared* folder, but it can be copied to a new location.)
7. Click **Save**, and then click **Close**.

Associating Separate TransACTConfig.xml Files with Separate Products

To associate separate TransACTConfig.xml files with separate products:

1. Open the Duck Creek Technologies, Inc. Edit Configuration utility.
2. In the **Virtual Directory** drop-down, click the appropriate virtual directory.
3. To the right of the virtual directory drop-down, beneath Mode, select **Form**.
4. On the **TransAct** tab, under **entries**, click **TransACTConfig**.
5. In the **keyValues** text box, enter the lines of business used in your Manuscript catalog for the products you wish to associate with the first TransACTConfig.xml file. Use a comma-separated list if multiple products share the same file.
6. In the **url** text box, enter the location of the TransACTConfig.xml file to be used with the products listed in the **keyValues** text box. (The TransACTConfig.xml file is originally installed in the *[GlobalRootPath]\Shared* folder, but it can be copied to a new location.)
7. To the right of the virtual directory drop-down, switch the Mode to **Text**.
8. Copy the *TransACTConfig* entry you just specified, and paste it directly beneath the first entry.
9. (Optional) To the right of the virtual directory drop-down, switch the Mode back to **Form**.
10. Modify the following attributes as desired:
 - **ID** — Unique identifier for the file. (This identifier MUST be unique.)
 - **description** — Label to appear on the tab for this file in the Edit Configuration Utility.
 - **keyValues** — Lines of business for the products you wish to associate with this file.
 - **url** — Location of the file to be used with the products listed in the **keyValues** text box.
11. Repeat Steps 7 through 10 as necessary.
12. Click **Save**, and then click **Close**.

EXAMPLE TransACT® 1.8 Configuration Settings



EXAMPLE TransACT® 1.8 is not supported by the EXAMPLE Platform® 5.x.

These settings are not applicable to EXAMPLE TransACT® 2.1, and are included here for purposes of legacy reference. The following TransACTConfig.xml settings define configurations for EXAMPLE TransACT® 1.8:

- <transactionPath>

- <OSEPath>
- <CompleteOSE>
- <OSECalculateField>
- <FinalChargePath>
- <PendingStatus>
- <RenewalStatus>
- <ActiveTransaction>
- <ValidTransaction>
- <LastInforceTransaction>
- <transaction>
 - <HistoryID>
 - <HistoryIDOriginal>
 - <OriginalCharge>
 - <Charge>
 - <ProRateFactor>
 - <TermPremium>
 - <PriorPremium>
 - <NewPremium>
 - <Completed>
 - <Issued>
 - <IssueDate>
 - <CreatedDate>
 - <CreatedUser>
 - <IssuedUser>
 - <FutureTransaction>
- <IgnoreTags>
- <WrittenPrem>
- <EarnedPrem>
- <PremiumChange>
- <OriginalPrem>
- <OriginalTermPrem>
- <XPathCodes>

EXAMPLE TransACT® 2.1 Configuration Settings

The following sections describe TransACTConfig.xml settings for EXAMPLE TransACT® 2.1.

<TransactionReport>

The <TransactionReport> section defines settings for EXAMPLE TransACT® reporting. You can customize the settings in this section to fit your transaction reporting needs.

This section contains the following settings.

Attribute	Description	Data Type
<Shredding>		
<i>enabled</i>	Indicates whether to shred data when a transaction report is run. • 0 — Off • 1 — On	Boolean
<i>shredNow</i>	Indicates if shredding should be immediate or queued: • 0 — Send the data to the shred queue in the EXAMPLE database • 1 — Shred immediately	Boolean
<MSMQ>		
<i>enabled</i>	Indicates whether to send data to an MSMQ when a transaction report is run.	Boolean
<i>queueName</i>	Specifies the name of the MSMQ to which the transaction report data should be sent. The queue must be specified using backslashes (for example, <i>queueName</i> =".\\private\$\\transactq").	String
<Report>		
<i>details</i>	Indicates the level of detail to be included in a transaction report. You can enter any of the following option codes or add any together to create a combination: • 0 — Summary only • 1 — Premium details • 2 — Difference list • 4 — Complete policy image	Integer
<i>premiumClassList</i>	Specifies a comma-separated list of premium classes to be included in a transaction report. Used if the <i>details</i> attribute specifies to include premium details. If this attribute is not specified, the default is "Premium."	String
<i>useLegacyReporting</i>	Indicates whether to use legacy transaction reporting functionality. New transaction reporting functionality (released in EXAMPLE Platform® 4.1.3, and in {{plat()}} 4.1.5 and following) corrects an issue with legacy reporting that could prevent Final Audit transactions from appearing correctly in the transaction report under certain circumstances. • 0 — Use new transaction reporting. • 1 — Use legacy reporting. Defaults to 0.	Boolean

<i>useLegacySorting</i>	Indicates whether to use the legacy method of sorting offsets and onsets. Legacy sorting causes <entry> elements in the transaction report to be sorted in the following order: • Offsets in reverse chronological order by effective date. • Onsets in chronological order by effective date. Set <i>useLegacySorting</i> to 1 if you wish to use updated reporting functionality (<i>useLegacyReporting=0</i>) but require <entry> elements to be sorted as they were with legacy reporting. • 0 – Use new sorting method (both offsets and onsets in chronological order by effective date). • 1 – Use legacy sorting (offsets in reverse chronological order by effective date, onsets in chronological order by effective date). Defaults to 0.	Boolean
-------------------------	---	---------



If downstream systems depend on the *index* attribute of <entry> elements in the transaction report, Duck Creek Technologies, Inc. recommends modifying downstream systems to accommodate the new order of <entry> elements. The *useLegacySorting* configuration setting can be used as a temporary solution, but Duck Creek Technologies will deprecate this setting in a future release.

<Settings>

The <Settings> section defines various named constants used throughout transaction processing. You can customize the values assigned to these named constants to fit your transaction processing needs.

Each <Setting> entry in the <Settings> section contains the following attributes.

Attribute	Description	Data Type
<i>name</i>	Specifies the DCT-defined name used to identify the <Settings> entry.	String
<i>value</i>	Specifies a constant value assigned to the name.	String

Out of the box, the <Settings> section contains the following named constants.

Name	Value
transactManuScriptID	ID of the TransACT Master ManuScript to be used with the lines of business using this TransACTConfig.xml file.
ignoreTags	Comma-separated list of paths in the session document that should be ignored during premium calculation and out-of-sequence reconciliation.
startStatusText	Text that populates the transaction status field (as defined in the <PathMap> section) when a new transaction is initiated. The default is Pending.

closedStatusText	Text that populates the transaction status field (as defined in the <PathMap> section) when a new transaction is closed. The default is Closed.
committedStatusText	Text that populates the transaction status field (as defined in the <PathMap> section) when a new transaction is committed. The default is Committed.
forceOnOST	Comma-separated list of xpaths pointing to fields that have values to be propagated over future transactions.

<FieldMap>

The <FieldMap> section defines the location of a group or field used during transaction processing. You can customize this section to fit your transaction processing needs.

Each <Field> entry in the <FieldMap> section contains the following attributes.

Attribute	Description	Data Type
<i>name</i>	Specifies the DCT-defined name used to identify the <FieldMap> entry.	String
<i>manuscript</i>	Specifies the ID of the Manuscript to execute. • \$product\$ — Product Manuscript, specified by <Path name="policyManuscriptID"> • \$transact\$ — TransACT Manuscript, specified by <Setting name="transactManuscriptID">	String
<i>field</i>	Specifies the name of the field in the <i>manuscript</i> to execute.	String

Out of the box, the <FieldMap> section contains the following named constant.

Name	Value
transactionGroupName	Public group whose iterations are added to the transaction record in the _processingData document. When initiated, this process adds another <transaction> to the <transactions> group.

<PathMap>

The <PathMap> section specifies the paths to various data used during transaction processing. You can customize this section to fit your transaction processing needs.

Each <Path> entry in the <PathMap> section contains the following attributes.

Attribute	Description	Data Type
<i>name</i>	Specifies the DCT-defined name used to identify the <PathMap> entry. Child entry names appear as ParentName.ChildName.	String

<i>document</i>	Specifies the name of the session document where the data exists. This attribute is required for all parent entries. If unspecified in a child entry, this attribute is inherited from the parent entry.	String
<i>path</i>	Specifies the xpath of the data location within the <i>document</i> specified. For parent entries, the specified path begins from the appropriate root element in the specified document. For child entries, the specified path appears as ParentPath/ChildPath.	String

Out of the box, the <PathMap> section contains a number of <Path> entries.

<Path>	Description
policyManuscriptID	Location of the Manuscript ID against which the current policy image is rated. This ID is typically in the session document.
transactions	Location of the master transactions list. This list is typically in the _processingData document.
checkedOutUser	Location of the current checked out user.
checkedOutUserContext	Location of the current checked out user's context.
writtenPremium	Location of the current policy premium.
premiumPrior	Location of the policy premium for the prior transaction.
premiumChange	Location of the difference between the prior premium and the written premium.
currentTransactionID	Transaction ID of the current <transaction> being processed. This value is set prior to relevant Event execution.
currentOSTransactionID	Transaction ID of the OST <transaction> during out-of-sequence processing. This value is set at the beginning of out-of-sequence processing and will remain the same during the entire reconciliation process.
roundOverride	Path to the rounding override field must be relative to the coverage group. Used to set the rounding precision for a specific coverage.
factorRoundOverride	Path to the factor rounding override field must be relative to the coverage group. Used to set the factor precision for a specific coverage.
termPremium	Current policy term premium.
auditPremium	Location where the calculated premium is stored when the Interim Audit transaction is performed. Calculated by the <SessionReconcile.setWrittenPremiumRq> request.

auditCharge	Location where the difference between premium and premiumPrior is stored when an Interim Audit transaction is performed. Because Interim Audit transactions do not change premiums, this value is fixed so that the change is always 0. Determined by the <SessionReconcile.setWrittenPremiumRq> request.
currentTransactionId	Location of the transaction ID of the current <transaction> being processed. This value is set prior to relevant event execution.
currentOSTTransactionId	Location of the transaction ID of the OST <transaction> being processed. This value is set at the beginning of out-of-sequence processing and remains the same during the entire reconciliation process.
currentDate	Location of the current date.
policyStatus	Location of the current policy status.
policyExpirationDate	Location of the current policy expiration date.
policyCancellationDate	Location of the current policy cancellation date.
minWrittenPremium	Location of the policy minimum written premium.
minCoverageWrittenPremium	Location of the minimum written premium for a specific coverage. Path must be relative to the coverage group.
lastInforceTransaction	Currently not used in EXAMPLE TransACT®. This item <path> setting must remain in the TransACTConfig.xml file, but the value can be blank.
proRate	Location of the prorate flag that turns prorating on or off for a specific coverage. The value of this field is a flag (1 or 0) that indicates whether to override the value of the proRatingOn field for a specific coverage. If this field does not exist, the value of the proRatingOn field is used for the coverage.
proRatingOn	Location of the prorate flag that turns prorating on or off for the entire policy. The value of this field is a flag (1 or 0) that indicates whether to prorate the entire policy. If this field does not exist, the system assumes the policy will be prorated.
waiveChargeCheck	Location of the waive charge flag that allows users to select that a transaction be waived in the billing system.
roundOverride	Location of the field used to set rounding precision for a specific coverage. This path must be relative to the coverage group.

factorRoundOverride	Location of the field used to set factor rounding precision for a specific coverage. This path must be relative to the coverage group.
transaction	Location of iterative transaction elements. These elements should reside under the Transactions location (indicated by the Transactions <Path> entry).
transaction.manuScriptID	Child of transaction. Policy Manuscript ID.
transaction.transactionDate	Child of transaction. Date the transaction is committed.
transaction.code	Child of transaction. Transaction code.
transaction.caption	Child of transaction. Transaction caption.
transaction.state	Child of transaction. State of the transaction: open, closed, or committed.
transaction.status	Child of transaction. Status of the transaction.
transaction.statusUser	Child of transaction. User that changed the status to its current value.
transaction.auditPremium	Child of transaction. Calculated premium value.
transaction.auditCharge	Child of transaction. Calculated difference between the premium and the prior premium.
transaction.statusUserContext	Child of transaction. Context of the user that changed the status to its current value.
transaction.effectiveDate	Child of transaction. Effective date of the transaction.
transaction.createdDate	Child of transaction. Date the transaction was created.
transaction.createdUser	Child of transaction. User that created the transaction.
transaction.historyID	Child of transaction. Database history ID of the transaction.
transaction.originalHistoryID	Child of transaction. The history ID of the original (deprecated) transaction upon which the current transaction is based.
transaction.orgId	Child of transaction. ID of the original <transaction> that caused the current transaction to be added. Used in Over Renewal <transactions>.
transaction.origEffectiveDate	Child of transaction. Effective date of the original <transaction> that caused the current transaction to be added. Used in Over Renewal <transactions>. For all other <transactions>, this date will equal the transaction's effective date.

transaction.issueDate	Child of transaction. Date transaction was issued.
transaction.issueUser	Child of transaction. User that issued the transaction.
transaction.revisionOf	Child of transaction. ID of the <transaction> that the current transaction is a revision of. Set only for revisions.
transaction.newPremium	Child of transaction. Current premium for the transaction.
transaction.completed	Currently not used in EXAMPLE TransACT®. This item must remain in the TransACTConfig.xml file, but the value can be blank.
transaction.priorPremium	Child of transaction. Premium from the prior transaction.
transaction.termPremium	Child of transaction. Term premium for this transaction.
transaction.activityLogs	Currently not used in EXAMPLE TransACT®. This item must remain in the TransACTConfig.xml file, but the value can be blank.
transaction.charge	Child of transaction. Current charge for the transaction.
transaction.cancelPendingDate	Currently not used in EXAMPLE TransACT®. This item must remain in the TransACTConfig.xml file, but the value can be blank.
transaction.originalCharge	Child of transaction. Charge from the prior transaction.
transaction.deprecatedBy	Child of transaction. Transaction ID of the <transaction> that caused this <transaction> to be deprecated.
transaction.replacementId	Child of transaction. Transaction ID of the <transaction> that replaced this <transaction> during the reconciliation process.
transaction.offsetDate	Child of transaction. Date that the transaction was deprecated (offset).
transaction.onsetBy	Child of transaction. Transaction ID of the <transaction> that reinstated a cancelled policy.
transaction.proRateFactor	Child of transaction. Current prorate factor.
transaction.sourcePolicyID	Child of transaction. ID of source policy. Used during duplicate.
transaction.destinationPolicyID	Child of transaction. ID of target policy. Used during duplicate.
transaction.scheduleDate	Child of transaction. Date the transaction is scheduled.
transaction.rewrittenPolicyNumber	Child of transaction. Policy number.
transaction.transactionPolicyStatus	Child of transaction. Policy status.
transaction.transactionPolicyExpirationDate	Child of transaction. Policy expiration date.
transaction.transactionPolicyCancellationDate	Child of transaction. Policy cancellation date.

transaction.waiveChargeCheck	Child of transaction. Field that allows the user to select for the transaction to be waived in the billing system.
transaction.reasons	Child of transaction. Grouping element for reasons.
transaction.requestForChangeAppliedTo	Child of transaction. History ID to which changes were applied during a RenewalChange transaction.
transaction.requestForChangeAppliedFrom	Child of transaction. History ID from which changes were applied during a RenewalChange transaction.
transaction.reason	Child of transaction. Iterative reasons list.
transaction.reason.code	Child of reason. Reason code.
transaction.reason.caption	Child of reason. Reason caption.
transaction.reason.description	Child or reason. Reason description.
startTransactionReasons	Grouping element for startTransactionReasons.
startTransactionReason	Iterative reasons list used to specify reasons on the <TransACT.StartTransactionRq> request.
startTransactionReason.code	Child of startTransactionReason. Reason code.
startTransactionReason.caption	Child of startTransactionReason. Reason caption.
startTransactionReason.description	Child or startTransactionReason. Reason description.
imageTransactions	Location to place the read-only transaction list within the product data.
auditCollection	Location to place the data associated with audit segment collection.
useSegmentRating	Determines whether Segment Rating is used in Audit functionality, based upon the value of the field at this path. In Duck Creek Templates™, the associated field is named PolicyAdmin.UseSegmentRating .

<UpdateTransactionRecord>

The <UpdateTransactionRecord> section specifies the data to be copied during the <TransACT.UpdateTransactionRecordRq> request and the location to which that data is to be copied. You can customize these settings to fit your transaction processing needs.

Each <Update> entry in the <UpdateTransactionRecord> section contains the following attributes.

Attribute	Description	Data Type
src	Specifies the <PathMap> entry that points to the source from which to pull the data.	String

<i>dest</i>	Specifies the <PathMap> entry that points to the destination for the pulled data.	String
-------------	---	--------

Out of the box, the <UpdateTransactionRecord> section points to several items (through <PathMap> entries) to be updated during the <TransACT.UpdateTransactionRecordRq> request, including:

- Written premium
- Prior premium
- Premium change
- Term premium
- Policy Manuscript ID
- Current date
- Policy expiration date
- Policy cancellation date
- Waive charge check

<OSTReconcileDuplicateData>

The <OSTReconcileDuplicateData> section specifies the data fields to copy from a base transaction (that is, the last transaction prior to a new transaction's effective date) to a new transaction during out-of-sequence processing. You can customize these settings to fit your transaction processing needs.

Each <Update> entry in the <OSTReconcileDuplicateData> section contains the following attributes.

Attribute	Description	Data Type
<i>src</i>	Specifies the <PathMap> entry that points to the item in the base transaction to copy.	String
<i>dest</i>	Specifies the <PathMap> entry that points to the destination of the copied data. If not specified, this value defaults to the <i>src</i> value.	String

Out of the box, the <OSTReconcileDuplicateData> section points to several items (through <PathMap> entries) to be updated during out-of-sequence processing, including:

- Transaction reasons
- Transaction status
- Transaction schedule date
- Transaction caption
- Transaction Manuscript ID
- Additional transaction information

<Premium>

The <Premium> section specifies settings for the written premium and transaction report calculation processes. You can customize the settings in this section to fit your transaction processing needs.

This section contains the following settings.

Element	Attribute	Description	Data Type
<WrittenPrem>		Specifies the path to the location in which to store the written premium value for the specified coverage.	String
<PremiumChange>		Specifies the path to the location in which to store the premium change value for the specified coverage.	String
<OriginalPrem>		Specifies the path to the location in which to store the written premium for the specified coverage resulting from the last transaction.	String
	<i>useWritten</i>	Specifies the premium to use. 1 — Written premium 2 — Term premium If not specified, this attribute defaults to 1.	Integer
<OriginalTermPrem>		Specifies the path to the location in which to store the full term premium for the specified coverage resulting from the last transaction.	String
<XPathCodes>		Specifies a semicolon-separated list of xpath values used to query the session for groups that have premium information.	String
<PremiumClasses>		Specifies a comma-separated list of premium classes to process.	String
<FEIndicator>		Specifies the xpath to a field in the Manuscript that designates a coverage as fully earned. The xpath must be relative to the coverage group in the Manuscript.	String
<FECompatibilityPath>		Specifies the xpath to a field in the Manuscript that designates whether to use <FEIndicator> logic. A value of 1 indicates to override <FEIndicator> logic. The xpath must be relative to the root of the session.	Boolean
<RenewalStatus>		Specifies a comma-separated list of transaction types that are classified as types of renewal transactions.	String
<CancelPrem>		Stores the written premium prior to the Cancel transaction in the Cancellation image. When a reinstate transaction occurs, the written premium is restored to what it was before the Cancel transaction occurred.	Float

<FormInfo>

The <FormInfo> section specifies settings for forms processing. You can customize the settings in this section to fit your forms processing needs.

The <FormInfo> section contains the following settings.

Element	Description	Data Type
<DCT_FORMLIST>	Specifies the path to the list of form names included in a print job.	String
<DCT_NAMELIST>	Specifies the path to the list of form captions included in a print job.	String
<DCT_JOBNAMEs>	Specifies the path to the list of print job names included in a print job.	String
<DCT_JOBCAPTIONS>	Specifies the path to the list of print job captions included in a print job.	String
<AutoChangeDesc>	Specifies whether to place descriptions of forms changes in the session when the <FormsEngine.initPrintJobRq> request is executed. If enabled, when this request is executed, the system will produce a list of forms that have changed (i.e., been added, removed, or modified) since the last committed transaction on the policy. This list of forms is placed in the _temporaryData document in the session where it can be retrieved and placed on a form through Manuscript logic. For more information, see <i>Placing Forms Change Information on a Form</i> .	Boolean

<EventMap>

The <EventMap> section defines the locations of fields used during transaction processing to initiate events. You can customize this section to fit your transaction processing needs.

Each <Event> entry in the <EventMap> section contains the following attributes.

Attribute	Description	Data Type
<i>name</i>	Specifies the DCT-defined name used to identify the <EventMap> entry.	String
<i>transactions</i>	Specifies a comma-separated list of transaction codes for which the event is valid. To make all transaction codes valid, use "*".	String
manuscript	Specifies the ID of the Manuscript to execute. \$product\$ — Product Manuscript, specified by <Path name="policyManuscriptID"> \$transact\$ — TransACT Manuscript, specified by <Setting name="transactManuscriptID"> [ManuscriptID] — ID of the desired Manuscript	String
field	Specifies the field in the manuscript to execute.	String

Out of the box, the <EventMap> section contains a number of events.

<Event>	Description
CanCheckIn	Reserved for future use.
CanCheckOut	Executes whether a user has the right to check out a policy.

CanOverrideCheckOut	Determines whether a user may override a checkout made by another context.
CanRollbackEvent	Executes actions that should occur every time the rollback event occurs.
CanSetStatus	Determines whether a certain transaction status change can occur.
CheckOut	Executes actions that should occur every time a user checks out a policy.
CloseTransaction	Executes actions that should occur every time a user closes a transaction. Any data changes that must be made to a transaction before committal should occur during this event.
CommitTransaction	Executes actions that should occur every time a user commits a transaction.
DuplicatePolicy	Determines whether a policy should be duplicated when a transaction is committed.
IntegrationCommit	Executes actions that should occur every time a user commits a transaction. This event is called during the CommitTransaction event.
LoadPolicy	Executes the ExecuteOnLoad field. This field runs initialization code in a Manuscript when a policy loads.
MovePolicy	Executes custom actions that should occur when updating history records during the <OnlineData.movePolicyRq> and <OnlineData.movePoliciesToNewAgencyRq> requests. This event is executed for each history record on the policy (or policies) being moved if the UpdateOnMovePolicy event has been executed prior to the MovePolicy event and the UpdateOnMovePolicy event returned a value of true.
OSTRate	Executes re-rating of a product during a re-ratable out-of-sequence transaction to check for rating errors. This event is executed during the <TransACT.startTransactionRq> request and can be controlled through this request and the TransACTConfig.xml file. If the system encounters an error, it returns a value of false and invalidates the <TransACT.startTransactionRq> request. This event is used only on transaction codes that are re-rateable.
PolicyConvert	Executes the PolicyConvert field. This field determines whether a policy should be converted from old EXAMPLE TransACT® (1.8) to new EXAMPLE TransACT®.
PolicyNeedsAdmin	Executes the PolicyNeedsAdmin field. This field determines whether a policy should load the policy in the policy administration screen or the product interview screens.
RecommendedEffectiveDate	Specifies a recommended effective date for a given transaction if the <i>recommendedEffectiveDate</i> attribute of the <TransACT.listTransactionCodesRq> request is defined.

ReinstateRenewalCheck	Determines whether to reinstate future terms of a cancelled policy during a Reinstate transaction if future terms were cancelled.
RenewalCheck	Determines whether the out-of-sequence reconcile process should cross a term with an out-of-sequence transaction or stop applying changes when a new term is reached.
RenewalReset	Executes rules for out-of-sequence transactions when the resulting out-of-sequence reconcile process reaches the beginning of a new term. This event can be used to present exceptions or additions to normal processing when out-of-sequence processing requires different actions.
ReplaceTransaction	Specifies the transaction to be replaced (deprecated) by another transaction. During the <TransACT.startTransactionRq> request, the system uses this information to determine the correct history image to load. During the <TransACT.closeTransactionRq> request, the system uses this information to deprecate the appropriate transaction. A value of -1 indicates to not deprecate any transaction and to use the last effective history image on the policy. Out of the box, this event is used by the Revised Final Audit and Void Final Audit transactions.
RequestForChange	Specifies the history ID of the transaction to which changes should apply during a requestForChange transaction.
RequestForChangeManuScript	Specifies the ID of the ManuScript containing the fields that changed during a requestForChange transaction.
RequestForChangeReRate	Specifies whether to re-rate the transaction to which changes were applied during a requestForChange transaction.
RequestForTopic	Specifies the PageSet containing the fields that changed during a requestForChange transaction.
ReRate	Executes re-rating of a product during a re-ratable transaction to check for rating errors. This event is executed during the <TransACT.startTransactionRq> request and can be controlled through this request and the TransACTConfig.xml file. (For any <TransactionCode> defined as a re-ratable transaction, the system initiates this event during the <TransACT.startTransactionRq> request.) If the system encounters an error, it returns a value of false and invalidates the <TransACT.startTransactionRq> request. This event is used only on transaction codes that are re-rateable.
StartOSTTTransactionSetup	Modifies transaction or policy data before calculating changes or allowing a user to make changes during an out-of-sequence transaction.
StartTransactionSetup	Modifies transaction or policy data before calculating changes or allowing a user to make changes.
StatusSet	Executes actions that should occur every time the transaction status changes.

UpdateOnMovePolicy	Executes rules to determine whether to update user and agency information in each transaction history record for a policy during the <OnlineData.movePolicyRq> and <OnlineData.movePoliciesToNewAgencyRq> requests. This event is executed for each history record on the policy (or policies) being moved.
ValidateStartTransaction	Determines whether the user can start a transaction based on the user's context, current policy information, and other data.

<PolicySummary>

The <PolicySummary> section specifies a list of data fields to return on the <TransACT.PolicySummaryRq> request. You can customize this section to fit your transaction processing needs.

Each <Path> entry in the <PolicySummary> section contains the following attributes.

Attribute	Description	Data Type
<i>name</i>	Specifies the DCT-defined name used to identify the <PolicySummary> entry.	String
<i>document</i>	Specifies the name of the session document where the data exists.	String
<i>path</i>	Speciifes the xpath of the data location within the <i>document</i> specified.	String

Out of the box, the <PolicySummary> section contains several fields to be returned during the <TransACT.PolicySummaryRq> request, including:

- Insured
- PolicyStatus
- PolicyNumber
- QuoteNumber
- AccountNumber
- EffectiveDate
- InceptionDate
- ExpirationDate
- FullTermPremium
- WrittenPremium
- Agency
- AgencyCode
- Broker
- AccountPhone

<TransactionStatusValidations>

The <TransactionStatusValidations> section specifies a list of validations to perform during the <TransACT.getTransactionStatusRq> request. You can customize this section to fit your transaction processing needs.

Each <Entry> in the <TransactionStatusValidations> section contains the following attributes.

Attribute	Description	Data Type
<i>type</i>	Specifies the DCT-defined validation type (Close, Commit, SetStatus).	String
<i>name</i>	Specifies the name of the element in which to place the validation response.	String
<i>status</i>	Specifies the status to validate. Used for the SetStatus <i>type</i> only.	String

Out of the box, the <TransactionStatusValidations> section contains a "Close," a "Commit," and five "SetStatus" entries:

- Refer
- Approve
- Decline
- Pending
- Schedule

<TransactionCodes>

The <TransactionCodes> section lists available transaction codes and settings for each code. You can customize these codes to fit your transaction processing needs.

Each <TransactionCode> entry in the <TransactionCodes> section can contain the following elements and attributes.

Attribute	Description	Data Type
<TransactionCode>		
<i>transType</i>	Specifies the DCT-defined name for the transaction type.	String
<i>code</i>	Specifies the code for the transaction type.	String
<i>caption</i>	Specifies the caption for the transaction type.	String
<i>applicable</i>	Indicates whether the transaction type is applicable. This setting allows the transaction type to be turned on or off.	Boolean
<i>seqValid</i>	Indicates whether the transaction type is valid for sequenced transactions.	Boolean
<i>ostValid</i>	Indicates whether the transaction type is valid for out-of-sequence transactions.	Boolean
<i>newTerm</i>	Indicates whether the transaction type is valid for the start of a new policy term.	Boolean
<i>recalc</i>	Indicates whether to re-rate the policy when the <TransACT.startTransactionRq> request is initiated.	Boolean
<i>startType</i>	Reserved for future use.	N/A

<i>authorization</i>	Specifies a comma-separated list of contexts authorized to initiate this transaction type.	String
<i>listValid</i>	Specifies a Manuscript field that determines whether the transaction type is valid at the current point in the policy lifecycle. Specified as Manuscript!Field. If blank, this attribute resolves to true. If the Manuscript name is missing, the Manuscript defaults to \$transact\$.	String
<i>mustExist</i>	Reserved for future use.	N/A
<i>integrationAfterDbCommit</i>	Indicates whether to commit the transaction to the database before executing the IntegrationCommit event. This setting is only evaluated when the <TransACT.startTransactionRq> request is executed with the value of the <i>autoCommit</i> attribute set to 1. It is not evaluated when the <TransACT.commitTransactionRq> request is executed. If the value of the <i>integrationAfterDbCommit</i> setting is <i>yes</i>, then the IntegrationCommit event is executed after the transaction has been committed to the database. If the value of this setting is not set to <i>yes</i>, then the IntegrationCommit event is executed before the transaction has been committed to the database. If a customized IntegrationCommit event posts back to EXAMPLE Server® for any reason (for example, to print forms or create a task), you should set this value to <i>yes</i>. Doing so prevents a database deadlock that can result from reentrancy. If the IntegrationCommit event alters session data, you should set this value to <i>no</i>. Doing so allows changes to session data to be committed as part of the database transaction, which in turn allows those changes to be rolled back if the commit process fails.	Boolean (yes/no)
<Reasons>		
<i>required</i>	Indicates whether a reason is required to complete a transaction.	Boolean
<i>allowGeneral</i>	Reserved for future use.	N/A
<i>allowMultiple</i>	Indicates whether to allow multiple reasons for a single transaction.	Boolean
<Reason>		
<i>caption</i>	Specifies the reason caption. This attribute defaults to "See Detail."	String
<i>value</i>	Specifies the reason code.	String
<i>needComment</i>	Indicates whether to require user comments when <i>caption=See Detail</i> .	Boolean
<i>restriction</i>	Specifies a field to execute additional rules to restrict when the reason displays. Syntax is <i>ManuscriptName!fieldName</i> .	String
<i>authorization</i>	Specifies the contexts that can view this reason. If blank, all contexts can view the reason.	String

Out of the box, the <Transaction Codes> section contains the following <TransactionCode> entries:

- New
- Endorse
- Cancel
- Reinstate
- Reissue
- Rewrite
- Renew
- Renewal Change



Because the Renewal Change transaction is designed to be used with a custom batch process, this transaction is not enabled out of the box. To enable this transaction, uncomment the transaction in the TransACTConfig.xml file and implement the desired batch process.

- Information
- Book Policy
- Issue Policy
- Move Agency
- Cancel Pending
- Rescind Cancel Pending
- Rescind (also called *Rescind Endorse*)
- Non Renew
- Interim Audit
- Final Audit
- Revised Final Audit
- Void Final Audit
- Rescind Non Renew



Currently, MoveAgency is not valid a transaction.

UserAdminWeb.config Settings

The following configuration options are available for EXAMPLE UserAdmin™.

Key	Default
<i>ExampleServerURL</i>	http://localhost:8080/DuckCreek22/DCTServer.aspx
<i>UserDetailsManuScriptID</i>	Null
<i>AgencyDetailsManuScriptID</i>	Null

<i>MailTo</i>	support@mycompany.com
<i>SMTPServer</i>	Null
<i>TimeOut</i>	360,000 (milliseconds)
<i>OnAddDuplicateEntity</i>	Error

AgencyDetailsManuScriptID

ID of the Manuscript to use to add or edit customized entity details.

Default	Valid
null	Valid ID of a Manuscript in an accessible catalog.

ExampleServerURL

URL of the EXAMPLE Server® to be used with EXAMPLE UserAdmin™. Specify the DCTServer.aspx target if requests to the EXAMPLE Server® are to use HTTP. If EXAMPLE UserAdmin™ resides on the same machine as EXAMPLE Server®, then this setting can be left blank. This local configuration increases performance of each EXAMPLE Server® request but requires the EXAMPLE UserAdmin™ installation to exist on the same server with EXAMPLE Server®.

Default	Valid
http://localhost:8080/DuckCreek22/DCTServer.aspx	URL of an existing EXAMPLE Server®.

MailTo

Email address for support. If an EXAMPLE UserAdmin™ user elects to send a support email from EXAMPLE UserAdmin™, the email will be sent to this address. This value may be used in custom skins.

Default	Valid
support@mycompany.com	Any valid email address.

OnAddDuplicateEntity

Specifies the expected behavior when entered entity data is identical to an existing entity.

Default	Valid
Error	• Error – Display an error message and require the user to enter alternative data. • Continue – Do not display an error message, and allow the user to continue.

SMTPServer

SMTP mail server to use when generating email messages. The SMTP mail service need not be on the same machine as EXAMPLE UserAdmin™ or EXAMPLE Server®.

Default	Valid
null	• null – No email service. • Fully qualified name of the SMTP Server to which to route service when sending an email message.

TimeOut

Number of milliseconds that EXAMPLE UserAdmin™ should wait for a response from EXAMPLE Server® before timing out. To force EXAMPLE UserAdmin™ to never time out when making calls to EXAMPLE Server®, set this value to -1. If this value is null, the system will use a value of 90,000 milliseconds (90 seconds).

Default	Valid
360000	• Any positive integer – Number of milliseconds to wait before timing out. • -1 – Disable EXAMPLE UserAdmin™ timeout.

UserDetailsManuScriptID

ID of the Manuscript to use to add or edit customized user details.

Default	Valid
null	Valid ID of a Manuscript in an accessible catalog.

Web\Web.config Settings

Key	Default Value
<i>ServerConfig</i>	C:\Program Files\Duck Creek Technologies\Shared\Server.config
<i>DebugAssemblies</i>	0
<i>TraceConfig</i>	null
<i>QueryOptions</i>	C:\Program Files\Duck Creek Technologies\Shared\BatchProcessQueryOptions.xml
<i>PassPhrase</i>	null
<i>SaltValue</i>	null
<i>InitVector</i>	null
<i>StartTime</i>	08:00:00
<i>InterfaceWindow</i>	600
<i>Frequency</i>	600
<i>RecordsPerCycle</i>	100

<i>Use3rdPartyPayments</i>	False
----------------------------	-------

DebugAssemblies

This setting is for Duck Creek Technologies, Inc. internal use only, and has no effect on commercial installations.

Frequency

This setting specifies how often the interface will check for unprocessed pending disbursements.

Default	Valid Value
600	Any valid number of seconds.

InitVector

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string. Should be 16 characters long for maximum encryption strength.

InterfaceWindow

This setting specifies the number of minutes from the start time that requests can be processed. Using duration rather than a specific time makes it easier to process over midnight.

Default	Valid Value
600	Any valid number of minutes. Empty node means no restriction.

PassPhrase

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string.

RecordsPerCycle

This setting specifies the maximum number of disbursements that will be processed per cycle.

Default	Valid Value
---------	-------------

100	Any valid amount 1 or greater. Zero (0) or an empty node means there is no maximum limit.
-----	---

QueryOptions

Name and location of the XML file that defines queries available in the Batch Script Editor.

Default	Valid
C:\Program Files\Duck Creek Technologies\Shared\BatchProcessQueryOptions.xml	Any valid file path and file name.

SaltValue

Encryption key used for authentication in EXAMPLE Express® and EXAMPLE Server®. The value of this setting must be identical when used in multiple config files. (This setting is not included in the out-of-the-box Express\Web.config file, but it can be added manually.)

Default	Valid
N/A	Any ASCII text string.

ServerConfig

Location of the Server.config file.

Default	Valid
C:\Program Files\Duck Creek Technologies\Shared\Server.config	Any valid path and file name.

StartTime

This setting specifies the earliest time in the day the interface will check for disbursements.

Default	Valid Value
08:00:00	Any valid time. Empty node means no restriction.

TraceConfig

Name and location of the Trace.config file.

Default	Valid
null	Full path and name of an appropriate file.

Use3rdPartyPayments

This setting specifies whether 3rd party payments are accepted in Duck Creek Billing™.

Default	Valid Value
---------	-------------

False	• False — Do not allow. • True — Allow.
-------	--

Skin.config

The skin.config file is used with the Avant Garde 2 skin. The contents of this file are attached to the internal content XML document for the page XSL to reference during XSLT transforms.



This file must be present for any skin based on Avant Garde 2 skins. Absence of this file forces the code to use the Avant Garde skins.

The following code sample illustrates the basic structure of the skin.config file:

```
<settings>
  <CoreDirectory>Skins\DCTBase\Core</CoreDirectory>
  <Themes>
    <Theme name="DuckCreek"/>
    <ExtJsTheme cssFile="ext-xtheme-gray"/>
    <DCTExtJsExtensionTheme cssFile="dctExt-xtheme-gray"/>
  </Themes>
  <Panels>
    <RatingMessages showBar="1"/>
    <TogglePanelButton showButton="0"/>
  </Panels>
  <Buttons>
    <PreviousButtonDefaultType></PreviousButtonDefaultType>
    <NextButtonDefaultType></NextButtonDefaultType>
  </Buttons>
  <StaticPanelContent location="leftPanel"></StaticPanelContent>
  <Controls>
    <ComboBoxes maxSize="200"/>
  </Controls>
  <custom></custom>
</settings>
```

Skin.config Settings

This section contains descriptions, defaults, and valid values of all the skin.config configuration settings. You can use the Edit Configuration Utility in the Duck Creek root directory (by default C:\Program Files\Duck Creek Technologies\UtiEditConfig.exe) to manually alter these settings.



You can only use the Edit Configuration Utility in Text Mode to alter these settings.

Improperly adjusting skin.config settings can lead to unintended behaviors or can prevent EXAMPLE Express® skins from displaying correctly. Use caution when changing these settings.

Key	Default Value
-----	---------------

<i>CoreDirectory</i>	Skins\DCTBase\Core
<i>Theme name</i>	DuckCreek
<i>ExtJsTheme</i>	ext-xtheme-gray
<i>DCTExtJsExtensionTheme cssFile</i>	dctExt-xtheme-gray
<i>RatingMessage showBar</i>	1
<i>TogglePanelButton showButton</i>	0
<i>PreviousButtonDefaultType</i>	N/A
<i>NextButtonDefaultType</i>	N/A
<i>StaticPanelContent</i>	leftPanel
<i>ComboBoxes maxSize</i>	200
<i>custom</i>	N/A
<i>ContentUrl</i>	N/A
<i>ContentTitle</i>	blank
<i>ContentBorder</i>	Hide
<i>ContentFrame</i>	Hide
<i>ContentCollapsible</i>	False
<i>ContentScrollable</i>	False
<i>ContentHeight</i>	N/A
<i>ContentName</i>	N/A
<i>IgnoreIECheck</i>	0

ComboBoxes maxSize

Defines the maximum width to use for all combo boxes.

Default	Valid
200	Any positive integer.



If the value of this setting is left blank, the default value of 200 will be used.

ContentUrl

The URL of the external content you wish to use in EXAMPLE Express®.

Default	Valid
blank	Any valid URL or path relative to EXAMPLE Express®.

ContentTitle

If specified, a title bar containing the specified string will appear in the title bar at the top of the tab section.

Default	Valid
blank	Any valid string.

ContentBorder

Displays or hides the section border.

Default	Valid
Hide	• Show – Displays the panel border. • Hide – Hides the panel border.

ContentCollapsible

Displays or hides the ability to collapse a section.

Default	Valid
False	• True – Allows the panel to be collapsed. • False – Prevents the panel from being collapsed.

ContentFrame

Displays or hides the section frame.

Default	Valid
Hide	• Show – Displays the panel border. • Hide – Hides the panel border.

ContentHeight

Height of a panel in pixels.

ContentName

Applies a name to an iFrame, if specified.

ContentScrollable

Enables content scrolling within a section.

Default	Valid
False	• True – Enables content scrolling. • False – Disables content scrolling.

CoreDirectory

Points to the core being used. This allows EXAMPLE Express® to know if the system is using the old or new core.



When using the Avant Garde 2 skin, the core should point to the Core folder in the \Duck Creek Technologies\Express\Skins\DCTBase\ directory.

Default	Valid
Skins\DCTBase\Core	Any valid location.

Custom

Contains skin customizations. The value of this setting appears in the content XML document, which the XSL then transforms into page HTML. Skin developers can add any XML they wish to the <custom> element.



New skin.config content should only be added in the <custom> section. Duck Creek will always add new supported skin configuration setting above the <custom> section, and will always ship an empty <custom> section.

Default	Valid
N/A	Any valid XML customization information.

DCTExtJsExtensionTheme

Duck Creek modifications to the ExtJs CSS framework have been moved to their own layer. This configuration setting Defines the theme to be used for the ExtJs EXAMPLE Platform® extensions.

Default	Valid
dctExt-xtheme-gray	Any valid theme.

ExtJsTheme

Defines the base ExtJs theme CSS file to load.

Default	Valid
ext-xtheme-gray	Any valid theme.

IgnoreECheck

Ignores the browser to check to allow controls on the page to be converted to ExtJs controls when using Internet Explorer 8 or higher. Enabling this setting could result in the increase of memory consumption by the Avant Garde 2 skin.

Default	Valid
0	0 - Ignore the Web browser check. 1 - Check the browser to determine whether to convert all controls to ExtJs.

NextButtonDefaultType

Defines the type of button to be used for the **Next** button.

Default	Valid
N/A	• Button • Hyperlink

The following table lists some examples of default buttons available for use with EXAMPLE Express®.

Configuration Settings	Buttons
<pre><Buttons> <PreviousButtonDefaultType></PreviousButtonDefaultType> <NextButtonDefaultType></NextButtonDefaultType> </Buttons></pre>	
<pre><Buttons> <PreviousButtonDefaultType>white</PreviousButtonDefaultType> <NextButtonDefaultType>blue</NextButtonDefaultType> </Buttons></pre>	
<pre><Buttons> <PreviousButtonDefaultType>hyperlink</PreviousButtonDefaultType> <NextButtonDefaultType>orange</NextButtonDefaultType> </Buttons></pre>	

PreviousButtonDefaultType

Defines the type of button to be used for the **Previous** button.

Default	Valid
N/A	• Button • Hyperlink

This configuration setting allows developers to specify a default button type for the previous buttons throughout the interview screens.


The following table lists some examples of default buttons available for use with EXAMPLE Express®.

Configuration Settings	Buttons
<pre> <Buttons> <PreviousButtonDefaultType></PreviousButtonDefaultType> <NextButtonDefaultType></NextButtonDefaultType> </Buttons> </pre>	
<pre> <Buttons> <PreviousButtonDefaultType>white</PreviousButtonDefaultType> <NextButtonDefaultType>blue</NextButtonDefaultType> </Buttons> </pre>	
<pre> <Buttons> <PreviousButtonDefaultType>hyperlink</PreviousButtonDefaultType> <NextButtonDefaultType>orange</NextButtonDefaultType> </Buttons> </pre>	

RatingMessage showBar

Defines whether to display a rating message bar at the bottom of the browser that can be used to display a popup with the rating messages displayed.

The following image illustrates the dynamic rating message indicator.

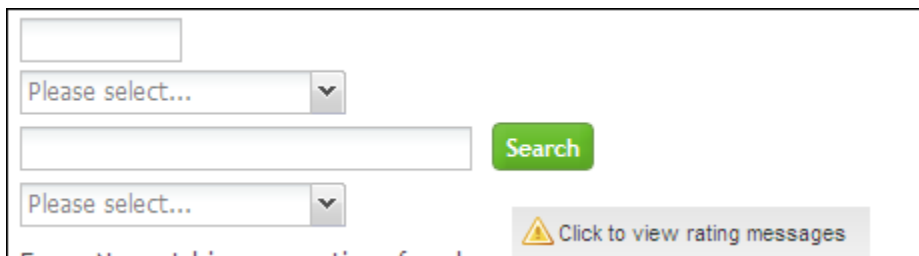

The image shows a web form with a search bar and a rating message bar at the bottom. The search bar has a dropdown menu with "Please select..." and a "Search" button. Below the search bar is another dropdown menu with "Please select...". At the bottom of the form, there is a rating message bar with a yellow warning icon and the text "Click to view rating messages".

Default	Valid
1	• 1 – Displays the rating message. • 0 – Does not display the rating message.

StaticPanelContent

Defines the location(s) where external content should be added.

Default	Valid
---------	-------

leftPanel	Any valid page panel.
-----------	-----------------------

Theme name

Defines the theme to be used with EXAMPLE Express® pages. By default, the the corresponding DuckCreek theme stylesheet will be automatically loaded from the C:\Program Files\Duck Creek Technologies\Express\Skins\AvantGarde2\themes\DuckCreek\css\ directory.

Default	Valid
DuckCreek	Any valid theme.

TogglePanelButton showButton

Defines whether a button displays at the top of the page to open or close all collapsible sections on the page.

Default	Valid
0	• 0 – Hides the button that collapses all collapsible sections on the page. • 1 – Displays the button that collapses all collapsible sections on the page.