Experiment 5

AIM: Develop Academic Calendar & Leave Management System using Rich Controls, Session & Cookies.

Source: Login.aspx.cs

Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Practical_5
{
    public partial class Login : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                if (Request.Cookies["username"] != null)
                {
                    Username.Text = Request.Cookies["username"].Value;
                    Remember.Checked = true;
                }
            }
        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            String username = Username.Text;
            String password = Password.Text;
            if (username == "Student" && password == "123456")
            {
                Session["Username"] = Username.Text;
                if (Remember.Checked)
                {
                    HttpCookie userCookie = new HttpCookie("username", Username.Text);
                    userCookie.Expires = DateTime.Now.AddDays(7);
                    Response.Cookies.Add(userCookie);
                }
                else
                {
                    if (Request.Cookies["username"] != null)
                    {
                        HttpCookie userCookie = new HttpCookie("username");
                        userCookie.Expires = DateTime.Now.AddDays(-1);
                        Response.Cookies.Add(userCookie);
                    }
                }
                Response.Redirect("Default.aspx");
```

```
            }
        }
    }
}
```

Source: login.aspx

Code:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Login.aspx.cs"
Inherits="Practical_5.Login" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
        <h3>Login</h3>
        <table>
            <tr>
                <td><asp:Label ID="Label1" runat="server" Text="Label">Username</asp:Label></td>
                <td><asp:TextBox ID="Username" runat="server"></asp:TextBox></td>
            </tr>
            <tr>
                <td><asp:Label ID="Label2" runat="server" Text="Label">Password</asp:Label></td>
                <td><asp:TextBox ID="Password" runat="server"></asp:TextBox></td>
            </tr>
            <tr>
                <td></td>
                <td><asp:CheckBox ID="Remember" runat="server" />Remember</td>
             </tr>
             <tr>
                <td colspan="2"><asp:Button ID="Button1" runat="server" Text="Login"
OnClick="Button1_Click" /></td>
            </tr>
        </table>
    </form>
</body>
</html>
```

Source: Leave.aspx.cs

Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Practical_5
{
    public partial class Leave : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                if (Session["Username"] == null)
                {
                    Response.Redirect("Login.aspx");
                }


                if (Request.QueryString["selectedDate"] != null)
                {
                    string d = Request.QueryString["selectedDate"];
                    Date.Text = d;
                }
                else
                {
                    Date.Text = "NULL";

                }
            }
        }

        protected void Button2_Click(object sender, EventArgs e)
        {
            string name = Name.Text;
            string id = ID.Text;
            string reason = Reason.Text;
            string leaveDate = Date.Text;
            string swapFaculty = TextBox2.Text;

            Label9.Text = $"<b>Application Summary:</b><br/>" +
                          $"Name: {name}<br/>" +
                          $"ID: {id}<br/>" +
                          $"Leave Date: {leaveDate}<br/>" +
                          $"Reason: {reason}<br/>" +
                          $"Swap Faculty: {swapFaculty}";
        }

        protected void Button1_Click(object sender, EventArgs e)
        {
            Session.Clear();
            Session.Abandon();
```

```
            Response.Redirect("Login.aspx");
        }
    }
}
```

Source: Leave.aspx

Code:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Leave.aspx.cs"
Inherits="Practical_5.Leave" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
          <h2>Fill The Application</h2>
          <table>
              <tr>
                  <td>Enter the Name: </td>
                  <td><asp:TextBox ID="Name" runat="server"></asp:TextBox></td>
              </tr>
              <tr>
                  <td>Enter the ID:</td>
                  <td><asp:TextBox ID="ID" runat="server"></asp:TextBox></td>
              </tr>
              <tr>
                 <td>Enter the Reason:</td>
                 <td><asp:TextBox ID="Reason" runat="server"></asp:TextBox></td>
              </tr>
              <tr>
                  <td>Entered Date: </td>
                  <td><asp:Label ID="Date" runat="server" Text="Label"></asp:Label></td>
              </tr>
              <tr>
                 <td>Enter the Reason:</td>
                 <td><asp:TextBox ID="TextBox1" runat="server"></asp:TextBox></td>
              </tr>
              <tr>
                  <td>Enter the swap faculty: </td>
                  <td><asp:TextBox ID="TextBox2" runat="server"></asp:TextBox></td>
              </tr>
              <tr>
                  <td><asp:Button ID="Button1" runat="server" Text="Logout"
OnClick="Button1_Click" /></td>
                  <td><asp:Button ID="Button2" runat="server" Text="Submit"
OnClick="Button2_Click" /></td>
              </tr>
          </table>
    </form>

    <br />
    <hr />
```

```
    <h3>Details</h3>
    <p>
    <asp:Label ID="Label9" runat="server"></asp:Label></p>

</body>
</html>
```

Source: Default.aspx.cs

Code:

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

namespace Practical_5
{
    public partial class Default : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (Session["Username"] == null)
            {
                Response.Redirect("Login.aspx");
            }
        }

        protected void Calendar1_DayRender(object sender, DayRenderEventArgs e)
        {
            DateTime d1 = new DateTime(2026, 9, 16);
            DateTime d2 = new DateTime(2026, 9, 17);
            DateTime d3 = new DateTime(2026, 9, 18);

            DateTime[] specificdate = { d1, d2, d3 };

            if (e.Day.Date.DayOfWeek == DayOfWeek.Sunday)
            {
                e.Day.IsSelectable = false;
                e.Cell.BackColor = System.Drawing.Color.Gray;
                e.Cell.ToolTip = "Sunday";
            }
            if (specificdate.Contains(e.Day.Date))
            {
                e.Cell.BackColor = System.Drawing.Color.Yellow;
                e.Cell.ToolTip = "Mid Exam";
            }
            if (e.Day.IsOtherMonth)
            {
                e.Day.IsSelectable = false;
                e.Cell.BackColor = System.Drawing.Color.WhiteSmoke;
            }

        }
```

```
        protected void Button1_Click(object sender, EventArgs e)
        {
            if (Calendar1.SelectedDates.Count == 1)
            {
                string dateToSend = Calendar1.SelectedDate.ToString("yyyy-MM-dd");
                Response.Redirect("Leave.aspx?Selecteddate=" + dateToSend);
            }
        }
    }
}
```

Source: Default.aspx

Code:

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Default.aspx.cs"
Inherits="Practical_5.Default" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <title></title>
</head>
<body>
    <form id="form1" runat="server">
      <h2>Select the date of Leave:</h2>
        <asp:Calendar ID="Calendar1" runat="server"
OnDayRender="Calendar1_DayRender"></asp:Calendar>
      <asp:Button ID="Button1" runat="server" Text="Submit" OnClick="Button1_Click" style="height:
26px" />
    </form>
</body>
</html>
```

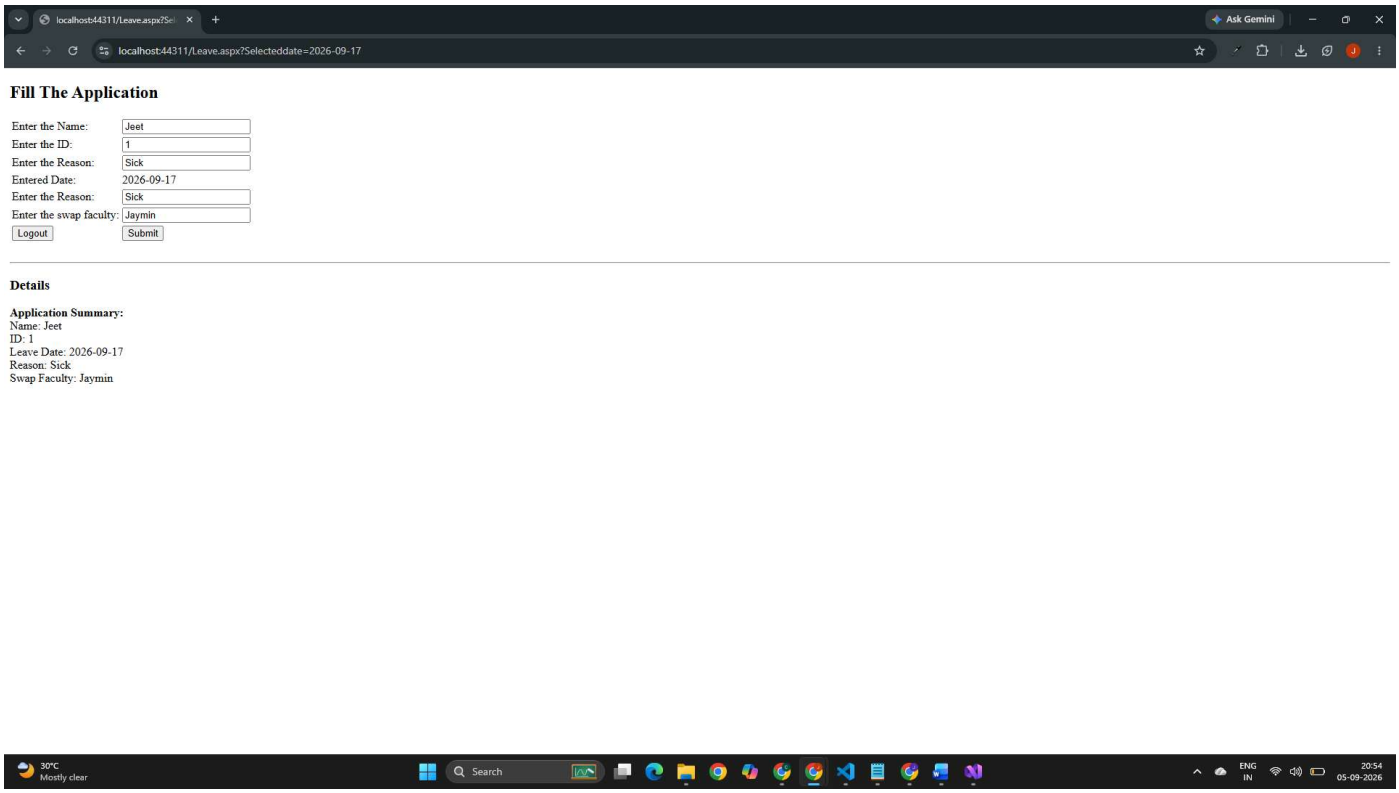
Output:

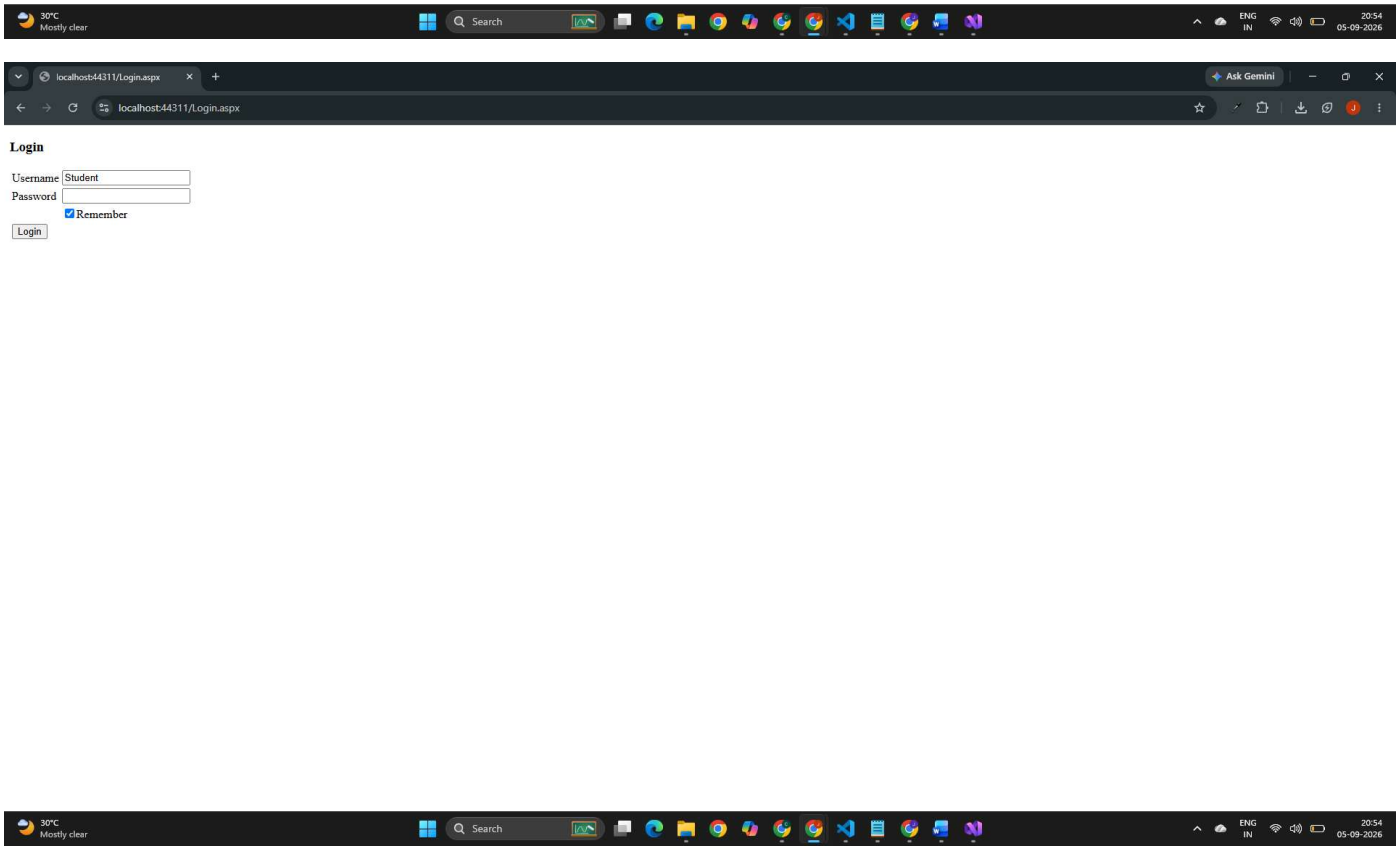

localhost:44311/Login.aspx
Ask Gemini
localhost:44311/Login.aspx
Login
Username Student
Password 123456
Remember
Login


30°C
Mostly clear
Search
ENG
IN
20:52
05-09-2026


localhost:44311/Default.aspx
Ask Gemini
localhost:44311/Default.aspx
Select the date of Leave:
September 2026
Sun Mon Tue Wed Thu Fri Sat
30 31 1 2 3 4 5
6 7 8 9 10 11 12
13 14 15 16 17 18 19
20 21 22 23 24 25 26
27 28 29 30 1 2 3
4 5 6 7 8 9 10
Submit


javascript:__doPostBack('Calendar1','9755')
30°C
Mostly clear
Search
ENG
IN
20:53
05-09-2026





Github Url: https://github.com/jd-thakrar/Uni-DotNet-Work/tree/master/Practical-5/Practical-5