

Course C++ - EXERCISES

2.28 (*Digits of an Integer*) Write a program that inputs a five-digit integer, separates the integer into its digits and prints them separated by three spaces each. [Hint: Use the integer division and modulus operators.] For example, if the user types in 42339, the program should print:

```
4 2 3 3 9
```

3.14 (*Employee Class*) Create a class called `Employee` that includes three pieces of information as data members—a first name (type `string`), a last name (type `string`) and a monthly salary (type `int`). [Note: In subsequent chapters, we'll use numbers that contain decimal points (e.g., 2.75)—called floating-point values—to represent dollar amounts.] Your class should have a constructor that initializes the three data members. Provide a *set* and a *get* function for each data member. If the monthly salary is not positive, set it to 0. Write a test program that demonstrates class `Employee`'s capabilities. Create two `Employee` objects and display each object's *yearly* salary. Then give each `Employee` a 10 percent raise and display each `Employee`'s yearly salary again.

4.37 (*World Population Growth*) World population has grown considerably over the centuries. Continued growth could eventually challenge the limits of breathable air, drinkable water, arable cropland and other precious resources. There is evidence that growth has been slowing in recent years and that world population could peak some time this century, then start to decline.

For this exercise, research world population growth issues online. *Be sure to investigate various viewpoints.* Get estimates for the current world population and its growth rate (the percentage by which it is likely to increase this year). Write a program that calculates world population growth each year for the next 75 years, *using the simplifying assumption that the current growth rate will stay constant.* Print the results in a table. The first column should display the year from year 1 to year 75. The second column should display the anticipated world population at the end of that year. The third column should display the numerical increase in the world population that would occur that year. Using your results, determine the year in which the population would be double what it is today, if this year's growth rate were to persist.

6.30 (*Reverse Digits*) Write a function that takes an integer value and returns the number with its digits reversed. For example, given the number 7631, the function should return 1367.

6.50 (*Pass-by-Value vs. Pass-by-Reference*) Write a complete C++ program with the two alternate functions specified below, each of which simply triples the variable `count` defined in `main`. Then compare and contrast the two approaches. These two functions are

- function `tripleByValue` that passes a copy of `count` by value, triples the copy and returns the new value and
- function `tripleByReference` that passes `count` by reference via a reference parameter and triples the original value of `count` through its alias (i.e., the reference parameter).

6.52 (*Function Template minimum*) Write a program that uses a function template called `minimum` to determine the smaller of two arguments. Test the program using integer, character and floating-point number arguments.

7.21 (Sales Summary) Use a two-dimensional array to solve the following problem. A company has four salespeople (1 to 4) who sell five different products (1 to 5). Once a day, each salesperson passes in a slip for each different type of product sold. Each slip contains the following:

- a) The salesperson number
- b) The product number
- c) The total dollar value of that product sold that day

Thus, each salesperson passes in between 0 and 5 sales slips per day. Assume that the information from all of the slips for last month is available. Write a program that will read all this information for last month's sales (one salesperson's data at a time) and summarize the total sales by salesperson by product. All totals should be stored in the two-dimensional array `sales`. After processing all the information for last month, print the results in tabular format with each of the columns representing a particular salesperson and each of the rows representing a particular product. Cross total each row to get the total sales of each product for last month; cross total each column to get the total sales by salesperson for last month. Your tabular printout should include these cross totals to the right of the totaled rows and to the bottom of the totaled columns.

Chapter 8: Exercises about pointers

Indicate in red the code lines that are syntactically incorrect. Indicate in green the expressions that are syntactically correct, but that are useless or might cause problems during execution.

Finally, what will appear on the display? Do not use your computer.

```
int main()
{
    int i,j;
    double d;
    int *ip = nullptr, *jp = nullptr;
    double *dp = nullptr;
    i = 7;
    ip = &7;
    jp = &i;
    *jp = j;
    *ip = i;
    ip = &j;
    &i = ip;
    j=4;
    (*ip)++;
    &d = dp;
    *ip*= i;
    *jp=*&j;
    ip++;
    i = ip-&i;
    dp = &i;
    dp = ip;
    &dp = &&d;
    *ip+=1;
    *ip++;
    cout <<endl<< i << j << d;
    cout <<endl<< *ip << *jp << *dp;
    return 0;
}
```

9.8 (*Enhancing Class Date*) Modify the Date class of Figs. 9.17–9.18 to perform error checking on the initializer values for data members month, day and year. Also, provide a member function nextDay to increment the day by one. Write a program that tests function nextDay in a loop that prints the date during each iteration to illustrate that nextDay works correctly. Be sure to test the following cases:

- a) Incrementing into the next month.
- b) Incrementing into the next year.

```
// Fig. 9.17: Date.h
// Date class definition; Member functions defined in Date.cpp
#ifndef DATE_H
#define DATE_H

class Date
{
public:
    static const unsigned int monthsPerYear = 12; // months in a year
    explicit Date( int = 1, int = 1, int = 1900 ); // default constructor
    void print() const; // print date in month/day/year format
    ~Date(); // provided to confirm destruction order
private:
    unsigned int month; // 1-12 (January-December)
    unsigned int day; // 1-31 based on month
    unsigned int year; // any year

    // utility function to check if day is proper for month and year
    unsigned int checkDay( int ) const;
}; // end class Date

#endif

// Fig. 9.18: Date.cpp
// Date class member-function definitions.
#include <array>
#include <iostream>
#include <stdexcept>
#include "Date.h" // include Date class definition
using namespace std;

// constructor confirms proper value for month; calls
// utility function checkDay to confirm proper value for day
Date::Date( int mn, int dy, int yr )
{
    if ( mn > 0 && mn <= monthsPerYear ) // validate the month
        month = mn;
    else
        throw invalid_argument( "month must be 1-12" );

    year = yr; // could validate yr
    day = checkDay( dy ); // validate the day

    // output Date object to show when its constructor is called
    cout << "Date object constructor for date ";
    print();
    cout << endl;
} // end Date constructor

// print Date object in form month/day/year
void Date::print() const
{
    cout << month << '/' << day << '/' << year;
} // end function print
```

```

// output Date object to show when its destructor is called
Date::~Date()
{
    cout << "Date object destructor for date ";
    print();
    cout << endl;
} // end ~Date destructor

// utility function to confirm proper day value based on
// month and year; handles leap years, too
unsigned int Date::checkDay( int testDay ) const
{
    static const array< int, monthsPerYear + 1 > daysPerMonth =
        { 0, 31, 28, 31, 30, 31, 30, 31, 31, 30, 31, 30, 31 };

    // determine whether testDay is valid for specified month
    if ( testDay > 0 && testDay <= daysPerMonth[ month ] )
        return testDay;

    // February 29 check for leap year
    if ( month == 2 && testDay == 29 && ( year % 400 == 0 ||
        ( year % 4 == 0 && year % 100 != 0 ) ) )
        return testDay;

    throw invalid_argument( "Invalid day for current month and year" );
} // end function checkDay

```

10.10 (*RationalNumber Class*) Create a class RationalNumber (fractions) with the following capabilities:

- Create a constructor that prevents a 0 denominator in a fraction, reduces or simplifies fractions that are not in reduced form and avoids negative denominators.
- Overload the addition, subtraction, multiplication and division operators for this class.
- Overload the relational and equality operators for this class.

12.16 (*CarbonFootprint Abstract Class: Polymorphism*) Using an abstract class with only pure virtual functions, you can specify similar behaviors for possibly disparate classes. Governments and companies worldwide are becoming increasingly concerned with carbon footprints (annual releases of carbon dioxide into the atmosphere) from buildings burning various types of fuels for heat, vehicles burning fuels for power, and the like. Many scientists blame these greenhouse gases for the phenomenon called global warming. Create three small classes unrelated by inheritance—classes Building, Car and Bicycle. Give each class some unique appropriate attributes and behaviors that it does not have in common with other classes. Write an abstract class CarbonFootprint with only a pure virtual getCarbonFootprint method. Have each of your classes inherit from that abstract class and implement the getCarbonFootprint method to calculate an appropriate carbon footprint for that class (check out a few websites that explain how to calculate carbon footprints). Write an application that creates objects of each of the three classes, places pointers to those objects in a vector of CarbonFootprint pointers, then iterates through the vector, polymorphically invoking each object's getCarbonFootprint method. For each object, print some identifying information and the object's carbon footprint.

CO₂-uitstoot:

Fiets = 0 kg/jaar

Auto = verbruik_per_100_km x 20 kg/jaar

Gebouw = aantal_vierkante_meter x 100 kg/jaar

13.15 (Point Class) Write a program that accomplishes each of the following:

- Create a user-defined class `Point` that contains the private integer data members `xCoordinate` and `yCoordinate` and declares stream insertion and stream extraction overloaded operator functions as friends of the class.
- Define the stream insertion and stream extraction operator functions. The stream extraction operator function should determine whether the data entered is valid, and, if not, it should set the `failbit` to indicate improper input. The stream insertion operator should not be able to display the point after an input error occurred.
- Write a main function that tests input and output of user-defined class `Point`, using the overloaded stream extraction and stream insertion operators.

14.11 (Hardware Inventory) You are the owner of a hardware store and need to keep an inventory that can tell you what different tools you have, how many of each you have on hand and the cost of each one. Write a program that initializes the random-access file `hardware.dat` to 100 empty records, lets you input the data concerning each tool, enables you to list all your tools, lets you delete a record for a tool that you no longer have and lets you update *any* information in the file. The tool identification number should be the record number. Use the following information to start your file:

| Record # | Tool name | Quantity | Cost |
|----------|-----------------|----------|-------|
| 3 | Electric sander | 7 | 57.98 |
| 17 | Hammer | 76 | 11.99 |
| 24 | Jig saw | 21 | 11.00 |
| 39 | Lawn mower | 3 | 79.50 |
| 56 | Power saw | 18 | 99.99 |
| 68 | Screwdriver | 106 | 6.99 |
| 77 | Sledge hammer | 11 | 21.50 |
| 83 | Wrench | 34 | 7.50 |

Chapter 15

Rewrite the carbon footprint exercise in such a way that

- The carbon footprint is calculated in the constructor of each class and set in a member variable.
- The function `GetCarbonFootprint()` no longer calculates the carbon footprint but serves merely as a getter.
- Add the name ("Bicycle", "Building", "Car") as a new member to the class and initialize it in the constructor.
- Choose an appropriate collection that allows sorting. Sort the collection by carbon footprint.
Store the objects (and not pointers to the objects) in the collection
- Print name and footprint before and after sorting:
BEFORE SORTING:
Bicycle: 0
Building: 335000
Car: 200
AFTER SORTING:
Bicycle: 0
Car: 200
Building: 335000
- Save name and footprint of the sorted collection to a text file.

7. Are virtual functions still needed?

Chapter 16

Now implement the sort in the Carbon Footprint exercise with a lambda expression.


Chapter 24

CarbonFootprint: the final version

Revisit once again the CarbonFootprint exercise

1. Use smart pointers in your collection
- ~~2. Avoid extra copy constructors~~
3. Use *using* to define appropriate type definitions
4. Sort in three ways
 - a. Operator overloading
 - b. Function pointer
 - c. Lambda function
5. Zoek zelf naar minstens één zinvolle exception. Stuur ze uit en vang ze op.
6. Make sure the destructors are called (check that!).
7. Discuss the advantages and disadvantages of the use of smart pointers in this case.

1. Ontwerp een GUI-applicatie waarin je de klassen uit de oefening CarbonFootPrint (“final version”) herbruikt zodat je via een dropdown kunt kiezen tussen Bicycle, Car of Building waarna je vervolgens in een MessageBox de CarbonFootprint krijgt.
Tips:
 - a. gebruik QComboBox voor de dropdown.
 - b. Werk eerst met een vaste oppervlakte voor het gebouw en een vast verbruik voor de auto.
2. Laat vervolgens de oppervlakte en het verbruik invullen via een invulscherf dat zich aanpast aan de keuze in de dropdown. Stuur een exception uit bij “ongeldige” waarden. Toon een message box met een foutmelding als de exception zich voordoet.

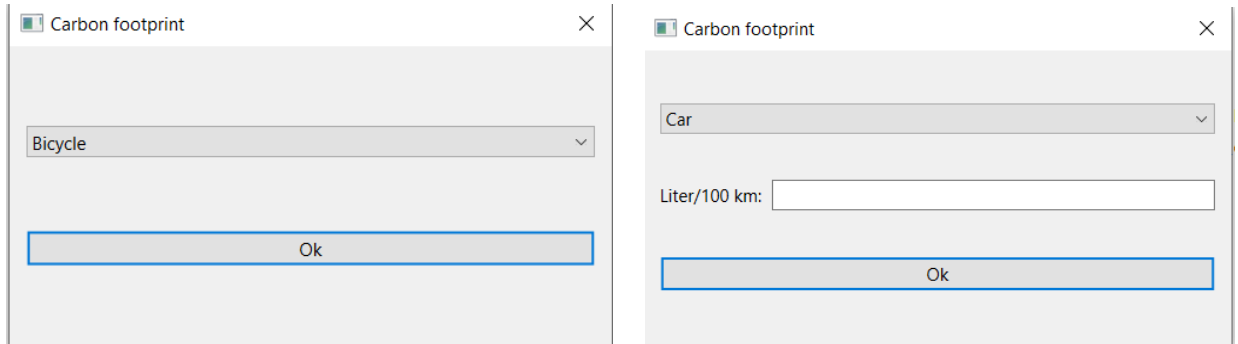

3. Toon bij het afsluiten van de applicatie een “Bedankt en tot ziens”-boodschap.
4. Voeg twee menu’s toe:
 - a. “CarbonFootprint” met
 - i. submenu “Calculate” die bovenstaand scherm toont
 - ii. submenu “Save” die de gesorteerde lijst van CarbonFootprints opslaat in een tekstbestand.
 - b. “About” met
 - i. Submenu “Version” die de build-versie van de applicatie toont.
5. Geef de naam van het tekstbestand door als parameter via de command line.