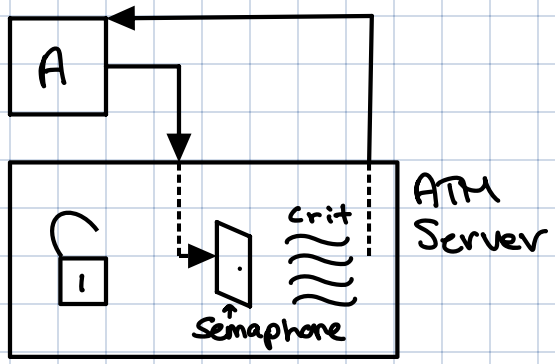

ATM A sends msg(amount) to the ATM Server. The critical section is protected via semaphore using an atomic lock. After the data is accessed, the server sends the requested information back to the ATM for further modification or to for the ATM to execute SIGNAL() and exit the critical section.