
ERD Implementation Basics

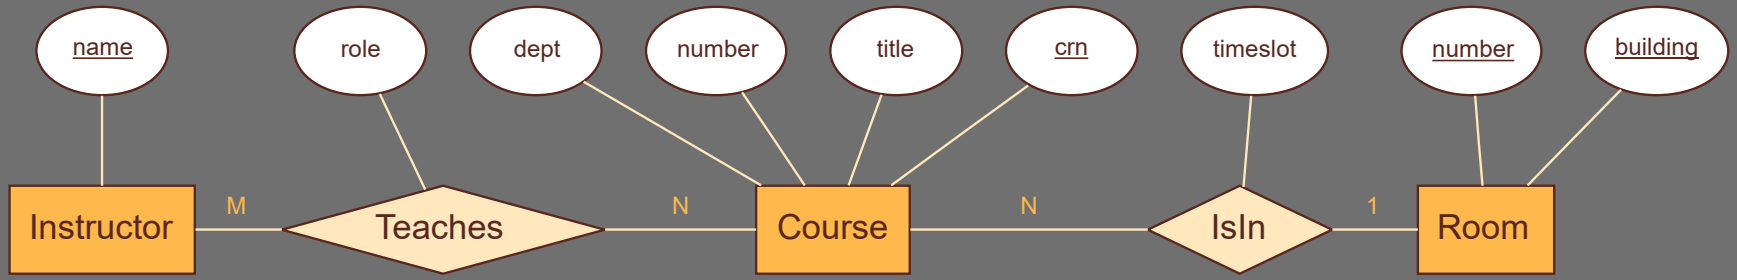


Instructor(name)

Course(crn, dept, cnumber, title, timeslot, building, rnumber)

Room(building, number)

Teaches(name, crn, role)

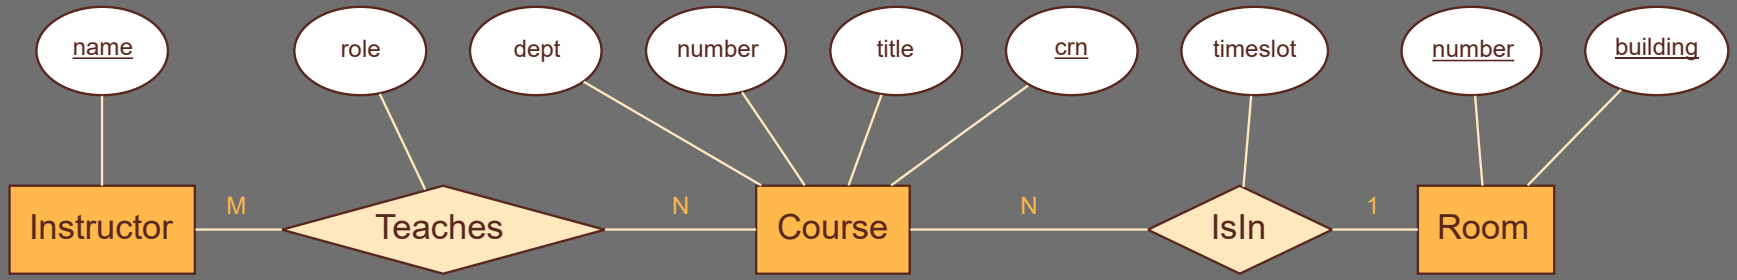


Course(<u>crn</u>, dept, cnumber, title, timeslot, building, rnumber)

Room(<u>building</u>, <u>number</u>)

How to remember which table gets additional attributes:

- Course has one Room, so Room can be an attribute.
- Room has many Courses, so they can't be an attribute.

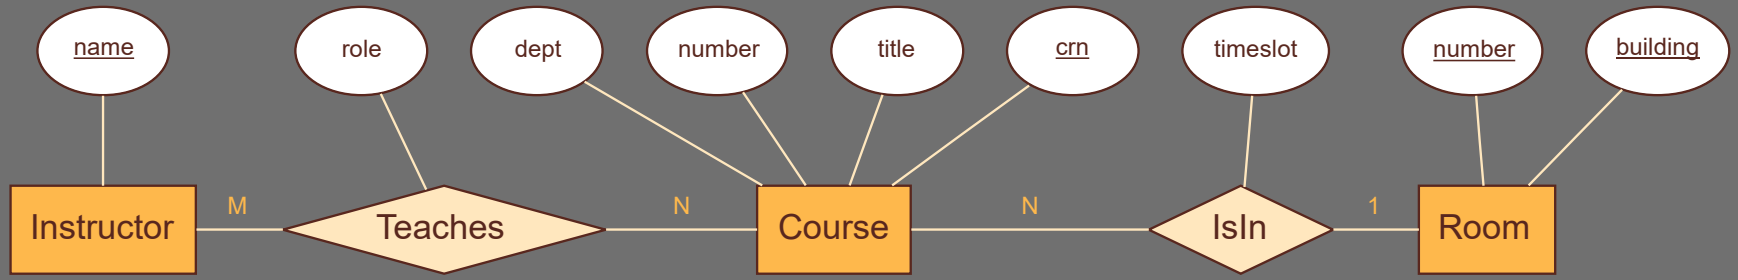

PKs are non-null.
Doesn't this force minimum cardinality of 1?

Teaches(<u>name</u>, <u>crn</u>, role)