
Conflicts

Schedules & conflicts

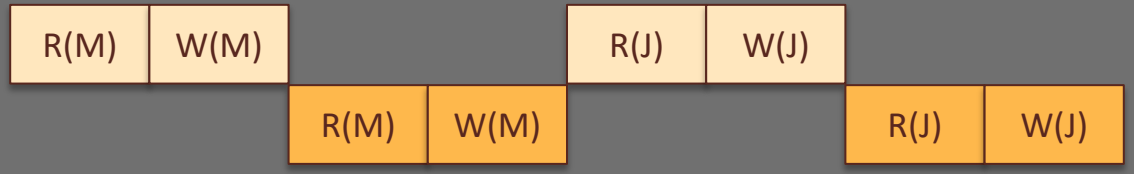

Two actions (A_i,A_j) are a conflicting pair if

- Different transactions
- Same variable
- At least one Write
- A_i precedes A_j

Conflicts signal potential problems.

Conflict serializability

Two schedules conflict equivalent if

- Same transactions with same actions
- Every pair of conflicting actions are ordered in same way

Schedule conflict serializable if

- Conflict equivalent to some serial schedule


Conflict serializable $\rightarrow$ serializable

Comparing “good” and “bad” schedules

Serial



Conflict equiv. Serializable

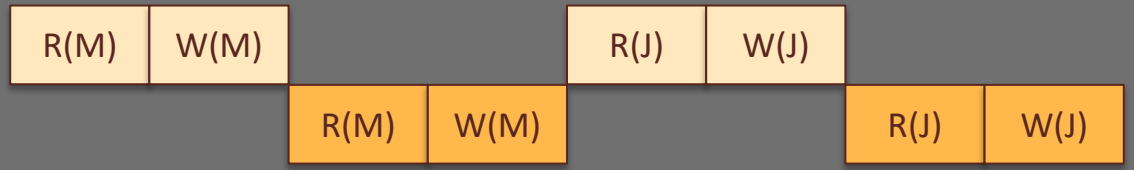

Not conflict equiv. Non-serializable

