
Combining Operations in a Query Plan

Combining

```
For r in R:
    For s in S:
        If r.a == s.a, yield (r,s)
```

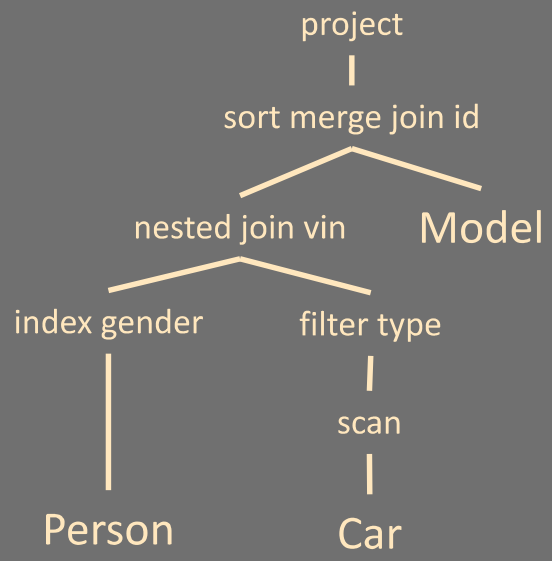

When operations can combine

- Filter & project:
  - Can combine with parent.
  - Can combine with child.
- Scan:
  - Can combine with parent if data read only once.

```
For r in R:
   For s in S:
      If r.a == s.a, yield (r,s)
```