Taylor Jordan

Prof. Geetika Vyas

IT 6203 – IT Design Studio

November 11, 2026

# Milestone 2: Landlord Profile Management

For Milestone 2, the Landlord Profile component of Property Pulse (Group 8) was integrated with a Node.js and Express backend that stores landlord profiles in MongoDB. Users can create, view, update, and archive landlord profiles, with all changes persisted in the database. The Angular component communicates with the Express server at `http://localhost:8000/landlords` via a landlord service, and the server uses a Mongoose model to manage the Landlords collection in the PropertyPulse database.

**Team member:** Taylor Jordan

**Assigned component:** Landlord Profile Management

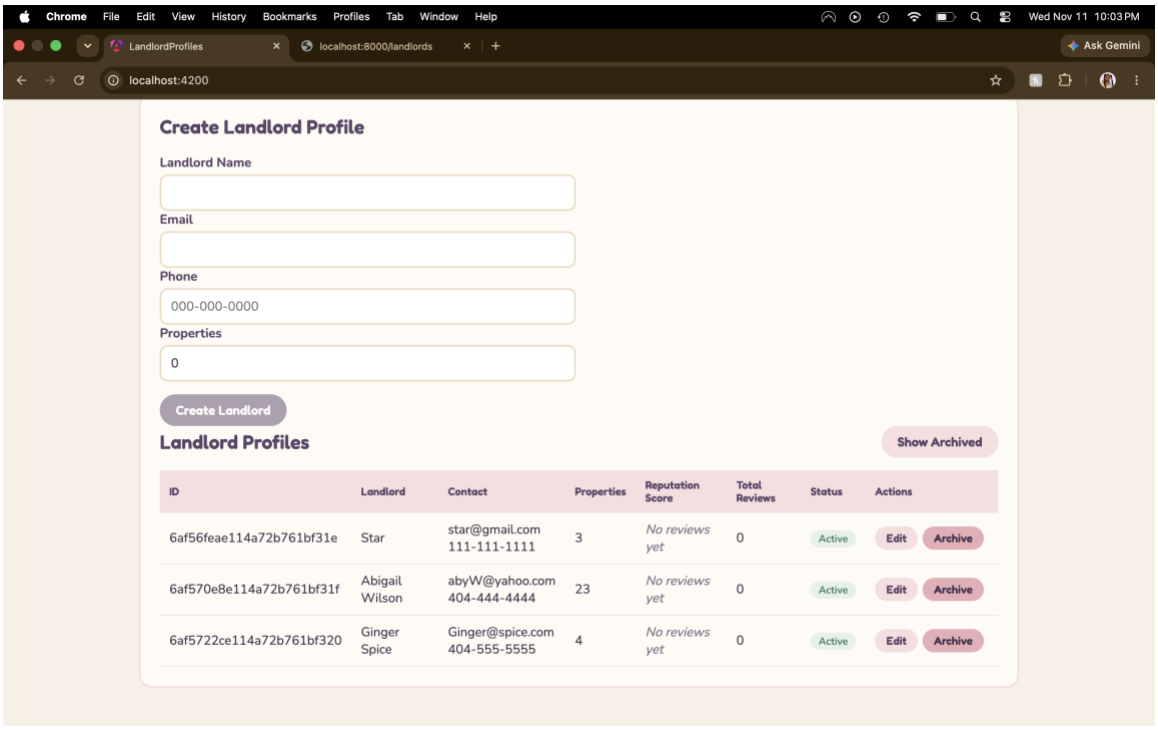
**Repository folder:** `taylor-jordan-landlord-profiles` (Angular front end in `src`, Express back end in `server`)

**GitHub repository:** https://github.com/jdixo137/Property-Pulse

## Screenshots and Descriptions

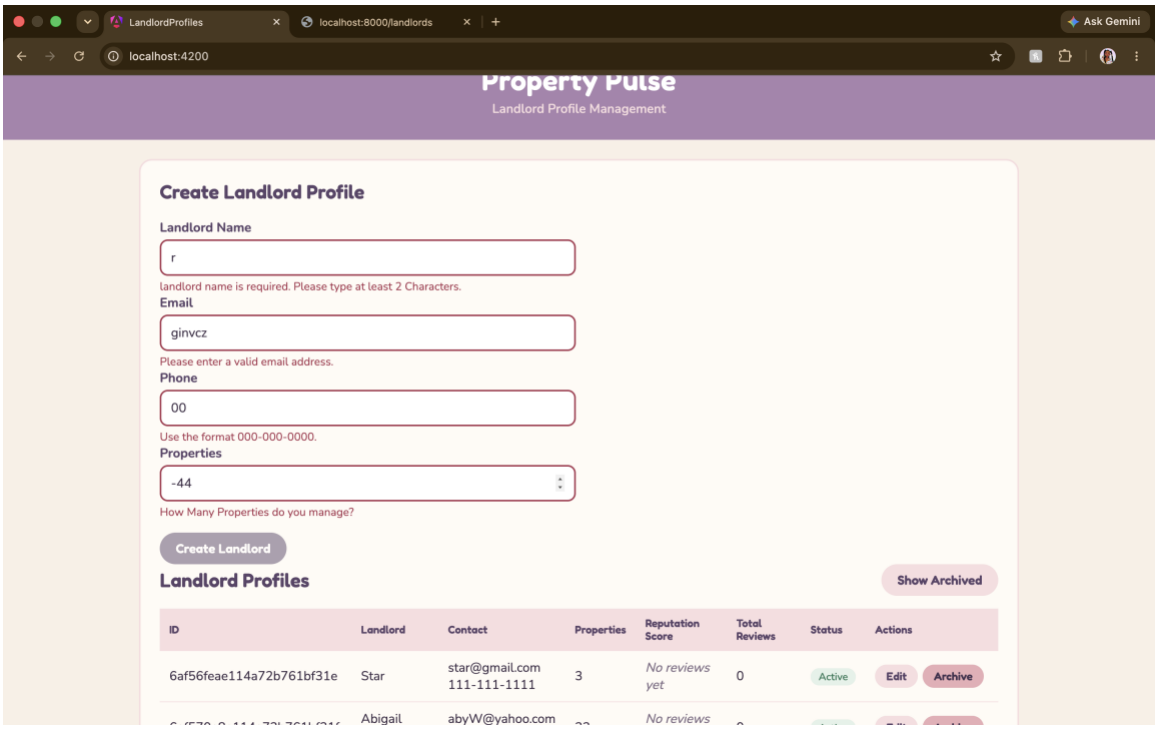
### Screenshot 1: Read – Landlord Profiles Loaded from MongoDB

When the page loads, the component sends a GET request to `/landlords`, and the table displays all landlords stored in MongoDB, including their IDs, contact information, properties owned, reputation scores, total reviews, and status. Since the data is retrieved from the database, the list remains consistent after refreshing the page.



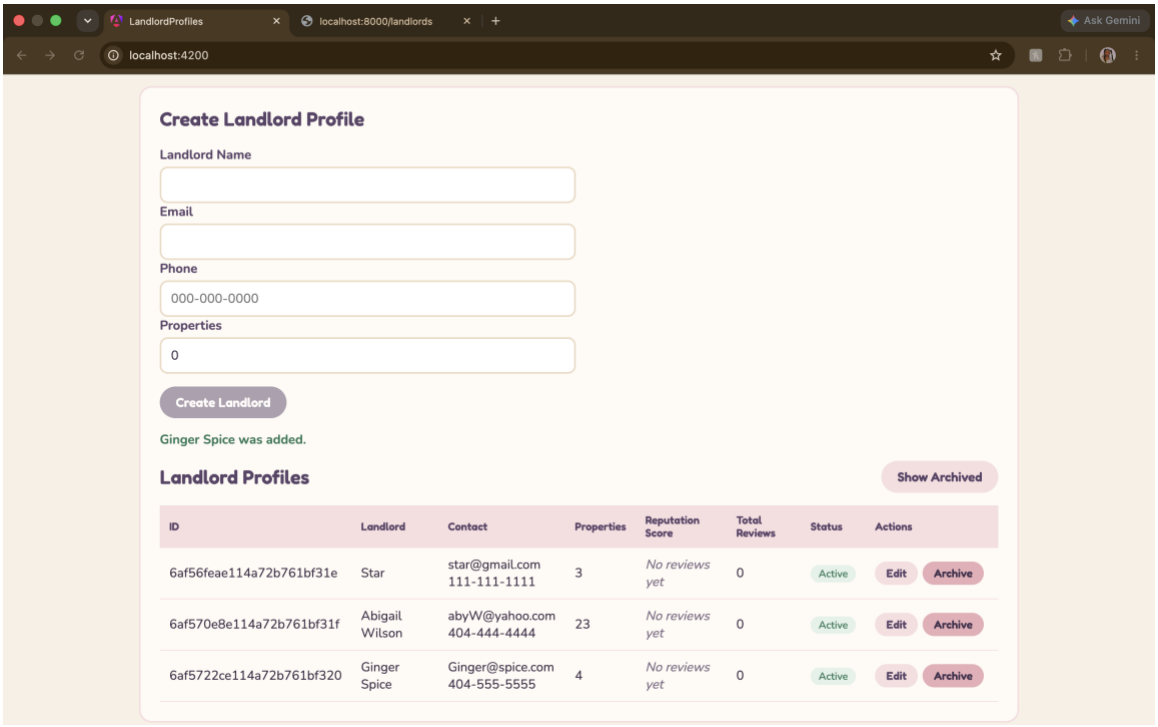

### Screenshot 2: Create – Form Validation

Before creating a landlord, the reactive form validates each field. Invalid entries display a red border and an error message, and the Create Landlord button remains disabled until the name, email, phone, and properties owned fields are valid.



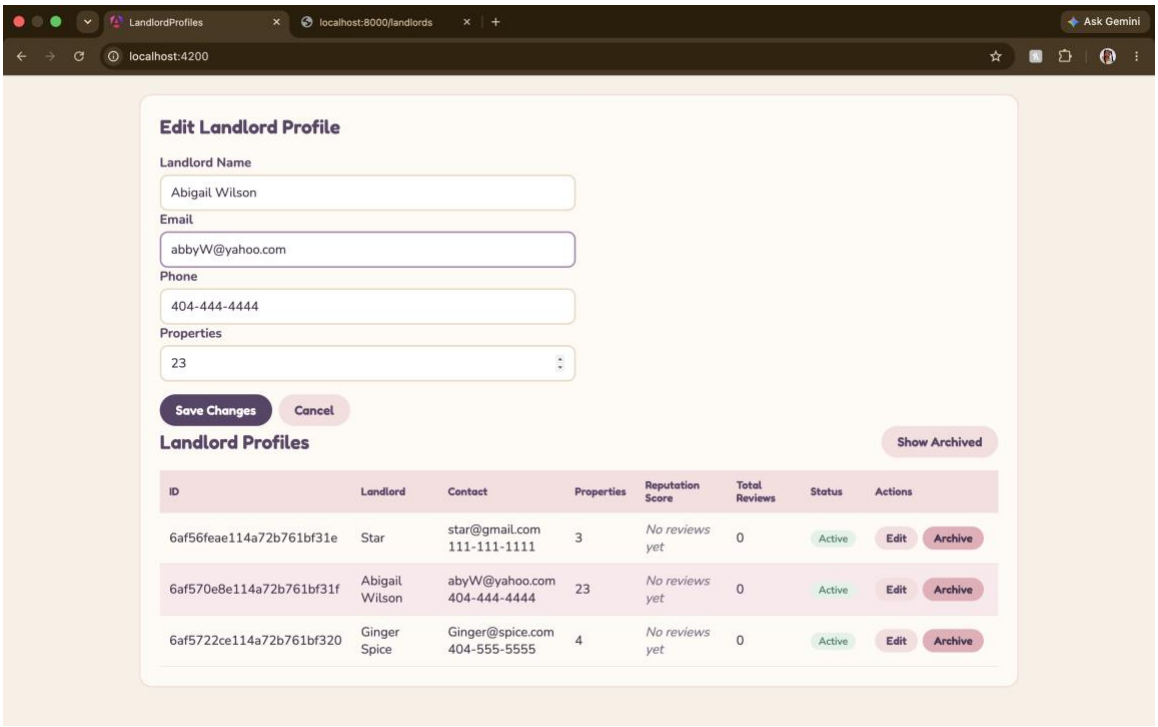

**Screenshot 3: Create – New Landlord Saved to MongoDB**

Submitting the form sends a POST request to `/landlords`. The server saves Ginger Spice as a new document in MongoDB with a unique ID, the table reloads from the database, and a confirmation message appears.



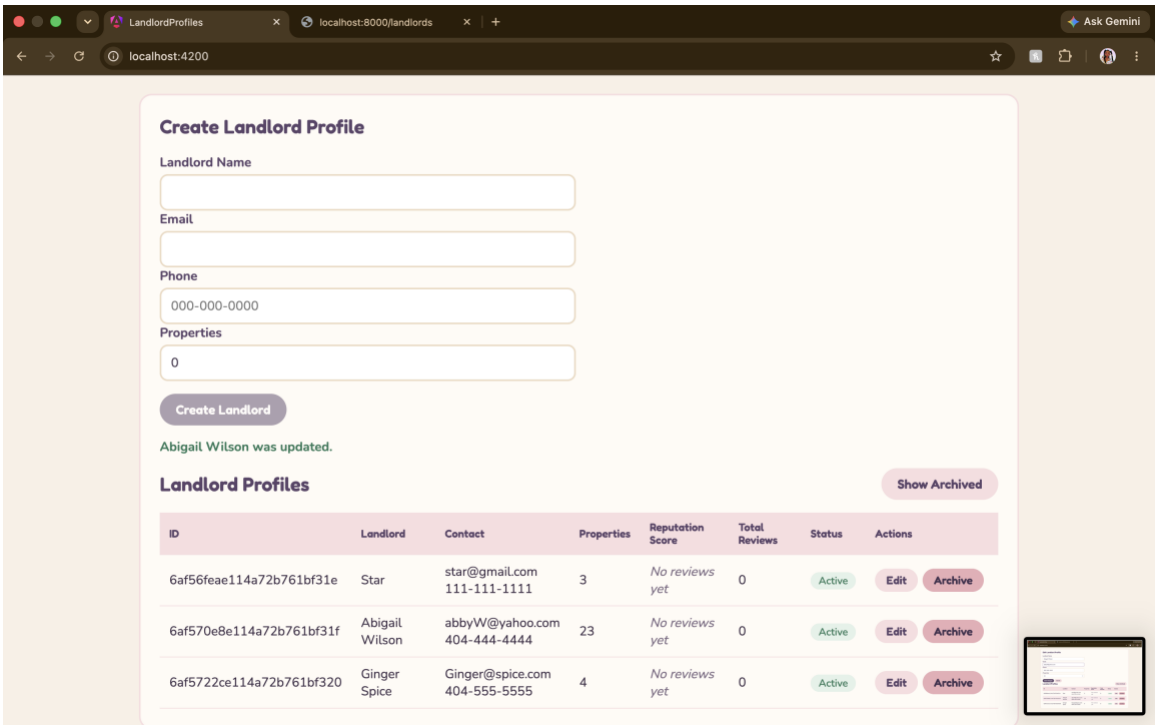
**Screenshot 4: Update – Edit Mode**

Clicking Edit loads Abigail Wilson's information into the form. The heading updates to Edit Landlord Profile, the button changes to Save Changes, a Cancel button appears, and the row being edited is highlighted.



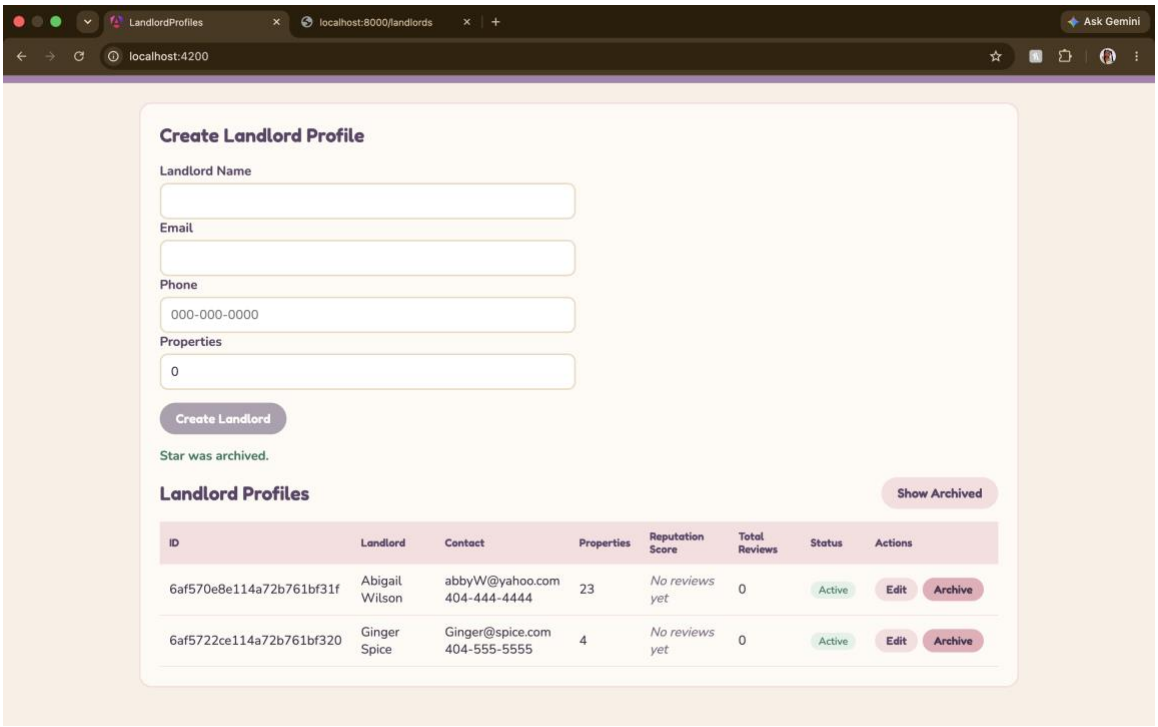

**Screenshot 5: Update – Changes Saved to MongoDB**

Clicking Save Changes sends a PUT request to `/landlords/:id`, and the server updates the landlord's document in MongoDB. The corrected email address appears in the table, and a message confirms that Abigail Wilson was updated.



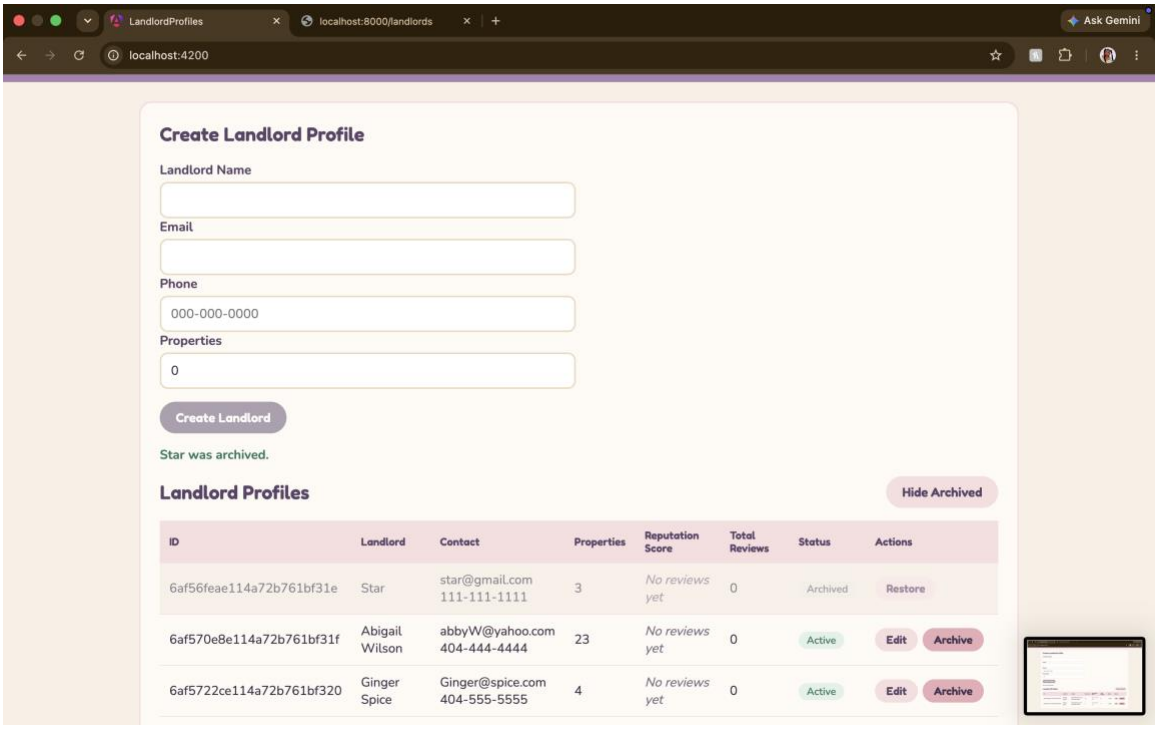

**Screenshot 6: Delete – Landlord Archived (Soft Delete)**

Delete is implemented as a soft delete, as outlined in the project proposal. Clicking Archive sends a PUT request that sets `isArchived` to `true` in MongoDB, so Star is hidden from the list but not removed from the database.



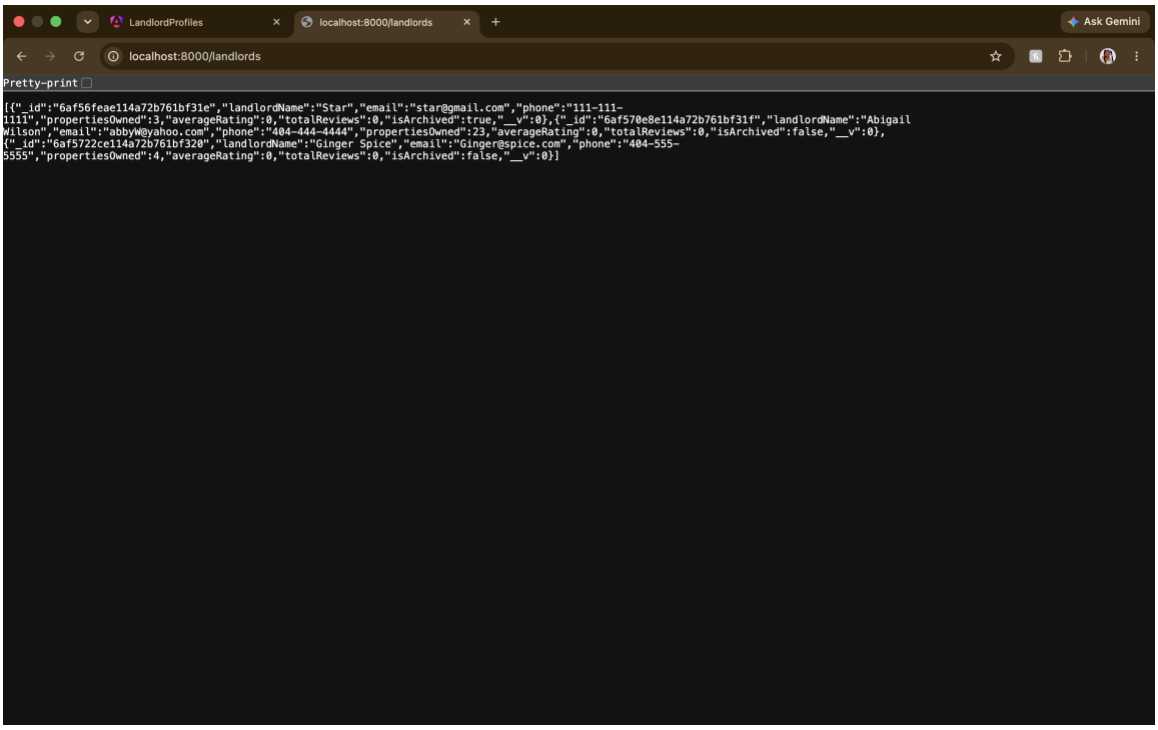

**Screenshot 7: Delete – Viewing Archived Landlords**

Clicking Show Archived displays archived landlords alongside active ones. Star appears faded, with an Archived status badge and a Restore button.



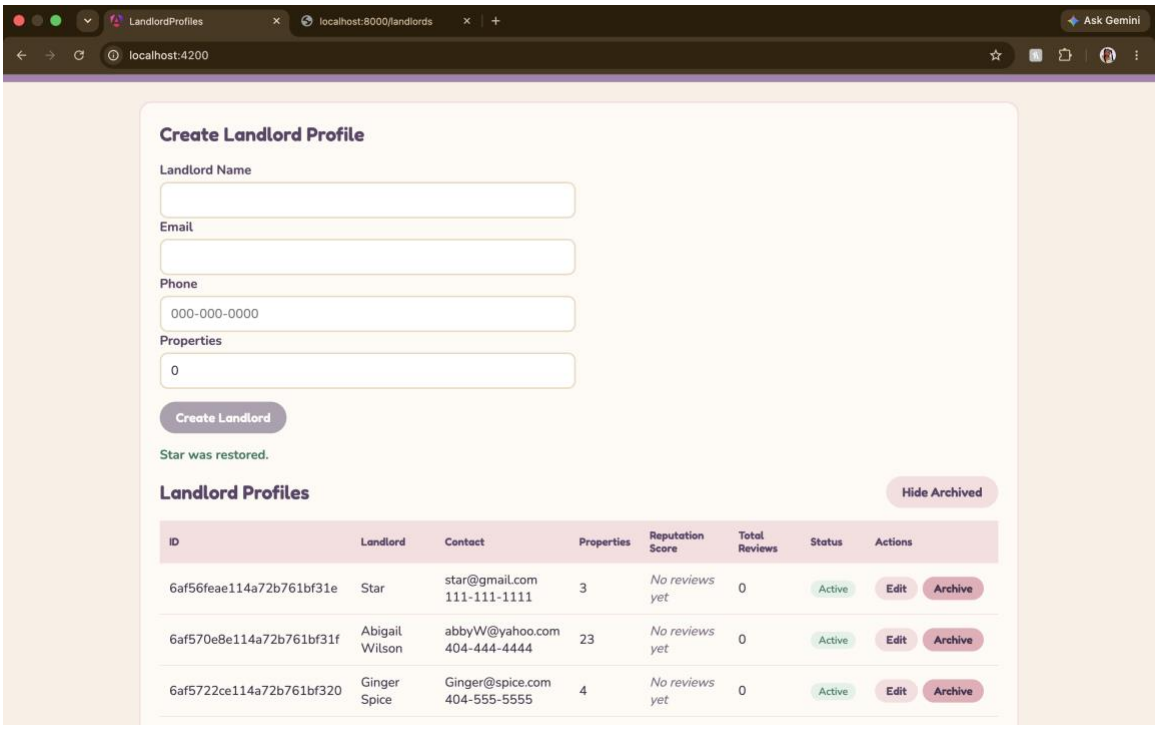

**Screenshot 8: MongoDB Records from the Express GET Endpoint**

Opening `http://localhost:8000/landlords` in the browser displays landlord documents returned directly from MongoDB as JSON. The records include Ginger Spice from the Create step, Abigail Wilson's updated email from the Update step, and Star with `"isArchived": true` from the Archive step.




**Screenshot 9: Restore an Archived Landlord**

Clicking Restore sends a PUT request that sets `isArchived` to `false` in MongoDB. Star returns to Active status, and the Edit and Archive buttons reappear.



## Reference

Anthropic. (2026). *Claude* (Opus 5.5) [Large language model]. https://claude.ai

## AI Use Statement

I used Claude (Anthropic) as an assistant while completing this milestone. It provided guidance for building the Express server, the Mongoose landlord model, the CRUD routes, the Angular landlord service, and for connecting the Landlord Profile component to MongoDB. It also drafted the structure of this report. I wrote, ran, and tested all code myself in VS Code and verified the results in the browser.