

Technical Dimensions of Programming Systems

JOEL JAKUBOVIC, University of Kent, UK
JONATHAN EDWARDS
TOMAS PETRICEK, University of Kent, UK

Many programming systems go beyond programming languages. Programming is usually done in the context of a stateful environment, beyond just writing code, by interacting with a system through a graphical user interface. Much research effort focuses on building programming systems that are easier to use, accessible to non-experts, moldable and/or powerful, but such efforts are often disconnected. They are informal, guided by the personal vision of the authors and thus are only evaluable and comparable on the basis of individual experience using them. In other words, they fail to form a coherent body of research. It isn't clear how to build on what has been done. Much has been said and done that allows comparison of *programming languages*, yet no similar theories exist for *programming systems*. We believe that programming systems deserve a theory too. We examine some influential past programming systems and review their stated design principles, technical capabilities, and styles of user interaction. We propose a framework of *technical dimensions*, capturing the underlying system characteristics and providing a means for conceptualising and comparing programming systems. We thus break the holistic view of programming systems down into characteristics that can be compared or advanced independently. These make it possible to talk about programming systems in a way that can be shared and agreed or constructively disagreed upon, rather than relying just on individual experience of using them. Our aim is to bring programming systems into the focus of programming research by providing the foundations that allow such research to proceed in a more systematic way. In other words, we wish the designers of future programming systems to finally stand on the shoulders of giants.

ACM Reference Format:

Joel Jakubovic, Jonathan Edwards, and Tomas Petricek. 2021. Technical Dimensions of Programming Systems. In *Proceedings of PLoP*. ACM, New York, NY, USA, 32 pages. <https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

A systematic presentation removes ideas from the ground that made them grow and arranges them in an artificial pattern.

— Paul Feyerabend, *The Tyranny of Science*, Polity Press (2011)

Irony is said to allow the artist to continue his creative production while immersed in a sociocultural context of which he is critical.

— Emmanuel Petit, *Irony or, the Self-Critical Opacity of Postmodernist Architecture*, Yale (2013)

1 INTRODUCTION

Many forms of software have been developed to enable programming. The classic form consists of a *programming language*, a text editor to enter source code, and a compiler to turn it into an executable program. Instances of this form are differentiated by the syntax and semantics of the language, along with the implementation techniques in the compiler or runtime environment. Since the advent of graphical user interfaces (GUIs), programming languages can be found embedded within graphical environments that increasingly define how programmers

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

PLoP, 2021, online

© 2021 Association for Computing Machinery.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM...\$15.00

<https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

work with the language (by directly supporting debugging or refactoring, for instance.) However, the rise of GUIs also permits diverse visual forms of programming, including visual languages and GUI-based end-user programming tools. This paper relies on, and encourages, a shift of attention from *programming languages* to the more general notion of “software that enables programming”—in other words, *programming systems*.

A *programming system* may include tools, protocols, notations and languages. It is a software artefact that makes it possible to construct programs, debug them, and turn them into operational, maintained and evolvable artifacts running on appropriate hardware. This notion covers classic programming languages together with their editors, debuggers, compilers and other tools. Yet it is intentionally broad enough to accommodate image-based programming environments like Smalltalk, operating systems like UNIX, and hypermedia systems like Hypercard, as well as various other examples we will mention.

1.1 What is the problem?

There is a growing interest in broader forms of *programming systems*, both in the programming research community and in industry. On the one hand, researchers are increasingly studying topics such as *programming experience* and *live programming* that require considering not just the *language*, but further aspects of a given system. On the other hand, commercial companies are building new programming environments like Replit or low-code programming tools like Dark and Glide. Yet, such topics remain at the sidelines of mainstream programming research. While *programming languages* are a well-established concept, analysed and compared in a common vocabulary, no similar foundation exists for the wider range of *programming systems*.

The academic research on programming suffers from the lack of common vocabulary for talking about programming systems. While we can thoroughly assess programming languages, as soon as we add interaction or graphics into the picture, all we can say is that the resulting system is vaguely “cool” or “interesting”. Moreover, when designing new systems, inspiration is often drawn from same few somewhat disconnected sources of ideas. These might be influential past systems like Smalltalk, programmable end-user applications like spreadsheets, or motivational illustrations by thinkers like Victor [Victor 2012].

Instead of forming a solid body of work, the ideas that emerge are difficult to relate to each other. Similarly, the research methods used to study programming systems lack the more rigorous structure of programming language research methods. They tend to rely on singleton examples, which demonstrate the author’s ideas, but are inadequate methods for comparing new ideas with the work of others. This makes it hard to build on top and thereby advance the state of the art.

Studying *programming systems* is not merely about taking a programming language and looking at the tools that surround it. It presents a *paradigm shift* to a perspective that is, at least partly, *incommensurable* with that of languages. When studying programming languages, everything that matters is in the program code; when studying programming systems, everything that matters is in the *interaction* between the programmer and the system. As documented by Gabriel [Gabriel 2012], looking at a *system* from a *language* perspective makes it impossible to think about concepts that arise from interaction with a system, but are not reflected in the language. Thus, we must proceed with some caution. As we will see, when we talk about Lisp as a programming system, we mean something very different from a parenthesis-heavy programming language!

1.2 Contributions

We propose a new common language as an initial, tentative step towards more progressive research on programming systems. Our set of “Technical Dimensions for Programming Systems” seeks to break down the holistic view of systems along various specific “axes”: verbal conceptual prompts inspired by the *Cognitive Dimensions of Notation* [Green and Petre 1996]. While not strictly quantitative, we have designed them to be narrow enough to be comparable, so that we may say one system has more or less of a property than another. Generally, we see

the various possibilities as tradeoffs and are reluctant to assign them “good” or “bad” status. If the framework is to be useful, then it must encourage some sort of rough consensus on how to apply it; we expect it will be more helpful to agree on descriptions of systems first, and settle normative judgements later.

The set of dimensions can be understood as a map of the design space of programming systems (Figure 1). Past and present systems will serve as landmarks, and with enough of them, unexplored or overlooked possibilities will reveal themselves. So far, the field has not been able to establish a virtuous cycle of feedback where practitioners are able to situate their work in the context of others’ for subsequent work to improve on. Our aim is to provide foundations for the study of programming systems that would allow such development.

1. We present in detail several clusters of technical dimensions: *interaction dimensions*, *notational dimensions*, *conceptual dimensions*, *customizability*, *level of automation*, *errors*, *factoring of complexity*, *representation*, and *adoptability*.
2. We define these dimensions by reference to landmark programming systems of the past, and discuss any relationships between them.
3. We demonstrate the salience of these dimensions by applying them to example systems from both the past and present. We situate some experimental systems as explorations at the frontier of certain dimensions.

2 RELATED WORK

While we do have new ideas to propose, part of our contribution is simply integrating a wide range of existing concepts under a common umbrella. This work is spread out across different domains, but each part connects to programming systems or focuses on a specific characteristic they may have.

2.1 Which “systems” are we talking about?

The programming systems that shape our framework come from a few recognisable clusters:

- “Platforms” supporting arbitrary software ecosystems: UNIX, Lisp, Smalltalk, the Web
- “Applications” targeted to a specific domain: spreadsheets
- Mixed aspects of platform and application: HyperCard, Boxer, Flash, and programming language workflows

Richard Gabriel noted a “paradigm shift” [Gabriel 2012] from the study of systems to the study of languages in computer science, which informs our distinction here. One consequence of the change is that a *language* is often formally specified apart from any specific implementations, while *systems* resist formal specification and are often *defined by* an implementation. We do, however, intend to recognize programming languages as a small part of the space of possible systems (Figure 1). Hence we refer to the *interactive programming system* aspects of languages, such as text editing and command-line workflow.

Our “system” concept is mostly technical in scope, with occasional excursions as in “Adoptability” (Section 4.9). This contrasts with the more socio-political focus found in [Tchernavskij 2019]. It overlaps with Kell’s conceptualization of UNIX, Smalltalk, and Operating Systems generally [Kell 2013], and we ensure UNIX is a part of ours. We do not, however, extend it to systems distributed over networks, although our framework may still be applicable there.

2.2 Industry and research interest in programming systems

There is renewed interest in programming systems in both industry and research. In industry we see:

- Computational notebooks such as Jupyter¹ that make data analysis more amenable to scientists by combining code snippets and their numerical or graphical output in a convenient document format.

¹<https://jupyter.org/>

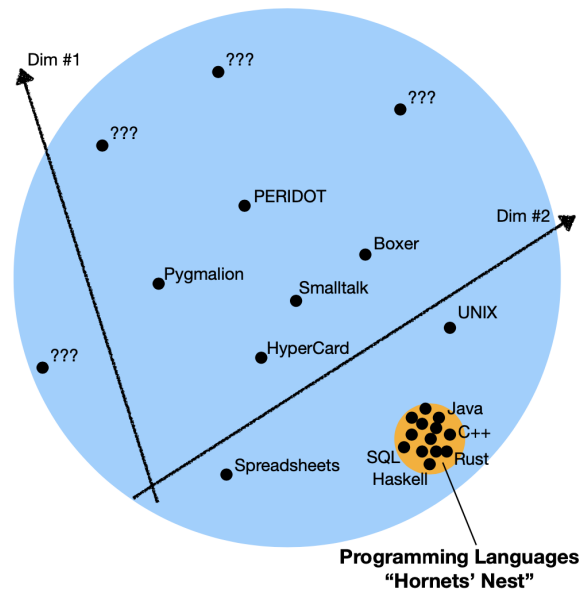


Fig. 1. A speculative sketch of one 2-dimensional slice of the space of possible systems.

- “Low code” end-user programming systems that present a simplified GUI for developing applications. One example is Coda,² which combines tables, formulas, and scripts to enable non-technical people to build “applications as a document”.
- Specialized programming systems that augment a specific domain. For example Dark,³ which creates cloud API services with a “holistic” programming experience including a language and direct manipulation editor with near-instantaneous building and deployment.
- Even for general purpose programming with conventional tools, systems like Replit⁴ have demonstrated the benefits of integrating all needed languages, tools, and user interfaces into a seamless experience available from a browser with no setup.

In research, there are an increasing number of explorations of the possibilities of full programming systems:

- Subtext [Edwards 2005], which combines code with its live execution in a single editable representation.
- Sketch-n-sketch [Hempel et al. 2019], which can synthesize code by direct manipulation of its outputs.
- Hazel [Omar et al. 2017], a live functional programming environment featuring typed holes which enable execution of incomplete or type-erroneous programs.

Several research venues investigate programming systems:

- VL/HCC (IEEE Symposium on Visual Languages and Human-Centric Computing)
- The LIVE programming workshop at SPLASH
- The PX (Programming eXperience) workshop at <Programming>

²<https://coda.io/welcome>

³<https://darklang.com/>

⁴<https://replit.com/>

2.3 Related methodology

There are several existing projects identifying characteristics of programming systems. Some of these revolve around a single one, such as levels of liveness [Tanimoto 2013], or plurality and communicativity [Kell 2017]. Others propose, as we do here, an entire collection:

- *Memory Models of Programming Languages* [Sitaker 2016] identifies the “everything is an X” metaphors underlying many programming languages.
- The *Design Principles of Smalltalk* [Ingalls 1981] documents the philosophical goals and dictums used in the design of Smalltalk.
- The original *Design Patterns* [Gamma et al. 1995] names and catalogues specific tactics within the *codebases* of software systems.
- The *Cognitive Dimensions of Notation* [Green and Petre 1996] introduces a common vocabulary for software’s *notational surface* and shows how they trade off and affect the performance of certain types of tasks.

Of these sources, the latter two bear the most obvious influence on our proposal. Our framework of “technical dimensions” continues the approach of the Cognitive Dimensions to the “rest” of a system beyond its notation. Our individual dimensions naturally fall under larger *clusters* that we present in a regular format, similar to the presentation of the classic Design Patterns. As for characteristics identified by others, part of our contribution is to integrate them under a common umbrella: Liveness, pluralism, and uniformity metaphors (“everything is an X”) are incorporated as dimensions already identified by the related work.

We follow the attitude of *Evaluating Programming Systems* [Edwards et al. 2019] in distinguishing our work from HCI methods and empirical evaluation. We are generally concerned with characteristics that are not obviously amenable to statistical analysis (e.g. mining software repositories) or experimental methods like controlled user studies, so numerical quantities are generally not featured.

Similar development seems to be taking place in HCI research focused on user interfaces. The UIST guidelines⁵ instruct authors to evaluate system contributions holistically, and the community has developed heuristics for such evaluation, such as *Evaluating User Interface Systems Research* [Olsen 2007]. Our set of dimensions offers similar heuristics for identifying interesting aspects of programming systems, though they focus more on underlying technical properties than the surface interface.

Finally, it is worth mentioning an influence from the history and philosophy of science. In fields like physics, superseded theories made predictions that were eventually falsified by the world they tried to model. Much of *computing*, however, involves creating custom “worlds” with their own rules, making the judgement cast by “supercession” seem rather less final. Hence we follow Chang’s “Complementary Science” approach [Chang 2004], drawing our attention to historical systems that have been superseded, forgotten, or largely ignored—a “Complementary Computer Science”.

2.4 What we are trying to achieve

In short, while there is a theory for programming languages, programming *systems* deserve a theory too. It should apply from the small scale of language implementations to the vast scale of operating systems. It should be possible to analyse the common and unique features of different systems, to reveal new possibilities, and to build on past work in an effective manner. In Kuhnian terms, it should enable a body of “normal science”: filling in the map of the space of possible systems (Figure 1), thereby forming a knowledge repository for future designers.

⁵<https://uist.acm.org/uist2021/author-guide.html>

3 HISTORY OF PROGRAMMING SYSTEMS

Here, we will present a brief and incomplete history of programming systems. This serves two purposes. First, looking at a number of examples from the past helps build an intuitive understanding of what we mean by a programming system. Second, it allows us to introduce example systems that we will use in the next section to illustrate the individual technical dimensions.

3.1 Interacting with computers

The key aspect of computers that enabled the rise of programming systems was the ability for a programmer to interact one-on-one with a computer. This was not possible in the 1950s when most computers were large and operated in a batch-processing mode. Two historical developments enabled such interactivity from the 1960s. First, time-sharing systems enabled interactive shared use of a computer via a teletype. Second, smaller computers such as the PDP-1 and PDP-10 provided similar direct interaction, while 1970s workstations such as the Alto and Lisp Machines added graphical displays and mouse input.

3.1.1 Lisp. The Lisp programming language (in the form of LISP 1.5 [McCarthy 1962]) was designed before the rise of interactive computers. Nevertheless, the existence of an interpreter plus the absence of declarations made it natural to use Lisp interactively, with the first interactive implementations appearing in the early 1960s. Two branches of the Lisp family,⁶ MacLisp and the later Interlisp, fully embraced the so called “conversational” way of working. Interaction occurred through the teletype at first, later giving way to the screen and keyboard. Even on the teletype, the system incorporated a number of ideas that remain popular with programming systems today.

Both MacLisp and Interlisp adopted the idea of *persistent address space*. The address space (what Smalltalk calls the *image*) contained both program code and program state, meaning that both could be accessed and modified interactively as well as programmatically using the *same means*. This idea of persistent address space appeared on time-sharing systems and culminated with the development of Lisp Machines, which embraced the idea that the machine runs continually and saves the state to disk when needed. Today, while this is still not the default state for systems running “natively” on some hardware, it is widely seen in cloud-based services like Google Docs and online IDEs.

One idea not widely seen today, yet pioneered in MacLisp and Interlisp, was the use of *structure editors*. These let programmers work with Lisp data structures not as sequences of characters, but as nested lists. In Interlisp, for example, the programmer would use commands such as *P to print the current expression, or *(2 (X Y)) to replace its second element with the argument (X Y). The PILOT system [Teitelman 1966], later integrated into Interlisp, offered even more sophisticated conversational features. For typographical errors and other slips, it would offer an automatic fix for the user to interactively accept, modifying the program in memory and resuming the execution.

3.1.2 Smalltalk. Smalltalk came on the scene in the 1970s, with the ambition of providing “dynamic media which can be used by humans of all ages”. The authors saw computers as *meta-media* that could become a range of other media for applications like animation, circuit design, simulation and others not yet invented. Smalltalk was designed for single-user workstations with graphical display, and this display was pioneered not just for applications, but also for programming. In Smalltalk 72, one wrote code in the bottom half of the screen. When editing a definition, the window became a structure editor logically similar to that in Lisp, but controlled using a mouse and menu instead of a teletype.

Smalltalk shared a number of other characteristics with Lisp, although its key concept was that of an *object* rather than a *list*. Today, Smalltalk is perhaps best known for adopting the aforementioned persistent address

⁶The Lisp family consists of several branches, including MacLisp, InterLisp, ZetaLisp, Common Lisp, Scheme, Racket, and Clojure. see [Steele and Gabriel 1993]

space model of programming, where all objects remain in memory. Any changes made to the system state by programming or execution are preserved when the computer is turned off. The graphical interface then provides easy access to all objects and their methods through the *object browser*. The fact that much of the Smalltalk environment was implemented in itself, a property shared with many Lisp later systems, made it possible to significantly modify the system from within.

3.1.3 UNIX. Both Lisp and Smalltalk worked, to some extent, as operating systems. The user started their machine directly in the Lisp or Smalltalk environment and was able to do everything they needed from *within* the system.⁷ This explains why it is worth considering (especially programmer-oriented) operating systems as programming systems as well. A prime example of this is UNIX, which was a simpler 1970s operating system for time-sharing computers.

As we discuss later under “Adoptability” (Section 4.9), many aspects of programming systems are shaped by their intended target audience. UNIX was built for computer hackers themselves and, as such, its interface is close to the machine. While everything is an object in Smalltalk, the ontology of the UNIX system consists of files, memory, executable programs, and running processes. Interestingly, there is an explicit stage distinction here, that is not present in Smalltalk or Lisp. The ontology, however, enables an open pluralistic environment.

3.2 Early application platforms

The previously discussed programming systems did not focus on any particular kind of application. They were universal. As computers became more widely used, it became clear that there are typical kinds of applications that need to be built. For those, more specialized programming systems began to appear. Although they are more focused, they also support programming based on rich interactions with specialized visual and textual notations.

3.2.1 Spreadsheets. Spreadsheets, along with word processors, were the application that turned personal computers from playthings for hackers into a business tool. The first system, VisiCalc, became available in 1979 and helped analysts perform budget calculations. Spreadsheets developed over time, acquiring features that made them into powerful programming systems in a way VisiCalc was not. The final step was the 1993 inclusion of *macros* in Excel, later extended with *Visual Basic for Applications*. As programming systems, spreadsheets are notable for their programming substrate (a grid) and evaluation model (automatic re-evaluation).

3.2.2 HyperCard. While spreadsheets were designed to solve problems in a specific application area, the next system we consider was designed around a particular application format. 1987 saw HyperCard [Michel 1989], with programs as “stacks of cards” containing multimedia components and controls such as buttons. The logic associated with the controls could be programmed with pre-defined operations (e.g. “navigate to another card”) or otherwise via the HyperTalk scripting language.

As a programming system, HyperCard is interesting for a couple of reasons. It effectively combines visual and textual notation. Programs appear the same way during editing as they do during execution. Most notably, HyperCard supports gradual progression from the “user” role to “developer”: a user may first use stacks, then go on to edit the visual aspects or choose pre-defined logic until, eventually, they learn to program in HyperTalk.

3.3 Developer ecosystems

Programming systems such as Smalltalk and HyperCard are relatively *self-contained*. It is clear what is *part of* the system, and what is on the *outside*. For many systems that began to appear in the late 1980s, this is not the

⁷When the Lisp and Smalltalk systems were implemented on specialized computers—InterLisp and Smalltalk on the Alto and Xerox D, ZetaLisp and Common Lisp on Lisp machines—the user would start their computers directly in the programming system environment. When implemented on commodity hardware, the user would resume a saved image of the programming system.

case. To think about them, we have to consider a number of components, some of which may be conventional programming languages.

3.3.1 Early and late Web. The Web appeared in 1989 as a way of sharing and organizing information, implementing the ideas of *hypertext*. The web gradually evolved from an *information sharing* system to a *developer platform* when client-side scripting using JavaScript became possible. The Web ecosystem started to consist of server-side and client-side programming tools. Today, the Web combines the notations of HTML, CSS, a wide range of server-side programming systems as well as JavaScript, and many languages that compile to JavaScript.

In the 1990s, the “early Web” became a widely used programming system. JavaScript code was distributed in a form that made it easy to copy and re-use existing scripts, which led to enthusiastic adoption by non-experts. This is comparable to the birth of microcomputers like Commodore 64 with BASIC a decade earlier.

The Web ecosystem continued to evolve. In the 2000s, multiple programming languages started to treat JavaScript as a compilation target, while JavaScript started to be used as a programming language on the server-side. This defines the “late Web” ecosystem, which is quite different from its early incarnation. JavaScript code was no longer simple enough to whimsically copy and paste, yet advanced developer tools provided functionality resembling early interactive programming systems like Lisp and Smalltalk. The *Document Object Model (DOM)* structure created by a web page is transparent, accessible to the user and modifiable through the built-in browser debugging tools, and third-party code to modify the structure can be injected via extensions. In this, the DOM resembles the *persistent image* model. The DOM also inspired further research on image-based programming: Webstrates [Klokmore et al. 2015] synchronizes DOM edits made in the browser to all other clients connected to a single server.

3.3.2 REPLs and notebooks. Another kind of developer ecosystem that evolved from simple scripting tools are the modern tools for data science, such as Jupyter. Their roots date back to conversational implementations of Lisp, where users could type commands to be evaluated and see the results printed. This interaction became known as the REPL (Read-Eval-Print Loop). In the late 1980s, Mathematica 1.0 combined the REPL interaction with a notebook document format that shows the commands alongside visual outputs.

Today, REPLs exist for many programming languages. Unlike in Lisp, they are often separate from the running program. REPLs often maintain an execution state independent of a running program and there are many strategies for prototyping code in a REPL before making it a part of an ordinary compiled application.

Notebooks for data science are a particularly interesting example. Their primary output is the notebook itself, rather than a separate application to be compiled and run. The code lives in a document format, interleaved with other notations. Code is written in small parts that are executed (almost) immediately, offering the user more rapid feedback than in conventional programming. A notebook can be seen as a trace of how the result has been obtained, although one often problematic feature of notebooks is that they allow the user to run code blocks out-of-order. Retracing the individual steps in a notebook may thus be more subtle than following a trace produced from a conventional REPL (for example, using the `dribble` function in Common Lisp).

3.3.3 Haskell and other languages. The aforementioned 1990s paradigm shift from thinking about *systems* to thinking about *languages* means that researchers tend to emphasize the language side of programming. However, all programming languages are a part of a richer ecosystem that consist of editors and other tools. In our analysis, we choose Haskell as our example as a clearly language-focused programming system.

Like most programming languages, Haskell code can be written in a wide range of text editors, some of which support assistance tools such as syntax highlighting and auto-completion. These offer immediate feedback while editing code, such as when highlighting type errors. This way, “lapse” and “slip” type errors are mitigated—we discuss this further under “Errors” (4.6).

Haskell is mathematically rooted and relies on mathematical intuition for understanding many of its concepts. This background is also reflected in the notations it uses. In addition to the concrete language syntax (used when writing code), the Haskell ecosystem also uses an informal mathematical notation, which is used when writing about Haskell (e.g. in academic papers or on the whiteboard). This provides an additional tool for manipulating Haskell programs and experimenting with them on paper “*in vitro*”, in ways that other systems may attempt to achieve through experimentation within the system “*in vivo*”.

4 TECHNICAL DIMENSIONS

In this section, we present our most worked-out technical dimensions under *clusters*. This is a consequence of how we developed the framework. In the beginning, we considered these clusters the “dimensions” themselves—yet, as we added detail, they soon developed an internal “glossary” structure defining more primitive terms. Since it was easier to see how these primitives could be compared and assigned values for concrete systems, and unclear how the same would be possible for the clusters, we tentatively settled on the format that follows. The clusters may be regarded as “topics of interest” or “areas of inquiry” when studying a given system, grouping together related dimensions against which to measure it.

Each cluster is named and opens with a short *summary*, followed by a longer *description*, and closes with a list of any *relations* to other clusters along with any *references* if applicable. Within the main description, individual *dimensions* are identified. Sometimes, a particular value along a dimension (or a combination of values along several dimensions) can be recognized as a familiar pattern—perhaps with a name already established in the literature. These are marked as *instances*. Finally, interspersed discussion that is neither a *dimension* nor an *instance* is introduced as a *remark*.

For brevity, we present three dimension clusters from our current list, and leave the rest to the Appendix. These are *interaction dimensions*, *notational dimensions*, and *conceptual dimensions*.

4.1 Interaction dimensions

How do users execute their ideas, evaluate the result, and generate new ideas in response?

An essential aspect of programming systems is how the user interacts with them when creating programs. Take the standard form of statically typed, compiled languages with straightforward library linking: here, programmers write their code in a text editor, invoke the compiler, and read through error messages they get. After fixing the code to pass compilation, a similar process might happen with runtime errors.

Other forms are yet possible. For example, the compilation or execution of a program can contain further nested programmer interactions, or they may not even be perceptible at all. To analyze all forms of programming, we use the concepts of *gulf of execution* and *gulf of evaluation* from *The Design of Everyday Things* [Norman 2002].

4.1.1 Dimension: feedback loops. In using a system, one first has some idea and attempts to make it exist in the software; the gap between the user’s goal and the means to execute the goal is known as the *gulf of execution*. Then, one compares the result actually achieved to the original goal in mind; this crosses the *gulf of evaluation*. These two activities comprise the *feedback loop* through which a user gradually realises their desires in the imagination, or refines those desires to find out “what they actually want”.

A system must contain at least one such feedback loop, but may contain several at different levels or specialized to certain domains. For each of them, we can separate the gulf of execution and evaluation as independent legs of the journey, with possibly different manners and speeds of crossing them.

For example, we can analyze statically checked *programming languages* (e.g. Java, Haskell) into several feedback loops (Figure 2):

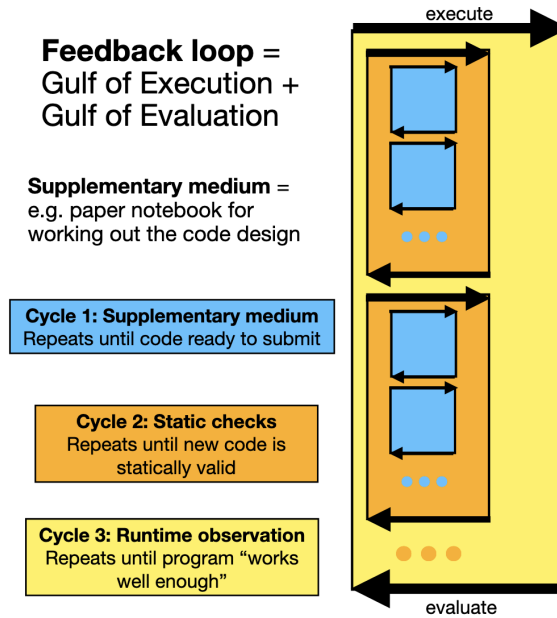


Fig. 2. The nested feedback loops of a statically-checked programming language.

1. The notation is plain monospaced text, so users will typically invoke another medium (pencil and paper, whiteboard, or another piece of software) to work out details (e.g. design, organization, mathematics) before translating this into code. This *supplementary medium* has its own feedback loop.
2. The code is written (through multiple iterations of cycle 1) and is then put through the static checker. Errors here send the user back to writing code, but in the case of success, they are “allowed” to run the program, leading into cycle 3.
 - The execution gulf comprises multiple cycles of the supplementary medium, plus whatever overhead is needed to invoke the compiler (such as build systems).
 - The evaluation gulf is essentially the waiting period before static errors or a successful termination are observed. Hence this is bounded by some function of the length of the code (the same cannot be said for the following cycle 3.)
3. With a runnable program, the user now evaluates the *runtime* behavior. Runtime errors can send the user back to writing code to be checked, or to tweak dynamically loaded data (e.g. data files) in a similar cycle.
 - The execution gulf here may include multiple iterations of cycle 2, each with its own nested cycle 1.
 - The *evaluation* gulf here is theoretically unbounded; one may have to wait a very long time, or create very specific conditions, to rule out certain bugs (like race conditions) or simply to consider the program as fit for purpose.
 - The latter issue, of evaluating according to human judgement, is made tractable by targetting “good enough for this release” instead of some final, comprehensive measure.
 - By imposing *static checks*, some bugs can be pushed earlier to the evaluation stage of cycle 2, reducing the likely size of the cycle 3 *evaluation* gulf.
 - On the other hand, this can make it harder to write statically valid code, which may increase the number of level-2 cycles, thus increasing the total *execution* gulf at level 3.

- Depending on how these balance out, the total top-level feedback loop may grow longer or shorter.

4.1.2 *Instance: immediate feedback.* The specific case where the *evaluation* gulf is minimized to be imperceptible is known as *immediate feedback*. Once the user has caused some change to the system, its effects (including errors) are immediately visible. This is a key ingredient of *liveness*, though it is not sufficient on its own. (See *Relations*)

The ease of achieving immediate feedback is obviously constrained by the computational load of the user's effects on the system, and the system's performance on such tasks. However, such "loading time" is not the only way feedback can be delayed: a common situation is where the user has to manually ask for (or "poll") the relevant state of the system after their actions, even if the system finished the task quickly. Here, the feedback could be described as *immediate upon demand* yet not *automatically demanded*. For convenience, we choose to include the latter criterion—automatic demand of result—in our definition of immediate feedback.

In a *REPL* or *shell*, there is a *main* cycle of typing commands and seeing their output, and a *secondary* cycle of typing and checking the command line itself. The output of commands can be immediate, but usually reflects only part of the total effects or even none at all. The user must manually issue further commands afterwards, to check the relevant state bit by bit. The secondary cycle, like all typing, provides immediate feedback in the form of character "echo", but things like syntax errors may only get reported *after* the entire line is submitted. This evaluation gulf has been reduced in the JavaScript console of web browsers, where the line is "run" in a limited manner on every keystroke. Thus, simple commands without side-effects (such as calls to pure functions) can give instant previewed results, though partially typed expressions and syntax errors will not trigger previews.

4.1.3 *Instance: direct manipulation.* The origin of *direct manipulation* is in the real world, such as programming a robot by physically dragging its arms to record the process that it will later replay. Since most interaction with software takes place through keyboards, screens, and mice, it is more common for this to be simulated.

In this case, direct manipulation is a special case of an immediate feedback loop. The user sees and interacts with an artefact in a way that is as similar as possible to real life; this typically includes dragging with a cursor or finger in order to physically move a visual item, and is limited by the particular haptic technology in use.

Naturally, because moving real things with one's hands does not involve any waiting for the object to "catch up"⁸, direct manipulation is necessarily an immediate-feedback cycle. However, if one were to move a figure on screen by typing new co-ordinates in a text box, then this could still give immediate feedback (if the update appears instant and automatic) but would not be an example of direct manipulation.

Spreadsheets contain a feedback loop for direct manipulation of values and formatting, as in any other WYSIWYG application. They also contain another loop for formula editing and formula invocation. Here, there is larger execution gulf for designing and typing formulas. The evaluation gulf is often reduced by editor features, e.g. immediate feedback previews for cell ranges. However, one sees what the *effect* of a formula is only on "committing" the formula, i.e. pressing enter.

4.1.4 *Dimension: modes of interaction.* Programming systems can give programmers different modes in which to operate, each mode potentially supporting different feedback loops. A typical example here is debugging. In many programming systems, the user can debug a running program and, in this mode, they can modify the program state and get (more) immediate feedback on what individual operations do. When a program is not running, and outside of debug mode, this kind of feedback loop is not available.

A programming system may also be designed with just a single mode. The Jupyter notebook environment does not have a distinct debugging mode; the user runs blocks of code and receives the result. The single mode can be

⁸In some situations, such as steering a boat with a rudder, there is a delay between input and effect. But on closer inspection, this delay is between the rudder and the boat; we do not see the hand pass through the wheel like a hologram, followed by the wheel turning a second later. In real life, objects touched directly give immediate feedback; objects controlled further down the line might not!

used to quickly try things out, and to generate the final result. However, even Jupyter notebooks distinguish between editing a document and running code.

The idea of interaction modes goes beyond just programming systems, appearing in software engineering methodologies. In particular, having a separate *implementation* and *maintenance* phase would be an example of two modes.

4.1.5 Relations.

- *Errors* (Section 4.6) A longer evaluation gulf delays the detection of errors. A longer execution gulf can increase the *likelihood* of errors (e.g. writing a lot of code or taking a long time to write it). By turning runtime bugs into statically detected bugs, the combined evaluation gulfs can be reduced.
- *Adaptability* (Section 4.9): The *execution* gulf is concerned with software using and programming in general. The time taken to realize an idea in software is affected by the user's familiarity and the system's *learnability*, as well as the *expressive power* of the system's ontology.
- *Representation* (Section 4.8): The motto "The thing on the screen is supposed to be the actual thing" coined in the context of live programming [Ungar and Smith 2013] suggests that *liveness* also relates to representation. Objects that users interact with should be equipped with faithful behavior rather than being intangible shadows cast by the hidden *real* object.
- *Notation* (Section 4.2): Feedback loops are related to *notational structures*. In a system with multiple notations, each notation may have different associated feedback loops.

4.2 Notation dimensions

What are the different notations, both textual and visual, through which the system is programmed? How do they relate to each other when programming the system?

Programming is always done through some form of notation. We consider notations in the most general sense and include any structured gesture using textual or visual notation, user interface or other means. Textual notations include primarily programming languages, but may also include, for example, configuration files. Visual notations include graphical programming languages. Other kinds of structured gestures include, for example, user interfaces for constructing visual elements used in the system.

4.2.1 Dimension: notational structure. In practice, most programming systems use multiple notations. Different notations can play different roles in the system. On the one hand, multiple *overlapping notations* can be provided as different ways of programming the same aspects of the system. In this case, each notation may be more suitable to different kind of users, but may have certain limitations (for example, a visual notation may have a limited expressive power). On the other hand, multiple *complementing notations* may be used as the means for programming different aspects of the system. In this case, programming the system requires using multiple notations, but each notation may be more suitable for the task at hand, such as HTML for describing the document structure and JavaScript for specifying its behavior.

4.2.2 Instance: overlapping notations. A programming system may provide multiple notations for programming the same aspect of the system. This is typically motivated by an attempt to offer easy ways of completing different tasks, e.g., a textual notation for defining abstractions and a visual notation for specifying concrete structures. The crucial issue in this kind of arrangement is synchronization between the different notations. If the notations have different characteristics, this is not a straightforward mapping. For example, source code may allow a more elaborate abstraction mechanism (such as a loop) which will not be apparent in the output (it will result in visible repetitions). What should such a system do when the user edits a single object that resulted from such repetition? For programming systems that use *overlapping notations*, we need to describe how the notations are synchronized.

Sketch-n-sketch. Sketch-n-sketch [Hempel et al. 2019] is a tool for creating and editing SVG and HTML documents that employs the *overlapping notations* structure. The user edits documents in an interface with a split-screen structure that shows source code on the left and displayed visual output on the right. They can edit both of these and changes are propagated to the other view. The code can use abstraction mechanisms (such as functions) which are not visible in the visual editor (an issue we return to in *expression geography* below). Sketch-n-sketch can be seen as an example of a *projectional editor*⁹.

UML Round-tripping. Another example of a programming system that utilizes the *overlapping notations* structure are UML design tools that display the program both as source code and as a UML diagram. Edits in one result in automatic update of the other. An example is the Together/J system¹⁰. To solve the issue of notation synchronization, such systems often need to store additional information (e.g. location of classes in UML diagram after the user rearranges them) in the textual notation, typically using a special kind of code comment.

4.2.3 Instance: complementing notations. A programming system may also provide multiple complementing notations for programming different aspects of its world. Again, this is typically motivated by the aim to make specifying certain aspects of programming easier, but it is more suitable when the different aspects can be more clearly separated. The key issue for systems with complementing notations is how the different notations are connected. The user may need to use both notations at the same time, or they may need to progress from one to the next level when solving increasingly complex problems. In the latter case, the learnability of progressing from one level to the next is a major concern.

Spreadsheets and HyperCard. In Excel, there are three different complementing notations that allow users to specify aspects of increasing complexity: (i) the visual grid, (ii) formula language and (iii) a macro language such as Visual Basic for Applications. The notations are largely independent and have different degrees of expressivity. Entering values in a grid cannot be used for specifying new computations, but it can be used to adapt or run a computation, for example when entering different alternatives in What-If Scenario Analysis. A more complex tasks can be achieved using formulas and macros. A user gradually learns more advanced notations, but experience with previous notation does not help with mastering the next one. The approach optimizes for easy learnability at one level, but introduces a hurdle that users have to cross to get to the second level. The notational structure of HyperCard is similar and consists of (i) visual design of cards, (ii) visual programming (via graphical user interface) with a limited number of operations and (iii) HyperTalk for arbitrary scripting.

Boxer and Jupyter. Boxer [diSessa and Abelson 1986] uses *complementing notations* in that it combines a visual notation (the layout of the document and the boxes it consists of) with textual notation (the code in the boxes). In case of Boxer, the textual notation is always nested within the visual. The case of Jupyter notebooks is similar. The document structure is graphical (edited by adding and removing cells); code and visual outputs are nested as cells in the document. This arrangement is common in many other systems such as Flash or Visual Basic, which both combine visual notation with textual code, although one is not nested in the other.

4.2.4 Dimension: primary and secondary notations. In practice, most programming systems use multiple notations. Even in systems based on traditional programming languages, the *primary notation* of the programming language is often supported by *secondary notations* such as annotations encoded in comments, and build tool configuration files. In systems that use the *complementing* or *overlapping* notational structure, multiple notations can be primary.

Programming languages. Programming systems built around traditional programming languages typically have further notations or structured gestures associated with them. The primary notation in UNIX is the C programming language. Yet this is enclosed in a programming *system* providing a multi-step mechanisms for running C code via the terminal, assisted by secondary notations such as shell scripts. Some programming systems

⁹TODO: Insert some more references to research on "projectional editors"

¹⁰TODO: Make this into a citation

attempt to integrate tools that normally rely on secondary notations into the system itself, reducing the number of secondary notations that the programmer needs to master. For example, in the Smalltalk descendant Pharo, versioning and package management is done from within Pharo, removing the need for secondary notation such as `git` commands and dependency configuration files.¹¹

Haskell. In Haskell, the primary notation is the programming language, but there are also a number of secondary notations. Those include package managers (e.g. the `cabal.project` file) or configuration files for Haskell build tools. More interestingly, there is also an informal mathematical notation associated with Haskell that is used when programmers discuss programs on a whiteboard or in academic publications. Indeed, the idea of having a mathematical notation dates back to the Report on Algol 58 [Perlis and Samelson 1958], which explicitly defined a “publication language” for “stating and communicating problems” that used Greek letters and subscripts.

4.2.5 Dimension: expression geography. A crucial feature of a notation is the relationship between the structure of the notation and the structure of the behavior it encodes. Most importantly, do *similar expressions*, in a particular notation, represent *similar behavior*?¹² Visual notations may provide more or less direct mapping. On the one hand, similar-looking code in a block language may mean very different things. On the other hand, similar looking design of two HyperCard cards will result in similar looking cards—the mapping between the notation and the logic is much more direct in this case.

C/C++ expression language. In textual notations, this may easily not be the case. Consider the two C conditionals:

- `if (x==1) { ... }` evaluates the Boolean expression `x==1` to determine whether `x` equals 1, running the code block if the condition holds.
- `if (x=1) { ... }` assigns 1 to the variable `x`. In C, assignment is an expression returning the assigned value, so the result 1 is interpreted as `true` and the block of code is *always* executed.

A notation can be designed to map better to the logic behind it, for example, by requiring the user to write `1==x`. This solves the above problem as 1 is a literal rather than a variable, so it cannot be assigned to (`1=x` is a compile error).

4.2.6 Dimension: uniformity of notations. One common concern with notations is the extent to which they are uniform. A uniform notation can express a wide range of things using just a small number of concepts. The primary example here is S-expressions from Lisp. An S-expression is either an atom or a pair of S-expressions written `(s1 . s2)`. By convention, an S-expression `(s1 . (s2 . (s3 . nil)))` represents a list, written as `(s1 s2 s3)`. In Lisp, the uniformity of notations is closely linked to uniformity of representation. In the idealized model of LISP 1.5, the data structures represented by an S-expression is what exists in memory. In real-world Lisp systems, the representation in memory is more complex. A programming system can also take a very different approach and fully separate the notation from the in-memory representation.

Lisp source code is represented in memory as S-expressions, which can be manipulated by Lisp primitives. In addition, Lisp systems have robust macro processing as part of their semantics: expanding a macro revises the list structure of the code that uses the macro. Combining these makes it possible to define extensions to the Lisp system in Lisp with syntax indistinguishable from Lisp. Moreover, it is possible to write a Lisp program that constructs another Lisp program and not only run it interpretively (using the Lisp function `eval`) but compile it at runtime (using the Lisp function `compile`) and then execute it. Many domain-specific languages as well as prototypes of new programming languages (such as Scheme) were implemented this way. Lisp, the language, is, in this sense, a programmable programming language. [Felleisen et al. 2018; Foderaro 1991]

¹¹The tool for versioning and package management in Pharo can still be seen as an *internal* domain-specific language and thus as a secondary notation, but its basic structure is *shared* with other notations in the Pharo system.

¹²TODO: Add citations. The idea of “expression geography” is due to Antranig, but I cannot find a reference to cite. Similarly “pedantic notations” is due to Thomas Green, but again, I cannot find a citation.

A programming system can also take a very different approach and fully separate the notation from the in-memory representation.

4.2.7 References. Cognitive Dimensions [Green and Petre 1996] provide a comprehensive framework for analysing individual notations, but our focus here is on how multiple notations are related and how they are structured. The importance of notations in the practice of science, more generally, has been studied by Klein [Klein 2003] as “paper tools”—things like formulas, which can be manipulated by humans in lieu of experimentation. Programming notations are similar, but they are a way of communicating with a machine—the experimentation does not happen just on paper. One exception here is the mathematical notation in Haskell, which is used as a “paper tool” for experimentation on a whiteboard.

4.2.8 Relations.

- *Factoring of complexity* (Section 4.7): Using multiple complementing notations implicitly factors complexity by expressing different aspects of a program using different notations.
- *Interaction* (Section 4.1): The feedback loops that exist in a programming system are typically associated with individual notations. Different notations may also have different feedback loops.
- *Adaptability* (Section 4.9): Notational structure can affect learnability. In particular, complementing notations may require (possibly different) users master multiple notations. Overlapping notations may improve learnability by allowing the user to edit program in one way (e.g. visually) and see the effect in the other notation (e.g. in code).

4.3 Conceptual dimensions

What tradeoffs are made between conceptual integrity and plurality? How compatible is the system with established technologies? How open is it to the changing practices of the software industry?

I will contend that Conceptual Integrity is the most important consideration in system design. It is better to have a system omit certain anomalous features and improvements, but to reflect one set of design ideas, than to have one that contains many good but independent and uncoordinated ideas. — Fred Brooks [Brooks 1995]

Conceptual integrity arises not (simply) from one mind or from a small number of agreeing resonant minds, but from sometimes hidden co-authors and the thing designed itself. — Richard Gabriel [Gabriel 2008]

The evolution of programming systems has led away from conceptual integrity, towards an enormously complex ecosystem of specialized technologies and standards. Any attempt to unify parts of this ecosystem into a coherent whole will create *incompatibility* with the remaining parts, which becomes a major barrier to adoption. Designers seeking adoption are pushed to focus on localized incremental improvements that stay within the boundaries of existing practice. This tension manifests in two dimensions: how open we are to the pressures imposed by society, and how highly we value conceptual elegance.

4.3.1 Dimension: conceptual integrity. Perhaps the apotheosis of conceptual integrity was in early Smalltalk and Lisp machines, which were complete programming systems built around a single language. They incorporated capabilities commonly provided outside the programming language by operating systems and databases. Everything was done in one language, and so everything was represented with the datatypes of that language, sometimes explained as “everything is an x”. The benefit of all code being in one language was that it became a lingua franca reusable across all contexts.

UNIX offers a kind of conceptual integrity in the way that many sorts of things are manifested as files. Files provide a universal API of reading and writing an array of bytes. But this abstraction has many exceptions.

Directories are special kinds of files with special operations. Hardware devices are files, but requires special `ioctl` operations. Many commands expect files containing newline separators.

In addition to Smalltalk and Lisp, many programming languages focus on one kind of data structure [Sitaker 2016]:

- In COBOL, data consists of nested records as in a business form.
- In Fortran, data consists of parallel arrays.
- In SQL, data is a set of relations with key constraints.
- In scripting language like Python, Ruby, and Lua, most data takes the form of string-indexed hash tables.

Many languages are *imperative*, staying close to the hardware model of addressable memory, lightly abstracted into primitive values and references into mutable arrays and structures. *Functional* languages hide references and treat everything as complex immutable values. This conceptual simplification benefits certain kinds of programming, but can be counterproductive when an imperative approach is more natural, such as in external input/output.

Python and Perl showcase opposite extremes of conceptual integrity. On the one hand, Python follows the principle that “There should be one—and preferably only one—obvious way to do it” in order to promote community consensus on a single coherent style. On the other hand, Perl states that “There is more than one way to do it.” and considers itself “the first postmodern programming language” [Wall 1999]. “Perl doesn’t have any agenda at all, other than to be maximally useful to the maximal number of people. To be the duct tape of the Internet, and of everything else.” The Perl way is to accept the status quo of evolved chaos and build upon it using duct tape and ingenuity. Taken to the extreme, a programming system becomes no longer properly speaking a system, but rather a toolkit for improvising assemblages of found software. Perl could be seen as championing the value of Pluralism over Conceptual Integrity.

4.3.2 Dimension: conceptual openness. The choice between compatibility and integrity correlates with the personality traits of pragmatism and idealism. It is pragmatic to accept the status quo of technology and make the best of it. Conversely, idealists are willing to fight convention and risk rejection in order to attain higher goals. We can wonder which came first: the design decision or the personality trait? Do Lisp and Haskell teach people to think more abstractly and coherently, or do they filter for those with a preexisting condition? Likewise, introverted developers might prefer the cloisters of Smalltalk or Lisp to the adventurous Wild West of the Web.

Richard Gabriel first described the dilemma in his influential 1991 essay “Worse is Better” [Gabriel 1991] analyzing the defeat of Lisp by UNIX/C. Because UNIX and C were so easy to port to new hardware, they were “the ultimate computer viruses” despite providing only “about 50%–80% of what you want from an operating system and programming language”. Their conceptual openness meant that they adapted easily to the evolving conditions of the external world. The tradeoff was decreased conceptual integrity, such as the undefined behaviours of C, the junkyard of working directories, and the proliferation of special purpose programming languages to provide a complete development environment.

Another case is that of C++, which added to C the Object Oriented concepts pioneered by Smalltalk, while remaining 100% compatible with C, down to the level of ABI and performance. This strategy was enormously successful for adoption, but came with the tradeoff of enormous complexity compared to languages designed from scratch for OO, like Smalltalk, Ruby, and Java.

4.3.3 Dimension: conceptual granularity. Many programming languages and systems impose structure at a “fine granularity”: that of individual variables and other data and code structures. This replaces and constrains the flat, “anything goes” memory landscape of the machine level, and the similar “run it and see what happens” indifference of machine instruction streams. Conversely, systems like UNIX or the Web impose fewer restrictions on how programmers represent things—in UNIX’s case, delegating all fine-grained structure to the client program

and insisting only on a basic infrastructure of “large objects” (i.e. files) [Kell 2013]. The price to pay for this flexibility is that the system can provide relatively little insight into “what is going on” inside the programs if they use a peculiar representation. Everything being a file is both a blessing and a curse.

Web HTTP endpoints have proven to be an even more adaptable and viral abstraction than UNIX files. They operate at a similar level of abstraction as files, but support richer content and encompass internet-wide interactions between autonomous systems. In a sense HTTP GET and PUT have become the “subroutine calls” of an internet-scale programming system. The most surprising thing about the web is that its usefulness came as a surprise to everyone involved in designing it or competing with it.

4.3.4 Remark: the end of the history? Today we live in a highly developed world of software technology. It is estimated that 41,000 person years have been invested into Linux. We describe software development technologies in terms of *stacks* of specialized tools, each of which might capitalize over 100 person years of development. Programming system designers face an existential question: how to make a noticeable impact on the overwhelming edifice of existing technology? There are strong incentives to focus on localized incremental improvements that don’t cross the established boundaries.

The history of computing is one of cycles of evolution and revolution. Successive cycles were dominated in turn by mainframes, minicomputers, workstations, personal computers, and the web. Each transition built a whole new technology ecosystem replacing or on top of the previous. The last revolution, the web, was 25 years ago. Many people have never experienced a disruptive platform transition. Has history stopped, or are we just stuck in a long cycle, with increasingly pent-up pressures for change? If it is the latter, then incompatible ideas now spurned may yet flourish.

4.3.5 References. **TODO (Jonathan): Add some narrative around those**

- The Mythical Man Month [Brooks 1978]
- The Mythical Matched Modules [Kell 2009]
- Worse Is Better [Gabriel 1991]
- Notes on Postmodern Programming [Noble and Biddle 2004]
- [https://en.wikipedia.org/wiki/Mashup_\(web_application_hybrid\)](https://en.wikipedia.org/wiki/Mashup_(web_application_hybrid))
- End-User Software Customization by Direct Manipulation of Tabular Data [Litt et al. 2020] - mashup thing for glueing existing things in the web
- WebStrates / CodeStrates / mashups / Yahoo pipes
- Memory Models of Programming Languages [Sitaker 2016]

4.3.6 Relations.

- *Factoring of complexity* (Section 4.7): Normalizing redundancy across interrelated descriptions improves coherence.

4.4 Customizability

Considering an existing program created using the programming system, what aspects of the program can be extended and modified and in what ways is this achieved?

Programming is a gradual process. We start either from nothing or from an existing program and gradually extend and refine it until it serves a given purpose. Programs created using different programming systems can be refined to a different extent, in different ways, at different stages of their existence.

Consider three different examples. First, a program in a conventional programming language like Java can be refined only by modifying its source code. However, you may be able to do so by just adding new code, for example a new interface implementation. Second, a spreadsheet can be modified at any time by modifying the formulas or data it contains. There is no separate programming phase. However, you have to modify the formulas

directly in the cell—there is no way of modifying it by specifying a change in a way that is external to the cell. Third, a self-sustaining programming system, such as Smalltalk, does not make an explicit distinction between programming and using phases and it can be modified and extended from itself. It gives developers the power to experiment with the system and, in principle, replace it with a better system from within itself.

4.4.1 Dimension: staging of customization. For programming systems that distinguish between different stages, e.g. writing source code and running a program, the ways in which a program can be customized may be different for each stage. In traditional programming languages, customization is done by modifying or adding source code at the programming stage, but there is no (automatically provided) way of customizing the created programs once they are running.

There are a number of interesting questions related to staging of customization. First, what is the notation used for customization? This may be the notation in which a program was initially created, but a system may also use a secondary notation for customization (e.g., Emacs using Emacs Lisp). For systems with a stage distinction, an important question is whether such changes are *persistent*.

Smalltalk, Interlisp and similar. In image-based programming systems, there is generally no strict distinction between stages and so a program can be customized during execution in the same way as during development. The program image includes the programming environment. Users of a program can open this, navigate to a suitable object or a class (which serve as the addressable extension points) and modifying that. Lisp-based systems such as *Interlisp* follow a similar model. Changes made directly to the image are persistent. Teitelman’s PILOT system for Lisp [Teitelman 1966] offers an interactive way of correcting errors when a program fails during execution. Such corrections are then applied to the image and thus are persistent.

Document Object Model (DOM) and Webstrates: In the context of web programming, there is traditionally a stage distinction between programming (writing the code and markup) and running (displaying a page). However, the DOM can be also modified by browser Developer Tools—either manually, by running scripts in a console, or by using a userscript manager such as Greasemonkey. Such changes are not normally persistent. Webstrates [Klokose et al. 2015], however, make exactly this kind of modification persistent by synchronizing the DOM between the server and the client.

4.4.2 Dimensions: externalizability and addressability. A program is typically represented through some structure. This may be its source code (in conventional programming languages), a graph structure in memory (e.g., object graph in a Smalltalk image) or perhaps a document (as in spreadsheet or a Boxer program). When customizing a program, an interesting question is whether a customization needs to be done by modifying the original structure (*internally*) or whether it can be done by *adding* something alongside the original structure, *externally* [Basman et al. 2016].

When customizing programs through *external* means, the customization is done by *addressing* some aspect in the existing program and specifying additional or replacement behaviour. An important issue is how are such addresses specified and what extension points in the program can they refer to. The programming system may offer an automatic mechanism that makes certain parts of a program addressable or this task may be delegated to the programmer.

Cascading Style Sheets (CSS): CSS is a prime example of a system that offers external customizability with rich addressability mechanisms that is partly automatic (e.g., when referring to tag names) and partly manual (e.g., when using element IDs and class names). Given a web page, it is possible to modify (almost) any aspects of its look simply by *adding* additional rules to a CSS file. The Infusion project¹³ is a research programming system that offers similar customizability mechanism, but for behaviour rather than just styling.

¹³<https://fluidproject.org/infusion.html>

Object Oriented Programming and Aspect Oriented Programming: in conventional programming languages, customization is done by modifying the code itself. OOP and AOP make it possible to do so *externally* by adding code independently of existing program code. In OOP, this requires manual definition of extension points, i.e. interfaces and abstract methods. Functionality can then be added to a system by defining a new class (although injecting the new class into existing code without modification requires some form of configuration such as a dependency injection container). AOP systems such as AspectJ [Kiczales et al. 2001] provides a richer addressing mechanism. In particular, it makes it possible to add functionality to the invocation of a specific method (among other options) by using the *method call pointcut*. This functionality is also similar to *advising* in Pilot [Teitelman 1966].

4.4.3 Dimension: self-sustainability. For most programming languages, programming systems, and ordinary software applications, if one wants to customize beyond a certain point, one must go beyond the facilities provided in the system itself. Most programming systems maintain a clear distinction between the *user level*, where the system is used, and *implementation level*, where the source code of the system itself resides. If the user level does not expose control over some property or feature, then one is forced to go to the implementation level. In the common case this will be a completely different language or system, with an associated learning cost. It is also likely to be lower-level—lacking expressive functions, features or abstractions of the user level—which makes for a more tedious programming experience.

It is possible, however, to carefully design systems to expose deeper aspects of their implementation *at the user level*, relaxing the formerly strict division between these levels. For example, in the research system *3-Lisp* [Smith 1982], ordinarily built-in functions like the conditional *if* and error handling *catch* are implemented in 3-Lisp code at the user level.

The degree to which a system’s inner workings are accessible to the user level, we call *self-sustainability*. At the maximal degree of this dimension would reside “stem cell”-like systems: those which can be progressively evolved to arbitrary behavior without having to “step outside” of the system to a lower implementation level. In a sense, any difference between these systems would be merely a difference in initial state, since any could be turned into any other.

The other end, of minimal self-sustainability, corresponds to minimal customizability: beyond the transient run-time state changes that make up the user level of any piece of software, the user cannot change anything without dropping down to the means of implementation of the system. This would resemble a traditional end-user “application” focused on a narrow domain with no means to do anything else.

The terms “self-describing” or “self-implementing” have been used for this property, but they can invite confusion: how can a thing describe itself? Instead, a system that can *sustain itself* is an easier concept to grasp. The examples that we see of high self-sustainability all tend to be *Operating System-like*. UNIX is widely established as an operating system, while Smalltalk and Lisp have been branded differently. Nevertheless, all three have shipped as the operating systems of custom hardware, and have similar responsibilities. Specifically, they support the execution of “programs”; they define an interface for accessing and modifying state; they provide standard libraries of common functionality; they define how programs can communicate with each other; they provide a user interface.

UNIX: Self-sustainability of UNIX is owed to the combination of two factors: (1) the system is implemented in binary files (via ELF) and text files (for configuration); (2) these files are part of the user-facing filesystem, so users can replace and modify parts of the system using UNIX file interfaces.

Smalltalk and COLAs: Self-sustainability in Smalltalk is similar to UNIX, but at a finer granularity and with less emphasis on whether things reside in volatile (process) or non-volatile (file) storage. The analogous points are that (1) the system is implemented as objects with methods containing Smalltalk code, and (2) these are modifiable using the class browser and code editor. Combined Object Lambda Architectures, or COLAs [Piumarta 2006], are

a theoretical system design to improve on the self-sustainability of Smalltalk. This is achieved by generalizing the object model to support relationships beyond classes.

4.4.4 References. In addition to the examples discussed above, the proceedings of self-sustaining systems workshops [Hirschfeld et al. 2010; Hirschfeld and Rose 2008] provides numerous examples of systems and languages that are able to bootstrap, implement, modify, and maintain themselves; Gabriel’s analysis of programming language revolution [Gabriel 2012] uses *advising* in PILOT, related Lisp mechanisms and “mixins” in OOP to illustrate the difference in thinking about programming languages and systems.

4.4.5 Relations.

- *Factoring of complexity* (Section 4.7): related in that “customizability” is a form of creating new programs from existing ones; factoring repetitive aspects into a reusable standard component library facilitates the same thing.
- *Interaction structure* (Section 4.1): this determines whether there are separate stages for running and writing programs and may thus influence what kind of customizability is possible.

4.5 Level of automation

To what extent and in what ways does the programming system remove the need to specify the program implementation in minute detail?

In order to execute a computer program, computers require a full and exact specification of the instructions to run. Ever since the 1940s, programmers envisioned that some form of “automatic programming” will alleviate the need for repeatedly specifying all details. The computer still requires full details today, but many aspects of the task of programming can be automated.

Automation can take a number of forms. Extracting common functionality into a library may be merely good use of *factoring of complexity* (Section 4.7), but to the user of the library, this may appear as automation. In high-level programming languages, many details are also omitted; those are filled in by the compiler. Finally, the program may also be executed by a more sophisticated runtime that fills in details not specified explicitly, such as when running an SQL query or using logic programming system like Prolog.

4.5.1 Remark: notations. Even with high-level of automation, programming involves manipulating some program notation. In high-level functional or imperative programming languages, the programmer writes code that typically has clear operational meaning. When using more declarative programming like SQL, Prolog or Datalog, the meaning of a program is still unambiguous, but it is not defined operationally—there is a (more or less deterministic) inference engine that solves the problem based on the provided program. Finally, systems based on programming by example step even further away from having clear operational meaning—the program may be simply a collection of sample inputs and outputs and a (typically non-deterministic) engine infers the minute details of a program based on those.

4.5.2 Dimension: degrees of automation. There are many degrees of automation in programming systems, but the basic mechanism is always the same—given a program, some logic is specified explicitly and some is left to a reusable component that can specify the details. In the case of library reuse, the reusable component is just the library. In the case of higher-level programming languages, the reusable component may include a memory allocator or a garbage collector. In case of declarative languages or programming by example, the reusable component is a general purpose inference engine.

Higher levels of automation require more complex *reusable components* than lower levels. This is a difference between *level of automation* and *factoring of complexity*—producing systems with higher level of automation

requires more than simply extracting (factoring) existing code into a reusable component. Instead, it requires doing more work and introducing a higher level of indirection between the program and the reusable component.

There is also an interesting (and perhaps inevitable) trade-off. The higher the level of automation, the less explicit the operational meaning of a program. This has a wide range of implications. Smaragdakis [Smaragdakis 2019] notes, for example, that this means the implementation can significantly change the performance of a program.

4.5.3 Instance: programming by example. An interesting case of automation is *programming by example* [Lieberman 2001]. In this case, the user does not provide even a declarative specification of the program behavior, but instead specifies sample inputs and outputs. A more or less sophisticated algorithm then attempts to infer the relationship between the inputs and the outputs. This may, for example, be done through program synthesis where an algorithm composes a transformation using a (small) number of pre-defined operations. Programming by example is often very accessible and has been used in spreadsheet applications [Gulwani et al. 2012].

4.5.4 Remark: fragmentation. An interesting issue is that reusable components that enable higher levels of automation are often specific to each system. This, arguably, limits what we can achieve as components that enable higher-levels of automation are increasingly complex to implement. As noted in [Kell 2009, 2013], incompatible reusable components that exist for multiple systems also limit compositionality. One possible exception from the rule is the Z3 theorem prover, which is used as an implementation mechanism by multiple programming systems including Dafny and F*.

4.5.5 Instance: next-level automation. Throughout history, programmers have always hoped for the next level of “automatic programming”. As observed by Parnas [Parnas 1985], “automatic programming has always been a euphemism for programming in a higher-level language than was then available to the programmer”.

We may speculate whether Deep Learning will enable the next step of automation. However, this would not be different in principle from existing developments. We can see any level of automation as using *artificial intelligence* methods. This is the case for declarative languages or constraint-based languages—where the inference engine implements a traditional AI method (GOFAI, i.e., Good Old Fashioned AI).

4.5.6 Relations.

- *Factoring of complexity:* One typically automates the thing at the lowest level in one’s factoring (by making the lowest level a thing that exists outside of the program—in a system or a library)

4.6 Errors

What does the system consider to be an error, and how does it approach their prevention and handling?

In general, a *program error* is when the system cannot run in a normal way and needs to resolve the situation. This raises a number of questions for system design: What can cause a program error? Which program errors can be prevented from happening? How should the system react to a program error?

A computer system is not aware of human intentions. There will always be human mistakes that the system cannot recognize as errors. However, there are many human mistakes that a system can recognize. The design of a system can determine what human mistakes can be detectable program errors.

Following the standard literature on errors, we distinguish four kinds of errors: slips, lapses, mistakes and failures. A *slip* is a unintended error caused by a human attention failure such as a typo in source code. A *lapse* is also an unintended error, but caused e.g., by a memory failure such as an incorrectly remembered method name. A *mistake* is a logic error of the human such as bad design of an algorithm. Finally, a *failure* is a system error caused by the system itself that the programmer has no control over, e.g. a hardware or a virtual machine failure.

4.6.1 *Dimensions: error detection.* Errors can be identified in any of the *feedback loops* that the system implements. This can be done either by a human or the system itself, depending on the nature of the feedback loop.

Consider three examples. First, in live programming systems, the programmer immediately sees the result of their code changes. Error detection is done by a human and the system can assist this by visualizing as many consequences of a code change as possible. Second, in a system with static checking feedback loop (e.g. syntax checking, static type system), potential errors are reported as the result of the analysis. Third, errors can be detected when the developed software is run, either when it is tested by the programmer (manually or through automated testing) or when it is run by a user.

Error detection in different feedback loops is suitable for detecting different kinds of errors. Many slips and lapses can be detected by the static checking feedback loop, although this is not always the case. For example, a more compact *expression geography* can make it easier for slips and lapses to produce hard to detect errors. Mistakes are easier to detect through live feedback loop, but they can also be partly detected by more advanced static checking.

4.6.2 *Instance: static typing.* In statically typed programming languages like Haskell and Java, types are used to capture as much information about the intent of the programmer as possible. The type checker ensures code matches the lightweight specification given using types. In such systems, types and implementation serve as two descriptions of programmer's intent that need to align; what varies is the extent to which types can capture intent and the way in which the two are constructed, that is, which of the two comes first.

4.6.3 *Instance: TDD, REPL and live coding.* Whereas static typing aims to detect errors without executing code, approaches based on immediate feedback typically aim to execute (a portion of) the code and let the programmer see the error immediately. This can be done in a variety of ways.

In case of *test-driven development*, tests play the role of specification (much like types) against which the implementation is checked. Such systems may provide more or less immediate feedback, depending on when tests are executed (automatically in background or manually). Systems equipped with read-eval-print loop (REPL) let programmers run code on-the-fly and inspect results. For successful error detection, the results need to be easily observable: a printed output is more useful than a hidden change of system state. Finally, in live coding systems, code is executed immediately and the programmer's ability to recognize errors depends on the extent to which the system state is observable. (In live coded music, you *hear* that your code is not what you wanted, providing an easy to use immediate error detection mechanism.)

4.6.4 *Remark: eliminating latent errors.* A common aim of error detection is to prevent *latent errors*, i.e. errors that occur at some earlier point during execution, but will manifest themselves through an unexpected behaviour later (for example, dereferencing an incorrect memory address to obtain a value that will be stored in a database and accessed later). Latent errors can be prevented differently in different feedback loops. In the live feedback loop, this can be done by visualizing effects that would normally remain hidden. When running software, latent errors can be prevented through a mechanism that detects errors as early as possible (e.g. initializing pointers to null and stopping on null dereferencing).

Elm and time-traveling debugging. One notable mechanism for identifying latent error is the concept of time-traveling debugging, first developed for the programming language Elm. In time-traveling debugging, the programmer is able to step back through time and see what execution steps were taken prior to a certain point. This makes it possible to break execution when a latent error manifests, but then retrace the execution back to the actual source of the error.

4.6.5 *Dimension: error response.* When an error is detected by a system, there are a number of typical ways in which the system can respond. The following applies to systems that admit some kind of error detection during execution.

- A system may attempt to automatically recover from the error as best as possible. This may be possible for simpler errors (slips and lapses), but also for certain mistakes (e.g., a mistake in an algorithm's concurrency logic may often be resolved by restarting the code).
- A system may proceed as if the error did not happen. This can eliminate expensive checks, but may lead to latent errors later.
- A system may ask a human how to resolve the issue. This can be done interactively, by entering into a mode where the code can be corrected, or non-interactively by stopping the system.

Orthogonally to the above options, a system may also have a way to recover from latent errors by tracing back through the execution in order to find the root cause. It may also have a mechanism for undoing all actions that occurred in the meantime, e.g. through transactional processing.

Interlisp and Do What I Mean (DWIM). The DWIM facility, which was available in Interlisp is an example of an early system that attempts to automatically correct slips and lapses, especially misspellings and unbalanced parentheses. When Interlisp encounters an error, such as a reference to a symbol that is not defined, it invokes DWIM which attempts to correct the error. In case of an undefined symbol, it searches for similarly named symbols frequently used by the current user and, if it finds one, invokes that automatically, corrects the source code and notifies the user. In more complex cases where DWIM cannot correct the error automatically, it starts an interaction with the user and lets the user correct the error manually.

4.6.6 Relations.

- *Feedback loops:* Error detection always happens as part of an individual feedback loop. The feedback loops thus determine the structure at which error detection can happen.
- *Information loss:* Certain mechanism for error detection can only work if sufficient amount of information is available. For example, traveling debugger facility requires at least a form of execution log (but could also be easily implemented in a system based on bi-directional evaluation).
- *Level of automation:* A semi-automatic error recovery system (such as DWIM) implements a form of automation. The concept of antifragile software is a more sophisticated example of error recovery through automation.
- *Expression geography:* In an expression geography where small changes in notation lead to valid but differently behaved programs, a slip or laps is more likely to lead to an error that is difficult to detect through standard error detection mechanisms.

4.6.7 References. The most common error handling mechanism in conventional programming languages is exception handling. The modern form of exception handling has been described by Goodenough [Goodenough 1975]; Ryder [Ryder et al. 2005] documents the history and influences of Software Engineering on exception handling. The concept of *antifragile software* [Monperrus 2017] goes further by suggesting that software could improve in response to errors. Work on Chaos Engineering [Chang et al. 2015] is a step in this direction.

Reason [Reason 1990] analyses errors in the context of human errors and develops a classification of errors that we adopt. In the context of computing, errors or *miscomputation* has been analysed from a philosophical perspective [Floridi et al. 2015; Fresco and Primiero 2013]. Notably, the approach to errors also differs for different sub-cultures of programming [Petricek 2017].

4.7 Factoring of complexity

What are the primitives? How can they be combined? How is common structure recognized and utilized?

There is a large space of possible things we might want to do with a system. The question is, how do we “get” to all the possible locations in this space? We can have a very flat structure where different tools, methods or

features are used to reach individual points in this space. We can also have a more structured approach where we need to compose individual components to “get” to individual locations.

4.7.1 Dimension: composability. In short, *you can get anywhere by putting together a number of smaller steps.* There exist building blocks which span a range of useful combinations. Such a property can be analogized to *linear independence* in mathematical vector spaces: a number of primitives (basis vectors) whose possible combinations span a meaningful space. Composability is, in a sense, key to the notion of “programmability” and every programmable system will have some level of composability (e.g. in the scripting language.)

UNIX shell commands are a standard example of composability. The base set of primitive commands can be augmented by programming command executables in other languages. Given some primitives, one can “pipe” one’s output to another’s input (`|`), sequence (`;` or `&&`), select via conditions, and repeat with loop constructs, enabling full imperative programming. Furthermore, command compositions can be packaged into a named “script” which follows the same interface as primitive commands, and named subprograms within a script can also be defined.

In *HyperCard*, the user level just before writing code is *noncomposable* for programming buttons: there is simply a long list of predefined behaviors to choose from.

The *Haskell type system*, as well as that of other functional programming languages, exhibits high composability. New types can be defined in terms of existing ones in several ways. These include records, discriminated unions, function types and recursive constructs (e.g. to define a `List` as either a `Nil` or a combination of element plus other list.) The C programming language also has some means of composing types that are analogous in some ways, such as structs, unions, enums and indeed even function pointers. For every type, there is also a corresponding “pointer” type. It lacks, however, the recursive constructs permitted in Haskell types.

4.7.2 Dimension: convenience. In short, *you can get to X, Y or Z via one single step.* There are ready-made solutions to specific problems, not necessarily generalizable or composable. Convenience often manifests as “canonical” solutions and utilities in the form of an expansive standard library.

Composability without convenience is a set of atoms or gears; theoretically, anything one wants could be built out of them, but one must do that work. This could characterize low-level programming systems or systems in a “blank canvas” state.

Composability *with* convenience is a set of convenient specific tools *along with* enough components to construct new ones. The specific tools themselves could be transparently composed of these building blocks, but this is not essential. They save users the time and effort it would take to “roll their own” solutions to common tasks.

For example, let us turn to a convenience factor of *UNIX* shell commands, having already discussed their composability above. Observe that it would be possible, in principle, to pass all information to a program via standard input. Yet in actual practice, for convenience, there is a standard interface of *command-line arguments* instead, separate from anything the program takes through standard input. Most programming systems similarly exhibit both composability and convenience, providing templates, standard libraries, or otherwise pre-packaged solutions, which can nevertheless be used programmatically as part of larger operations.

4.7.3 Dimension: commonality. Humans can see Arrays, Strings, Dicts and Sets all have a “size”, but the software needs to be *told* that they are the “same”. Commonality like this can be factored out into an explicit structure (a “Collection” class), analogous to database *normalization*. This way, an entity’s size can be queried without reference to its particular details: if `c` is declared to be a Collection, then one can straightforwardly access `c.size`.

Alternatively, it can be left implicit. This is less upfront work, but permits instances to *diverge*, analogous to *redundancy* in databases. For example, Arrays and Strings might end up with “length”, while Dict and Set call it “size”. This means that, to query the size of an entity, it is necessary to perform a case split according to its concrete type, solely to funnel the diverging paths back to the commonality they represent:

```

1129 if (entity is Array or String) size := entity.length
1130 else if (entity is Dict or Set) size := entity.size

```

1131 *4.7.4 Instances: flattening and factoring.* Data structures usually have several “moving parts” that can vary independently. For example, a simple pair of “vehicle type” and “color” might have all combinations of (Car, Van, Train) and (Red, Blue). In this *factored* representation, we can programmatically change the color directly: `pair.second = Red` or `vehicle.colour = Red`.

1135 In some contexts, such as class names, a system might only permit such multi-dimensional structure as an *exhaustive enumeration*: RedCar, BlueCar, RedVan, BlueVan, RedTrain, BlueTrain, etc. The system sees a flat list of atoms, even though a human can see the sub-structure encoded in the string. In this world, we cannot simply “change the color to Red” programmatically; we would need to case-split as follows:

```

1140 if (type is BlueCar) type := RedCar
1141 else if (type is BlueVan) type := RedVan
1142 else if (type is BlueTrain) type := RedTrain
1143 ...

```

1144 The *commonality* between RedCar, RedVan, BlueCar, and so on has been *flattened*. There is implicit structure here that remains *un-factored*, similar to how numbers can be expressed as singular expressions (16) or as factor products (2,2,2,2). *Factoring* this commonality gives us the original design, where there is a pair of values from different sets.

1148 In *relational databases*, there is an opposition between *normalization* and *redundancy*. In order to fit multi-table data into a *flat* table structure, data needs to be duplicated into redundant copies. When data is *factored* into small tables as much as possible, such that there is only one place each piece of data “lives”, the database is in *normal form* or *normalized*. Redundancy is useful for read-only processes, because there is no need to join different tables together based on common keys. Writing, however, becomes risky; in order to modify one thing, it must be synchronized to the multiple places it is stored. This makes highly normalized databases optimized for writes over reads.

1155 *4.7.5 Dimension: abstraction construction.* Abstraction refers to deriving general concepts from specific examples. An *abstraction* is the result of such process. Almost all programming systems support some kind of abstraction. This is necessary, because we often want to instruct the computer to perform the same operation on multiple different inputs or produce many things using the same schema. This dimension captures what is the nature of *abstractions* used in the programming system, how are they created, modified and used.

1161 As suggested above, abstractions can be constructed from concrete examples, first principles or through other methods. A part of the process may happen in the programmer’s mind—for example, they can think of concrete cases and use that to come up with an abstract concept and then directly encode the abstract concept in the programming system. But a programming system can directly support different ways of producing abstractions.

1165 One option is to construct abstractions *from first principles*. Here, the programmer starts by defining an abstract entity such as an interface in object-oriented programming languages. To do this, they have to think what the required abstraction will be (in the mind) and then encode it (in the system).

1168 Another option is to construct abstractions *from concrete cases*. Here, the programmer uses the system to solve one or more concrete problems and, when they are satisfied, the system guides them in creating an abstraction based on their concrete case(s). This can be done in a programming language (e.g. through the “extract function” refactor, or by adding a parameter), but also through other approaches (e.g. a form of macro recording)

- 1172 • *Pygmalion*: In Pygmalion [Smith 1975], all programming is done by manipulating concrete icons that represent concrete things. To create an abstraction, you can use “Remember mode”, which records the operations done on icons and makes it possible to bind this recording to a new icon.

- *Jupyter notebook*: In Jupyter notebooks, you are inclined to work with concrete things, because you see previews after individual cells. This discourages creating abstractions, because then you would not be able to look inside at such a fine grained level.
- *Spreadsheets*: Up until the recent introduction of lambda expressions into Excel, spreadsheets have been relentlessly concrete, without any way to abstract and reuse patterns of computation other than copy-and-paste.

4.7.6 Relations.

- *Notational structure* - abstractions are typically done at a level of individual notations.
- *Level of Automation*. The human eye can see a rectangular array of pixels and straightforwardly recognise shapes. Programming a computer to do this is the subject of highly advanced research in *computer vision* and *artificial intelligence*.

4.7.7 References.

- How to Design a Good API and Why it Matters [API [n.d.]]

4.8 Representation

Which structures are available to programmatic manipulation, and which ones must be extracted by a non-trivial process?

Representations may be flat sequences or structured graphs. There may be multiple representations of the same thing. What are they and how do they relate?

4.8.1 Dimensions: Source Of Truth and Derived Representation. A human might recognize individual edges and objects in an image, but the image is a mere array of pixels. Similarly, an audio file might consist of a single, long waveform, yet a human listener could easily pick out individual instruments, sounds or words. In each of these cases there is (a) a messy, real-world *source of truth* easily understood by humans yet hard to formalize, and (b) a *derived representation* (shadow?) of computer-friendly repeating primitive units. The latter produces comparable stimuli for a human, but is merely a recording of the source of truth in a specific context.

4.8.2 Instance: String Typing. The epithet “stringly typed” refers to data with clear sub-structure which has been encoded in a string. This sub-structure may be evident to a human, but all a computer program sees is an opaque list of characters. For example, a citation might be displayed as “Example Paper (John Doe, 1993)”. Clearly, it contains the title of a work, an author name, and a year. However, while this may be clear to us, a machine simply sees a list of characters. In order to work with these individual fields, it must be programmed to *extract* them by *parsing* the string.

Alternatively, the citation could be programmatically represented in a structured form, such as a dictionary:

```
{
  title: "Example Paper", year: 1993,
  author: {forename: "John", surname: "Doe"}
}
```

This structure could then be *rendered* into a string for display or output to a document. The code to do this could well be simpler than the code required for the reverse transformation, parsing a string into the structure. The benefit would be that there is straightforward programmatic access to the individual sub-structures, for free, from the beginning.

4.8.3 Instances: Vector and Raster Graphics. *Raster graphics* organises graphics as a rectangular array of colored pixels, while *vector graphics* works on a tree or graph of shape descriptions. In a classic raster graphics program

like MS Paint, a user can see the pixels resulting from using the curve tool, but can't change the curve afterwards—they can only undo or erase the pixels and start again. In contrast, in a vector graphics tool, the curve's control points and parameters would be always present, only *incidentally* rendering the shape to pixels for display purposes.

This is analogous to the String Typing instance. However, the problem of starting from a block of pixels and wishing to *programmatically* work with sub-structure—parsing, so to speak—is much more complicated in this case. Extracting meaningful units of structure from digital images, such as recognizing shapes, is the domain of advanced research in AI and computer vision.

Thus, using a structured representation (vector graphics) for graphic design is the only technically feasible option. In the case of strings, the issue is less obvious due to decades of established techniques in parsing formal languages. The missing link between the two is that formal languages, as far as we are aware, have never been extended to formal structures of pixels in images, where parsing would not need to rely on artificial intelligence yet would still break on incorrect pixel placement.

4.8.4 Instances: Text vs. Structure Editing. There are two ways in which text editing can be analysed for its Source of Truth and Derived Artefact. In the first, we can consider text editing, and word processing more generally, as a special case of Vector Graphics. However, in another sense, text editing shares a resemblance to Raster Graphics.

Text editing as Vector Graphics. Text glyphs are shapes like any others, and need rasterizing to pixels on a screen. Text editors, word processors and other publishing software do not require a typist to correct their mistakes by manipulating blocks of pixels. These tools have the user work at the level of *characters* instead of *pixels*. The usual advantages apply, such as scaling to different sizes and easily navigating, selecting and modifying at the character level. Even though text needs rendering to pixels, it is usually inappropriate to manipulate text as pixels.

Text editing as Raster Graphics. On the other hand, what exactly is meant by *text*? Viewing written language as merely a list of characters may be just as naïve as viewing glyphs as pixel blocks. Written language clearly has internal structure. Documents comprise paragraphs and headings. Paragraphs contain sentences, sentences contain clauses, clauses contain words and words themselves contain syllables and hyphenation points. These same structural categories are concretely rendered with different punctuation characters in different languages. Furthermore, in formal languages such as program code, this property is explicit at the level of its formal grammar. A program might be made up of declarations, containing statements, containing expressions, containing tokens, which are ultimately made up of textual characters.

The possibility of making *typographical errors* in an English document, or *syntax errors* in some source code, is proof that the character level has degrees of freedom that our languages do not have. This is the motivation for *structure editing* as opposed to text editing—the approach of making errors *unrepresentable* in the first place.

Structure editors do for linguistic structures (like program code) what vector graphics editors do for diagrams. From a *notational* point of view, there is no reason why structure editing cannot be made arbitrarily close to text editing; the text can be rendered straightforwardly as in a text editor, and it can be entered by ordinary typing. The key difference is in what is being built up in computer memory: in structure editing, a *tree* or *graph* is being built up as the user works, whereas a text editor merely builds a long character sequence.

In order to write programs to transform, analyze, or otherwise work with the digital artefact the user has created, one can trivially navigate the structure output by a structure editor. For the output of a text editor, one must first parse it *into* such a structure, and deal with any errors just before use, instead of at the moment the user introduced the error.

Consider an interface to enter a personal name made up of a forename and a surname. The user could be presented with a single text field, in which they type the names separated with a space; or two fields, where the names are entered separately. We can also ask what is built up in memory: is it a single string, or two separate strings? Four *representation paradigms* are illustrated by the combinations that result:

1. *Sequence editing*: single field, single string. All the editor has to do is straightforwardly store whatever is in the text field. This corresponds to text editors, and more generally sensors and recorders for different data (video, photographs, and audio.)
2. *Sequence rendering*: two fields, single string. Here, there is a structured interface writing through to a string in memory. The information about the separation of the two strings, present in the interface, is not quite “thrown away” but it is made *implicit* as, say, a space character in the string. In order to recover this information, the string must be parsed late on. This combination corresponds to code generation from GUI forms in Visual Basic, as well as MIDI sequencers (which render musical notes played by virtual instruments to a single combined waveform), video editors, and renderers for 2D or 3D graphics. Another example is line-based diff tools, which provide side-by-side views and other interfaces but must ultimately forward the user’s changes to the underlying text file.
3. *Structure editing*: two fields, two strings. As in sequence editing, both parts match, so there is not much work to do. This corresponds to structure editors, vector graphics editors, and 3D modelling tools.
4. *Structure recovery*: single field, two strings. Parsing needs to happen each time the input changes. This style is found in the DOM inspector in browser developer tools, where HTML can be edited as text to make changes to the document tree structure. More generally, this is the mode found in compilers and interpreters which accept program source text yet internally work on tree and graph structures.

4.8.5 Relations.

- *Level of Automation*. The human eye can see a rectangular array of pixels and straightforwardly recognise shapes. Programming a computer to do this is the subject of highly advanced research in *computer vision* and *artificial intelligence*. The human eye can also recognise structures in a formal language from the character sequences used to render them. However, getting a computer to do the same thing—parsing—is a matter of ordinary programming instead of advanced probabilistic techniques. The parsing of natural language, perhaps, lies between these two degrees of formalization.
- *Errors* (Section 4.6). A process that merely records user actions in a sequence (such as text editing) will, in particular, record any *errors* the user makes and defer their handling to later use of the data. A process which instead treats user actions as edits to a structure, with constraints and correctness rules, will be able to catch errors at the moment they are introduced and ensure the data coming out is error-free.

4.9 Adoptability

How does the system facilitate or obstruct adoption by both individuals and communities? We consider adoption by individuals as the dimension of *Learnability*, and adoption by communities as the dimension of *Sociability*.

4.9.1 Dimension: Learnability. Mainstream software development technologies require substantial effort to learn. Systems can be made easier to learn in several ways:

- Specializing to a specific application domain.
- Specializing to simple small-scale needs.
- Leveraging the background knowledge, skills, and terminologies of specific communities
- Supporting learning with staged levels of complexity and assistive development tools. Better *Feedback Loops* can help.
- Collapsing heterogeneous technology stacks into simpler unified systems. This relates to the dimension of *Conceptual Structure*.

FORTTRAN was a breakthrough in programming because it specialized to scientific computing and leveraged the background knowledge of scientists about mathematical formulas. COBOL instead specialized to business data processing and embraced the business community by eschewing mathematics in favor of plain English.

LOGO was the first language explicitly designed for teaching children. Later Basic and Pascal were designed for teaching then-standard programming concepts at the University level. Basic and Pascal had second careers on microprocessors in the 90's. These microprocessor programming systems were notable for being complete solutions integrating everything necessary and so becoming home schools for a generation of programmers. More recently languages like Racket, Pyret, and Grace have supported learning by revealing progressive levels of complexity in stages. Scratch returned to Logo's vision of teaching children with a graphical programming environment emphasizing playfulness rather than generality.

Some programming languages have consciously prioritized the programmer's experience of learning and using them. Ruby calls itself *a programmer's best friend* by focusing on simplicity and elegance. Elm targets the more specialized but still fairly broad domain of web applications while focusing on simplicity and programmer-friendliness. It forgoes capabilities that would lead to run-time crashes. It also tries hard to make error messages clear and actionable.

If we look beyond programming languages per se, we find programmable systems with better learnability. The best example is spreadsheets, which offer a specialized computing environment that is simpler and more intuitive. The visual metaphor of a grid leverages human perceptual skills. Moving all programming into declarative formulas and attributes greatly simplifies both creation and understanding. Research on Live Programming has sought to incorporate these benefits into general purpose programming, but with limited success.

HyperCard and Flash were both programming systems that found widespread adoption by non-experts. Like spreadsheets they had an organizing visual metaphor (cards and timelines respectively). They both made it easy for beginners to get started. Hypercard had layers of complexity intended to facilitate gradual mastery.

Smalltalk and Lisp machines were complex but unified. Once having overcome the initial learning curve their environments provided a complete solution for building entire application systems of arbitrary complexity without having to learn other technologies. Boxer is notable for providing a general purpose programming environment (albeit for small scale applications) along with an organizing visual metaphor like spreadsheets.

4.9.2 Dimension: Sociability. Over time, especially in the internet era, social issues have come to dominate programming. Much programming technology is now developed by open source communities, and all programming technologies are now embedded in social media communities of their users. The nature of these communities often trumps purely technical and individual considerations. See Socio-PLT. Some of the specific concerns of sociability are:

- Easy integration into standard technology stacks, allowing incremental adoption, and also easy exit if needed. See Worse is Better for the classic case of UNIX vs Lisp.
- Backing by large corporations or widespread industry investments that ensures economic sustainability.
- An open source community of volunteers investing their time, which has proven to be as viable as financial support.
- Easy sharing of code via package repositories or open exchanges. Prior to the open source era, commercial marketplaces were important, like VBX components for VisualBasic.
- Friendly and helpful user communities on social media, for example Stack Overflow. Such communities have to some extent replaced the traditional role of documentation.

The tenor of the online community around a programming system can be its most public attribute. Even before social media, Flash developed a vibrant community of amateurs sharing code and tips. The Elm language invested much effort in creating a welcoming community from the outset. Attempts to reform older communities have introduced Codes of Conduct, but not without controversy.

On the other hand, a cloistered community that turns its back on the wider world can give its members strong feelings of belonging and purpose. Examples are Smalltalk, Racket, Clojure, and Haskell. These communities bear some resemblance to cults, with guru-like leaders, and fierce group cohesion.

The economic sustainability of a programming system can be even more important than strictly social and technical issues. Adopting a technology is a costly investment in terms of time, money, and foregone opportunities. Everyone feels safer investing in a technology backed by large corporations that are not going away, or in technologies that have such widespread adoption that they are guaranteed to persist. A vibrant and mature open source community backing a technology also makes it safer.

Unfortunately, all of these issues of sociability create barriers to new programming systems targeting non-experts, and indeed the entire dimension of learnability. Large internet corporations have invested mainly in technologies relevant to their high-end needs. Open source communities have only flourished around technologies for expert programmers “scratching their own itch”. While there has been a flow of venture funding into “no-code” and “low-code” programming systems, it is not clear how they can become economically and socially sustainable. By and large, the internet era has seen the ascendancy of expert programmers.

4.9.3 References. **TODO (Jonathan): Add some narrative around those**

- Principles for Programming Language Adoption [Meyerovich and Rabkin 2012]
- Lisp Curse [Winestock 2011]
- What is Success [Czaplicki 2018]
- Programming On An Already Full Brain [Fry 1997]
- Bret Victor Learnable Programming [Victor 2012]
- Chris Hanson thesis ???
- A Principled Design for an Integrated Computational Environment” [di Sessa 1985]

5 CONCLUSIONS

There is a renewed interest in developing new programming systems. Such systems go beyond the simple model of code written in a programming language using a more or less sophisticated text editor. They combine textual and visual notations, create programs through rich graphical interactions, and challenge accepted assumptions about program editing, execution and debugging. Despite the growing number of novel programming systems, it remains difficult to evaluate the novelty of programming systems and see how they improve over work done in the past. To address the issue, we proposed a framework of “technical dimensions” that captures essential characteristics of programming systems in a qualitative but rigorous way.

The framework of technical dimensions puts the vast variety of programming systems, past and present, on a common footing of commensurability. This is crucial to enable the strengths of each to be identified and, if possible, combined by designers of the next generation of programming systems. As more and more systems are assessed in the framework, a picture of the space of possibilities will gradually emerge. Some regions will be conspicuously empty, indicating unrealized possibilities that could be worth trying. In this way, a domain of “normal science” is created for the design of programming systems.

6 ACKNOWLEDGEMENTS

We would like to thank Richard Gabriel for his detailed comments and shepherding of the drafts for this paper. We also thank the committee of the *Pattern Languages of Programming (PLoP)* conference, who enabled such a collaboration for our submission. We have additionally benefited from discussions with members of the *Temporary Computing Collective* during its regular reading group and elsewhere.

REFERENCES

- [n.d.]. *How to Design a Good API and Why it Matters*. <http://www.cs.bc.edu/~muller/teaching/cs102/s06/lib/pdf/api-design>
- Antranig Basman, L. Church, C. Klokmoose, and Colin B. D. Clark. 2016. Software and How it Lives On: Embedding Live Programs in the World Around Them. In *PPIG*.

- FP Brooks. 1995. Aristocracy, Democracy and System Design. In *The Mythical Man Month: Essays on Software Engineering*. Addison-Wesley.
- Frederick P. Brooks. 1978. *The Mythical Man-Month: Essays on Softw* (1st ed.). Addison-Wesley Longman Publishing Co., Inc., USA.
- Hasok Chang. 2004. *Inventing temperature: Measurement and scientific progress*. Oxford University Press, Oxford.
- Michael Alan Chang, Bredan Tschäen, Theophilus Benson, and Laurent Vanbever. 2015. Chaos monkey: Increasing sdn reliability through systematic network destruction. In *Proceedings of the 2015 ACM Conference on Special Interest Group on Data Communication*. 371–372.
- Evan Czaplicki. 2018. . <https://www.youtube.com/watch?v=uGlzRt-FYto>
- Andrea A. di Sessa. 1985. A Principled Design for an Integrated Computational Environment. *Human-Computer Interaction* 1, 1 (1985), 1–47. https://doi.org/10.1207/s15327051hci0101_1 arXiv:https://doi.org/10.1207/s15327051hci0101_1
- A. A diSessa and H. Abelson. 1986. Boxer: A Reconstructible Computational Medium. *Commun. ACM* 29, 9 (Sept. 1986), 859–868. <https://doi.org/10.1145/6592.6595>
- Jonathan Edwards. 2005. Subtext: Uncovering the Simplicity of Programming. *SIGPLAN Not.* 40, 10 (Oct. 2005), 505–518. <https://doi.org/10.1145/1103845.1094851>
- Jonathan Edwards, Stephen Kell, Tomas Petricek, and Luke Church. 2019. Evaluating programming systems design. In *Proceedings of 30th Annual Workshop of Psychology of Programming Interest Group* (Newcastle, UK) (PPIG 2019).
- Matthias Felleisen, Robert Bruce Findler, Matthew Flatt, Shriram Krishnamurthi, Eli Barzilay, Jay McCarthy, and Sam Tobin-Hochstadt. 2018. A Programmable Programming Language. *Commun. ACM* 61, 3 (Feb. 2018), 62–71. <https://doi.org/10.1145/3127323>
- Luciano Floridi, Nir Fresco, and Giuseppe Primiero. 2015. On malfunctioning software. *Synthese* 192, 4 (2015), 1199–1220.
- John Foderaro. 1991. LISP: Introduction. *Commun. ACM* 34, 9 (Sept. 1991), 27. <https://doi.org/10.1145/114669.114670>
- Nir Fresco and Giuseppe Primiero. 2013. Miscomputation. *Philosophy & Technology* 26, 3 (2013), 253–272.
- Christopher Fry. 1997. Programming on an Already Full Brain. *Commun. ACM* 40, 4 (apr 1997), 55–64. <https://doi.org/10.1145/248448.248459>
- Richard P. Gabriel. 1991. *Worse Is Better*. <https://www.dreamsongs.com/WorseIsBetter.html>
- Richard P. Gabriel. 2008. Designed as Designer. In *Proceedings of the 23rd ACM SIGPLAN Conference on Object-Oriented Programming Systems Languages and Applications* (Nashville, TN, USA) (OOPSLA '08). Association for Computing Machinery, New York, NY, USA, 617–632. <https://doi.org/10.1145/1449764.1449813>
- Richard P. Gabriel. 2012. The Structure of a Programming Language Revolution. In *Proceedings of the ACM International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software* (Tucson, Arizona, USA) (Onward! 2012). Association for Computing Machinery, New York, NY, USA, 195–214. <https://doi.org/10.1145/2384592.2384611>
- Erich Gamma, Richard Helm, Ralph E. Johnson, and John Vlissides. 1995. *Design Patterns: Elements of Reusable Object-Oriented Software*. Addison-Wesley, Reading, Mass.
- John B. Goodenough. 1975. Exception Handling: Issues and a Proposed Notation. *Commun. ACM* 18, 12 (1975), 683–696. <https://doi.org/10.1145/361227.361230>
- T. R. G. Green and M. Petre. 1996. Usability Analysis of Visual Programming Environments: a ‘cognitive dimensions’ framework. *JOURNAL OF VISUAL LANGUAGES AND COMPUTING* 7 (1996), 131–174.
- Sumit Gulwani, William R Harris, and Rishabh Singh. 2012. Spreadsheet data manipulation using examples. *Commun. ACM* 55, 8 (2012), 97–105.
- Brian Hempel, Justin Lubin, and Ravi Chugh. 2019. Sketch-n-Sketch: Output-Directed Programming for SVG. In *Proceedings of the 32nd Annual ACM Symposium on User Interface Software and Technology* (New Orleans, LA, USA) (UIST '19). Association for Computing Machinery, New York, NY, USA, 281–292. <https://doi.org/10.1145/3332165.3347925>
- Robert Hirschfeld, Hidehiko Masuhara, and Kim Rose (Eds.). 2010. *Workshop on Self-Sustaining Systems, S3 2010, Tokyo, Japan, September 27-28, 2010*. ACM. <https://doi.org/10.1145/1942793>
- Robert Hirschfeld and Kim Rose (Eds.). 2008. *Self-Sustaining Systems, First Workshop, S3 2008, Potsdam, Germany, May 15-16, 2008, Revised Selected Papers*. Lecture Notes in Computer Science, Vol. 5146. Springer. <https://doi.org/10.1007/978-3-540-89275-5>
- Daniel Ingalls. 1981. *Design Principles Behind Smalltalk*. <https://archive.org/details/byte-magazine-1981-08/page/n299/mode/2up>
- Stephen Kell. 2009. The mythical matched modules: overcoming the tyranny of inflexible software construction. In *OOPSLA Companion*.
- Stephen Kell. 2013. The Operating System: Should There Be One?. In *Proceedings of the Seventh Workshop on Programming Languages and Operating Systems* (Farmington, Pennsylvania) (PLOS '13). Association for Computing Machinery, New York, NY, USA, Article 8, 7 pages. <https://doi.org/10.1145/2525528.2525534>
- Stephen Kell. 2017. Some Were Meant for C: The Endurance of an Unmanageable Language. In *Proceedings of the 2017 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software* (Vancouver, BC, Canada) (Onward! 2017). Association for Computing Machinery, New York, NY, USA, 229–245. <https://doi.org/10.1145/3133850.3133867>
- Gregor Kiczales, Erik Hilsdale, Jim Hugunin, Mik Kersten, Jeffrey Palm, and William G. Griswold. 2001. An Overview of AspectJ. In *ECOOP 2001 - Object-Oriented Programming, 15th European Conference, Budapest, Hungary, June 18-22, 2001, Proceedings (Lecture Notes in Computer Science, Vol. 2072)*, Jørgen Lindskov Knudsen (Ed.). Springer, 327–353. https://doi.org/10.1007/3-540-45337-7_18
- Ursula Klein. 2003. *Experiments, Models, Paper Tools: Cultures of Organic Chemistry in the Nineteenth Century*. Stanford University Press, Stanford, CA. <http://www.sup.org/books/title/?id=1917>

- Clemens N. Klokmoose, James R. Eagan, Siemen Baader, Wendy Mackay, and Michel Beaudouin-Lafon. 2015. Webstrates: Shareable Dynamic Media. In *Proceedings of the 28th Annual ACM Symposium on User Interface Software & Technology* (Charlotte, NC, USA) (*UIST '15*). Association for Computing Machinery, New York, NY, USA, 280–290. <https://doi.org/10.1145/2807442.2807446>
- H. Lieberman. 2001. *Your Wish Is My Command: Programming by Example*. Morgan Kaufmann.
- Geoffrey Litt, Daniel Jackson, Tyler Millis, and Jessica Quayle. 2020. End-User Software Customization by Direct Manipulation of Tabular Data. In *Proceedings of the 2020 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software* (Virtual, USA) (*Onward! 2020*). Association for Computing Machinery, New York, NY, USA, 18–33. <https://doi.org/10.1145/3426428.3426914>
- John McCarthy. 1962. *LISP 1.5 Programmer's Manual*. The MIT Press.
- Leo A. Meyerovich and Ariel S. Rabkin. 2012. Socio-PLT: Principles for Programming Language Adoption. In *Proceedings of the ACM International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software* (Tucson, Arizona, USA) (*Onward! 2012*). Association for Computing Machinery, New York, NY, USA, 39–54. <https://doi.org/10.1145/2384592.2384597>
- Stephen L. Michel. 1989. *Hypercard: The Complete Reference*. Osborne McGraw-Hill, Berkeley.
- Martin Monperrus. 2017. Principles of Antifragile Software. In *Companion to the First International Conference on the Art, Science and Engineering of Programming* (Brussels, Belgium) (*Programming '17*). Association for Computing Machinery, New York, NY, USA, Article 32, 4 pages. <https://doi.org/10.1145/3079368.3079412>
- James Noble and Robert Biddle. 2004. Notes on Notes on Postmodern Programming. *SIGPLAN Not.* 39, 12 (dec 2004), 40–56. <https://doi.org/10.1145/1052883.1052890>
- Donald A. Norman. 2002. *The Design of Everyday Things*. Basic Books, Inc., USA.
- Dan R. Olsen. 2007. Evaluating User Interface Systems Research. In *Proceedings of the 20th Annual ACM Symposium on User Interface Software and Technology* (Newport, Rhode Island, USA) (*UIST '07*). Association for Computing Machinery, New York, NY, USA, 251–258. <https://doi.org/10.1145/1294211.1294256>
- Cyrus Omar, Ian Voysey, Michael Hilton, Joshua Sunshine, Claire Le Goues, Jonathan Aldrich, and Matthew A. Hammer. 2017. Toward Semantic Foundations for Program Editors. In *2nd Summit on Advances in Programming Languages (SNAPL 2017) (Leibniz International Proceedings in Informatics (LIPIcs), Vol. 71)*, Benjamin S. Lerner, Rastislav Bodik, and Shriram Krishnamurthi (Eds.). Schloss Dagstuhl–Leibniz-Zentrum fuer Informatik, Dagstuhl, Germany, 11:1–11:12. <https://doi.org/10.4230/LIPIcs.SNAPL.2017.11>
- David Lorge Parnas. 1985. Software Aspects of Strategic Defense Systems. (1985). <http://web.stanford.edu/class/cs99r/readings/parnas1.pdf>
- A. J. Perlis and K. Samelson. 1958. Preliminary Report: International Algebraic Language. *Commun. ACM* 1, 12 (Dec. 1958), 8–22. <https://doi.org/10.1145/377924.594925>
- Tomas Petricek. 2017. Miscomputation in software: Learning to live with errors. *Art Sci. Eng. Program.* 1, 2 (2017), 14. <https://doi.org/10.22152/programming-journal.org/2017/1/14>
- Ian Piumarta. 2006. *Accessible Language-Based Environments of Recursive Theories*. http://www.vpri.org/pdf/rn2006001a_colaswp.pdf
- James Reason. 1990. *Human error*. Cambridge university press.
- Barbara G. Ryder, Mary Lou Soffa, and Margaret Burnett. 2005. The Impact of Software Engineering Research on Modern Programming Languages. *ACM Trans. Softw. Eng. Methodol.* 14, 4 (oct 2005), 431–477. <https://doi.org/10.1145/1101815.1101818>
- Kragen Javier Sitaker. 2016. *The Memory Models That Underlie Programming Languages*. <http://canonical.org/~kragen/memory-models/>
- Yannis Smaragdakis. 2019. Next-Paradigm Programming Languages: What Will They Look like and What Changes Will They Bring?. In *Proceedings of the 2019 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software* (Athens, Greece) (*Onward! 2019*). Association for Computing Machinery, New York, NY, USA, 187–197. <https://doi.org/10.1145/3359591.3359739>
- Brian Cantwell Smith. 1982. *Procedural Reflection in Programming Languages*. Ph.D. Dissertation. Massachusetts Institute of Technology. <https://dspace.mit.edu/handle/1721.1/15961>
- D. C. Smith. 1975. Pygmalion: a creative programming environment.
- Guy L. Steele and Richard P. Gabriel. 1993. The Evolution of Lisp. In *The Second ACM SIGPLAN Conference on History of Programming Languages* (Cambridge, Massachusetts, USA) (*HOPL-II*). Association for Computing Machinery, New York, NY, USA, 231–270. <https://doi.org/10.1145/154766.155373>
- Steven L. Tanimoto. 2013. A Perspective on the Evolution of Live Programming. In *Proceedings of the 1st International Workshop on Live Programming* (San Francisco, California) (*LIVE '13*). IEEE Press, 31–34.
- Philip Tchernavskij. 2019. *Designing and Programming Malleable Software*. PhD thesis. Université Paris-Saclay, École doctorale n°580 Sciences et Technologies de l'Information et de la Communication (STIC).
- Warren Teitelman. 1966. *PILOT: A Step Toward Man-Computer Symbiosis*. Ph.D. Dissertation.
- David Ungar and Randall B. Smith. 2013. *The thing on the screen is supposed to be the actual thing*. http://davidungar.net/Live2013/Live_2013.html
- Bret Victor. 2012. *Learnable Programming*. <http://worrydream.com/#!/LearnableProgramming>
- Larry Wall. 1999. *Perl, the first postmodern computer language*. <http://www.wall.org/~larry/pm.html>
- Rudolf Winestock. 2011. *The Lisp Curse*. http://www.winestockwebdesign.com/Essays/Lisp_Curse.html