


Módulo 3 - Componentes y templates

https://github.com/jdotel/curso_angular

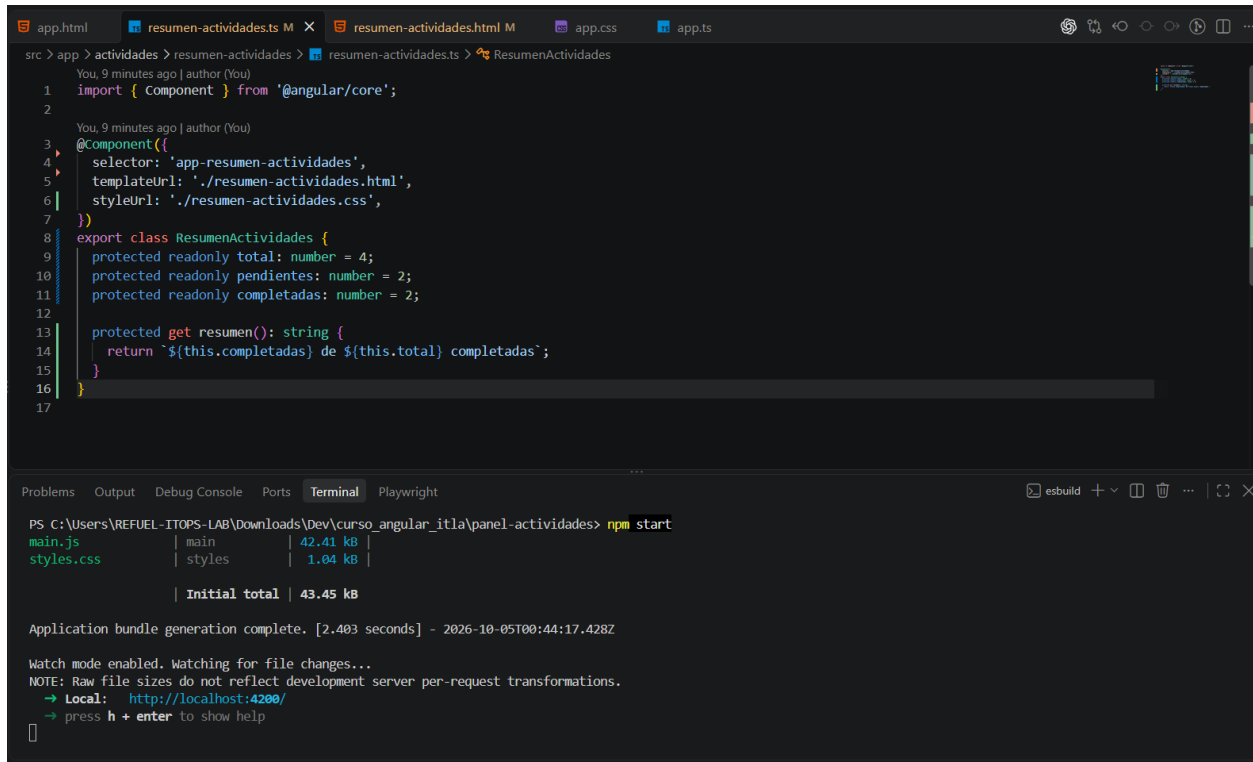

The screenshot shows a code editor with a file named `resumen-actividades.ts` containing the following TypeScript code:

```
1 import { Component } from '@angular/core';
2
3 You, 9 minutes ago | author (You)
4 @Component({
5   selector: 'app-resumen-actividades',
6   templateUrl: './resumen-actividades.html',
7   styleUrls: ['./resumen-actividades.css'],
8 })
9 export class ResumenActividades {
10   protected readonly total: number = 4;
11   protected readonly pendientes: number = 2;
12   protected readonly completadas: number = 2;
13
14   protected get resumen(): string {
15     return `${this.completadas} de ${this.total} completadas`;
16   }
17 }
```

Below the code editor, the terminal window displays the output of the `npm start` command:

```
PS C:\Users\REFUEL-ITOPS-LAB\Downloads\Dev\curso_angular_itla\panel-actividades> npm start
main.js | main | 42.41 kB |
styles.css | styles | 1.04 kB |

| Initial total | 43.45 kB

Application bundle generation complete. [2.403 seconds] - 2026-10-05T00:44:17.428Z

Watch mode enabled. Watching for file changes...
NOTE: Raw file sizes do not reflect development server per-request transformations.
→ Local: http://localhost:4200/
→ press h + enter to show help
```