



Building your first SMART on FHIR app

Workshop Tutorial

Table of Contents

Required software / preparation	2
Web browser settings	3
Forking the GitHub repositories.....	5
BMI Calculator.....	10
Testing your app	13
BMI Calculator [Cont'd].....	17
SMART authorization workflow	20
Framingham Risk Score.....	21
Post workshop.....	25

Required software / preparation



- 1) Microsoft Visual Studio Code or proficiency with similar web integrated development environment (IDE). You will need to run a live server and launch HTML files in Firefox.
 - a. [PC & Mac download](#) (install with default options)
- 2) [Firefox web browser](#)
- 3) [GitHub](#) account
- 4) Git (v2.0.0+)
 - a. [PC](#)
 - b. [Mac](#)
- 5) Internet connection
- 6) Familiarity with HTML/CSS/JavaScript (helpful)
- 7) [Zoom](#)
- 8) Open windows for this document, Visual Studio Code, Firefox, and Zoom during live tutorial to follow along



The remaining steps will be accomplished during the live tutorial.



Web browser settings

- 1) Make Firefox your default web browser.
 - a. Go to <about:preferences>.
 - b. Select *Make Default...*
 - c. In windows, a new Settings window may appear. Select the app option under *Web Browser* and change to *Firefox*

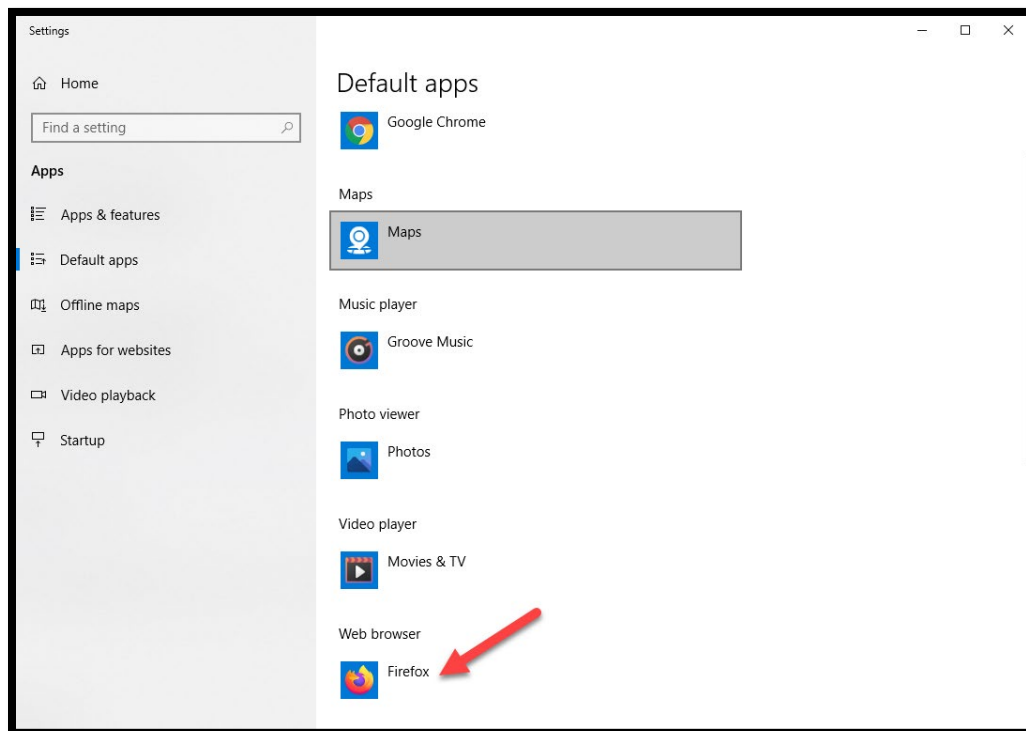
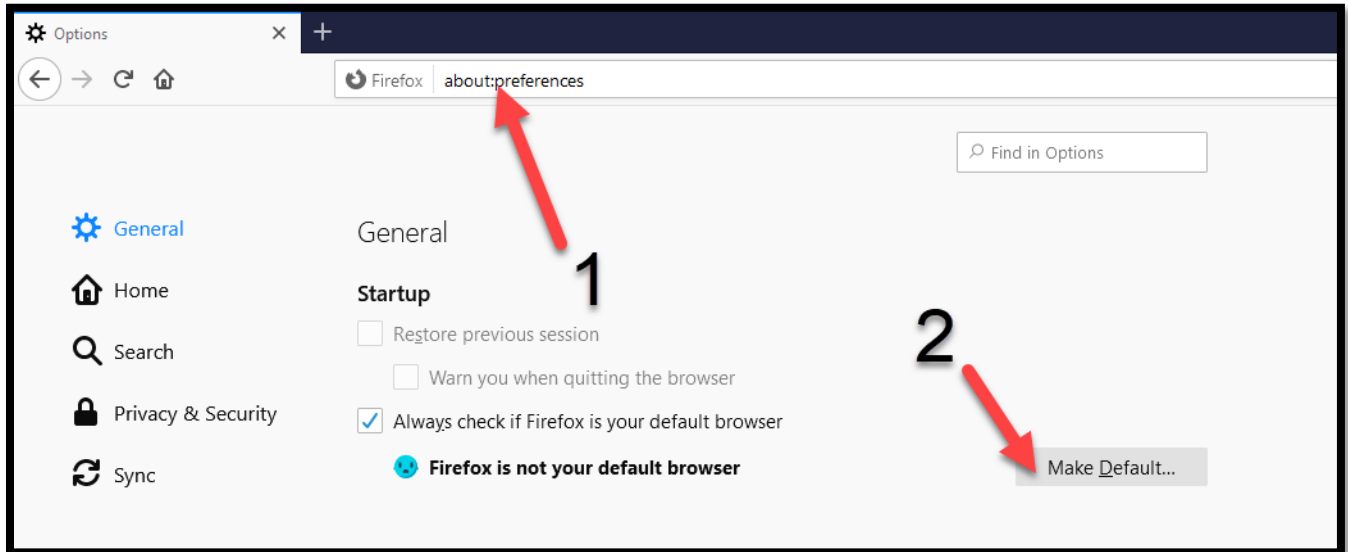


- 2) Block cookies for the SMART Health IT page in Firefox. Blocking cookies will allow us to test updates to our SMART app in the browser. Without blocking cookies, the SMART Health IT page will only use the starting version of your app.
 - a. Go to: <about:preferences#privacy>
 - b. Go to the second section, entitled, *Cookies and Site Data*

- c. Select *Manage Exceptions...*
- Add the following URLs to the *Block* list:
 - smarthealthit.org
 - launch.smarthealthit.org
 - Click *Save Changes*

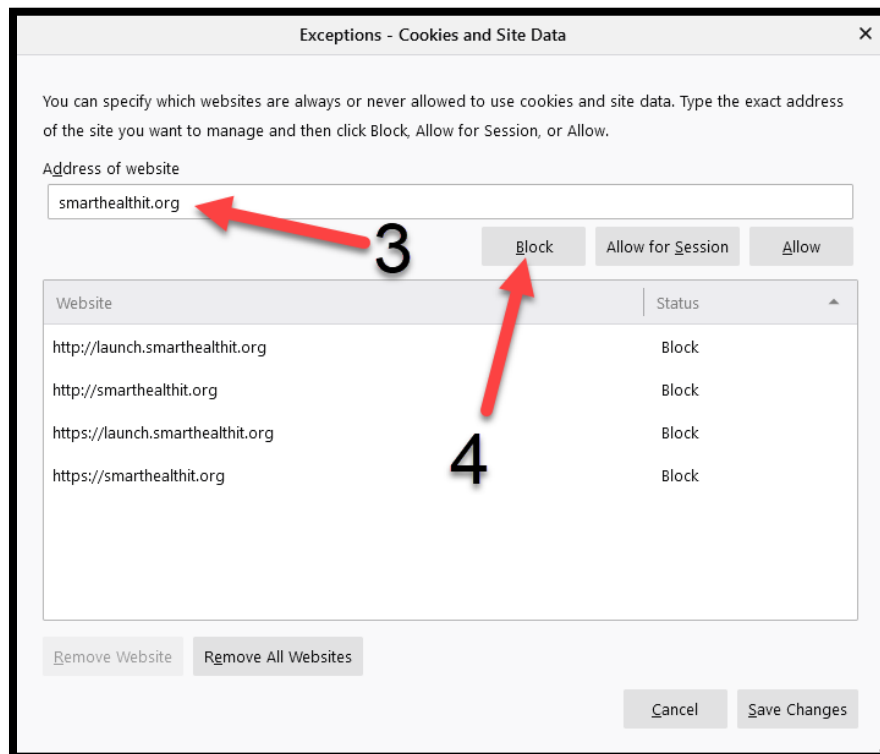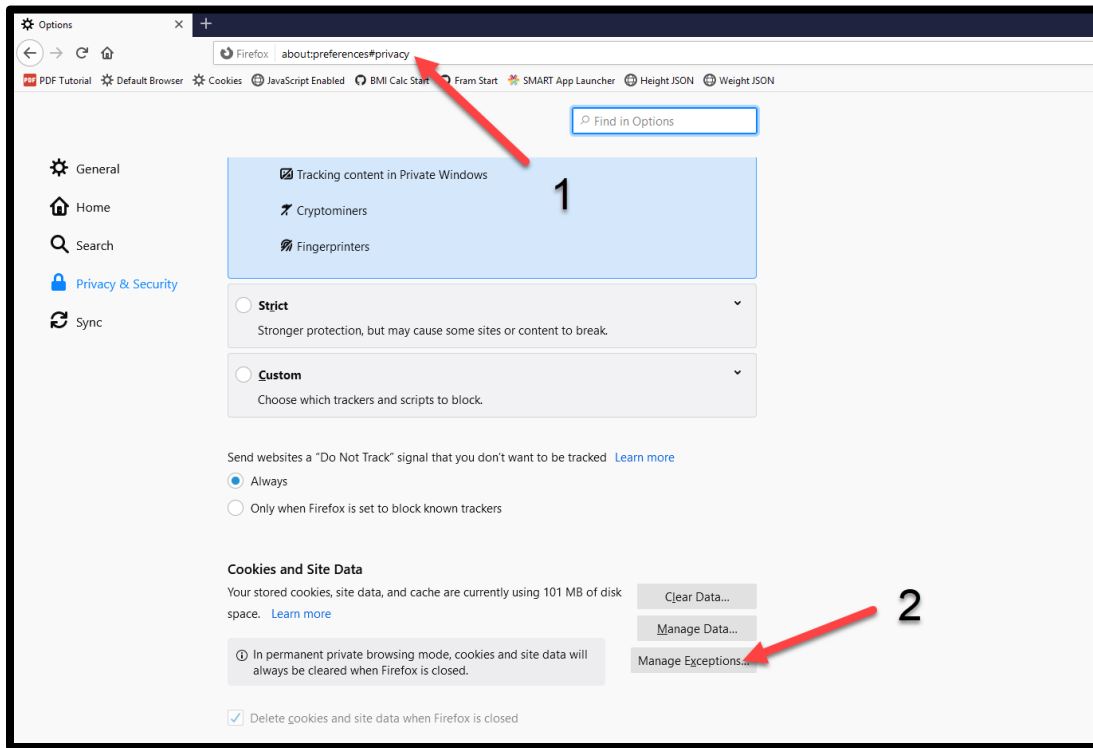


- 3) Ensure JavaScript is enabled in Firefox (should be enabled by default)
 - a. Go to: <about:config>
 - b. Click *Accept the Risk and Continue*
 - c. Search for *JavaScript.enabled*
 - d. Make sure it says *true* in the middle. If not, select the *Toggle* arrows on the right to change it to *true*. For Mac users, double click the *true/false* under *Value* to change it.

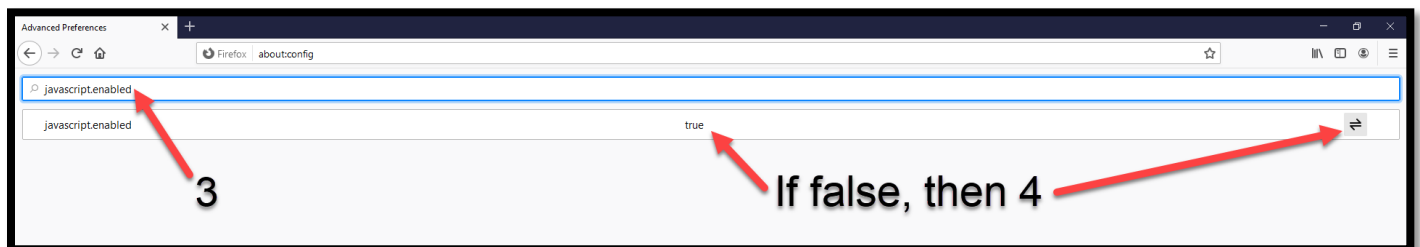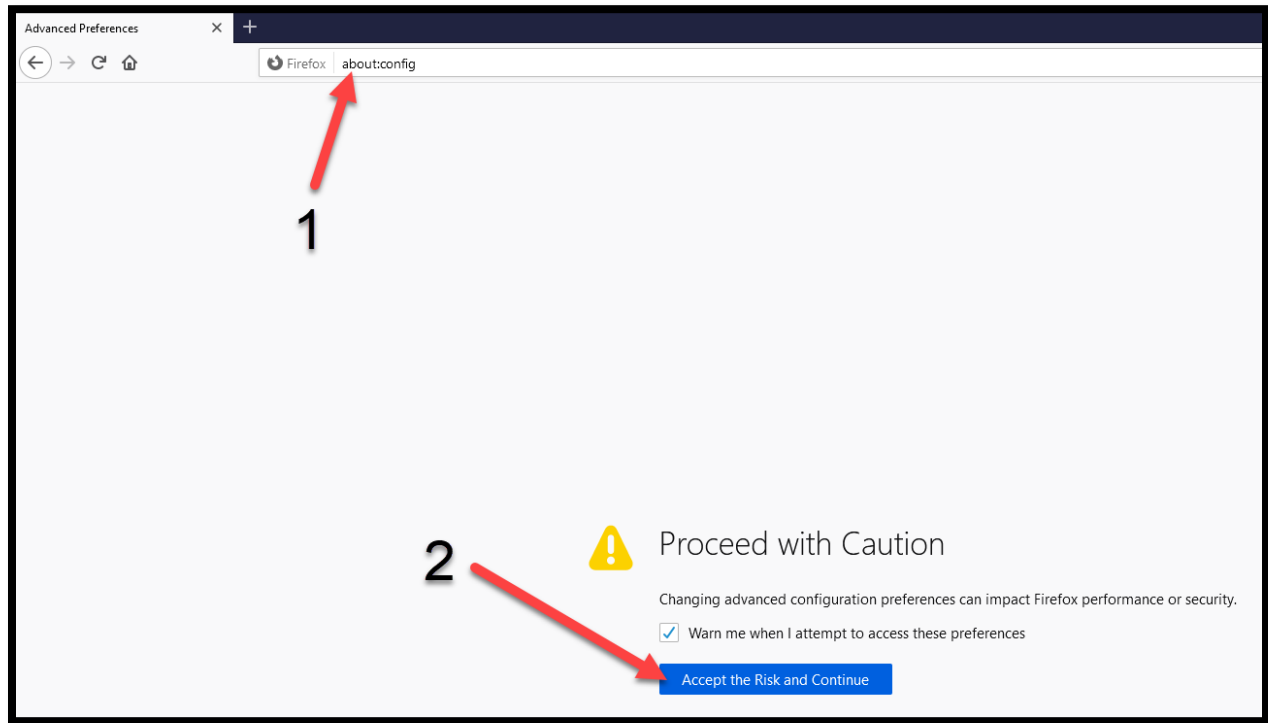

Forking the GitHub repositories


- 1) Go to <https://github.com/colbyuptegraft/bmi-calculator-start>
- 2) Fork this repository
 - a. This should create your own version of the repository in your GitHub account

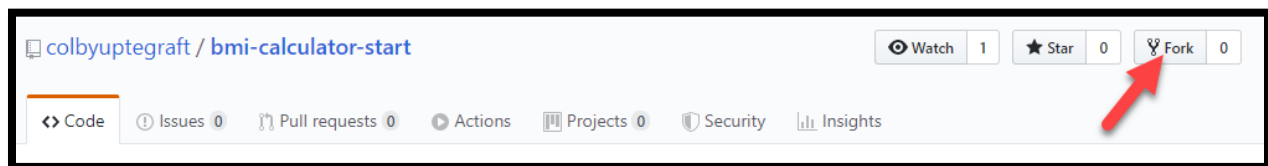

- 3) Go to your newly forked repository. Should be [https://github.com/\[yourGitHubUserName\]/bmi-calculator-start](https://github.com/[yourGitHubUserName]/bmi-calculator-start)




- a. Should be: [https://github.com/\[yourGitHubUserName\]/bmi-calculator-start.git](https://github.com/[yourGitHubUserName]/bmi-calculator-start.git)

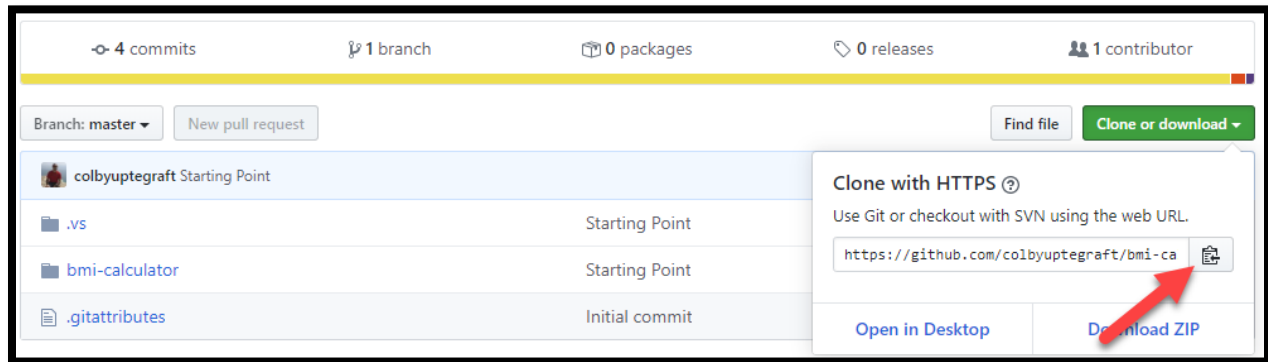


- 5) Open Visual Studio Code (or your own preferred IDE).


Make sure not to skip the next step!

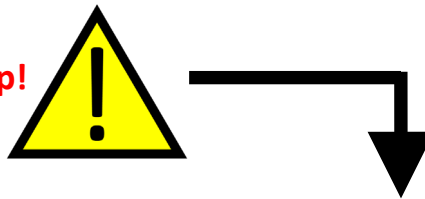


- 6) Type `Ctrl[Cmd] + Shift + P` to open the *Command Palette*. **Type *Git: Clone* in the *Command Palette* and hit *Enter*.**

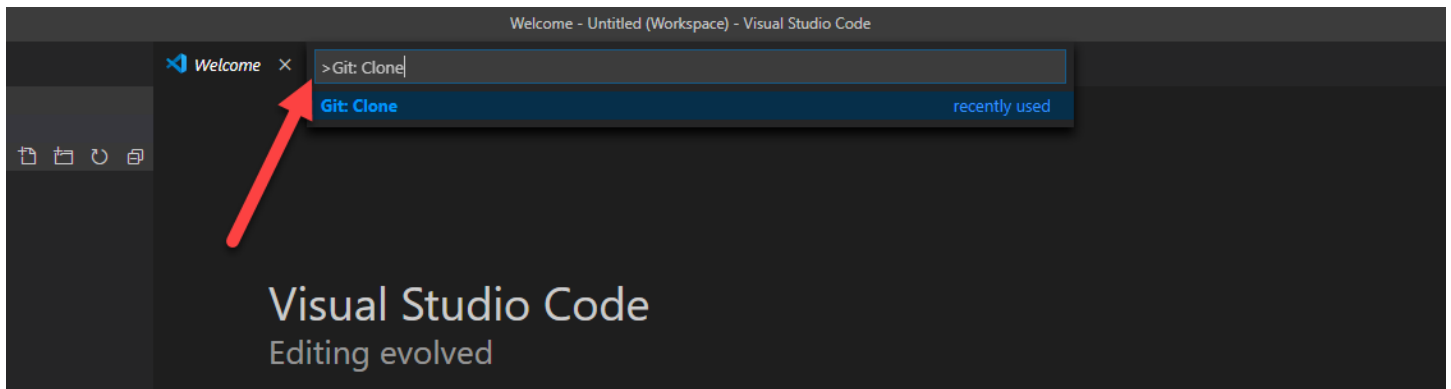


- 7) Paste the URL for the repository you just copied ([https://github.com/\[yourGitHubUserName\]/bmi-calculator-start.git](https://github.com/[yourGitHubUserName]/bmi-calculator-start.git)) and hit *Enter*.

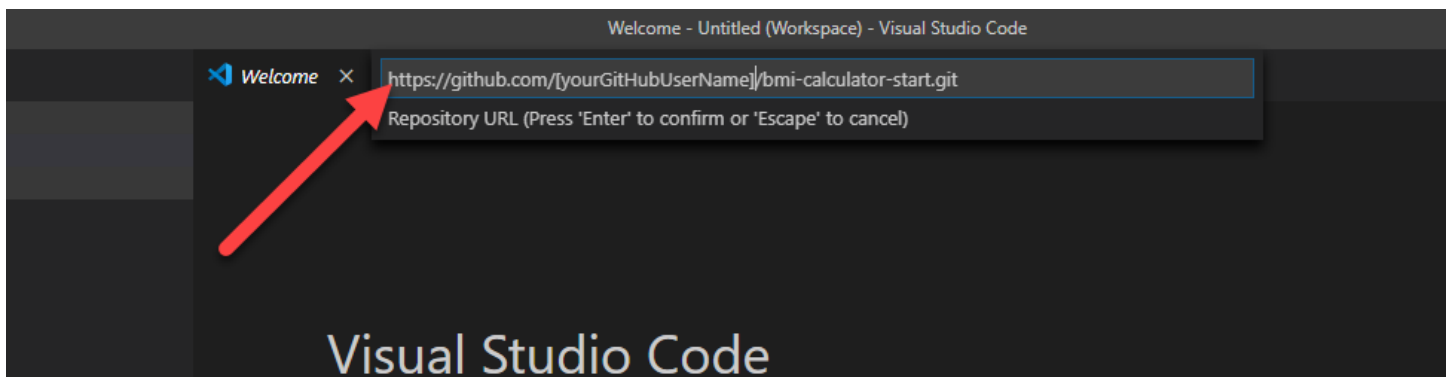

- 8) Select a location to save the repository or create a new folder. For the purposes of the tutorial, place it in an easy-to-find location, such as your desktop.

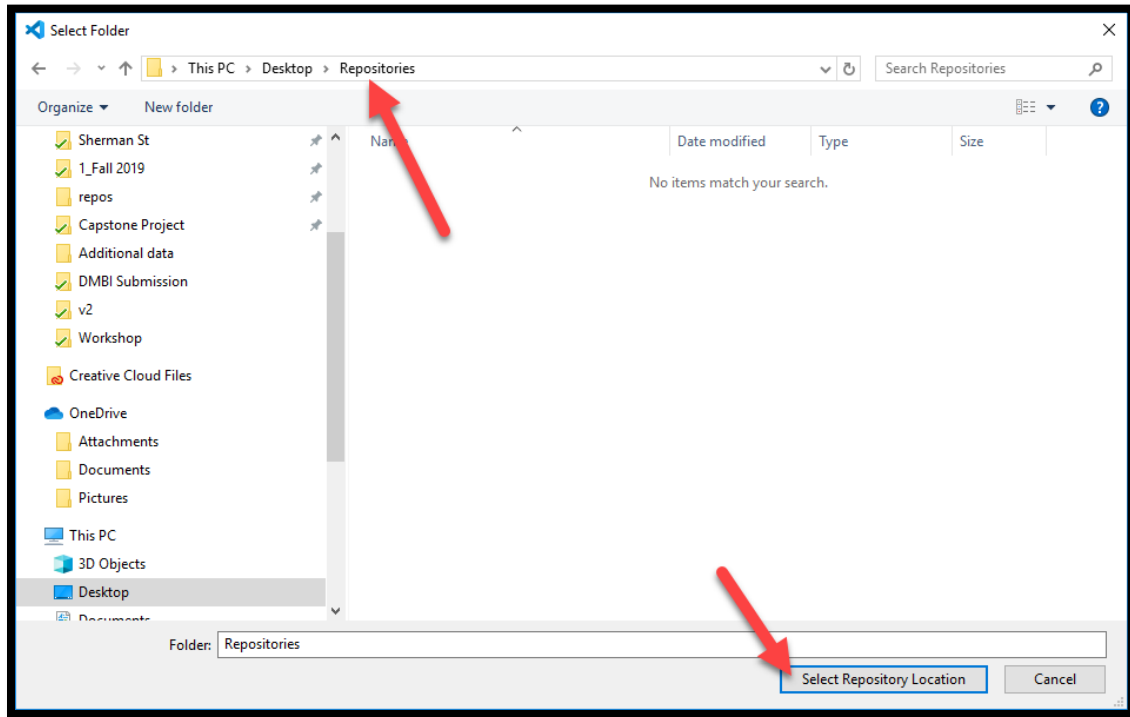


- 9) An info window should appear in the bottom right of your screen. Select the *Open* option.

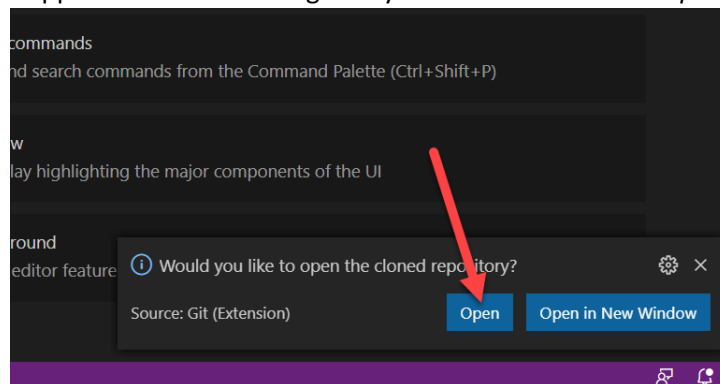


- 10) Repeat this process (steps 1-9) for the Framingham Risk Score repository:

<https://github.com/colbyuptegraft/framingham-risk-score-start>. For step 8, place the second repository in the same location as the first.

- a. Note: Make sure your window is maximized. Otherwise, the window that appears may not show the *Add to Workspace* option.


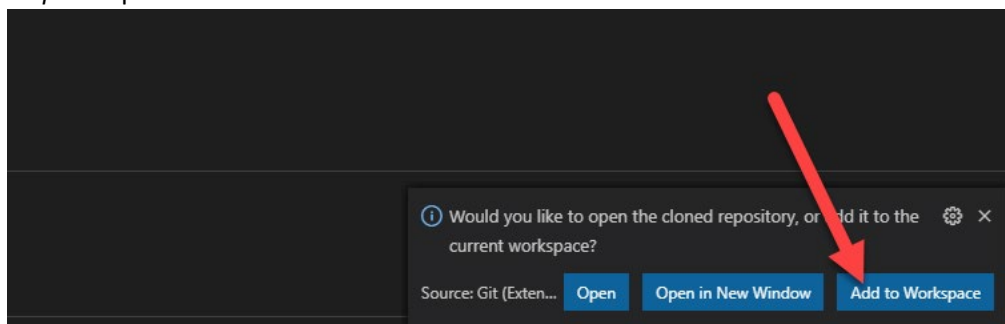


11) Both projects should now be in your Visual Studio Code workspace.

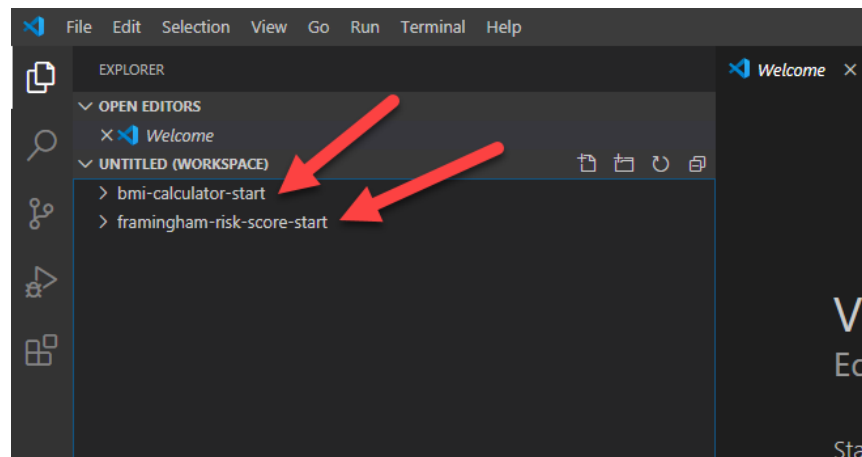

12) Install the *Live Server* extension.

- Click the *Extension* icon
- Type "Live Server" in the search box and select the top option by *Ritwick Dey*.
- Click *Install*

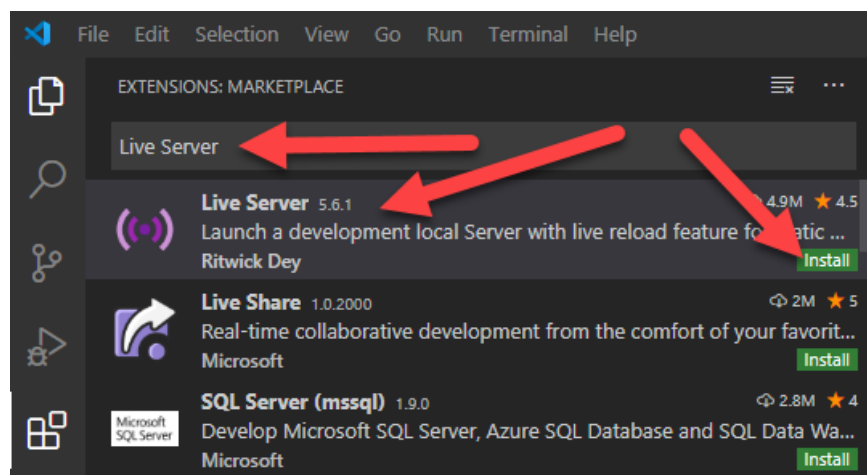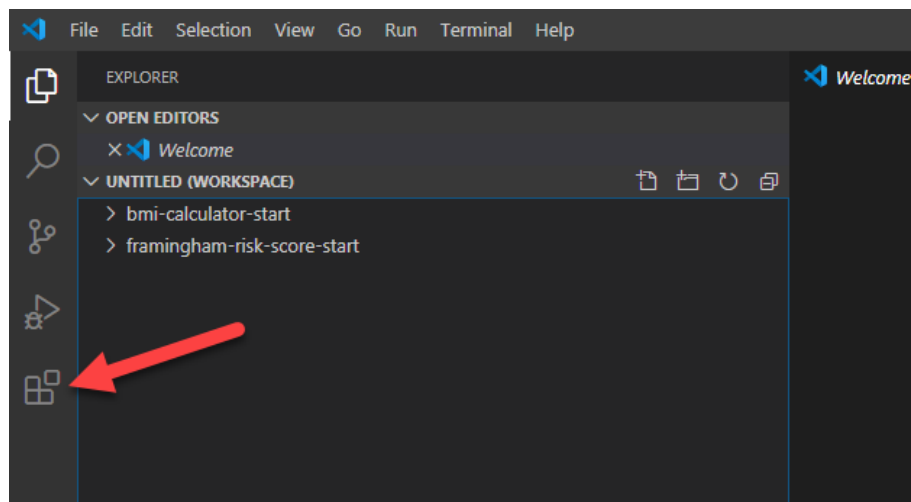



a. index.html

- i. The main HTML file for your application that structures the content of your application. This page is invoked at the conclusion of the SMART authorization workflow.

b. launch.html

- i. The entry point to this application within this tutorial and within an actual production environment

c. example-smart-app.js


- i. Follow bmi-calculator -> src -> js to find this file
- ii. *This is the only file in both apps that we'll be editing*

d. Other project files

- i. bmi-calculator / framingham-risk-score
 - 1. lib
 - a. css
 - i. cerner-smart-embeddable-lib-1.0.0.min.css
 - 1. A CSS file that you would need to embed this within Cerner's EHR, PowerChart
 - b. js
 - i. cerner-smart-embeddable-lib-1.0.0.min.js
 - 1. A JavaScript file that you would need to embed this app with Cerner's EHR, PowerChart
 - ii. fhir-client-cerner-additions-1.0.0.js
 - 1. Additional JavaScript added to FHIR Client JavaScript library
 - iii. [fhir-client-v0.1.12.js](#)
 - 1. An open-source JavaScript library to help make FHIR API calls and handle the SMART on FHIR authorization workflow.
 - 2. src
 - a. css
 - i. example-smart-app.css
 - 1. Custom CSS styling for this app
 - ii. [relaxCSS.css](#)
 - 1. CSS styling library
 - iii. [simple-grid.css](#)
 - 1. CSS styling library
 - 3. images
 - a. logo.png
 - i. Background picture for app

BMI Calculator

- 1) Open the *example-smart-app.js* file. This file will be the main file that we edit throughout this tutorial and is the meat of how we request FHIR resources.

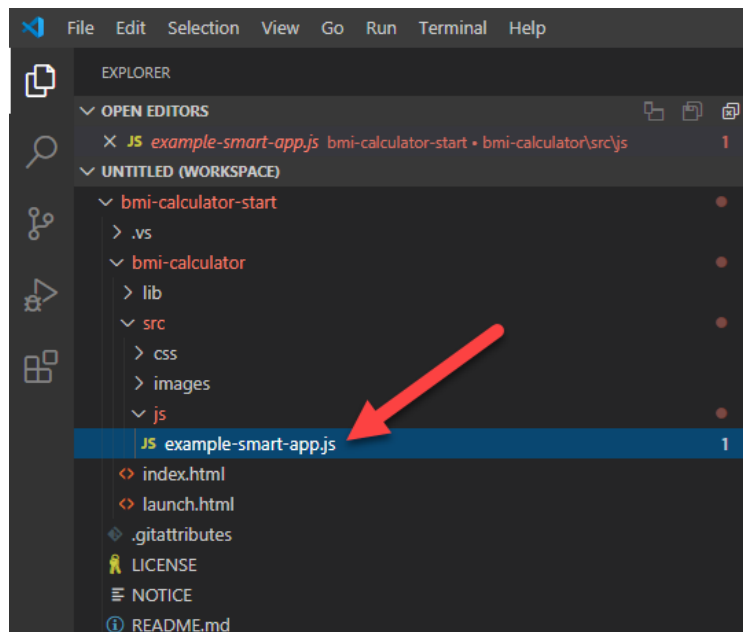

- 2) On line 16, find the *smart.patient.api.fetchAll* function. This function uses the [fhir.js](#) API to retrieve resources for the current patient in context. On line 17, find *type:*. This is your first assignment. Replace the commented-out text with the type of FHIR resource we'll be requesting for this app. Hint: This app only uses height and weight to calculate the BMI. Height and weight are both _____ event resources in the FHIR standard. Choices include:
 - a. ['Observation'](#)
 - b. ['Specimen'](#)
 - c. ['ImagingStudy'](#)
 - d. ['Person'](#)

ANSWER



- 3) Next, we need to select the applicable [LOINC](#) codes. As you can see, there're many different LOINC codes for height and weight, and these may vary by institution and context. For the sake of this application, we've included a subset of both that cover height and weight for the set of sample patients provided above ([Lines 21-34](#)). The *\$or* operator modifies the *fetchAll* query to return the resources that match any of the following LOINC codes (8302-2 or 3137-7 or 3138-5, etc).

```
16 var obv = smart.patient.api.fetchAll({
17   type: /* [Insert FHIR resource type here] */,
18   query: {
19     code: {
20       $or: [
21         'http://loinc.org|8302-2', // Height
22         'http://loinc.org|3137-7', // Height [measured]
23         'http://loinc.org|3138-5', // Height [stated]
24         'http://loinc.org|8308-9', // Height [standing]
25         'http://loinc.org|8306-3', // Height [lying]
26         'http://loinc.org|8301-4', // Height [estimated]
27
28         'http://loinc.org|29463-7', // Weight
29         'http://loinc.org|3141-9', // Weight
30         'http://loinc.org|18833-4', // Weight
31         'http://loinc.org|3142-7', // Weight [stated]
32         'http://loinc.org|75292-3', // Weight [usual]
33         'http://loinc.org|8335-2', // Weight [estimated]
34         'http://loinc.org|8351-9', // Weight [without clothes]
35       ]
36     }
37   }
38 });
```

- If you need to look up additional LOINC codes, you can create an account on their [website](#) and download their [documentation](#).
- You can also look up the LOINC codes used for particular patients within SMART Health IT:
 - [Height](#)
 - [Weight](#)

Response Body

```
1  {
2    "resourceType": "Observation",
3    "id": "790ab88d-6a87-4785-b7dd-42a694580f13",
4    "meta": {
5      "versionId": "1",
6      "lastUpdated": "2018-05-07T13:34:01.721-04:00",
7      "tag": [
8        {
9          "system": "https://smarthealthit.org/tags",
10         "code": "synthea-8-2017"
11       }
12     ],
13     "status": "final",
14     "category": {
15       "coding": [
16         {
17           "system": "http://hl7.org/fhir/observation-category",
18           "code": "vital-signs"
19         }
20       ]
21     },
22     "code": {
23       "coding": [
24         {
25           "system": "http://loinc.org",
26           "code": "8302-2",
27           "display": "Body Height"
28         }
29       ],
30       "text": "Body Height"
31     },
32     "subject": {
33       "reference": "Patient/57b85682-ce42-4187-a593-7864248a9484"
34     }
35   }
```

- 4) The *byCodes* function, created on line 44 and used on lines 55-56, is from the [FHIR Client JavaScript library](#). It searches resources by a given code, LOINC codes in this context, and returns an array of JSON objects of all resources with that code. In lines 55-56, copy/paste the remaining LOINC codes from lines 21-34.

```
16 var obv = smart.patient.api.fetchAll({
17   type: /* [Insert FHIR resource type here] */
18   query: {
19     code: {
20       $or: [
21         'http://loinc.org/8302-2', // Height
22         'http://loinc.org/3137-7', // Height [measured]
23         'http://loinc.org/3138-5', // Height [stated]
24         'http://loinc.org/8308-9', // Height [standing]
25         'http://loinc.org/8306-3', // Height [lying]
26         'http://loinc.org/8301-4', // Height [estimated]
27
28         'http://loinc.org/29463-7', // Weight
29         'http://loinc.org/3141-9', // Weight
30         'http://loinc.org/18833-4', // Weight
31         'http://loinc.org/3142-7', // Weight [stated]
32         'http://loinc.org/75292-3', // Weight [usual]
33         'http://loinc.org/8335-2', // Weight [estimated]
34         'http://loinc.org/8351-9', // Weight [without clothes]
35       ]
36     }
37   }
38 });
39
40 $.when(pt, obv).fail(onError);
41
42 $.when(pt, obv).done(function (patient, obv) {
43
44   var byCodes = smart.byCodes(obv, 'code');
45   var gender = patient.gender;
46   var fname = '';
47   var lname = '';
48
49   if (typeof patient.name[0] !== 'undefined') {
50     fname = patient.name[0].given.join(' ');
51     lname = patient.name[0].family.join(' ');
52   }
53
54   // Create arrays of JSON objects
55   var height = byCodes('8302-2', '3137-7', /* Copy/paste remaining LOINC codes for height here */);
56   var weight = byCodes('29463-7', '3141-9', /* Copy/paste remaining LOINC codes for weight here */);
57 }
```

Height Codes


Weight Codes


ANSWER

- 5) Now, find line 69. Don't delete this line yet! We're going to see what *Height* looks like as a JSON object. The current code is set to return the first item in the *Height* Array that we created above as the *String* version of a JSON object. Let's run our app to see!


```
67 // Height
68 p.height = getQuantityValueAndUnit(height[0]);
69 p.height = JSON.stringify(height[0]) // Delete this line
70
```

Testing your app


- 1) Save all your open files in Visual Studio Code.
- 2) If you've already launched your app at least once, close the two browser tabs initiated with that launch, ie the browser tabs automatically opened with *steps 3 & 7.h* below, and click the  Port : 5500 in the bottom right of your screen to close the server. Otherwise, ignore this step.

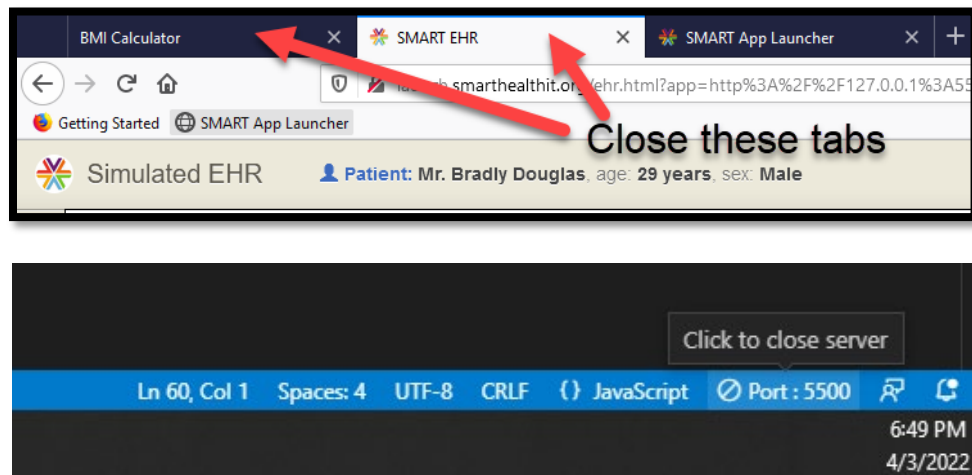


- 3) Open the *launch.html* file from within Visual Studio Code.

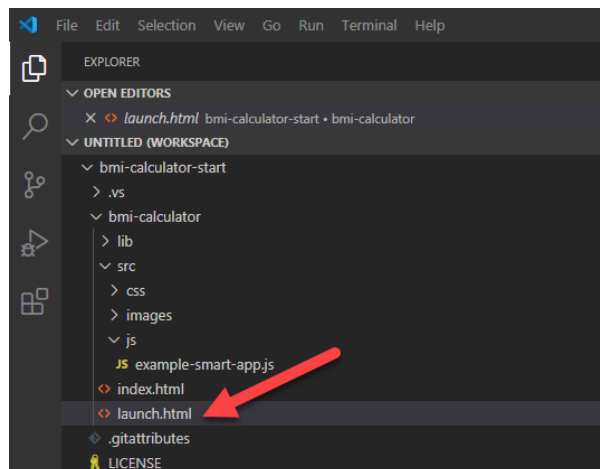


- 4) Right click on the file and select *Open with Live Server*. This should open a new tab in your default browser. You should also see an animation of three dots fading in and out.

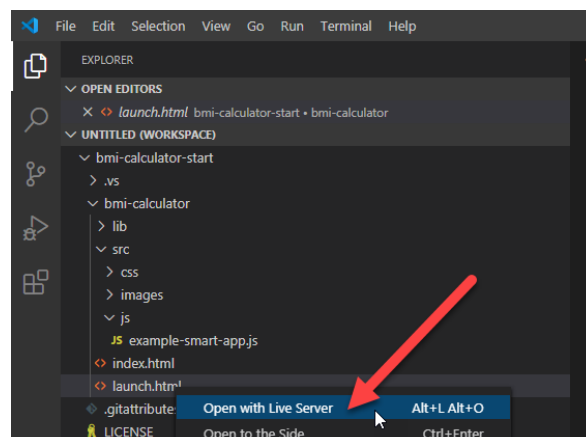

- 5) Copy the URL for this tab.
 - a. Should be similar to: <http://127.0.0.1:5500/bmi-calculator/launch.html>
 - b. This is the 'App Launch URL'

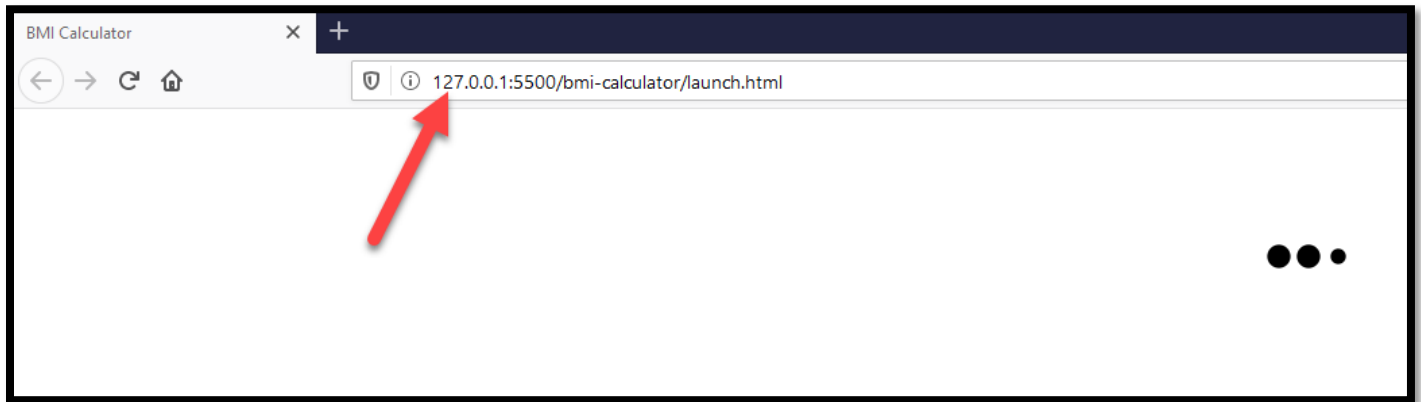

- 6) In a different browser tab, go to: <http://launch.smarthealthit.org/>
 - a. This is the *SMART App Launcher* page where we'll launch our SMART apps

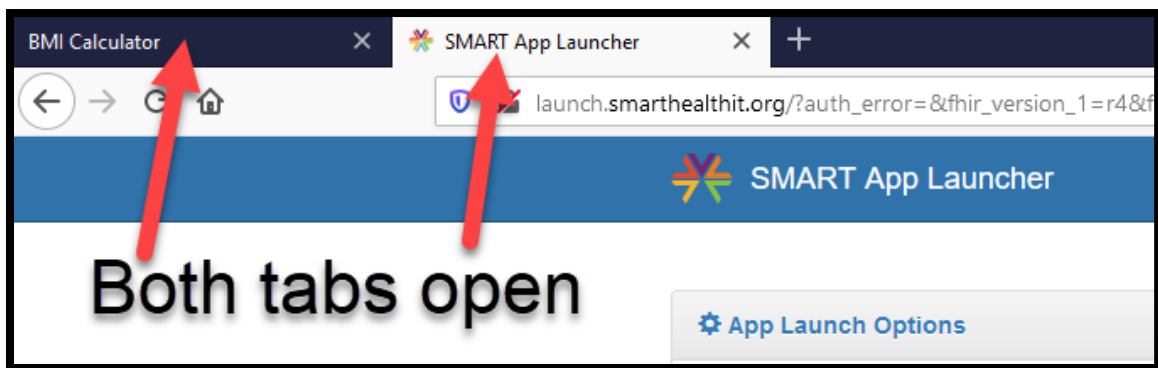

- 7) Configure the following *App Launch Options*
 - a. **Launch Type**
 - i. Select *Provider EHR Launch*
 1. Check *Simulate launch within the EHR user interface*
 - b. **FHIR Version**
 - i. Select *R2 (DSTU2)*
 - c. **Patient(s)**
 - i. Copy/paste the ID(s) for select patient(s). If you select multiple, put a common between IDs.
 1. For *BMI Calculator*
 - a. With *Height & Weight*
 - i. Mr. Ronnie Gutmann
 1. ID: 57b85682-ce42-4187-a593-7864248a9484
 - ii. Daniel X. Adams
 1. ID: smart-1288992
 - iii. Ruth C. Black
 1. ID: smart-665677
 - b. Without *Height &/or Weight*
 - i. Mr. Carey Krajcik
 1. ID: cb44df11-064a-4132-aeda-aeca5a7d2f5f

- ii. Mr. Andreas Ratke
 - 1. ID: 8ab4791f-0790-44f3-97c0-88f14c9329da
- 2. For Framingham Risk Score
 - a. With all data fields
 - i. Ruth C. Black
 - 1. ID: smart-665677
 - ii. Carol G. Allen
 - 1. ID: smart-1577780
 - iii. Daniel X. Adams (Technically, too old)
 - 1. ID: smart-1288992
 - b. Missing at least one of the required fields
 - i. Cristi Bernhard
 - 1. ID: 7478ade9-a06d-45ed-b179-1af1b13da49f
 - ii. Dan Diabetes
 - 1. ID: DDME
 - iii. Betty N. Davis
 - 1. ID: smart-1642068
 - c. Missing *Smoking Status &/or Medications*
 - i. Ewa Lowe
 - 1. ID: c9452102-96dd-46e0-8857-1ac14e65c214
 - ii. Mrs. Sylvia Emard
 - 1. ID: a13c822d-b782-415e-8a1a-9590e8fdd3a7
 - iii. Damon Shanahan
 - 1. ID: fb24ec64-ed6b-404a-a4dd-43f1ee69d67e
- d. **Provider(s)**
 - i. Leave blank
- e. **Active Encounter in EHR**
 - i. Select *Use the patient's most recent encounter if available*
- f. **Simulate Authentication Error for Testing**
 - i. Select *None*
- g. **App Launch URL**
 - i. Paste URL you copied above
 - 1. Should be similar to: <http://127.0.0.1:5500/bmi-calculator/launch.html>

App Launch Options

Launch Type

- ☒ Provider EHR Launch (practitioner opens the app from within an EHR)
 - ☒ Simulate launch within the EHR user interface
- ☐ Patient Portal Launch (patient opens the app from within patient portal)
- ☐ Provider Standalone Launch (practitioner opens the app directly and connects to FHIR)
- ☐ Patient Standalone Launch (patient opens the app directly and connects to FHIR)
- ☐ Backend Service (app connects to FHIR without user login)
- ☐ CDS Hooks Service (test your CDS services)

FHIR Version

R2 (DSTU2)

Open FHIR Server Endpoint: <https://r2.smarthealthit.org>

Test

Protected FHIR Server Endpoint: <http://launch.smarthealthit.org/vr2/fhir>

Test

Patient(s)

57b85682-ce42-4187-a593-7864248a9484

Simulates the active patient in EHR when app is launched. If no Patient ID is entered or if multiple comma delimited IDs are specified, a patient picker will be displayed as part of the launch flow.

Provider(s)

Provider ID

Simulates user who is launching the app. If no provider is selected, or if multiple comma delimited Practitioner IDs are specified, a login screen will be displayed as part of the launch flow.

Advanced

Active Encounter in EHR

- ☐ Show encounter selector
- ☒ Use the patient's most recent encounter if available

Simulate Authentication Error for Testing

None

Launch

Test With Sample App

client_id

The app's client_id is not validated on the SMART test server, so any text string will work. Use the error dropdown above to simulate the server response to an invalid client_id.

client_secret

The app's client_secret is not validated on the SMART test server, so any secret will work. If provided, the Authorization header must conform to the standard format (Example). Use the error dropdown above to simulate the server response to an invalid client_secret.

App Launch URL (required)

http://127.0.0.1:5500/bmi-calculator/launch.html

Full url of the page in your app that will initialize the SMART session (often the path for a launch.html file)

Launch App!

Launch App!

- You should briefly see the animation of three dots fading in and out before your app loads in a new browser tab. Hopefully, it looks like this:

Simulated EHR

Patient: Mr. Ronnie Gutmann
28 years
Male

BMI Calculator

Patient Resource

First Name: Ronnie

Last Name: Gutmann

Gender: male

Date of Birth: 1985-06-13

Body Mass Index (BMI)

Observation Resource

Height: 170.18 cm

Weight: 78.1 kg

16

i. Troubleshooting common errors

1. Failed to Call FHIR Service

- a. Solution: Make sure you've selected R2 (DSTU 2) as the **FHIR Version**

2. Endless three-dot animation

- a. This likely represents an error somewhere in your code, most likely the *example-smart-app.js* file. Double check your code with this tutorial's instructions.

3. Nothing changed in your app

- a. Make sure you've closed both the <http://127.0.0.1:5500/bmi-calculator/launch.html> page & the page that launched when you clicked Launch App before launching a new version of your app.
- b. Make sure cookies are disabled [see above].



BMI Calculator [Cont'd]

- 8) In your app, you should see the JSON object as a text string in the left column. It should look similar, minus the formatting, to the height resource [here](#).

Simulated EHR

Patient: Mrs. Sylvia Emard, age: 70 years, sex: Female

BMI Calculator

Body Mass Index (BMI)

Patient Resource

First Name:	Sylvia
Last Name:	Emard
Gender:	female
Date of Birth:	1949-11-16

Observation Resource

Height:

```
[{"resourceType": "Observation", "id": "46130886-886c-4c20-8972-4ef405a47a6c", "meta": {"versionId": "1", "lastUpdated": "2018-05-07T13:38:42.816-04:00"}, "tag": [{"system": "https://smarthealthit.org/tags", "code": "synthesia-8-2017"}], "status": "final", "category": [{"coding": [{"system": "http://hl7.org/fhir/observation-category", "code": "vital-signs"}]}, {"coding": [{"system": "http://loinc.org", "code": "8302-2"}], "display": "Body Height"}], "text": "Body Height", "subject": {"reference": "Patient/a13c822d-b782-415e-8a1a-9590e8fdd3a7"}, "encounter": {"reference": "Encounter/3cd0184d-7271-405e-a004-5b175e29747a"}, "effectiveDateTime": "2013-02-11T08:03:58-05:00", "issued": "2013-02-11T08:03:58-05:00", "valueQuantity": {"value": 167.86747972094287, "unit": "cm", "system": "http://unitsofmeasure.org/", "code": "cm"}}
```

Weight:


95.5 kg

FHIR Starter

Building your first SMART on FHIR app

- 9) Now we're going to look at the function that extracted the value of this height resource from the JSON object. Go to line 125 within the *getQuantityValue* function. This function takes the JSON object and drills down to find the value within the name/value pair of the pair with the name "value." Sounds confusing. For example, if we wanted to return the type of resource, the function would return *ob.resourceType*.

```
118 // Get only numerical value of observations
119 function getQuantityValue(ob) {
120
121     if (typeof ob !== 'undefined' &&
122         typeof ob.valueQuantity !== 'undefined' &&
123         typeof ob.valueQuantity.value !== 'undefined') {
124
125         return ob.valueQuantity.value;
126
127     } else {
128         return undefined;
129     }
130 }
```



Response Body

```
1  {
2    "resourceType": "Observation",
3    "id": "790ab88d-6a87-4785-b7dd-42a694580f13",
4    "meta": {
5      "versionId": "1",
6      "lastUpdated": "2018-05-07T13:34:01.721-04:00",
7      "tag": [
8        {
9          "system": "https://smarthealthit.org/tags",
10         "code": "synthea-8-2017"
11       }
12     ],
13   },
14   "status": "final",
15   "category": {
16     "coding": [
17       {
18         "system": "http://hl7.org/fhir/observation-category",
19         "code": "vital-signs"
20       }
21     ]
22   },
23   "code": {
24     "coding": [
25       {
26         "system": "http://loinc.org",
27         "code": "8302-2",
28         "display": "Body Height"
29       }
30     ]
31   },
32   "text": "Body Height",
33   "subject": {
34     "reference": "Patient/57b85682-ce42-4187-a593-7864248a9484"
35   },
36   "encounter": {
37     "reference": "Encounter/114b4ccb-cbf6-4abd-8f1b-8ded0dbb59a2"
38   },
39   "effectiveDateTime": "2015-05-31T21:12:44-04:00",
40   "valueQuantity": {
41     "value": 185.17409394207277,
42     "unit": "cm",
43     "system": "http://unitsofmeasure.org/",
44     "code": "cm"
45   }
46 }
```

height = valueQuantity.value

Wrote 1.0 KB (17.5 KB total including HTML) in estimated 1ms

10) Go back to line 69. Delete this line.

```
67 // Height
68 p.height = getQuantityValueAndUnit(height[0]);
69 p.height = JSON.stringify(height[0]) // Delete this line
70
```

11) Look at what is now line 74 or 75. You should be able to see how BMI is calculated in JavaScript. Delete the two `//` to un-comment this line.

a. Formula: $\text{weight (kg)} / [\text{height (m)}]^2$

```
74 // Calculate BMI
75 // p.bmi = (getQuantityValue(weight[0]) / (Math.pow((getQuantityValue(height[0]) / 100), 2))).toFixed(1);
76
```

ANSWER

Launch App!

Simulated EHR Patient: Mrs. Sylvia Emard age: 70 years sex: Female

BMI Calculator

Body Mass Index (BMI)

33.9

FHIR Starter
Building your first SMART on FHIR app


Patient Resource	
First Name:	Sylvia
Last Name:	Emard
Gender:	female
Date of Birth:	1949-11-16

Observation Resource	
Height:	167.9 cm
Weight:	95.5 kg

[Full example-smart-app.js file](#)

SMART authorization workflow

- 1) Now that you've created and launched a fully functioning SMART on FHIR app, you've indirectly experienced the SMART authorization workflow.

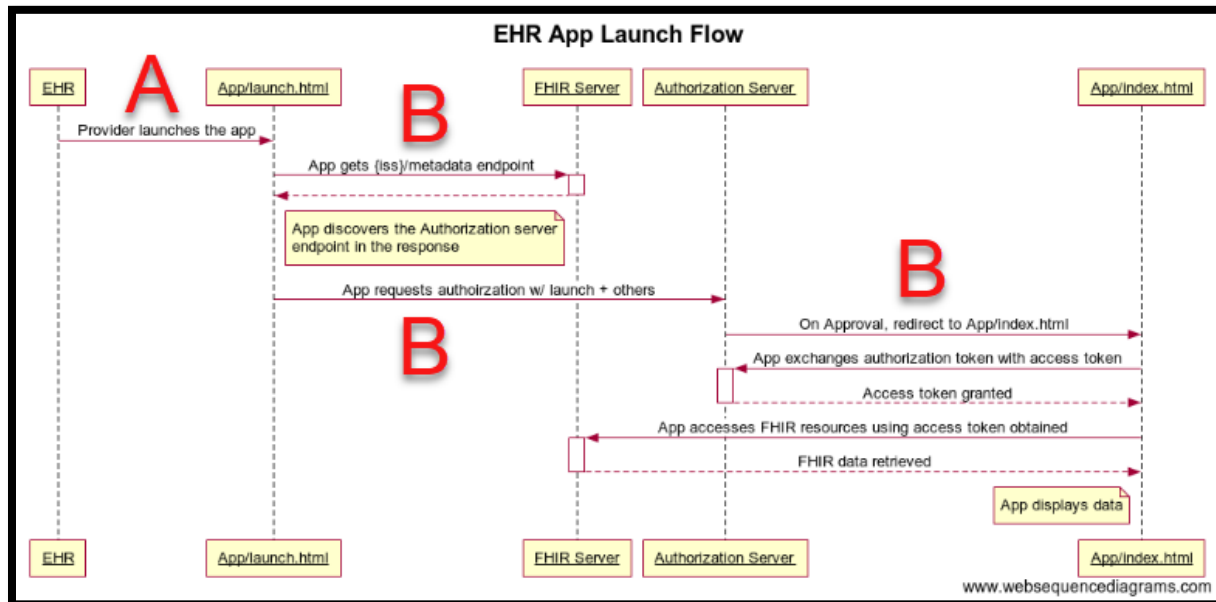


- 2) The <http://launch.smarthealthit.org/> site is taking care of step A above while lines lines 33-36 in the *launch.html* file are taking care of the steps labeled B above.

```
33  FHIR.oauth2.authorize({
34    'client_id': 'YOUR-SMART-HEALTH-IT-CLIENT-ID-HERE',
35    'scope': 'patient/*.read launch online_access openid profile'
36  });
```


- 3) As you can see, the *FHIR.oauth2.authorize* function from the [FHIR Client JavaScript library](#) makes the authorization step easy. Since the <http://launch.smarthealthit.org/> site does not validate the *client_id*, we leave this blank. In a SMART sandbox for Cerner, Epic, or another vendor, this likely would not be the case. Under *scope*, the following arguments do the following,
 - a. *patient/*.read*: permission to read all the resources for the current patient
 - b. *launch*: permission to obtain launch context; required when launching within EHR
 - c. *online_access*: request a refresh_token to obtain a new access token to replace an expired one and will be usable for as long as the user remains online; required when launching within EHR
 - d. *openid, profile*: permission to obtain information about user; required when launching within EHR

Framingham Risk Score

- 1) This second app is slightly more complicated than our first. Here, we'll be pulling in an additional resource type and utilizing another API. To start, open the *Framingham Risk Score* Visual Studio Code project that we created toward the beginning. The names of all the applicable files are the same as the *BMI Calculator* project. We'll be using [this formula](#) to calculate the risk.
 - a. Note: When patients are missing smoking status and medication information, we treat missing as 'No.'

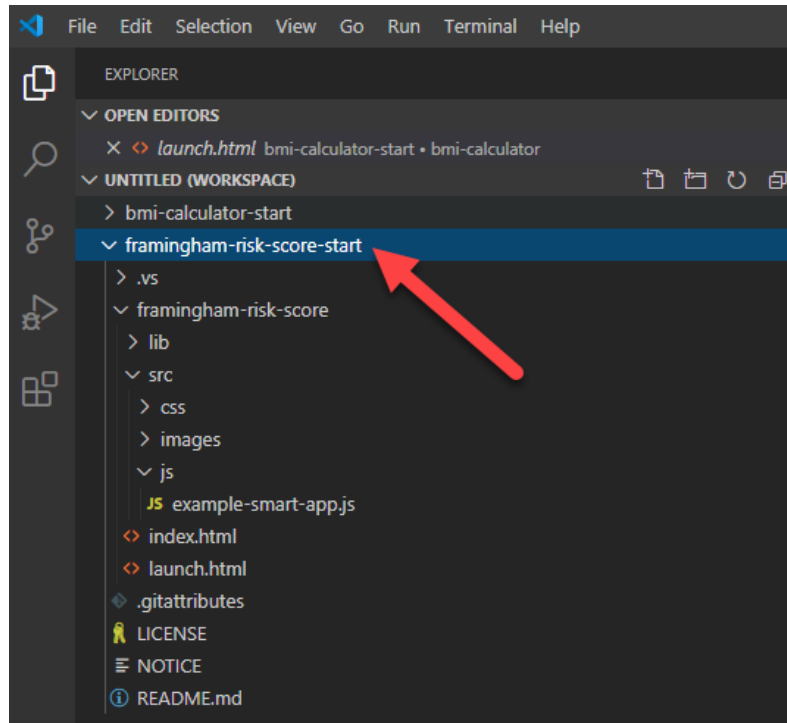

- 2) Open the *example-smart-app.js* file. It should look similar to the same file from the *BMI Calculator*. In lines 10-31, we created all the variables for the constants used in the [Framingham formula](#). In lines 42-70, we again pull in all the observation resources that match a certain LOINC code, in this case, all the data points needed to determine a patient's Framingham risk score.

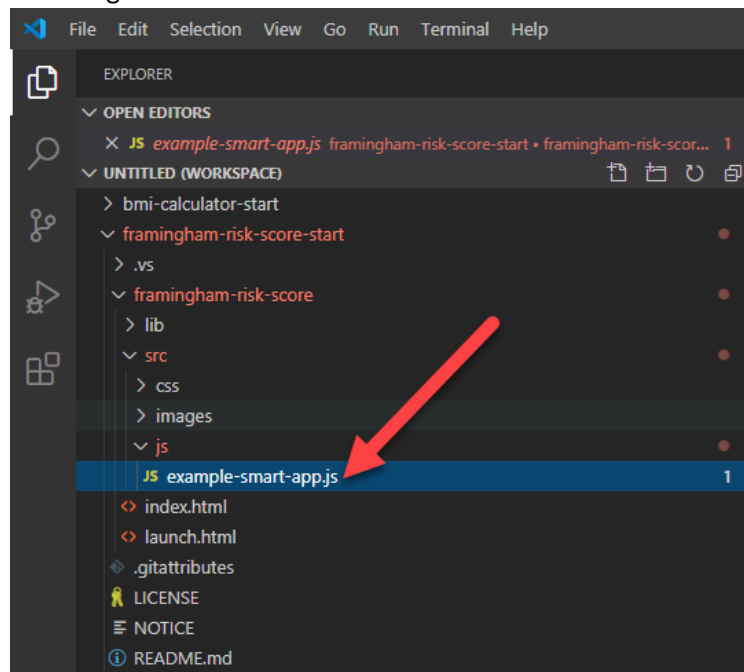

```

10      // Framingham Coefficients for Men
11      var age_men = 52.00961;
12      var tcl_men = 20.014077;
13      var hdl_men = -0.905964;
14      var sbp_men = 1.305784;
15      var bpTx_men = 0.241549;
16      var smk_men = 12.096316;
17      var ageTcl_men = -4.605038;
18      var ageSmk_men = -2.84367;
19      var age2_men = -2.93323;
20      var con_men = 172.300168;
21
22      // Framingham Coefficients for Women
23      var age_women = 31.764001;
24      var tcl_women = 22.465206;
25      var hdl_women = -1.187731;
26      var sbp_women = 2.552905;
27      var bpTx_women = 0.420251;
28      var smk_women = 13.07543;
29      var ageTcl_women = -5.060998;
30      var ageSmk_women = -2.996945;
31      var con_women = 146.5933061;
32

```

```

42      var obv = smart.patient.api.fetchAll({
43      type: 'Observation',
44      query: {
45      code: {
46      $or: [
47      'http://loinc.org|8462-4', // DBP
48      'http://loinc.org|8480-6', // SBP
49      'http://loinc.org|2085-9', // HDL
50      'http://loinc.org|2089-1', // LDL
51      'http://loinc.org|13457-7', // LDL
52      'http://loinc.org|18262-6', // LDL
53      'http://loinc.org|2093-3', // Total Cholesterol
54      'http://loinc.org|55284-4', // Blood pressure systolic & diastolic
55      'http://loinc.org|30525-0', // Age
56      'http://loinc.org|21611-9', // Age (estimated)
57      'http://loinc.org|21612-7', // Age (reported)
58      'http://loinc.org|29553-5', // Age (calculated)
59      'http://loinc.org|72166-2', // Tobacco smoking status in social history
60      'http://loinc.org|81229-7', // Tobacco smoking status - Tobacco Smoker
61      'http://loinc.org|11366-2', // Tobacco use status
62      'http://loinc.org|11367-0', // Tobacco use status
63      'http://loinc.org|39240-7', // Tobacco use status
64      'http://loinc.org|2571-8', // Triglycerides (mass/volume in Serum or plasma)
65      'http://loinc.org|3043-7', // Triglycerides (mass/volume in Blood)
66      'http://loinc.org|3049-4', // Triglycerides (mass/volume in serum or plasma) - Deprecated
67      ]
68      }
69      });
70

```

- 3) In [lines 72-78](#), we're going to pull in an additional resource type to determine if the patient is taking any medications for blood pressure control. Go [here](#) to identify this "resourceType" and fill in the missing code on [line 73](#).

- a. Note: [Line 76](#) shows how you would search for individual medications.

```

72      var meds = smart.patient.api.fetchAll({
73      type: /* [Insert FHIR resource type here] */ ,
74      query: {
75      status: "completed"
76      //code: 'http://www.nlm.nih.gov/research/umls/rxnorm|153666' // "irbesartan 150 MG Oral Tablet [Avapro]"
77      }
78      });

```

[ANSWER](#)

- 4) Find [line 119](#). This line uses the function `getRxCuis` to extract the RxNorm concept unique identifier (CUI) from each medication. Now we're going to look at this function in detail.
- Note: [Line 124](#) uses the [RxClass API](#) to help identify medications that could be used to control blood pressure. Take a look at this code and related functions in your own time.

```
114 // Determine if patient is on blood pressure medications (medications dispensed)
115 var onBpMeds;
116
117 if (typeof meds[0] != 'undefined') {
118
119     rxNormCuis = getRxCuis(meds);
120     var medClassCheck = "antihypertensive agents";
121     var medClassCheckArray = [];
122
123     for (i = 0; i < rxNormCuis.length; i++) {
124         var rxGetString = JSON.stringify(httpGet(rxClassBase.concat(rxNormCuis[i]))).toLowerCase();
125         var isBpMed = rxGetString.includes(medClassCheck);
126         medClassCheckArray.push(isBpMed);
127     }
128 }
```

- 5) Find [line 329](#). Complete this line. The goal of this function is to extract the RxNorm CUI (or code) for each medication, ie the value of "code" [here](#).
- Hint 1: The start of the code is: `medications[i]`.
 - Hint 2: Objects inside of "coding" are in an array. Accessing the first item in this array would be written as `coding[0]`.

```
323 // Get all RxNorm CUIs (Concept Unique Identifier) from each medication object
324 function getRxCuis(medications) {
325
326     var rxCuis = [];
327
328     for (i = 0; i < Object.keys(medications).length; i++) {
329         var code = /* Complete this code to extract the RxNorm CUI/code from each medication */
330         rxCuis.push(code);
331     }
332     return rxCuis;
333 }
```

ANSWER

- 6) Find [line 147](#) to begin our final task. This line uses the function `getSmokingStatus` to extract the smoking status as a text string from the relevant observation resources.

```
142 // Determine patient's smoking status
143 var smk_status;
144
145 if (typeof smk[0] != 'undefined') {
146
147     if (getSmokingStatus(smk[0]).toLowerCase().includes("current")) {
148         smk_status = 1;
149     } else {
150         smk_status = 0;
151     }
152     p.smk = getSmokingStatus(smk[0]);
153 } else {
154     smk_status = 0;
155     p.smk = 'Unk';
156 }
```


- 7) Find [line 420](#). Complete this line. The goal of this function is to extract the value of “display” [here](#).
- a. Hint 1: Objects inside of “coding” are in an array. Accessing the first item in this array would be written as `coding[0]`.

```
413 // Get smoking status
414 function getSmokingStatus(ob) {
415     if (typeof ob !== 'undefined' &&
416         typeof ob.valueCodeableConcept !== 'undefined' &&
417         typeof ob.valueCodeableConcept.coding !== 'undefined' &&
418         typeof ob.valueCodeableConcept.coding[0].display !== 'undefined') {
419
420         return /* Complete this code to extract the value of 'display' for tobacco smoking status */
421     } else {
422         return undefined;
423     }
424 }
425
```

[ANSWER](#)

Launch App!

Simulated EHR

Patient: Ruth C. Black, age 69 years, sex: Female

Framingham Risk Score

Patient Resource


First Name:	Ruth C.
Last Name:	Black
Gender:	female
Date of Birth:	1951-08-23
Age (Years):	68

10-Year Risk of MI or Death

6.13%

Observation & Medication Resources

Systolic Blood Pressure:	110 mmHg
Diastolic Blood Pressure:	69 mmHg
LDL:	144 mg/dL
HDL:	48 mg/dL
Total Cholesterol:	211 mg/dL
Smoking Status:	Current every day smoker
Triglycerides:	95 mg/dL
On Blood Pressure Medication(s):	Yes


FHIR Starter
Building your first SMART on FHIR app

[Full example-smart-app.js file](#)

Post workshop

- 1) Completed versions of each application are available below.
 - a. [BMI Calculator](#)
 - b. [Framingham Risk Score](#)
- 2) Please contact either Josh Herigon or Colby Uptegraft if you have any additional questions.
 - a. Josh: joshherigon@gmail.com
 - b. Colby: colby.uptegraft@gmail.com