


Fecha: 2/07/2026


Nombre: Juan Diego Sotomayor

Capturas - Taller 1 2P


1.

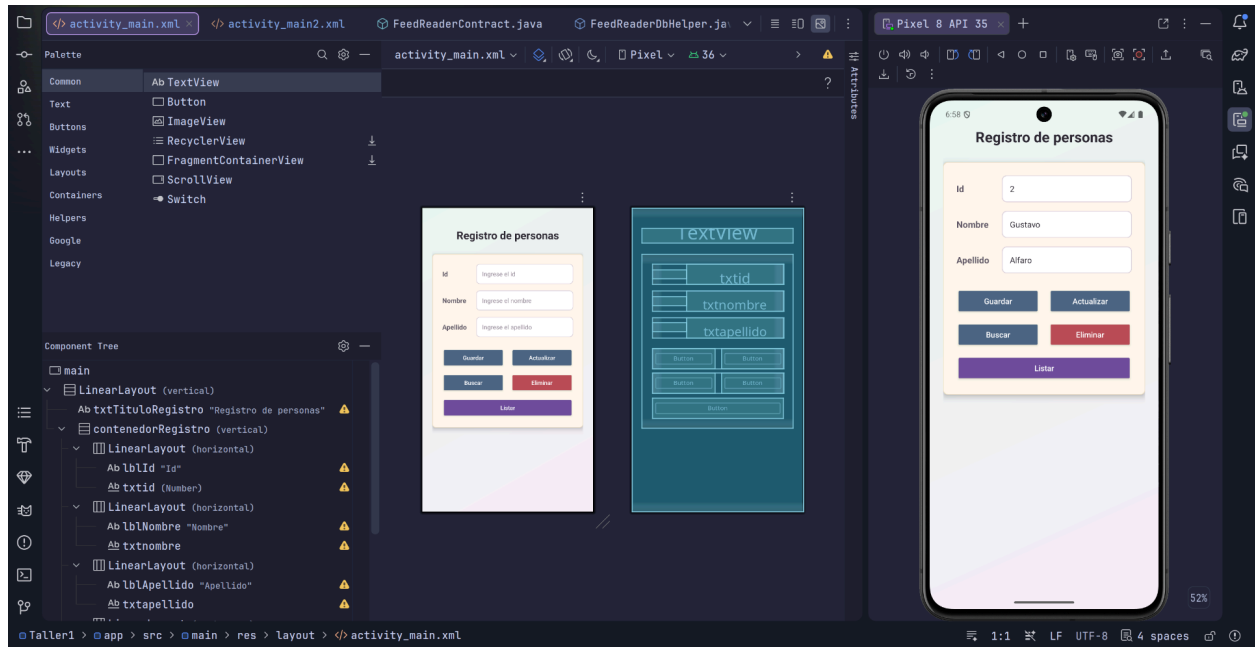


2.

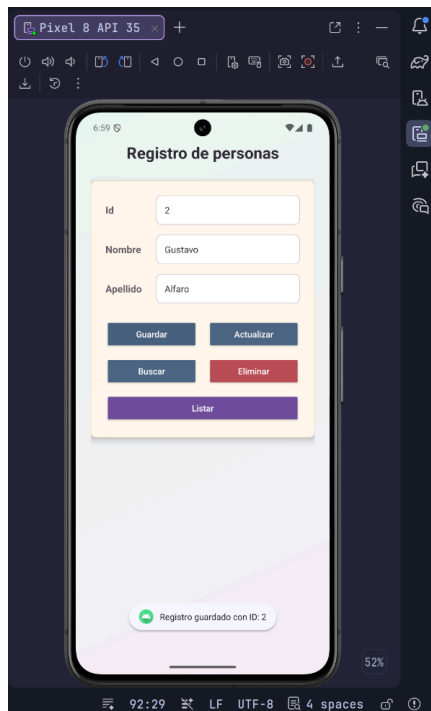


3.

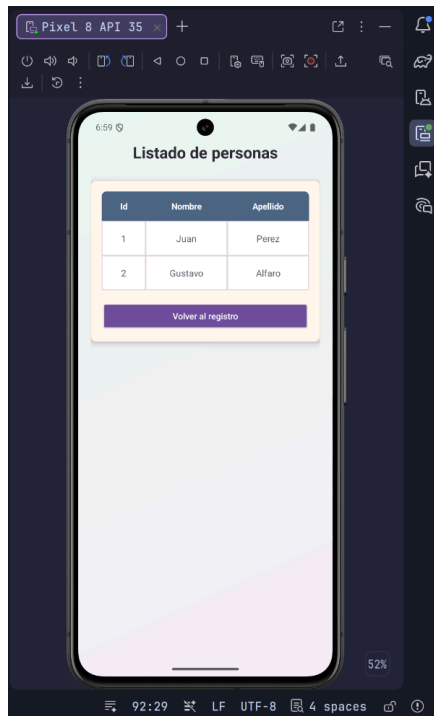


4.

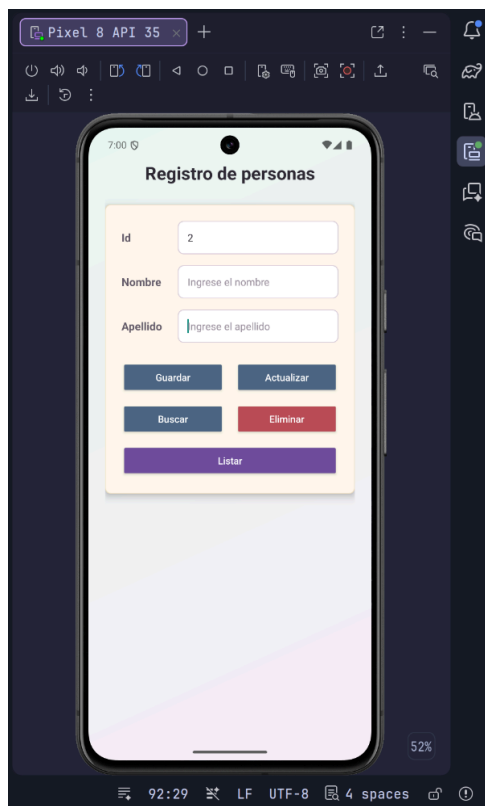


5.

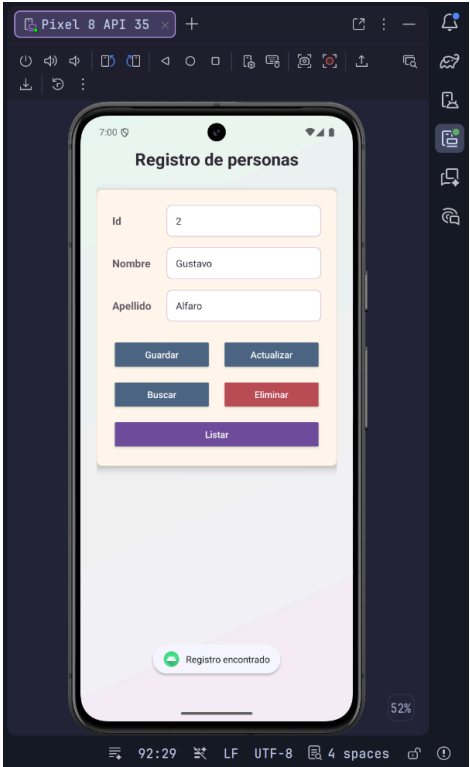


6.

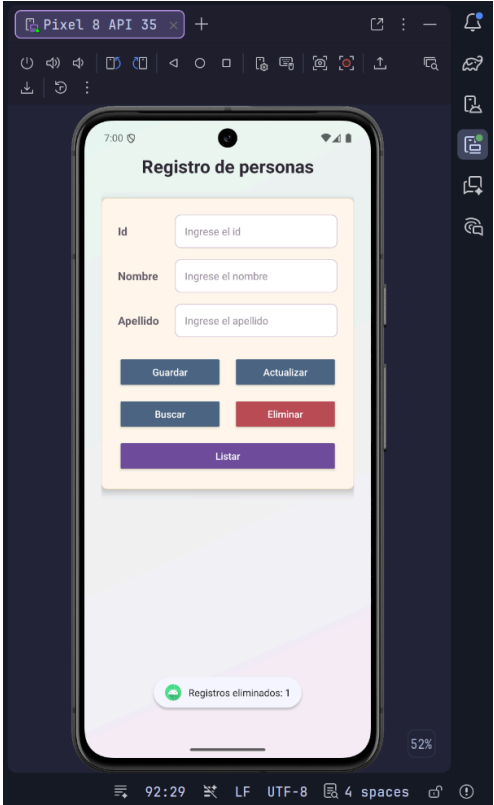


7.

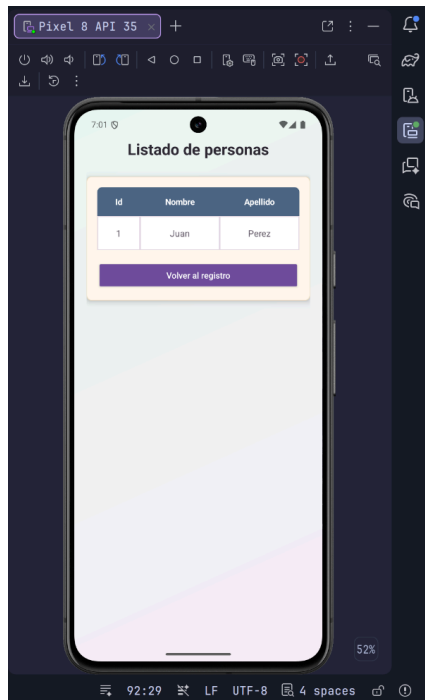

8.

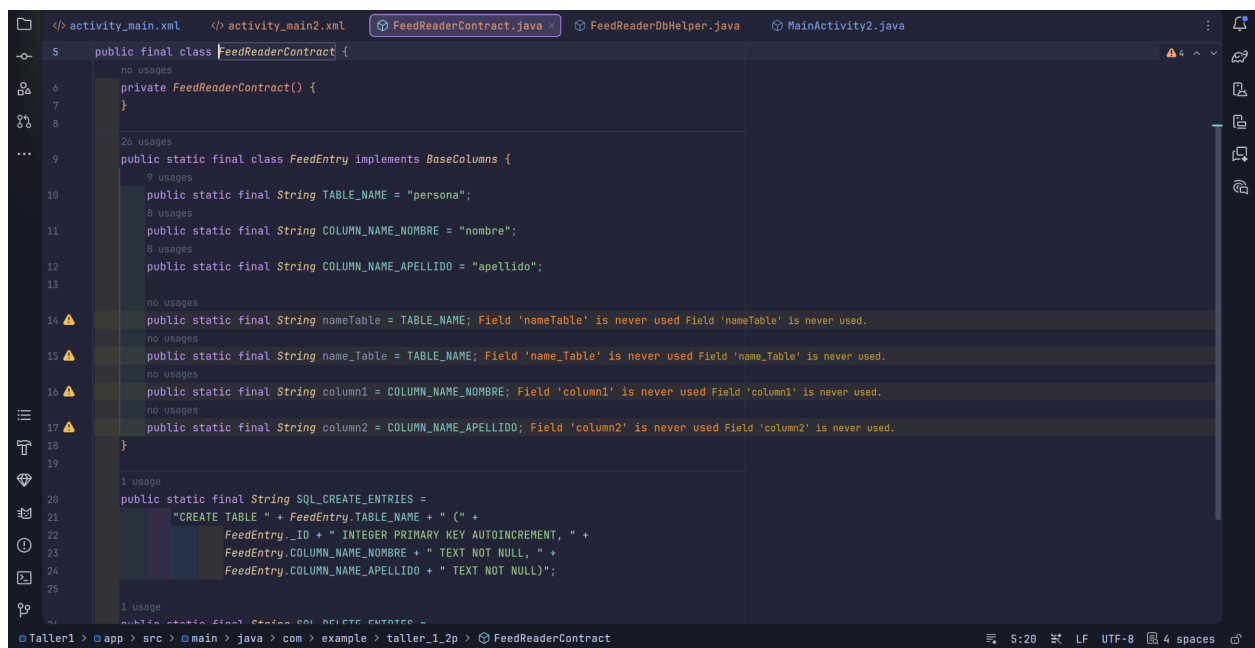


9.

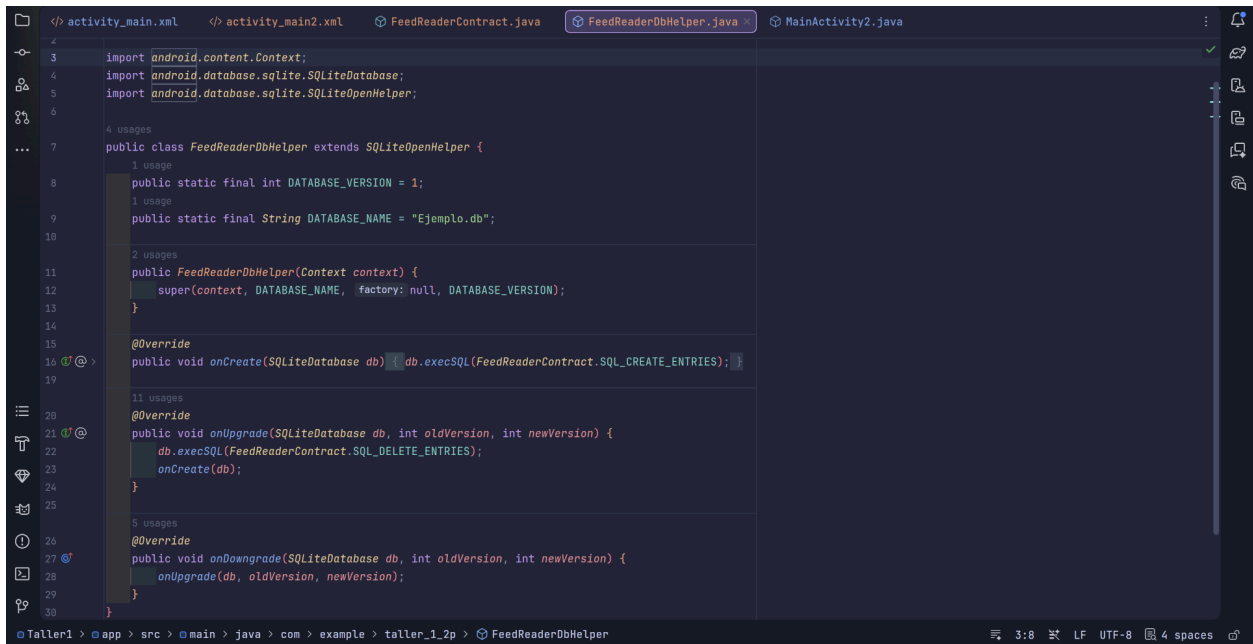

```
1  </> activity_main.xml    </> activity_main2.xml    FeedReaderContract.java    FeedReaderDbHelper.java    MainActivity2.java
2
3  import android.content.Context;
4  import android.database.sqlite.SQLiteDatabase;
5  import android.database.sqlite.SQLiteOpenHelper;
6
7  public class FeedReaderDbHelper extends SQLiteOpenHelper {
8      public static final int DATABASE_VERSION = 1;
9      public static final String DATABASE_NAME = "Ejemplo.db";
10
11     public FeedReaderDbHelper(Context context) {
12         super(context, DATABASE_NAME, factory: null, DATABASE_VERSION);
13     }
14
15     @Override
16     public void onCreate(SQLiteDatabase db) { db.execSQL(FeedReaderContract.SQL_CREATE_ENTRIES); }
17
18     @Override
19     public void onUpgrade(SQLiteDatabase db, int oldVersion, int newVersion) {
20         db.execSQL(FeedReaderContract.SQL_DELETE_ENTRIES);
21         onCreate(db);
22     }
23
24     @Override
25     public void onDowngrade(SQLiteDatabase db, int oldVersion, int newVersion) {
26         onUpgrade(db, oldVersion, newVersion);
27     }
28 }
29
30
```

Taller1 > app > src > main > java > com > example > taller_1_2p > FeedReaderDbHelper 3:8 LF UTF-8 4 spaces


10.

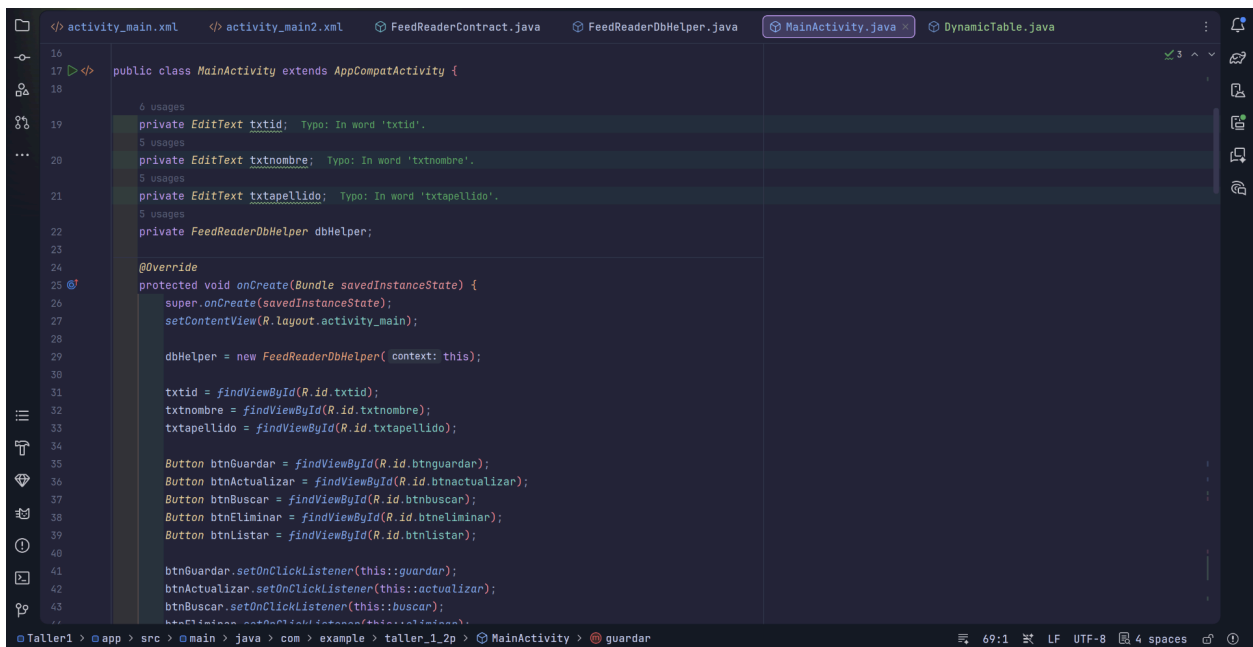

```
16  public class MainActivity extends AppCompatActivity {
17
18      private EditText txtid;
19      private EditText txtnombre;
20      private EditText txtapellido;
21      private FeedReaderDbHelper dbHelper;
22
23      @Override
24      protected void onCreate(Bundle savedInstanceState) {
25         super.onCreate(savedInstanceState);
26         setContentView(R.layout.activity_main);
27
28         dbHelper = new FeedReaderDbHelper( context: this);
29
30         txtid = findViewById(R.id.txtid);
31         txtnombre = findViewById(R.id.txtnombre);
32         txtapellido = findViewById(R.id.txtapellido);
33
34         Button btnGuardar = findViewById(R.id.btnguardar);
35         Button btnActualizar = findViewById(R.id.btnactualizar);
36         Button btnBuscar = findViewById(R.id.btnbuscar);
37         Button btnEliminar = findViewById(R.id.btneliminar);
38         Button btnListar = findViewById(R.id.btnlistar);
39
40         btnGuardar.setOnClickListener(this::guardar);
41         btnActualizar.setOnClickListener(this::actualizar);
42         btnBuscar.setOnClickListener(this::buscar);
43         btnEliminar.setOnClickListener(this::eliminar);
44         btnListar.setOnClickListener(this::listar);
45     }
46 }
47
```


Taller1 > app > src > main > java > com > example > taller_1_2p > MainActivity > guardar 69:1 LF UTF-8 4 spaces

11.

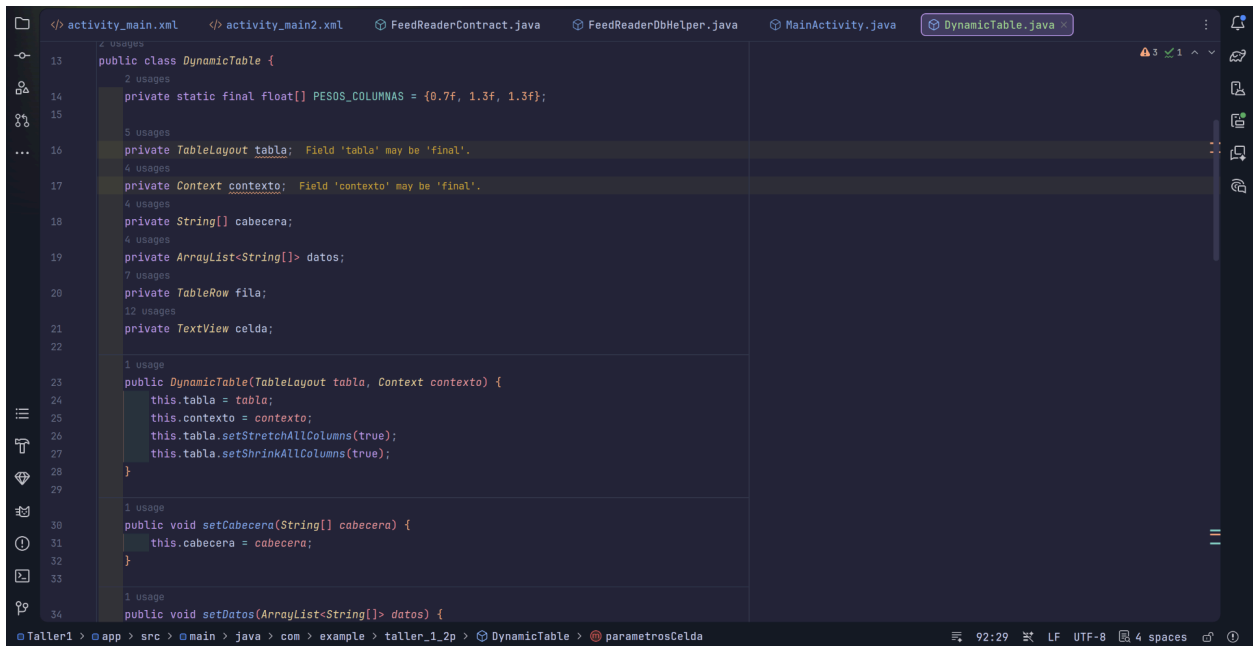

```
13 public class DynamicTable {
14     private static final float[] PESOS_COLUMNAS = {0.7f, 1.3f, 1.3f};
15
16     private TableLayout tabla; Field 'tabla' may be 'final'.
17     private Context contexto; Field 'contexto' may be 'final'.
18     private String[] cabecera;
19     private ArrayList<String[]> datos;
20     private TableRow fila;
21     private TextView celda;
22
23     public DynamicTable(TableLayout tabla, Context contexto) {
24         this.tabla = tabla;
25         this.contexto = contexto;
26         this.tabla.setStretchAllColumns(true);
27         this.tabla.setShrinkAllColumns(true);
28     }
29
30     public void setCabecera(String[] cabecera) {
31         this.cabecera = cabecera;
32     }
33
34     public void setDatos(ArrayList<String[]> datos) {
```

12.

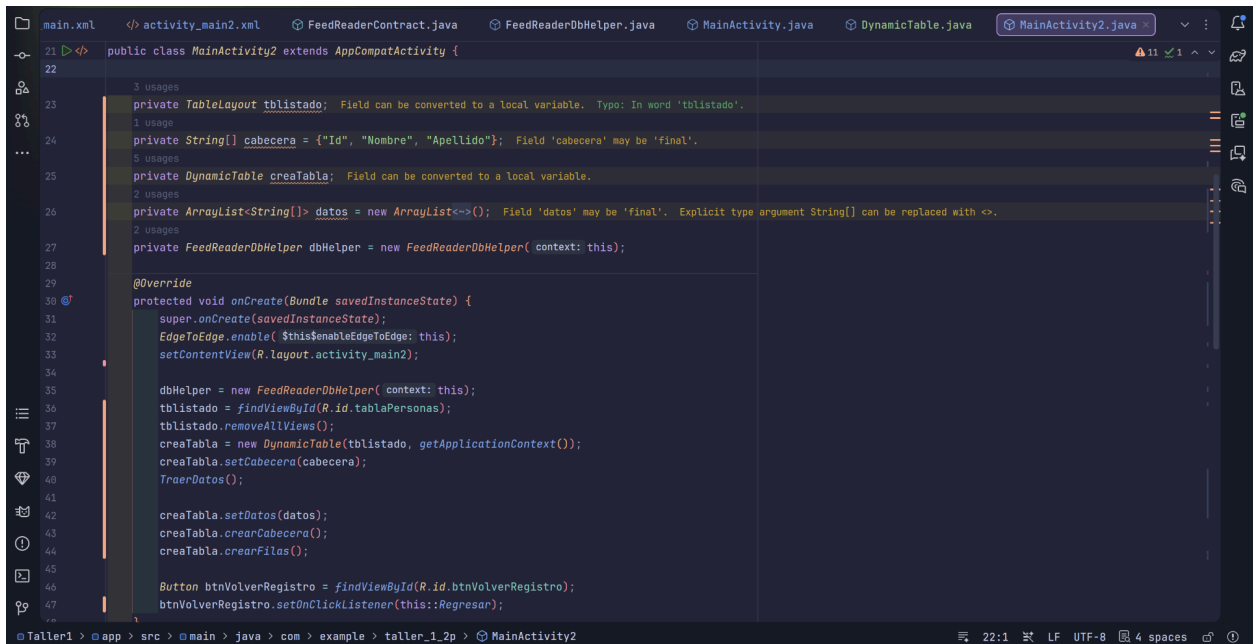

```
21 public class MainActivity2 extends AppCompatActivity {
22
23     private TableLayout tblistado; Field can be converted to a local variable. Type: In word 'tblistado'.
24     private String[] cabecera = {"Id", "Nombre", "Apellido"}; Field 'cabecera' may be 'final'.
25     private DynamicTable creaTabla; Field can be converted to a local variable.
26     private ArrayList<String[]> datos = new ArrayList<>(); Field 'datos' may be 'final'. Explicit type argument String[] can be replaced with <>.
27     private FeedReaderDbHelper dbHelper = new FeedReaderDbHelper(context: this);
28
29     @Override
30     protected void onCreate(Bundle savedInstanceState) {
31         super.onCreate(savedInstanceState);
32         EdgeToEdge.enable(this);
33         setContentView(R.layout.activity_main2);
34
35         dbHelper = new FeedReaderDbHelper(context: this);
36         tblistado = findViewById(R.id.tablaPersonas);
37         tblistado.removeAllViews();
38         creaTabla = new DynamicTable(tblastado, getApplicationContext());
39         creaTabla.setCabecera(cabecera);
40         TraerDatos();
41
42         creaTabla.setDatos(datos);
43         creaTabla.crearCabecera();
44         creaTabla.crearFilas();
45
46         Button btnVolverRegistro = findViewById(R.id.btnVolverRegistro);
47         btnVolverRegistro.setOnClickListener(this::Regresar);
```