DATA VISUALIZATION FOR DECISION MAKING


PRACTICAL REPORT

Student Name:	Jeel Patel
Enrollment No.:	T26084801021 / 26084801012
Course:	M. SC. IT (Data Science)
Semester:	1
Course Code:	P91A3DVD
Academic Year:	2026-27

Practical 5: Configure Data Refresh


> **Objective:** Publish a report to Power BI Service and configure scheduled data refresh using the Personal Gateway.

Step 1: Open Report in Power BI Desktop & Sign In

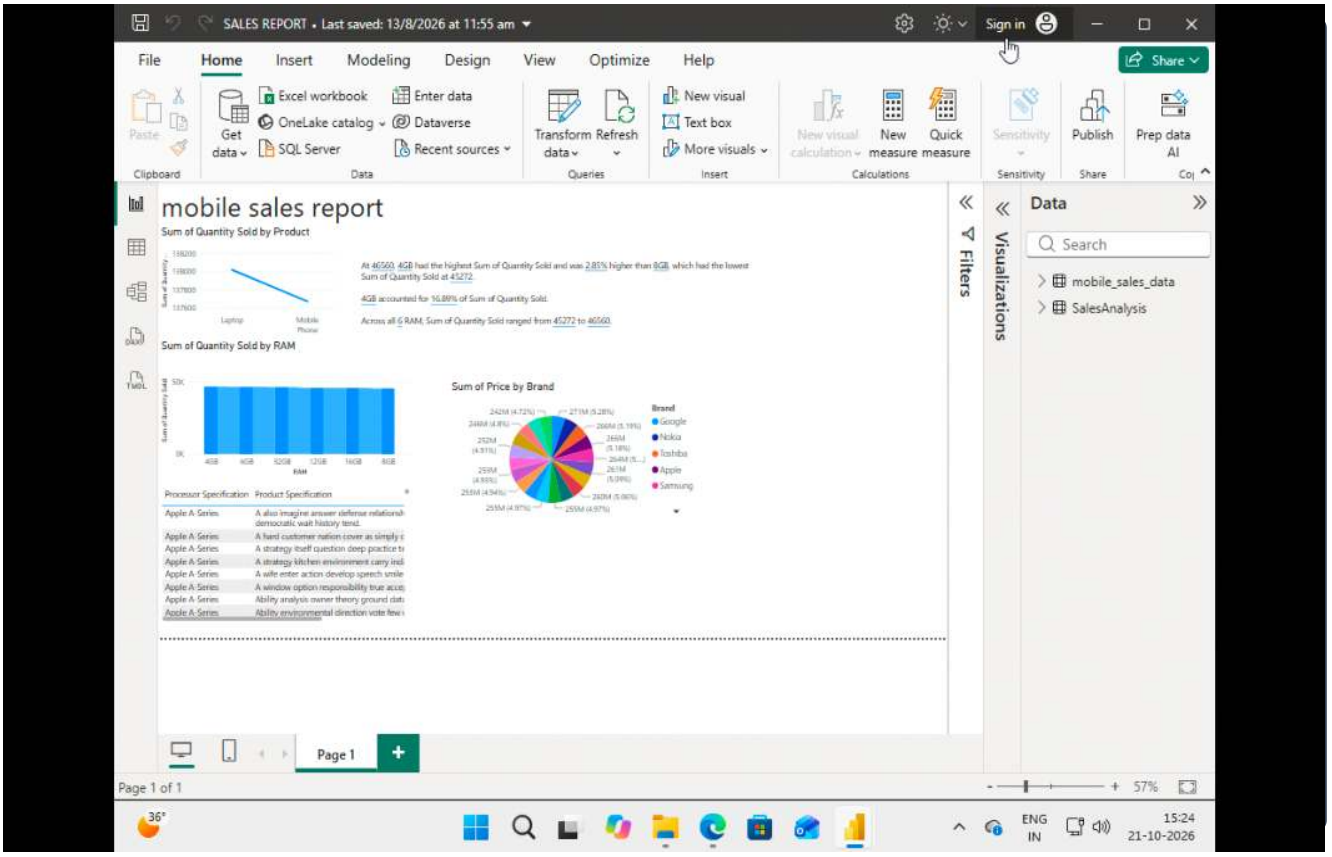


- Launch **Power BI Desktop** and open your completed practical report file (e.g., `HR_Analytics_Report.pbix`).
- Verify all visuals and queries are loaded correctly on the report canvas.
- Click on the **Sign In** button in the top right corner of Power BI Desktop to authenticate using your Power BI Service credentials.

Step 2: Publish Report to Power BI Service

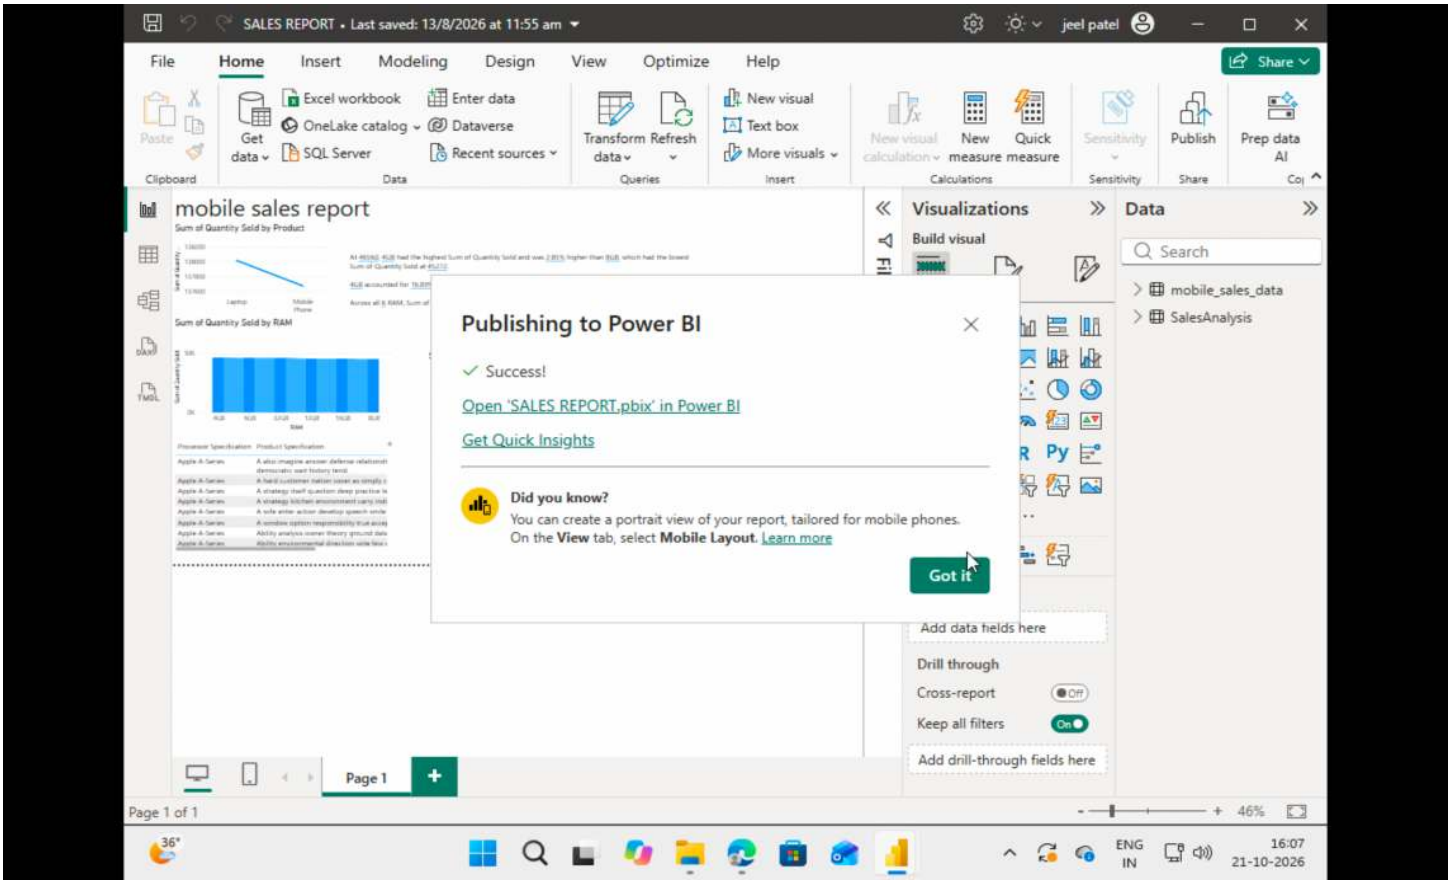


- In the **Home** ribbon tab of Power BI Desktop, locate and click the **Publish** button located on the far right.
- In the popup window, select **My Workspace** (or your designated organizational workspace) as the destination.
- Click **Select** to upload the report definitions and the underlying dataset/semantic model to the cloud service.
- Upon completion, a *"Success!"* message will appear confirming the report is published online.


Step 3: Access Power BI Service & Locate Semantic Model

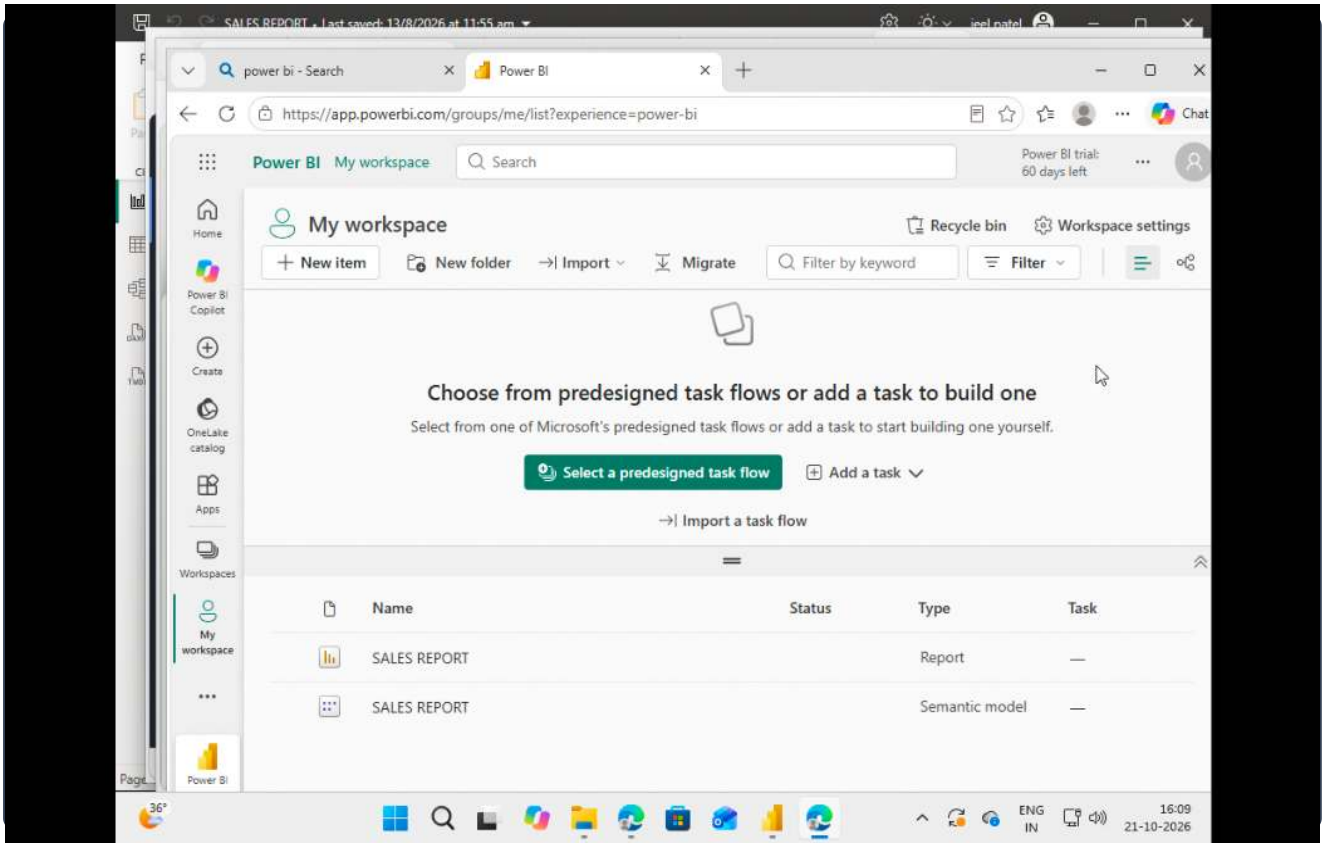


- Open your web browser, navigate to `https://app.powerbi.com`, and sign in.
- Go to **Workspaces** > **My Workspace** from the left-hand navigation bar.
- Identify both the **Report** item and the corresponding **Semantic Model / Dataset** item.
- Hover over the semantic model name, click on the three dots menu (**...**), and choose **Settings**.

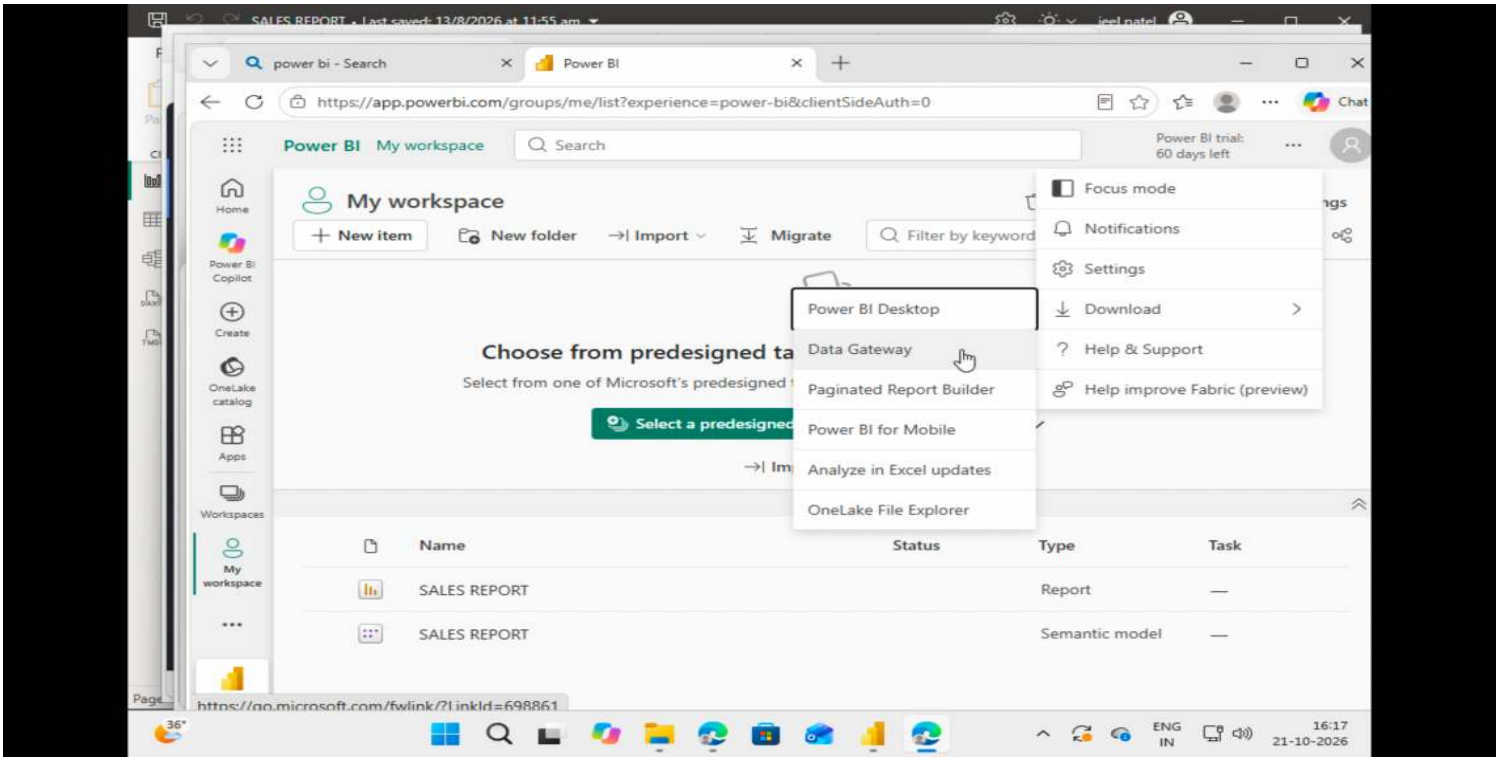


Step 4: Install and Configure Power BI Personal Gateway

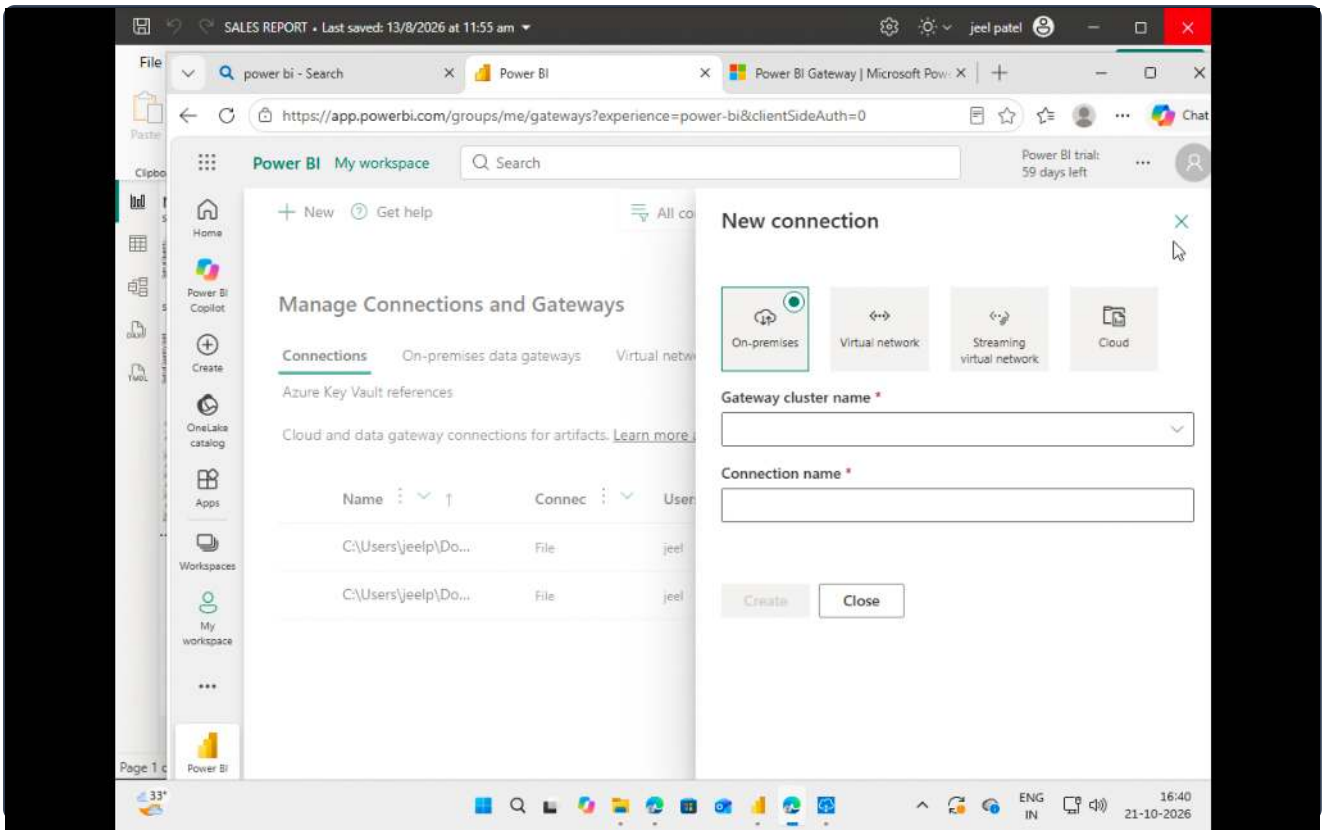


- Under the Semantic Model settings or the top Download menu in Power BI Service, download the **On-premises data gateway (Personal mode)** setup.
- Run the installer on your local system where the original dataset file (e.g., CSV/Excel) is stored.
- Sign in using your account credentials to register the gateway with your Power BI Service profile.
- Ensure the gateway status shows as **Online and ready to be used**.

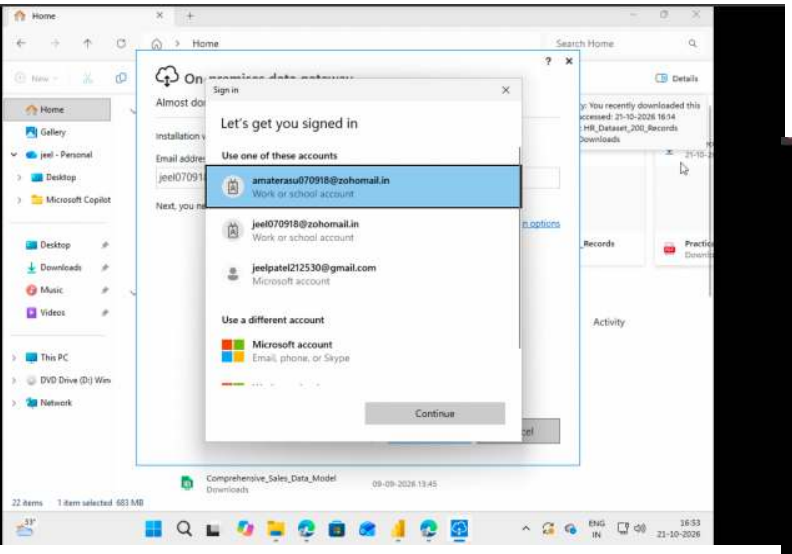


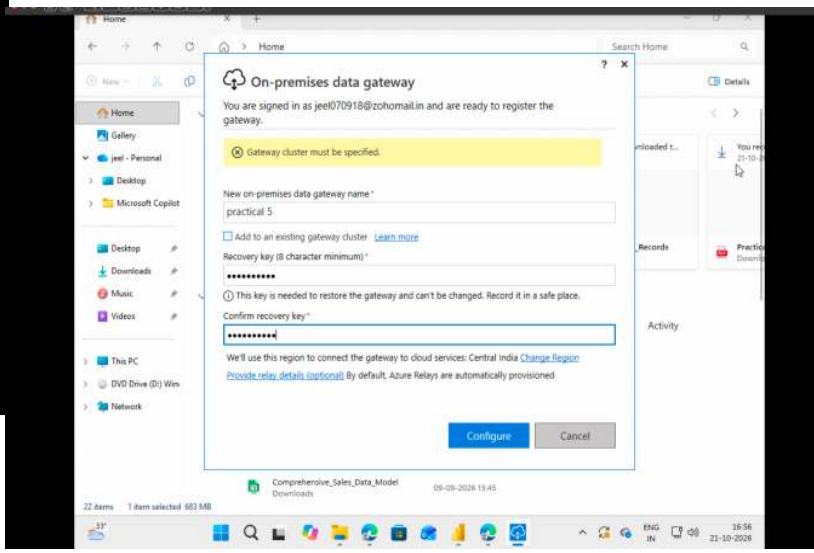


Step 5: Map Data Source Credentials in Gateway Settings

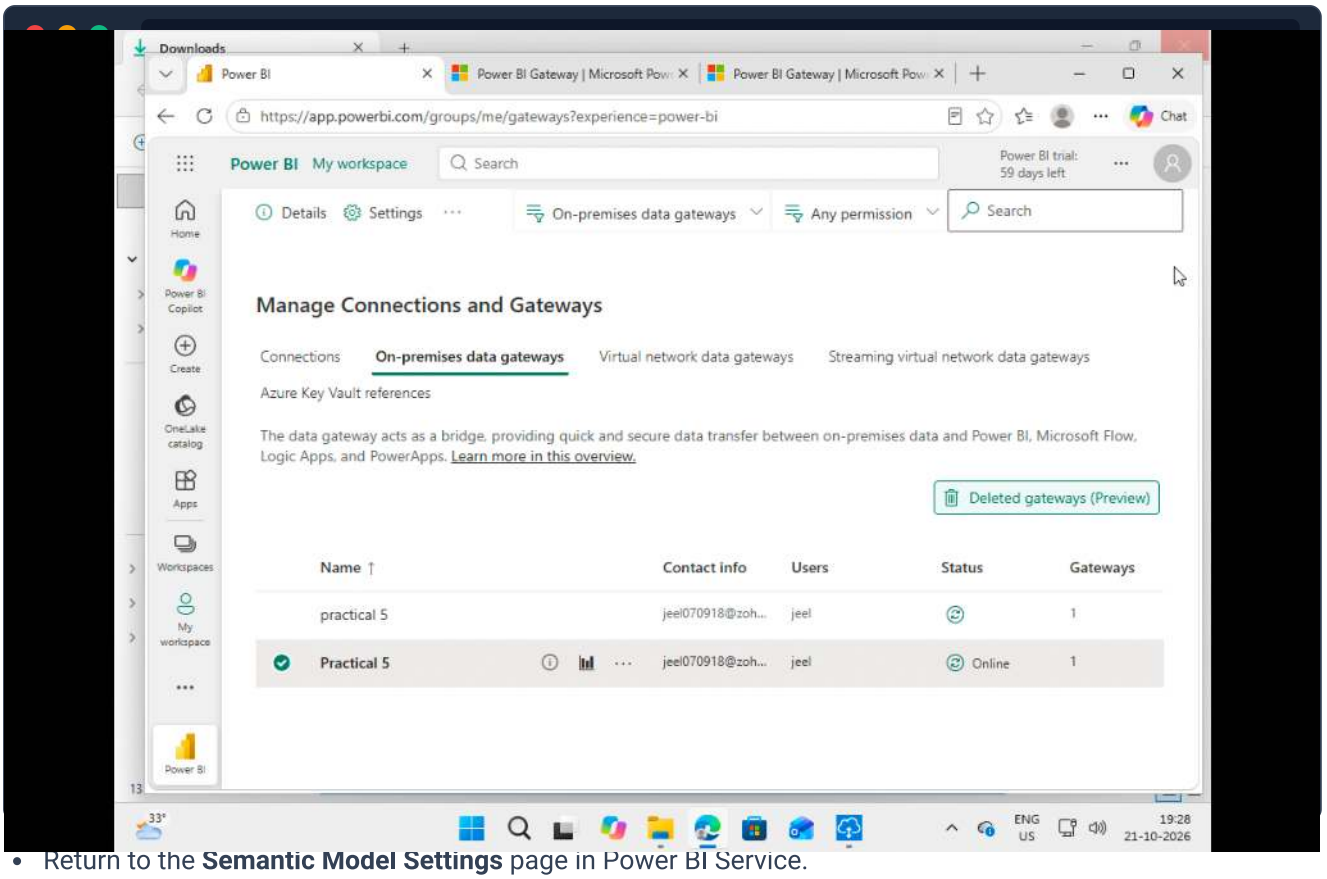


- Return to the **Semantic Model Settings** page in Power BI Service.
- Expand the **Gateway Connection** section and verify that your personal gateway is active and running.
- Expand the **Data Source Credentials** section and click **Edit Credentials**.
- Configure the authentication method (e.g., *Windows / Basic*) and set Privacy level settings to *Organizational* or *None* so Power BI Service can reach your local file path.

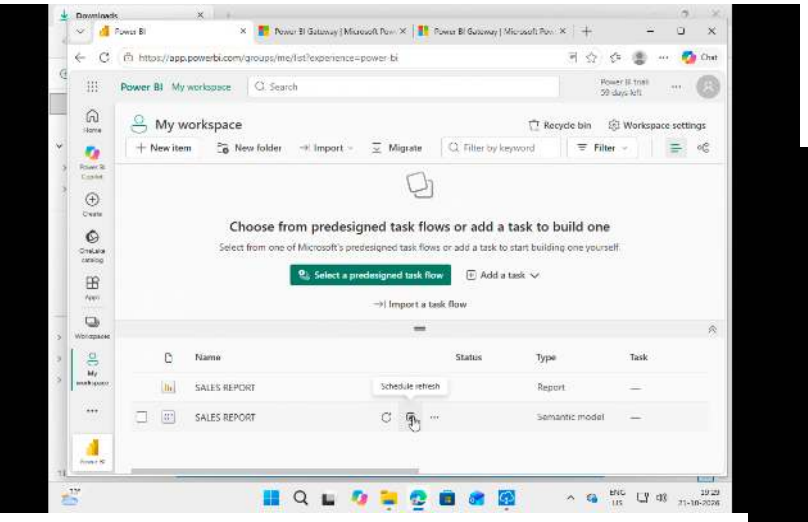


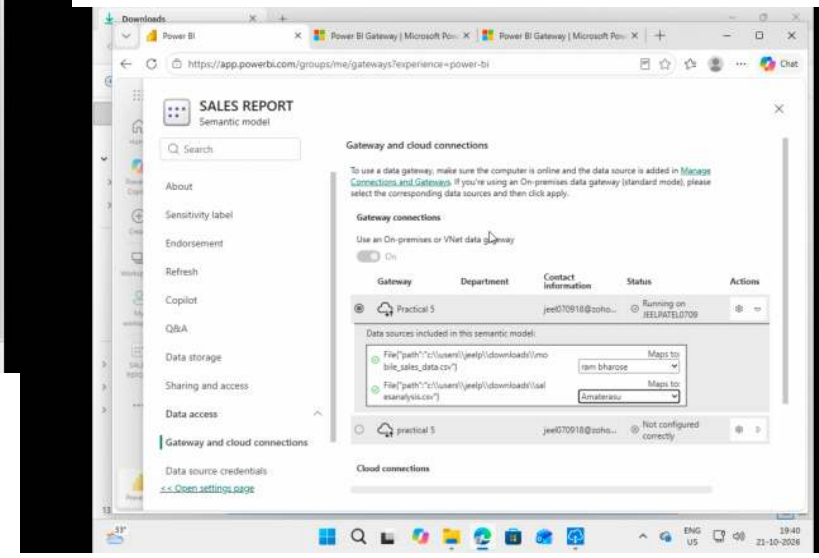


Step 6: Enable and Set Scheduled Refresh Timings

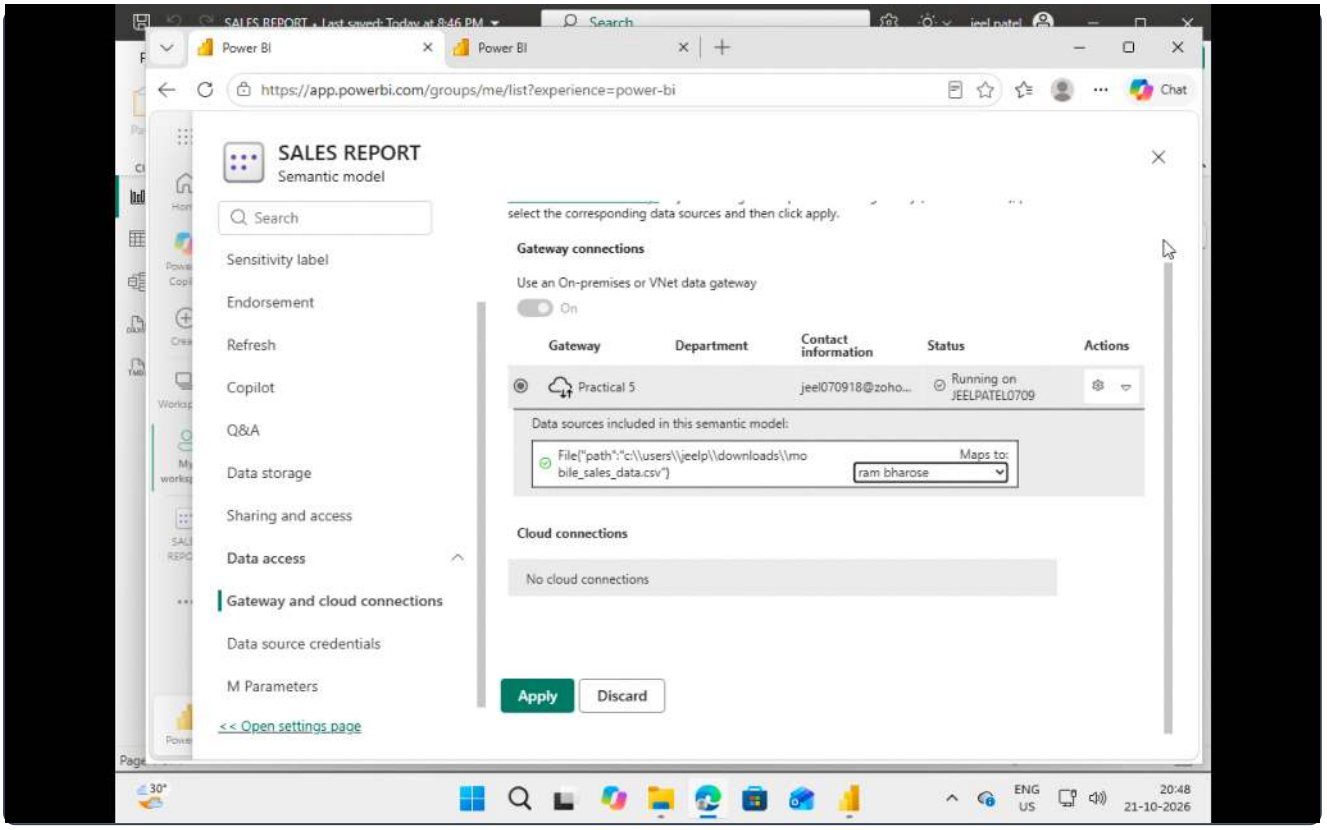

- In the same settings panel, expand the **Scheduled refresh** section.
- Toggle the switch to **On** under *"Keep your data up to date"*.
- Select the refresh frequency (e.g., **Daily**) and set your appropriate **Time zone**.
- Click **Add another time** to specify preferred execution slots (e.g., 08:00 AM, 02:00 PM) and click **Apply** to save.

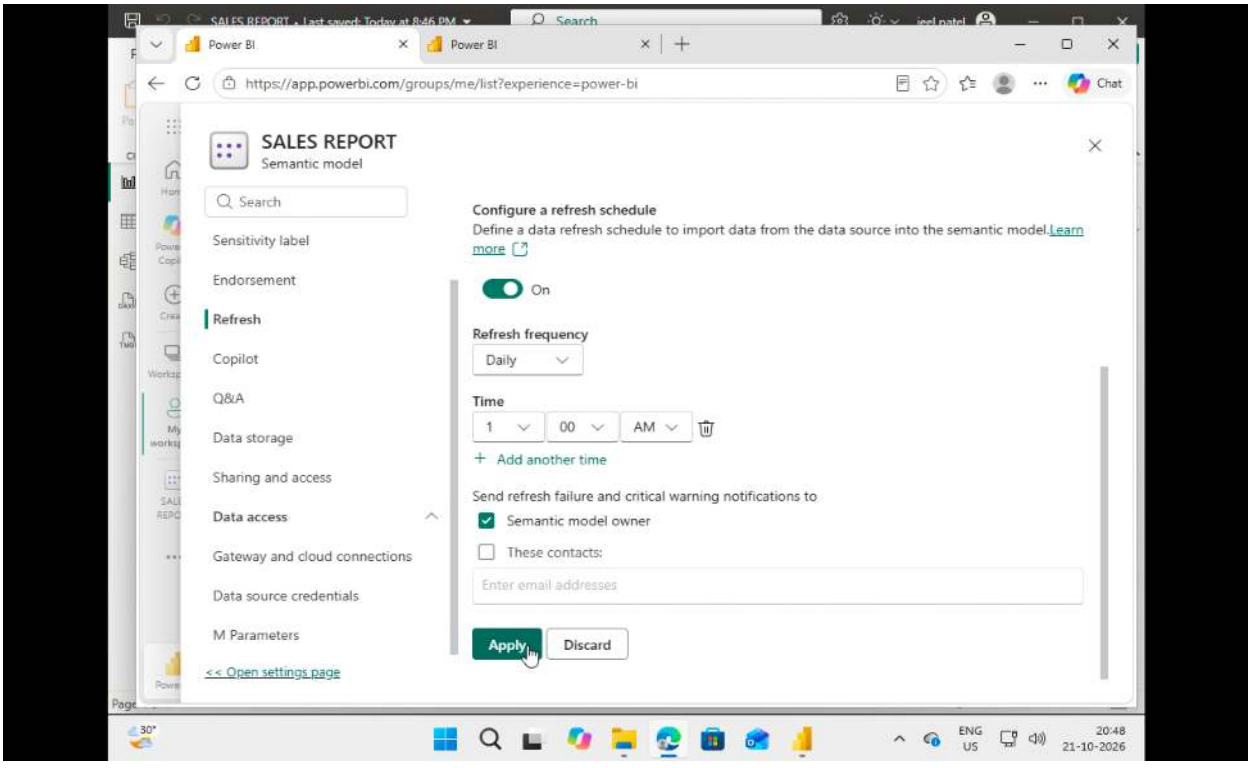

Step 7: Verify Manual & Scheduled Refresh

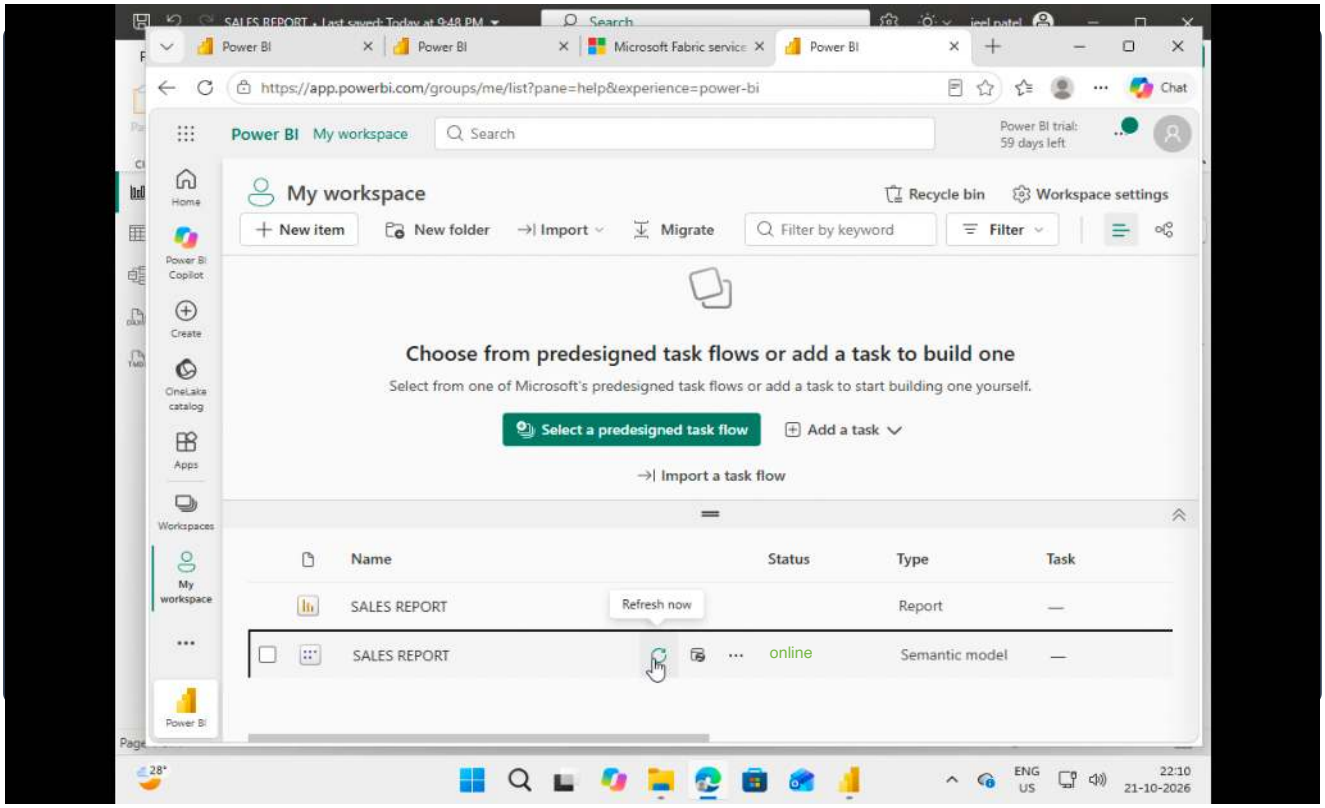

- Check the **Refresh history** log in dataset settings to confirm the refresh status indicates *Completed* without errors.

8. Result

The report was successfully published from Power BI Desktop to the Power BI Service workspace. The On-premises Data Gateway (Personal Mode) was configured to connect local files to the cloud environment, and automated scheduled data refresh was successfully established and verified.