JAVA(3350703) 186380307059

PRACTICAL: 3

AIM: Write A Program To Print Names of 5 Cities using Command Line Argument.

- **Command line Argument:** The java command-line argument is an argument which is passed at the time of running the java program.
- The arguments passed from the console can be received in the java program and it can be used as an input.
- So, it provides a convenient way to check the behaviour of the program for the different values.
- You can pass N (1,2,3 and so on) numbers of arguments from the command prompt.


PROGRAM:

```
class P3_7059
{
    public static void main(String args[])
    {
        System.out.println("youe entered cties are :");
        for(int i=0;i<args.length;i++)
        {
            System.out.println("city"+(i+1)+" : "+args[i]);
        }
    }
}</pre>
```

OUTPUT:

PIET-DS-CE Page 1

JAVA(3350703) 186380307059

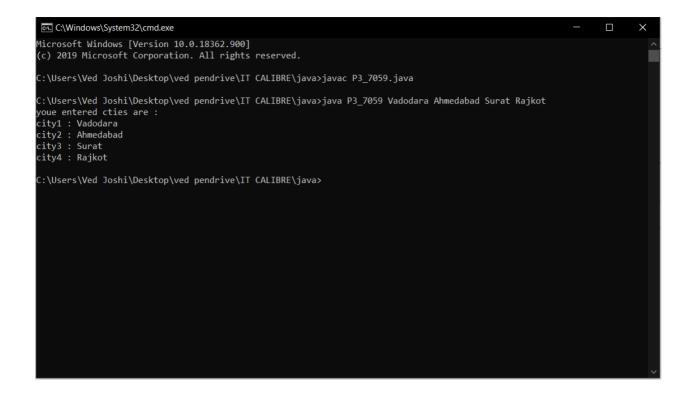

PIET-DS-CE Page 2