Sri Chandrasekharendra Saraswathi Viswa Mahavidyalaya

(Deemed to be University u/s 3 of UGC act 1956) (Accredited by NAAC with 'A' Grade)

Enathur, Kanchipuram - 631561 , Tamil Nadu



Web Technology Laboratory

Name : _____

Reg. No : _____

Class : **III B.Sc. Computer Science**

Subject Code : **UCSF235P70**

Subject : **Web Technology Lab**

Sri Chandrasekharendra Saraswathi Viswa Mahavidyalaya

(Deemed to be University u/s 3 of UGC act 1956) (Accredited by NAAC with 'A' Grade)

Enathur, Kanchipuram - 631561 , Tamil Nadu

BONAFIDE CERTIFICATE

This is to certify that this is the Bonafide record of work done by Mr./Mrs._____, with Reg. No._____ of III Year **B.Sc. Computer Science** in the **Web Technology Laboratory** during the academic year 2026-2027.

Staff-in-charge

Dr .T. Nirmal Raj
Assistant Professor,
Department of Computer Science
and Applications.

Head of the Department

Dr. V. Ramesh
Associate Professor,
Department of Computer Science
and Applications.

Submitted for the Practical Examination held on_____.

Internal Examiner **External Examiner**

INDEX

Exp. No	Date	Title	Page No	Signature
1	22-06-2026	Design a Class Timetable Using HTML Table and CSS		
2	29-06-2026	Design and Validate a Login Form Using JavaScript		
3	09-07-2026	Develop a Simple Calculator Using JavaScript		
4	13-07-2026	Display Squares and Cubes from 0 to 10 Using JavaScript		
5	20-07-2026	Develop a PHP Visitor Counter		
6	03-08-2026	Develop a PHP Digital Clock		
7	17-08-2026	Implement Calculator Operations Using PHP		
8	07-09-2026	Demonstrate Regular Expressions Using PHP		
9	16-09-2026	Develop a Student Registration Form Using PHP		
10	21-09-2026	Sort Student Records Stored in a Database Using PHP.		
11	24-09-2026	PHP Program for Inserting and Viewing Student Records		
12	24-09-2026	Student Information System using PHP and MySQL		

EX.NO: 01	Design a Class Timetable Using HTML Table and CSS
22-06-2026	

AIM

To design a Class Time Table using HTML Table Tags and CSS Styles for displaying class schedules in a neat tabular format

ALGORITHM

1. Start the program.
2. Create an HTML document.
3. Add the title and department headings.
4. Create a table using <table>, <tr>, <th>, and <td> tags.
5. Enter the class timetable details.
6. Create another table for subject and faculty details.
7. Apply CSS styles for borders, alignment, spacing, and colors.
8. Save the file with the .html extension.
9. Open it in a web browser.
10. Stop the program.

SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
<title>Class Time Table</title>
 <style> body{
 font-family: Arial;
 text-align:center;
}
```

```
h2,h3{
margin:5px;
}
table{
width:90%;
margin:auto;
border-collapse:collapse;
}
th,td{
border:1px solid black;
padding:8px;
text-align:center;
}
th{
background-color:#89CFF0;
}
.info{
width:90%;
margin:auto;
display:flex;
justify-content:space-between;
font-weight:bold;
margin-bottom:10px;
}
.subject{
```

```
margin-top:20px;
}

.footer{
width:90%;
margin:auto;
display:flex;
 justify-content:space-between;
margin-top:20px;
}
</style>
</head>
<body>
<h2>SRI CHANDRASEKHARENDRA SARASWATHI VISWA MAHAVIDYALAYA</h2>
<h3>DEPARTMENT OF COMPUTER SCIENCE AND APPLICATIONS</h3>
<h3>ODD SEMESTER - CLASS TIME TABLE</h3>
<div class="info">
<span>Year : III B.Sc.(CS) - A Section</span>
<span>Semester : V</span>
<span>Hall No : SA003</span>
</div>
<table>
<tr>
<th>Day</th>
<th>09:10-10:00</th>
<th>10:00-10:50</th>
```

```
<th>10:50-11:40</th>
<th>11:40-11:50</th>
<th>11:50-12:40</th>
<th>12.40-01.30</th>
</tr>

<tr>
<td>Monday</td>
<td colspan="2">Web Technology Lab - Lab 2</td>
<td rowspan="5">BREAK</td>
<td>CC</td>
<td>DM</td>
<td>WT</td>
</tr>
<tr>
<td>Tuesday</td>
<td>CC</td>
<td>MIS</td>
<td>DM</td>
<td>C#</td>
<td>MIS</td>
</tr>
<tr>
<td>Wednesday</td>
<td>C#</td>
<td>WT</td>
<td colspan="3">C# lab - lab1</td>
```

```
</tr>
<tr>
<td>Thursday</td>
<td>WT lab - lab 2</td>
<td>DM</td>
<td>WT</td>
<td>C#</td>
<td>CC</td>
</tr>
<tr>
<td>Friday</td>
<td>DM</td>
<td>CC</td>
<td>MIS</td>
<td>WT</td>
<td>C#</td>
</tr>
</table>
<br>
</table>
<div class="footer">
<div>
<b>Dr. K. Srinivasan</b><br>
Class In-charge
</div>
<div>
<b>Dr. V. Ramesh</b><br>
```

Head of the Department

</body>

</html>

OUTPUT

SRI CHANDRASEKHARENDRA SARASWATHI VISWA MAHAVIDYALAYA

DEPARTMENT OF COMPUTER SCIENCE AND APPLICATIONS

ODD SEMESTER - CLASS TIME TABLE

Year : III B.Sc.(CS) - A Section **Semester : V** **Hall No : SA003**

Day	09:10-10:00	10:00-10:50	10:50-11:40	11:40-11:50	11:50-12:40	12.40-01.30
Monday	Web Technology Lab - Lab 2		BREAK	CC	DM	WT
Tuesday	CC	MIS		DM	C#	MIS
Wednesday	C#	WT		C# lab - lab1		
Thursday	WT lab - lab 2	DM		WT	C#	CC
Friday	DM	CC		MIS	WT	C#

Dr. K. Srinivasan
Class In-charge

Dr. V. Ramesh
Head of the Department

RESULT

Thus, the Class Time Table was successfully designed using HTML Table Tags and CSS Styles, displaying the timetable and subject details in a well-formatted layout.

EX.NO: 02	DESIGN AND VALIDATE A LOGIN FORM USING JAVASCRIPT
29-06-2026	

AIM

To design a Login Form using HTML and CSS and validate the username and password using JavaScript.

ALGORITHM

1. Start the program.
2. Create an HTML form with Username and Password fields.
3. Design the form using simple CSS.
4. Create a JavaScript function to validate the login details.
5. Check whether the username and password are entered.
6. If either field is empty, display an error message.
7. If the username is admin and the password is 1234, display "Login Successful".
8. Otherwise, display "Invalid Username or Password".
9. Stop the program

SOURCE CODE:


```
<!DOCTYPE html>
<html>
<head>
<title>Login Form</title>
<style>
body{
font-family: Arial;
background-color: lightblue;
text-align: center;
}
```

```
.login{
width: 350px;
margin: 150px auto;
padding: 60px;
border: 5px solid black;
background: white;
}
input{
width: 90%;
padding: 8px;
margin: 10px;
}
button{
width: 100px;
 padding: 8px;
}
</style>
</head>
<body>
<div class="login">
<h2>LOGIN FORM</h2>
<input type="text" id="username" placeholder="Username"><br>
<input type="password" id="password" placeholder="Password"><br>
<button onclick="validate()">Login</button>
<p id="message"></p>
</div>
```

```
<script> function validate() {
  var user = document.getElementById("username").value;
 var pass = document.getElementById("password").value;


   if(user=="" || pass=="")
   {
      document.getElementById("message").innerHTML="Please enter Username and Password";
   }
   else if(user=="admin" && pass=="1234")
   {
      document.getElementById("message").innerHTML="Login Successful";
   }
   else
   {
      document.getElementById("message").innerHTML="Invalid Username or Password";
   }
}
</script>
</body>
</html>
```

Output

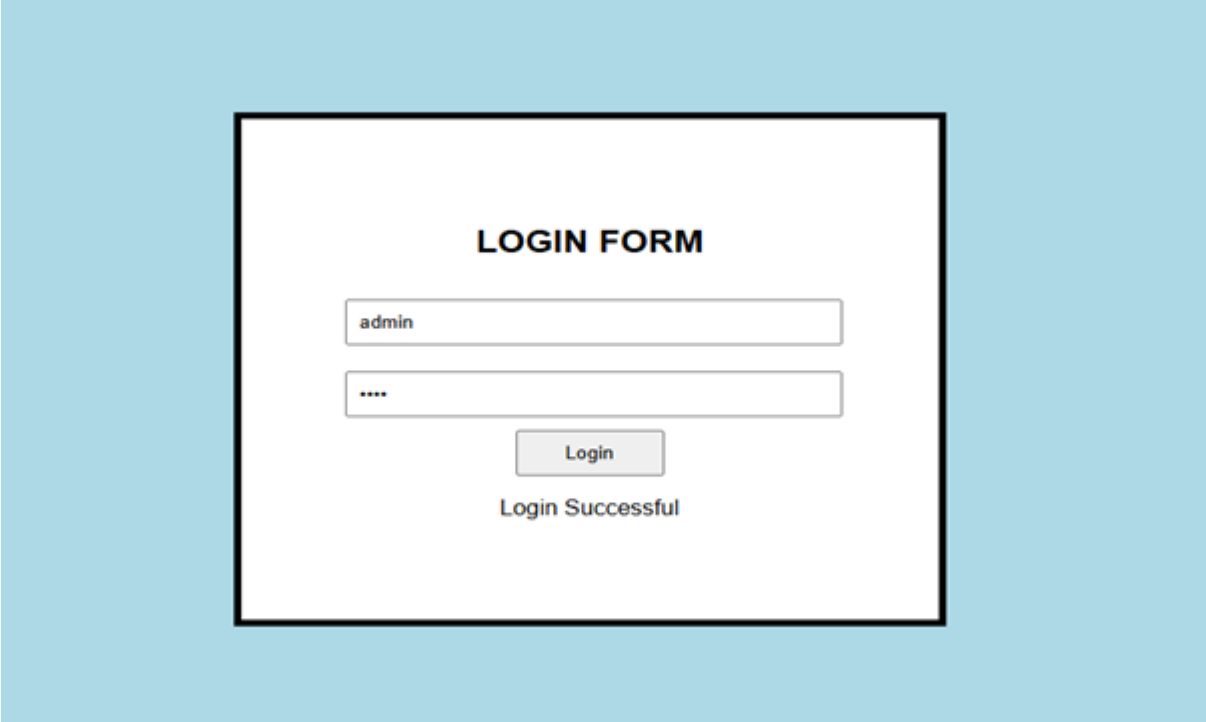

RESULT

The Login Form was successfully designed using HTML and CSS, and the user credentials were validated using JavaScript. The program displays appropriate messages for valid and invalid login details.

EX.NO: 03	DEVELOP A SIMPLE CALCULATOR USING JAVASCRIPT
09-07-2026	

AIM

To develop a simple calculator using HTML, CSS, and JavaScript that performs basic arithmetic operations such as addition, subtraction, multiplication, and division.

ALGORITHM

1. Start the program.
2. Create a calculator interface using HTML.
3. Design the calculator using CSS.
4. Create a display area to show the entered numbers and results.
5. Add buttons for digits (0–9), operators (+, −, ×, ÷), Clear (C), and Equal (=).
6. When a number or operator button is clicked, display it on the screen.
7. When the = button is clicked, evaluate the expression using JavaScript.
8. Display the calculated result.
9. If C is clicked, clear the display.
10. Stop the program.

SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
   <title>Simple Calculator</title>
   <style>
  body {
  font-family: Arial;
 background-color: lightblue;
  text-align: center;
```

```
        }


        .calculator {
width: 240px;
margin: 80px auto;
padding: 19px;
background-color: black;
border: 2px solid black;
        }
        #display {
width: 220px;
height: 40px;
font-size: 20px;
text-align: right;
margin-bottom: 10px;
        }
        button {
width: 50px;
height: 40px;
font-size: 28px;
margin: 3px;
        }
    </style>

</head>

<body> <center>

    <h2>CALCULATOR</h2>

    <div class="calculator">

        <input type="text" id="display" readonly><br>

        <button onclick="addValue('7')">7</button>

        <button onclick="addValue('8')">8</button>

        <button onclick="addValue('9')">9</button>

        <button onclick="addValue('/')">/</button><br>


        <button onclick="addValue('4')">4</button>

        <button onclick="addValue('5')">5</button>
```

```
        <button onclick="addValue('6')">6</button>
        <button onclick="addValue('*')">*</button><br>
        <button onclick="addValue('1')">1</button>

        <button onclick="addValue('2')">2</button>
        <button onclick="addValue('3')">3</button>
        <button onclick="addValue('-')">-</button><br>
        <button onclick="addValue('0')">0</button>
        <button onclick="calculate()">=</button>
   <button onclick="addValue('.')">.</button>
        <button onclick="addValue('+')">+</button><br><br>
        <button onclick="clearDisplay()">C</button>
    </div>
<script>
function addValue(value) {
document.getElementById("display").value += value;
        }
        function calculate() {
  var expression = document.getElementById("display").value;
  document.getElementById("display").value = eval(expression);
        }
        function clearDisplay() {
  document.getElementById("display").value = "";
        }
    </script>
</body>
</html>
```

OUTPUT

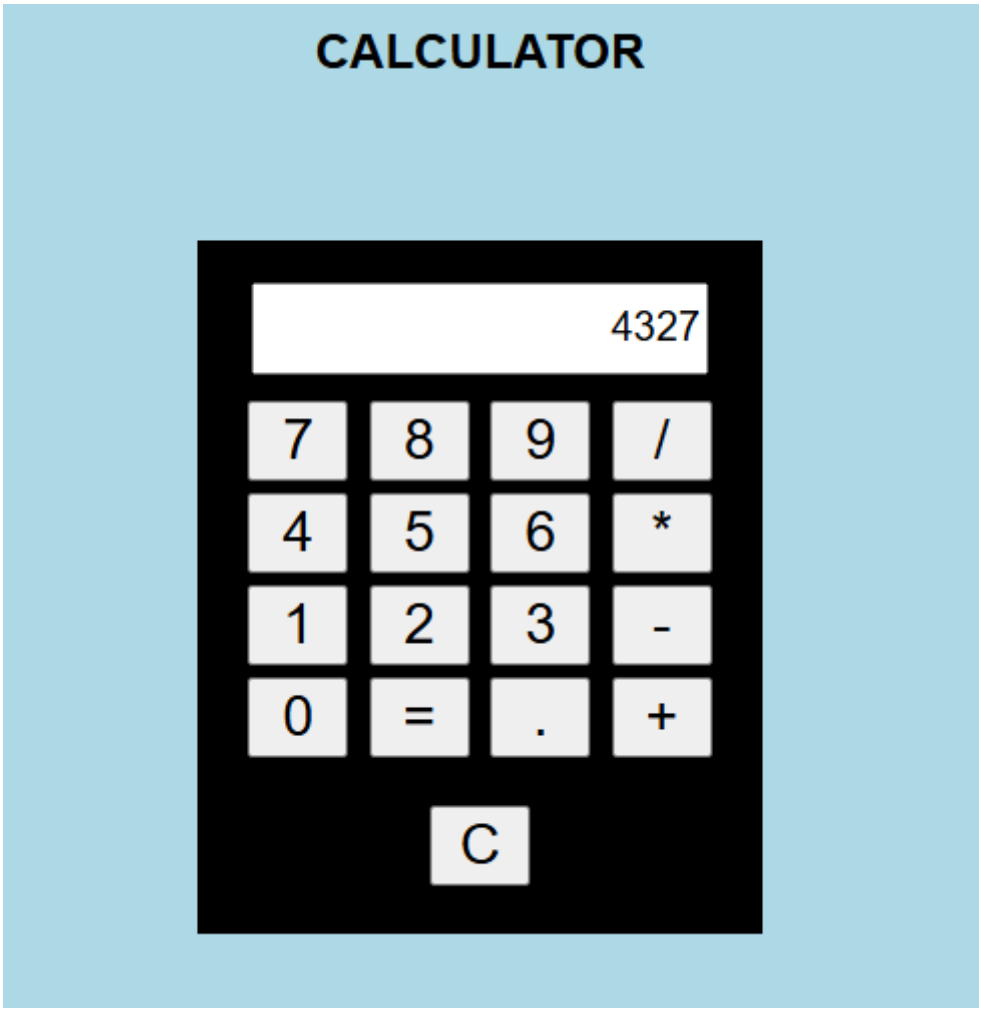

RESULT

The simple calculator was successfully developed using HTML, CSS, and JavaScript. It performs basic arithmetic operations (addition, subtraction, multiplication, and division) correctly and displays the result on the screen**.**

EX.NO: 04	DISPLAY SQUARES AND CUBES FROM 0 TO 10 USING JAVASCRIPT
13-07-2026	

AIM

To write a JavaScript program to calculate the squares and cubes of numbers from 0 to 10 and display the results in an HTML table.

ALGORITHM

1. Start the program.
2. Create an HTML table with three columns: Number, Square, and Cube.
3. Use a for loop to generate numbers from 0 to 10.
4. Calculate the square using number × number.
5. Calculate the cube using number × number × number.
6. Display the number, square, and cube in the HTML table.
7. Close the HTML table.

SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
   <title>Squares and Cubes</title>
   <style>
table {
          border-collapse: collapse;
            width: 500px;
            text-align: center;
       }
  th, td {
```

```
  border: 1px solid black;


  padding: 10px;
      }
  th {
          background-color: lightblue;
      }
    </style>
</head>
<body> <center>
    <h2>SQUARES AND CUBES OF NUMBERS FROM 0 TO 10</h2>
    <table>
        <tr>
            <th>NUMBER</th>
            <th>SQUARE</th>
            <th>CUBE</th>
        </tr>
        <script>
            for (let i = 0; i <= 10; i++) {
              let square = i * i;
              let cube = i * i * i;
                document.write("<tr>");
                        document.write("<td>" + i + "</td>");
                        document.write("<td>" + square + "</td>");
                        document.write("<td>" + cube + "</td>");
                        document.write("</tr>");
            }
```

```
    </script>
  </table>


</body>
</html>
```

OUTPUT

SQUARES AND CUBES OF NUMBERS FROM 0 TO 10

NUMBER	SQUARE	CUBE
0	0	0
1	1	1
2	4	8
3	9	27
4	16	64
5	25	125
6	36	216
7	49	343
8	64	512
9	81	729
10	100	1000

RESULT

Thus, the JavaScript program to calculate and display the squares and cubes of numbers from 0 to 10 in an HTML table was successfully executed.

EX.NO: 05	DEVELOP A PHP VISITOR COUNTER
20-07-2026	

AIM

To write a PHP program to count and display the number of visitors visiting a webpage using file handling functions.

ALGORITHM

1. Start the program.
2. Check whether the visitor.txt file is available.
3. If the file is not available, create the file and store **0** as the initial count.
4. Read the visitor count from the file.
5. Convert the value into an integer.
6. Add **1** to the visitor count.
7. Store the new count back into visitor.txt.
8. Close the file after updating the count.
9. Display the updated visitor count on the webpage.
10. Stop the program.

PROCEDURE

1. Open XAMPP Control Panel.
2. Start the Apache server.
3. Navigate to the htdocs folder.
4. Create a folder named visitor.
5. Create a file named visitor.php.
6. Enter the above PHP program and save it.
7. Open the browser.
8. Enter the following address:

http://localhost/visitor/visitor.php

9. The visitor count will be displayed.

SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
    <title>Visitor Counter</title>
</head>

<body>

<h2>PHP Visitor Counter</h2>

<?php

$file = "visitor.txt";

// Create file if it does not exist
if (!file_exists($file)) {
    $fp = fopen($file, "w");
    fwrite($fp, "0");
    fclose($fp);
}

// Read visitor count
$fp = fopen($file, "r");
$count = fread($fp, filesize($file));
fclose($fp);
```

```
// Increase count
$count++;

// Save new count
$fp = fopen($file, "w");
fwrite($fp, $count);
fclose($fp);

// Display count
echo "<h3>Visitor Count</h3>";
echo "Total Number of Visitors: <b>$count</b>";

?>

</body>
</html>
```

OUTPUT



RESULT

Thus, the PHP program to count and display the number of visitors using file handling was successfully executed and the visitor count was displayed correctly.

EX.NO: 06	DEVELOP A PHP DIGITAL CLOCK
03-08-2026	

AIM

To write a PHP program to display a digital clock showing the current server time.

ALGORITHM

1. Start the program.
2. Create an HTML page.
3. Use PHP to obtain the current time.
4. Display the time in HH:MM:SS format.
5. Use JavaScript with setInterval() to update the clock every second.
6. Display the updated time on the webpage.

Stop the program

SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
  <title>Digital Clock Using PHP</title>

  <style>
    body {
      background-color: lightblue;
      text-align: center;
      font-family: Arial;
      margin-top: 100px;
    }

    .clock {
      font-size: 50px;
      font-weight: bold;
```

```
            border: 2px solid black;

            display: inline-block;
            padding: 40px;
        }
    </style>
</head>

<body>

    <h2>DIGITAL CLOCK</h2>
    <?php
        date_default_timezone_set("Asia/Kolkata");
        $time = date("H:i:s");
    ?>

    <div class="clock" id="clock">
        <?php echo $time; ?>
    </div>

    <script>
        function showTime() {
            let time = new Date();


            let displayTime = time.toLocaleTimeString("en-IN", {
                hour12: false
            });

            document.getElementById("clock").textContent = displayTime;
        }
```

```
        showTime();
        setInterval(showTime, 1000);
    </script>

</body>
</html>
```

OUTPUT

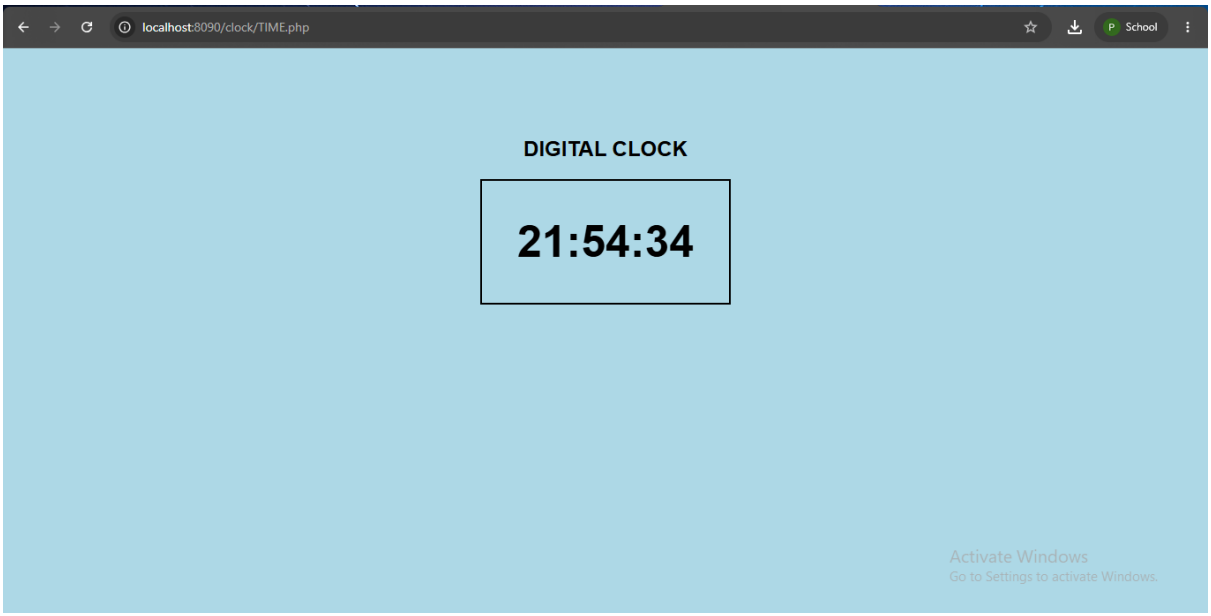

RESULT

Thus, the PHP program to display a digital clock showing the current server time was successfully implemented.

EX.NO:07	IMPLEMENT CALCULATOR OPERATIONS USING PHP
17-08-2026	

7(A). SIMPLE CALCULATOR

AIM

To implement simple calculator operations using PHP.

PROCEDURE


1. Create a PHP file.
2. Declare two numeric variables.
3. Assign values to the variables.
4. Perform addition using +.
5. Perform subtraction using -.
6. Perform multiplication using *.
7. Perform division using /.
8. Store or directly calculate the results.
9. Display all results using echo.
10. Run the PHP file through the server and verify the output.

SOURCE CODE

```
<?php
$a = 20;
$b = 5;

echo "Addition = " . ($a + $b) . "<br>";
echo "Subtraction = " . ($a - $b) . "<br>";
echo "Multiplication = " . ($a * $b) . "<br>";
echo "Division = " . ($a / $b);
?>
```

Output:

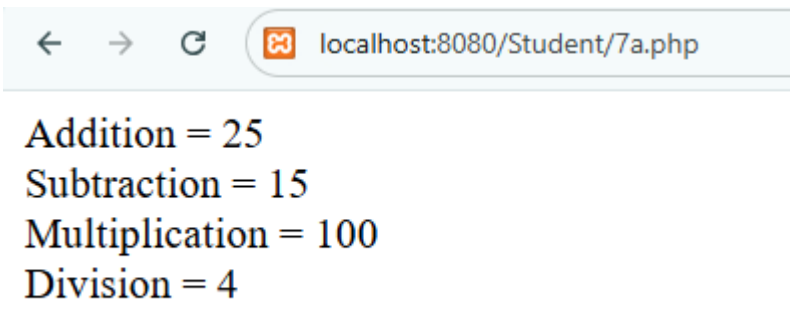

7(B). TRANSPOSE OF A MATRIX

AIM

To find the transpose of a matrix using PHP.

PROCEDURE

1. Create a PHP file.
2. Declare a matrix using a PHP array.
3. Store the required rows and columns.
4. Display the original matrix.
5. Use nested for loops to access the matrix elements.
6. Exchange the row and column positions.
7. Generate the transpose matrix.
8. Display the transposed elements.
9. Format the output using line breaks.
10. Run the PHP program and verify the transpose of the matrix.

SOURCE CODE

```
<?php
$matrix = [
   [1, 2, 3],
   [4, 5, 6]
];


echo "Original Matrix:<br>";

for ($i = 0; $i < 2; $i++) {
   for ($j = 0; $j < 3; $j++) {
      echo $matrix[$i][$j] . " ";
   }
   echo "<br>";
}

echo "<br>Transpose:<br>";

for ($j = 0; $j < 3; $j++) {
   for ($i = 0; $i < 2; $i++) {
      echo $matrix[$i][$j] . " ";
   }
   echo "<br>";
}
?>
```

OUTPUT

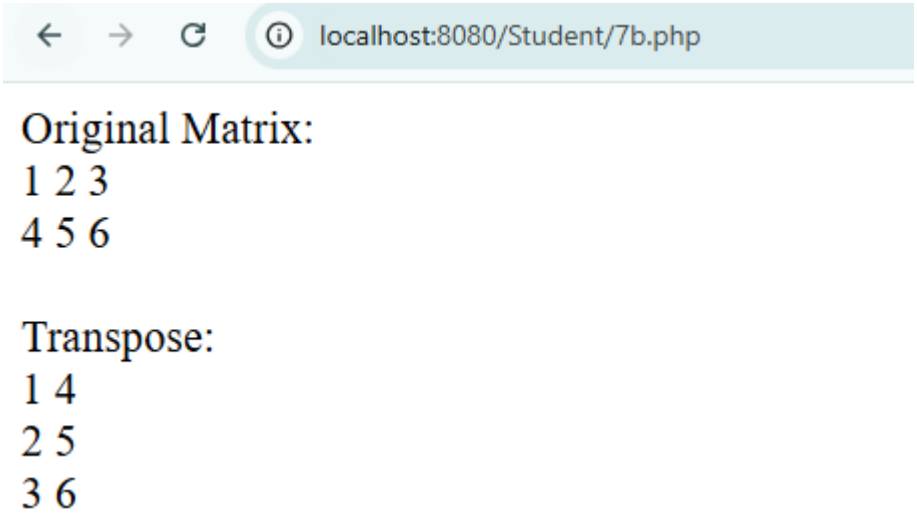

7(C). MULTIPLICATION OF TWO MATRICES

AIM

To multiply two matrices using PHP.

PROCEDURE

1. Create a PHP file.
2. Declare the first matrix as an array.
3. Declare the second matrix as an array.
4. Check that the matrices have compatible dimensions.
5. Create an array to store the result.
6. Use three nested for loops.
7. Multiply the corresponding elements.
8. Add the products to obtain each result element.
9. Display the resultant matrix.
10. Run the PHP program and verify the matrix multiplication result.

SOURCE CODE

```
<?php
$a = [
    [1, 2],
    [3, 4]
];

$b = [
```

```
    [5, 6],
    [7, 8]
];

$result = [];




for ($i = 0; $i < 2; $i++) {
    for ($j = 0; $j < 2; $j++) {
        $result[$i][$j] = 0;

        for ($k = 0; $k < 2; $k++) {
            $result[$i][$j] +=
                $a[$i][$k] * $b[$k][$j];
        }
    }
}

echo "Result:<br>";

for ($i = 0; $i < 2; $i++) {
    for ($j = 0; $j < 2; $j++) {
        echo $result[$i][$j] . " ";
    }
    echo "<br>";
}
?>
```

OUTPUT

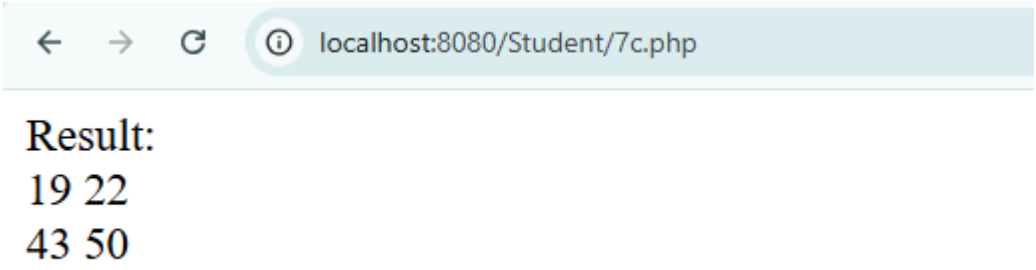

7(D). ADDITION OF TWO MATRICES

AIM

To add two matrices using PHP.

PROCEDURE

1. Create a PHP file.

2. Declare the first matrix.
3. Declare the second matrix.
4. Ensure both matrices have the same dimensions.
5. Use nested for loops to access the elements.
6. Add the corresponding elements of both matrices.
7. Store the result in a result array or display it directly.
8. Repeat the process for all rows and columns.
9. Display the resultant matrix.

SOURCE CODE


```
<?php
$a = [
    [1, 2],
    [3, 4]
];

$b = [
    [5, 6],
    [7, 8]
];

echo "Addition of Matrices:<br>";

for ($i = 0; $i < 2; $i++) {
    for ($j = 0; $j < 2; $j++) {
        echo ($a[$i][$j] + $b[$i][$j]) . " ";
    }
    echo "<br>";
}
?>
```

OUTPUT

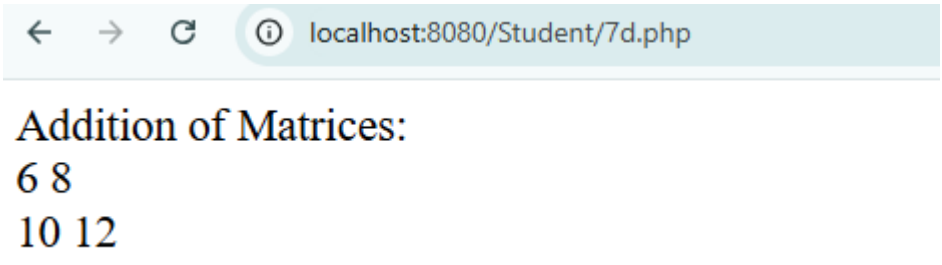

RESULT

Thus, the PHP program to perform Matrix Transpose, Matrix Addition, and Matrix Multiplication was successfully executed and the results were displayed.

EX.NO:08	DEMONSTRATE REGULAR EXPRESSIONS USING PHP
07-09-2026	

AIM

To write a PHP program to demonstrate the use of Regular Expressions (Regex) for searching, matching, and validating patterns in strings.

ALGORITHM

1. Start the program.
2. Define a string to be searched.
3. Define a regular expression pattern.
4. Use preg_match() to check whether the pattern matches the string.
5. Display whether a match is found.
6. Use preg_replace() to replace a matching pattern.
7. Use preg_match_all() to find all occurrences of a pattern.
8. Display the results.
9. Stop the program.


SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
   <title>Student Details</title>
</head>
<body>
<h2>Student Details - Regular Expression</h2>
<?php
$name = "Jeevan";
$email = "jeevan@gmail.com";
// 1. preg_match()
```

```
echo "<h3>1. Student Name</h3>";


if (preg_match("/^[A-Za-z]+$/", $name)) {
    echo "Valid Student Name: $name.<br>";
} else {
    echo "Invalid Student Name.<br>";
}
// 2. preg_match_all()
echo "<h3>2. preg_match_all()</h3>";
preg_match_all("/[A-Za-z]/", $name, $matches);
echo "Number of letters in name: " . count($matches[0]) . "<br>";
// 3. preg_replace()
echo "<h3>3. preg_replace()</h3>";
$newName = preg_replace("/[aeiou]/i", "*", $name);
echo "Original Name: $name<br>";
echo "Modified Name: $newName<br>";
// 4. Email Validation
echo "<h3>4. Email Validation</h3>";
$pattern = "/^[a-zA-Z0-9._%+-]+@[a-zA-Z0-9.-]+\.[a-zA-Z]{2,}$/";
if (preg_match($pattern, $email)) {
    echo "Valid Email Address: $email";
} else {
    echo "Invalid Email Address: $email";
}
?>
</body>
</html>
```

OUTPUT

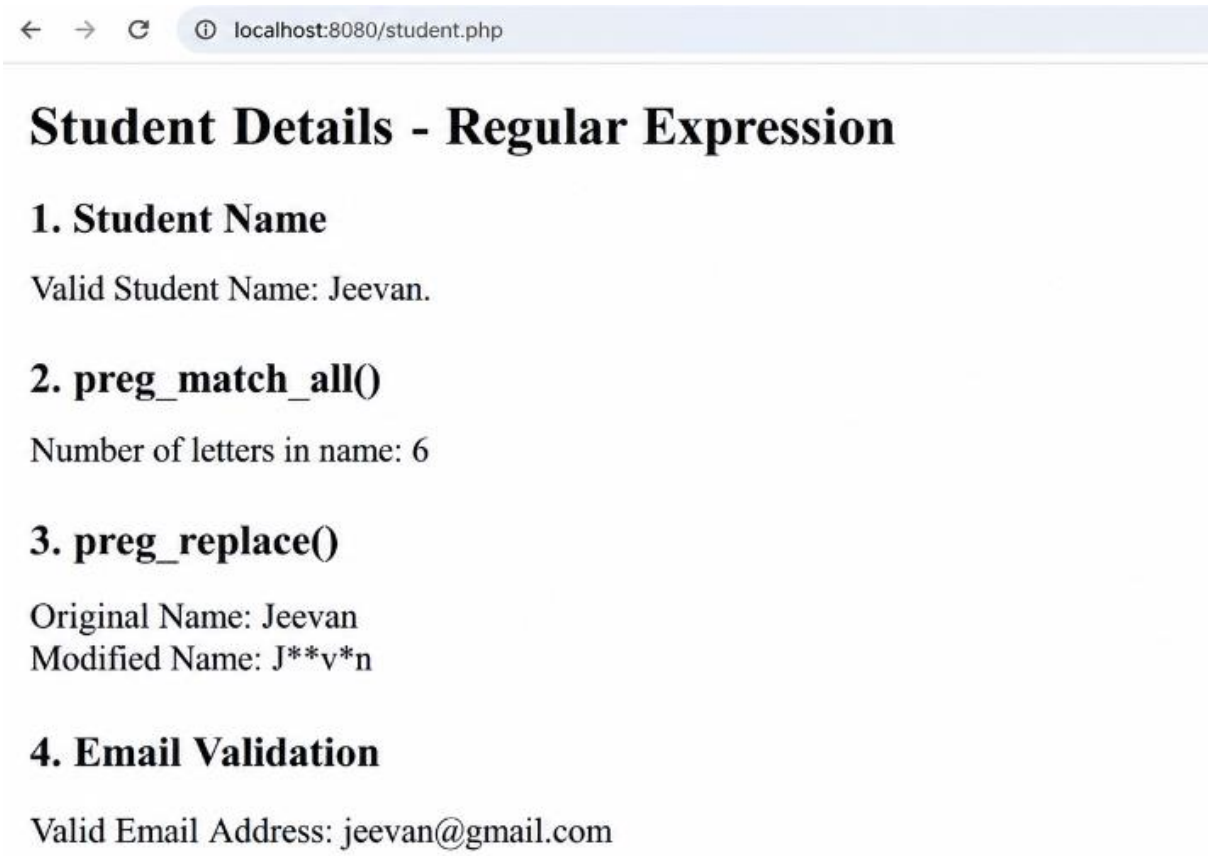

RESULT

Thus, the PHP program to demonstrate Regular Expressions using preg_match(), preg_match_all(), and preg_replace() was successfully executed.

EX.NO: 09	DEVELOP A STUDENT REGISTRATION FORM USING PHP
16-09-2026	

AIM

To design and implement a Student Registration Form using PHP and HTML and display the submitted student details.

ALGORITHM

1. Start the program.
2. Create an HTML registration form.
3. Provide fields for Name, Register Number, Date of Birth, Gender, Email, Mobile Number, Department, and Address.
4. Accept the details from the user.
5. Submit the form using the POST method.
6. Retrieve the submitted values using $_POST.
7. Validate the required fields.
8. Display the entered student details.
9. Stop the program.

SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
   <title>Student Registration</title>
</head>

<body>

<h2>STUDENT REGISTRATION FORM</h2>

<form method="post">

   Student Name:
```

```
<input type="text" name="name" required>

<br><br>

Register Number:
<input type="text" name="regno" required>
<br><br>

Date of Birth:
<input type="date" name="dob" required>
<br><br>

Gender:
<input type="radio" name="gender" value="Male" required> Male
<input type="radio" name="gender" value="Female"> Female
<br><br>

Email:
<input type="email" name="email" required>
<br><br>

Mobile Number:
<input type="text" name="mobile" required>
<br><br>

Department:
<select name="department" required>
    <option value="">Select Department</option>
    <option>BCA</option>
    <option>B.Sc Computer Science</option>
    <option>B.Sc Data Science</option>
    <option>B.Sc Cyber Security</option>
```

```
    </select>
    <br><br>


    Address:
    <br>
    <textarea name="address" rows="4" cols="30" required></textarea>
    <br><br>

    <input type="submit" name="submit" value="Register">
    <input type="reset" value="Clear">

</form>
<?php


if (isset($_POST["submit"])) {

    echo "<h2>STUDENT REGISTRATION DETAILS</h2>";

    echo "Student Name: " . $_POST["name"] . "<br>";
    echo "Register Number: " . $_POST["regno"] . "<br>";
    echo "Date of Birth: " . $_POST["dob"] . "<br>";
    echo "Gender: " . $_POST["gender"] . "<br>";
    echo "Email: " . $_POST["email"] . "<br>";
    echo "Mobile Number: " . $_POST["mobile"] . "<br>";
    echo "Department: " . $_POST["department"] . "<br>";
    echo "Address: " . $_POST["address"] . "<br>";
}
?>

</body>
</html
```

OUTPUT




```php
```

STUDENT REGISTRATION FORM

Student Name:

Register Number:

Date of Birth: mm/dd/yyyy

Gender: Male Female

Email:

Mobile Number:

Department: Select Department

Address:

Register Clear

STUDENT REGISTRATION DETAILS

Student Name: Naveen
Register Number: 112448031
Date of Birth: 2007-07-15
Gender: Male
Email: 112448031@kanchiuniv.ac.in
Mobile Number: 6380429290
Department: B.Sc Computer Science
Address: 09,Gandhi Nager,Kuram,Kanchipuram

```

**RESULT**

Thus, the Student Registration Form using PHP was successfully designed and executed, and the submitted student details were displayed successfully.
```

EX.NO: 10	SORT STUDENT RECORDS STORED IN A DATABASE USING PHP
21-09-2026	

AIM

To write a PHP–MySQL program to store student records in a MySQL database and display the records in sorted order.

ALGORITHM

1. Create a **college** database.
2. Create a **students** table with ID, name, register number, department and mark.
3. Create a PHP file named **student.php**.
4. Create a form to enter student details.
5. Connect PHP to MySQL using **PDO**.
6. Get the student details using $_POST.
7. Insert the details into the table using a **PDO prepared statement**.
8. Retrieve the student records using SELECT.
9. Sort the records by mark using ORDER BY mark DESC.

DATABASES:

```
CREATE DATABASE college;

USE college;

CREATE TABLE students (

   id INT AUTO_INCREMENT PRIMARY KEY,

   name VARCHAR(100),

   regno VARCHAR(20),

   department VARCHAR(50), mark INT);
```

CONNECTION DATABASES:

```
$conn = new PDO("mysql:host=localhost;dbname=college", "root", "");
$stmt = $conn->prepare($sql);
$stmt->execute([$name, $regno, $department, $mark]);
$stmt = $conn->query("SELECT * FROM students ORDER BY mark DESC");
while ($row = $stmt->fetch(PDO::FETCH_ASSOC)) {
   // display record
}
```

SOURCE CODE

```
<!DOCTYPE html>
<html>
<head>
   <title>Student Records</title>
</head>

<body>

<h2>Student Registration</h2>

<form method="post">
   Name:
   <input type="text" name="name" required>
   <br><br>

   Register Number:
   <input type="text" name="regno" required>
   <br><br>
```

```
    Department:
    <input type="text" name="department" required>
    <br><br>

    Mark:
    <input type="number" name="mark" required>
    <br><br>

    <input type="submit" name="save" value="Save Student">

</form>

<?php

// Connect to MySQL using PDO
$conn = new PDO(
    "mysql:host=localhost;dbname=college",
    "root",
    ""
);

$conn->setAttribute(PDO::ATTR_ERRMODE, PDO::ERRMODE_EXCEPTION);



// Store student record
if (isset($_POST['save'])) {
```

```
    $name = $_POST['name'];
    $regno = $_POST['regno'];
    $department = $_POST['department'];
    $mark = $_POST['mark'];

    $sql = "INSERT INTO students
            (name, regno, department, mark)
            VALUES (?, ?, ?, ?)";

    $stmt = $conn->prepare($sql);
    $stmt->execute([$name, $regno, $department, $mark]);

    echo "<p>Student record stored successfully.</p>";
}

// Display records sorted by mark
echo "<h2>Student Records - Sorted by Mark</h2>";

$sql = "SELECT * FROM students ORDER BY mark DESC";
$stmt = $conn->query($sql);

echo "<table border='1' cellpadding='10'>";

echo "<tr>";
echo "<th>ID</th>";
```

```
echo "<th>Name</th>";
echo "<th>Register Number</th>";
echo "<th>Department</th>";
echo "<th>Mark</th>";
echo "</tr>";

while ($row = $stmt->fetch(PDO::FETCH_ASSOC)) {

    echo "<tr>";

    echo "<td>" . $row['id'] . "</td>";
    echo "<td>" . htmlspecialchars($row['name']) . "</td>";
    echo "<td>" . htmlspecialchars($row['regno']) . "</td>";
    echo "<td>" . htmlspecialchars($row['department']) . "</td>";
    echo "<td>" . $row['mark'] . "</td>";


    echo "</tr>";
}

echo "</table>";

?>

</body>
</html>
```

OUTPUT

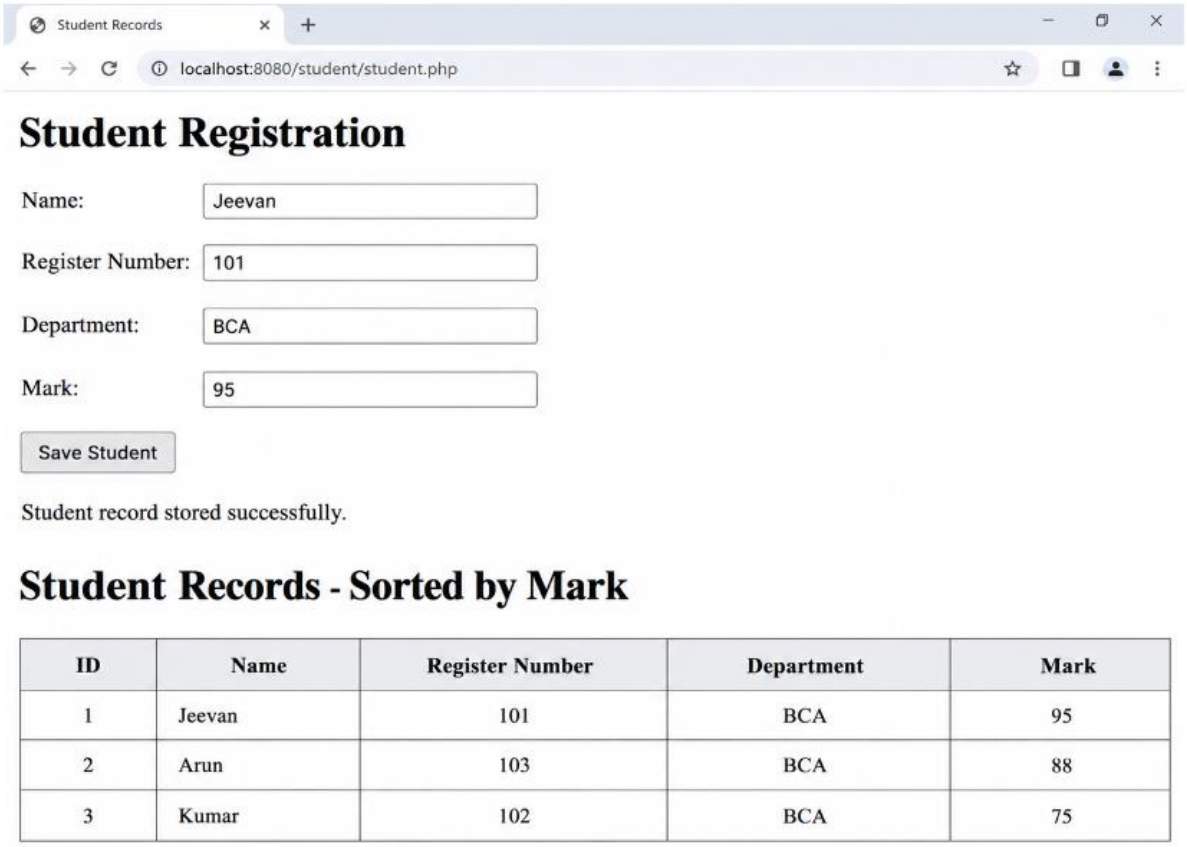

ID	Name	Register Number	Department	Mark
1	Jeevan	101	BCA	95
2	Arun	103	BCA	88
3	Kumar	102	BCA	75

RESULT

Thus, the PHP–MySQL program to store student records in a database and display them in sorted order was successfully executed.

EX.NO: 11	PHP PROGRAM FOR INSERTING AND VIEWING STUDENT RECORDS
24-09-2026	

AIM

To create a MySQL database and display student details using a PHP program.

ALGORITHM

1. Start the program.
2. Create the myDB database and MyGuests table.
3. Insert student details into the table.
4. Connect PHP to the MySQL database.
5. Check whether the database connection is successful.
6. Retrieve student details from the table.
7. Display the student details.
8. Close the database connection.
9. Stop the program.

CREATE DATABASE – phpMyAdmin:

```
CREATE DATABASE myDB;

USE myDB;

CREATE TABLE MyGuests (
   id INT UNSIGNED AUTO_INCREMENT PRIMARY KEY,
   firstname VARCHAR(30) NOT NULL,
   lastname VARCHAR(30) NOT NULL,
   email VARCHAR(50),
   reg_date TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);
```

INSERT DATABASE:phpmyadmin

```
INSERT INTO MyGuests (firstname, lastname, email)
VALUES
('Naveen', 'D', 'naveen@gmail.com'),
('Jeevan', 'A', 'jeevan@gmail.com'),
('Ashwin', 'B', 'ashwin@gmail.com');
```

SOURCE CODE

```
<?php

$servername = "localhost";
$username = "root";
$password = "";
$dbname = "myDB";

// Connect to database
$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

echo "Connected successfully.<br><br>";

// Display student details
$sql = "SELECT id, firstname, lastname, email FROM MyGuests";
```

```
$result = $conn->query($sql);

echo "<b>Student Details:</b><br><br>";

if ($result->num_rows > 0) {

    while ($row = $result->fetch_assoc()) {


        echo "ID: " . $row["id"] . "<br>";
        echo "First Name: " . $row["firstname"] . "<br>";
        echo "Last Name: " . $row["lastname"] . "<br>";
        echo "Email: " . $row["email"] . "<br>";
        echo "-------------------------<br>";
    }

} else {
    echo "No records found.";
}

$conn->close();

?>
```

OUTPUT



Connected successfully.

Student Details:

ID: 1
First Name: Naveen
Last Name: D
Email: naveen@gmail.com

ID: 2
First Name: Jeevan
Last Name: A
Email: jeevan@gmail.com

ID: 3
First Name: Ashwin
Last Name: B
Email: ashwin@gmail.com

RESULT

Thus, the PHP program was successfully executed to **insert and display student details from the MySQL database**

EX.NO: 12	IMPLEMENTATION OF CRUD OPERATIONS USING PHP AND MYSQL
24-09-2026	

AIM

To Develop a web based Student Management System using PHP and MySQL to perform fundamental CRUD operations.

PROCEDURE

1. **Start** and connect to the MySQL databases school_db
2. **Check User Action:**
    - **Create:** If submitted via POST, insert new student details into the database.
    - **Edit:** If an ID is passed via GET (edit), fetch that student's record into the form.
    - **Update:** If updated via POST, save the changes using the student's ID.
    - **Delete:** If an ID is passed via GET (delete), delete the record from the database.
3. **Fetch All Records:** Read all rows from the students table.
4. **Display:** Show the input form and display all student records in an HTML table with Edit/Delete buttons.
5. **Stop.**

CREATE DATABASES:

```
CREATE TABLE students (
    id INT AUTO_INCREMENT PRIMARY KEY,
    name VARCHAR(100),
    email VARCHAR(100),
    course VARCHAR(100)
);
```

SOURCE CODE

```
<?php

$conn = mysqli_connect("localhost", "root", "", "school");

if (!$conn) {
    die("Connection Failed");
}


// INSERT
if (isset($_POST['insert'])) {

    $name = $_POST['name'];
    $email = $_POST['email'];
    $course = $_POST['course'];

    $sql = "INSERT INTO students (name, email, course)
            VALUES ('$name', '$email', '$course')";

    mysqli_query($conn, $sql);

    echo "Record inserted successfully.<br><br>";
}


// UPDATE
if (isset($_POST['update'])) {

    $id = $_POST['id'];
    $name = $_POST['name'];
    $email = $_POST['email'];
    $course = $_POST['course'];
```

```
    $sql = "UPDATE students
            SET name='$name',
                email='$email',
                course='$course'
            WHERE id=$id";

    mysqli_query($conn, $sql);

    echo "Record updated successfully.<br><br>";
}


// DELETE
if (isset($_POST['delete'])) {

    $id = $_POST['id'];

    $sql = "DELETE FROM students WHERE id=$id";

    mysqli_query($conn, $sql);

    echo "Record deleted successfully.<br><br>";
}


// DISPLAY
$result = mysqli_query($conn, "SELECT * FROM students");

?>

<!DOCTYPE html>
<html>

<head>
```

```
    <title>Student CRUD</title>
</head>

<body>

<h2>Student Information System</h2>

<form method="POST">

    ID:
    <input type="number" name="id">

    <br><br>

    Name:
    <input type="text" name="name">

    <br><br>

    Email:
    <input type="email" name="email">

    <br><br>

    Course:
    <input type="text" name="course">

    <br><br>

    <!-- SEPARATE BUTTONS -->

    <button type="submit" name="insert">
        Insert
    </button>
```

```
    <button type="submit" name="update">
        Update
    </button>

    <button type="submit" name="delete"
            onclick="return confirm('Delete this record?');">
        Delete
    </button>

</form>


<h3>Student Details</h3>

<table border="1" cellpadding="10">

<tr>
    <th>ID</th>
    <th>Name</th>
    <th>Email</th>
    <th>Course</th>
</tr>

<?php

while ($row = mysqli_fetch_assoc($result)) {

?>

<tr>

    <td><?php echo $row['id']; ?></td>
```

```
    <td><?php echo $row['name']; ?></td>

    <td><?php echo $row['email']; ?></td>

    <td><?php echo $row['course']; ?></td>

</tr>

<?php

}

?>

</table>

</body>
</html>
```

OUTPUT

Student Information System

ID:

Name:

Email:

Course:

Insert Update Delete

Student Details

ID	Name	Email	Course
1	Naveen	naveen@gmail.com	B.Sc. Computer Science
2	Prem	prem@gmail.com	B.Sc. Computer Science
3	Manoj	manoj@gmail.com	B.Sc. Computer Science
4	Jeevan Kumar	jeevan@gmail.com	B.Sc. Computer Science

RESULT

The PHP and MySQL CRUD applications was Successfully implemented.