

Problem List

Submit

0

Premium

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 43 / 43 testcases passed

Analysis

Solution


Jeevankumar8074 submitted at Apr 24, 2026 10:42

Runtime

155 ms Beats: 48.63%

Memory

59.50 MB Beats: 54.85%

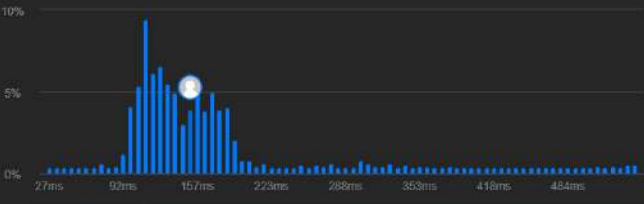

Code | C++

```
1 #include <vector>
2 #include <string>
3 #include <unordered_set>
4
5 using namespace std;
6
7 class Solution {
8 public:
9     bool canForm(string word, unordered_set<string>& st) {
10         int n = word.size();
11         vector<bool> dp(n + 1, false);
12         dp[0] = true;
13
14         for (int i = 1; i <= n; i++) {
15             for (int j = 0; j < i; j++) {
16                 if (dp[j] && st.count(word.substr(j, i - j))) {
17                     dp[i] = true;
18                     break;
19                 }
20             }
21         }
22         return dp[n];
23     }
24 }
```

View more

More challenges

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Input

words = ["cat","cats","catsdogcats","dog","dogcatsdog","hippopotamuses","rat","ratcatdogcat"]

Output

["catsdogcats","dogcatsdog","ratcatdogcat"]