

Cucumber Report

Mar 14, 2023, 12:13:26 PM

Start : Mar 14, 12:02:31.042 PM

End : Mar 14, 12:13:16.035 PM

Duration : 10 m 44.993 s

Features

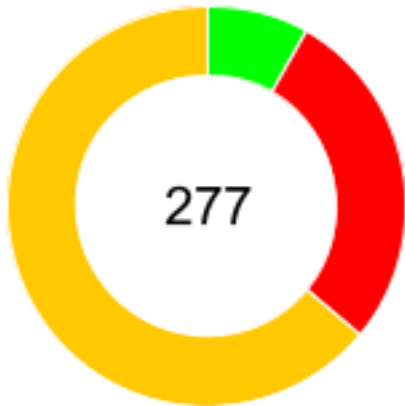
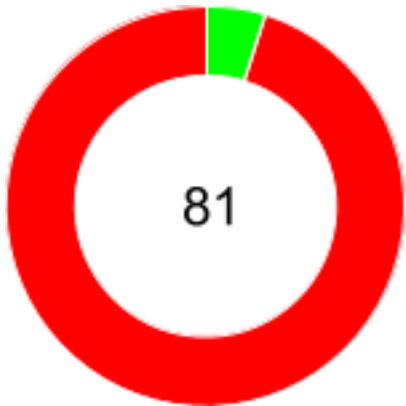
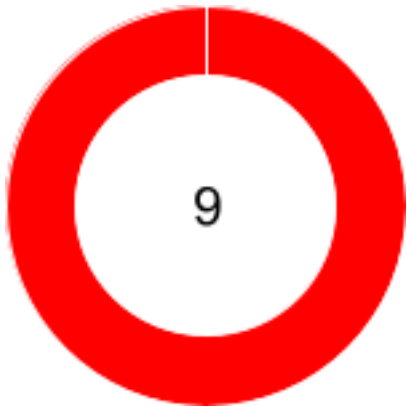
Scenarios

Steps

PASSED - 0
FAILED - 9
SKIPPED - 0

PASSED - 4
FAILED - 77
SKIPPED - 0

PASSED - 23
FAILED - 77
SKIPPED - 177



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>To launching dsalgo application and to test Home page</u>	28.373 s	4	0	4	0	13	0	4	9
<u>Validating Register page</u>	57.609 s	11	0	11	0	33	0	11	22
<u>User to signin</u>	20.966 s	4	0	4	0	20	0	4	16
<u>launching dsalgo application load Datastructure page</u>	10.522 s	2	0	2	0	6	0	2	4
<u>launching dsalgo application load Array page</u>	2 m 50.097 s	13	0	13	0	39	0	13	26
<u>User Testing Linkedlist page</u>	1 m 55.194 s	14	0	14	0	42	0	14	28
<u>Testing the stack page of the DS Algo application</u>	1 m 2.909 s	11	0	11	0	40	0	11	29
<u>User to sign in the dsalgo application and test Queue page</u>	2 m 24.201 s	14	4	10	0	54	18	10	26
<u>User to sign in the dsalgo application and test Graph page</u>	30.620 s	8	0	8	0	30	5	8	17

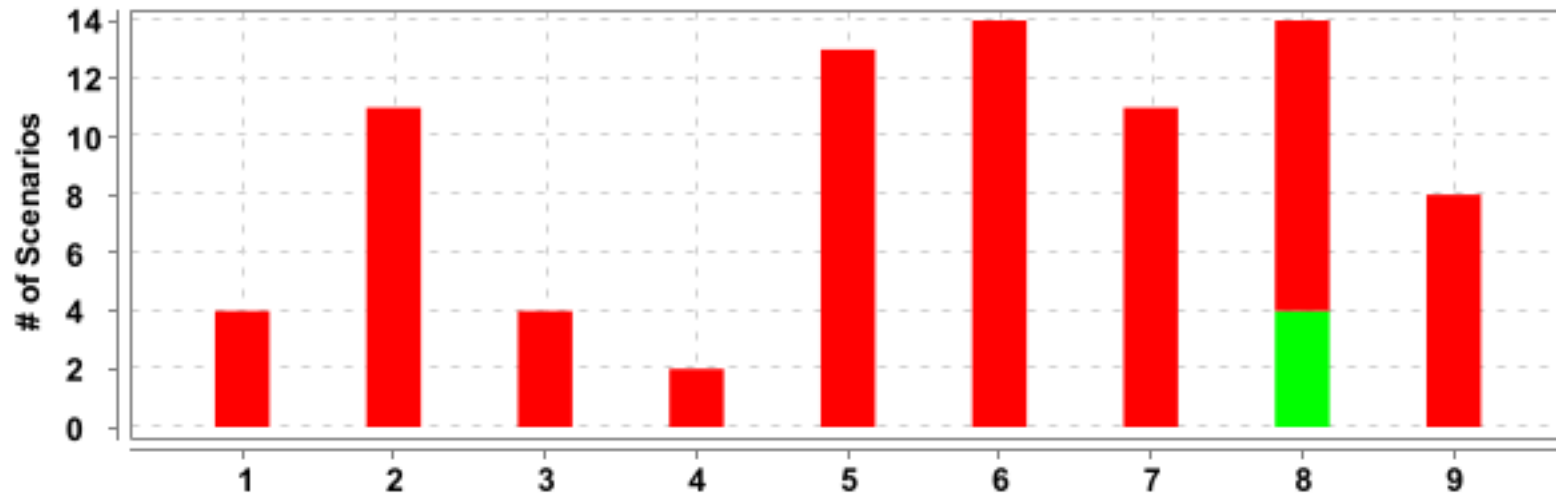
Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@TestSuit_home	4	0	4	0	1	0	1	0
@home	17	0	17	0	2	0	2	0
@Test_suit_register_02	1	0	1	0	1	0	1	0
@register	11	0	11	0	1	0	1	0
@Test_suit_register_03	1	0	1	0	1	0	1	0
@Test_suit_register_04	1	0	1	0	1	0	1	0
@Test_suit_register_05	1	0	1	0	1	0	1	0
@Test_suit_register_06	1	0	1	0	1	0	1	0
@Test_suit_register_07	1	0	1	0	1	0	1	0
@Test_suit_register_08	1	0	1	0	1	0	1	0
@Test_suit_register_09	1	0	1	0	1	0	1	0
@Test_suit_register_10	1	0	1	0	1	0	1	0
@Test_suit_register_11	1	0	1	0	1	0	1	0
@Test_suit_register_12	1	0	1	0	1	0	1	0
@Test_suit_signin01	1	0	1	0	1	0	1	0
@Test_suit_sigin02	1	0	1	0	1	0	1	0
@Test_suit_signin03	1	0	1	0	1	0	1	0

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Test_suit_signin04	1	0	1	0	1	0	1	0
@Datastructure	2	0	2	0	1	0	1	0
@TestSuit_Datastructure_01	1	0	1	0	1	0	1	0
@TestSuit_Datastructure_02	1	0	1	0	1	0	1	0
@TestSuit_Array_01	1	0	1	0	1	0	1	0
@TestSuit_Array_02	1	0	1	0	1	0	1	0
@TestSuit_Array_03	1	0	1	0	1	0	1	0
@TestSuit_Array_04	1	0	1	0	1	0	1	0
@TestSuit_Array_05	1	0	1	0	1	0	1	0
@TestSuit_Array_06	1	0	1	0	1	0	1	0
@TestSuit_Array_07	1	0	1	0	1	0	1	0
@TestSuit_Array_08	1	0	1	0	1	0	1	0
@TestSuit_Array_09	1	0	1	0	1	0	1	0
@TestSuit_Array_10	1	0	1	0	1	0	1	0
@TestSuit_Array_11	1	0	1	0	1	0	1	0
@TestSuit_Array_12	1	0	1	0	1	0	1	0
@TestSuit_Array_13	1	0	1	0	1	0	1	0

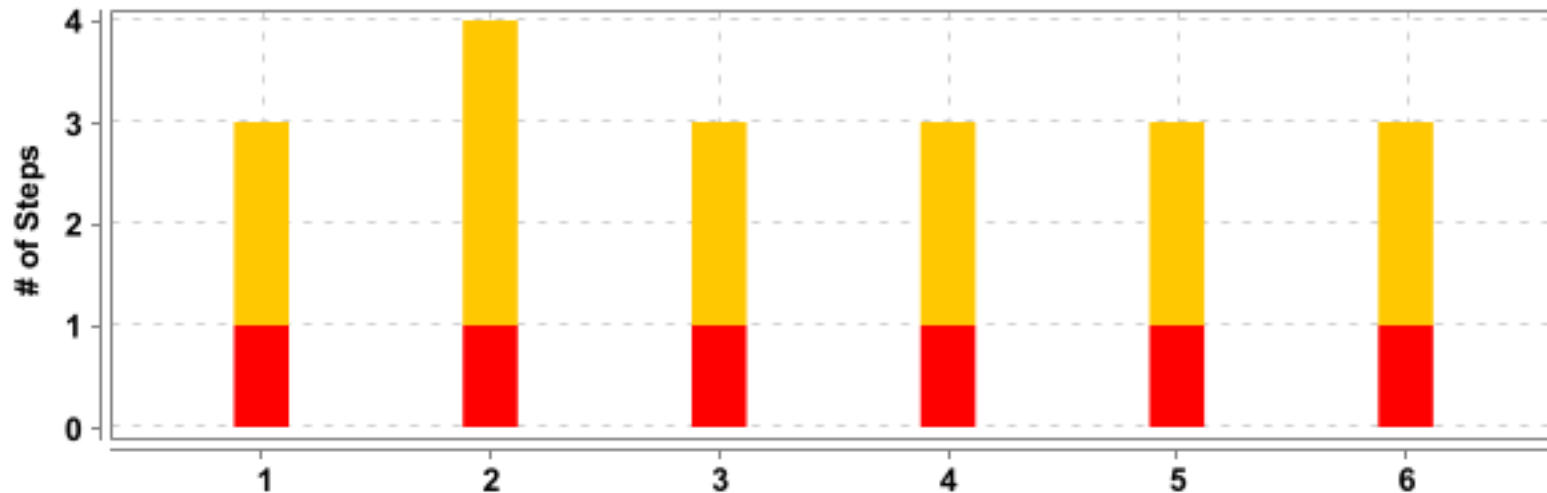
Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Linkedlist	14	0	14	0	1	0	1	0
@TS_II_01	1	0	1	0	1	0	1	0
@TS_II_02	1	0	1	0	1	0	1	0
@TS_II_03	1	0	1	0	1	0	1	0
@TS_II_04	1	0	1	0	1	0	1	0
@TS_II_05	1	0	1	0	1	0	1	0
@TS_II_06	1	0	1	0	1	0	1	0
@TS_II_07	1	0	1	0	1	0	1	0
@TS_II_08	1	0	1	0	1	0	1	0
@TS_II_09	1	0	1	0	1	0	1	0
@TS_II_10	1	0	1	0	1	0	1	0
@TS_II_11	1	0	1	0	1	0	1	0
@TS_II_12	1	0	1	0	1	0	1	0
@TS_II_13	1	0	1	0	1	0	1	0
@TS_II_14	1	0	1	0	1	0	1	0
@StackSutie	11	0	11	0	1	0	1	0
@TestDemo_Stack_01	1	0	1	0	1	0	1	0

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@TestDemo_Stack_02	1	0	1	0	1	0	1	0
@TestDemo_Stack_03	1	0	1	0	1	0	1	0
@TestDemo_Stack_04	1	0	1	0	1	0	1	0
@TestDemo_Stack_05	1	0	1	0	1	0	1	0
@TestDemo_Stack_06	1	0	1	0	1	0	1	0
@TestDemo_Stack_07	1	0	1	0	1	0	1	0
@TestDemo_Stack_08	1	0	1	0	1	0	1	0
@TestDemo_Stack_09	1	0	1	0	1	0	1	0
@TestDemo_Stack_10	1	0	1	0	1	0	1	0
@TestDemo_Stack_11	1	0	1	0	1	0	1	0
@TestDemo_Queue_01	1	0	1	0	1	0	1	0
@QueueSuite	14	4	10	0	1	0	1	0
@TestSuite_queue_02	1	0	1	0	1	0	1	0
@TestSuite_queue_03	1	0	1	0	1	0	1	0
@TestSuite_queue_04	1	0	1	0	1	0	1	0
@TestSuite_queue_05	1	0	1	0	1	0	1	0
@TestSuite_queue_06	1	0	1	0	1	0	1	0

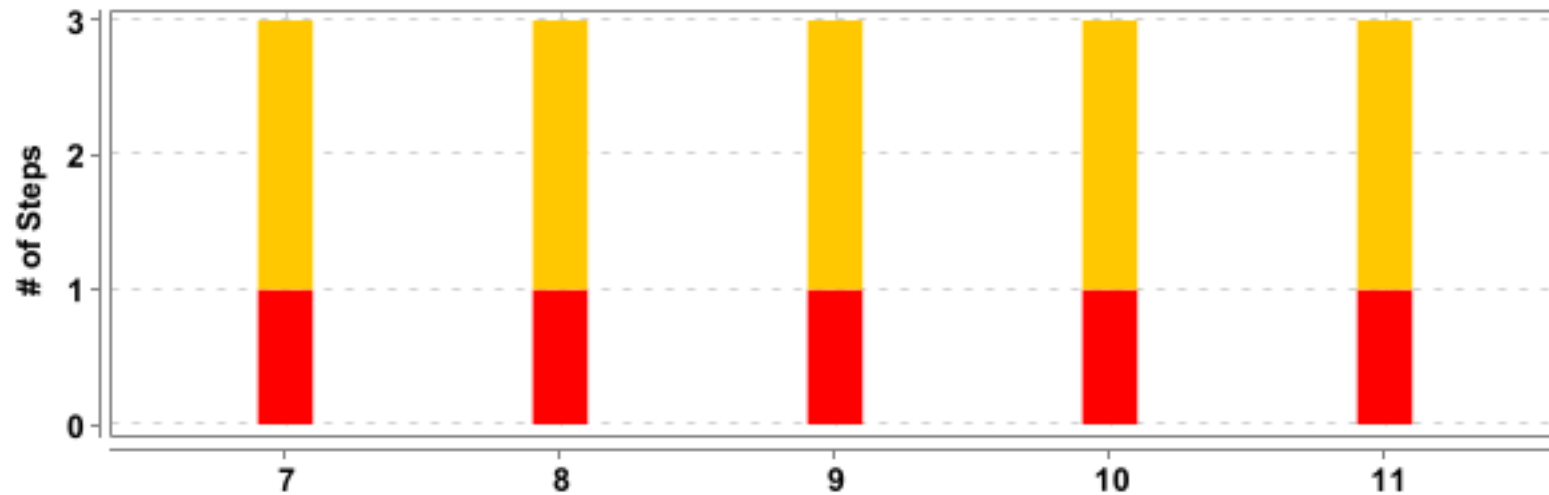
Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@TestSuite_queue_07	1	1	0	0	1	0	1	0
@TestSuite_queue_08	1	0	1	0	1	0	1	0
@TestSuite_queue_09	1	0	1	0	1	0	1	0
@TestSuite_queue_10	1	1	0	0	1	0	1	0
@TestSuite_queue_11	1	0	1	0	1	0	1	0
@TestSuite_queue_12	1	0	1	0	1	0	1	0
@TestSuite_queue_13	1	1	0	0	1	0	1	0
@TestSuite_queue_14	1	1	0	0	1	0	1	0
@GraphSuite	8	0	8	0	1	0	1	0
@TestDemo_Graph_01	1	0	1	0	1	0	1	0
@TestDemo_Graph_02	1	0	1	0	1	0	1	0
@TestDemo_Graph_03	1	0	1	0	1	0	1	0
@TestDemo_Graph_04	1	0	1	0	1	0	1	0
@TestDemo_Graph_05	1	0	1	0	1	0	1	0
@TestDemo_Graph_06	1	0	1	0	1	0	1	0
@TestDemo_Graph_07	1	0	1	0	1	0	1	0
@TestDemo_Graph_08	1	0	1	0	1	0	1	0



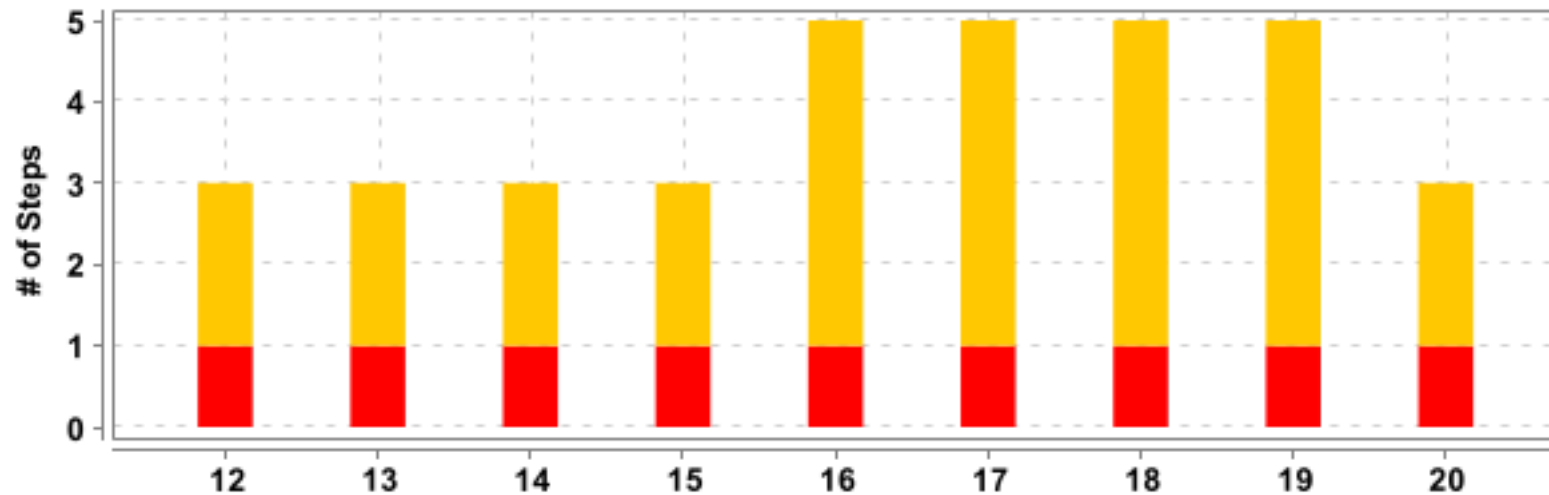
#	Feature Name	T	P	F	S	Duration
1	<u>To launching dsalgo application and to test Home page</u>	4	0	4	0	28.373 s
2	<u>Validating Register page</u>	11	0	11	0	57.609 s
3	<u>User to signin</u>	4	0	4	0	20.966 s
4	<u>launching dsalgo application load Datastructure page</u>	2	0	2	0	10.522 s
5	<u>launching dsalgo application load Array page</u>	13	0	13	0	2 m 50.097 s
6	<u>User Testing Linkedlist page</u>	14	0	14	0	1 m 55.194 s
7	<u>Testing the stack page of the DS Algo application</u>	11	0	11	0	1 m 2.909 s
8	<u>User to sign in the dsalgo application and test Queue page</u>	14	4	10	0	2 m 24.201 s
9	<u>User to sign in the dsalgo application and test Graph page</u>	8	0	8	0	30.620 s



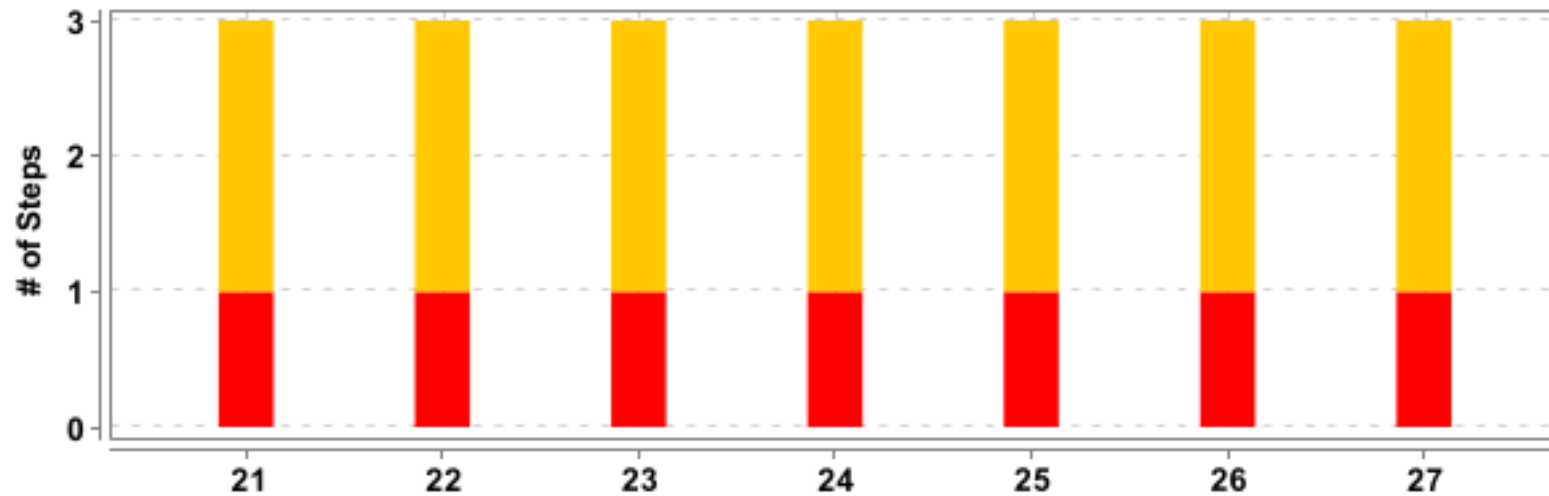
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>To launching dsalgo application and to test Home page</u>	<u>Launching home page of an dsalgo project</u>	3	0	1	2	14.066 s
2	<u>To launching dsalgo application and to test Home page</u>	<u>From Home page user tries to click on dropdown without login in</u>	4	0	1	3	3.805 s
3	<u>To launching dsalgo application and to test Home page</u>	<u>From Home page user clicks on signin link</u>	3	0	1	2	5.087 s
4	<u>To launching dsalgo application and to test Home page</u>	<u>From Home page user clicks on Register</u>	3	0	1	2	4.559 s
5	<u>Validating Register page</u>	<u>The user is presented with error message for empty fields below Username textbox</u>	3	0	1	2	5.784 s
6	<u>Validating Register page</u>	<u>The user is presented with error message for empty fields below Password textbox</u>	3	0	1	2	4.996 s



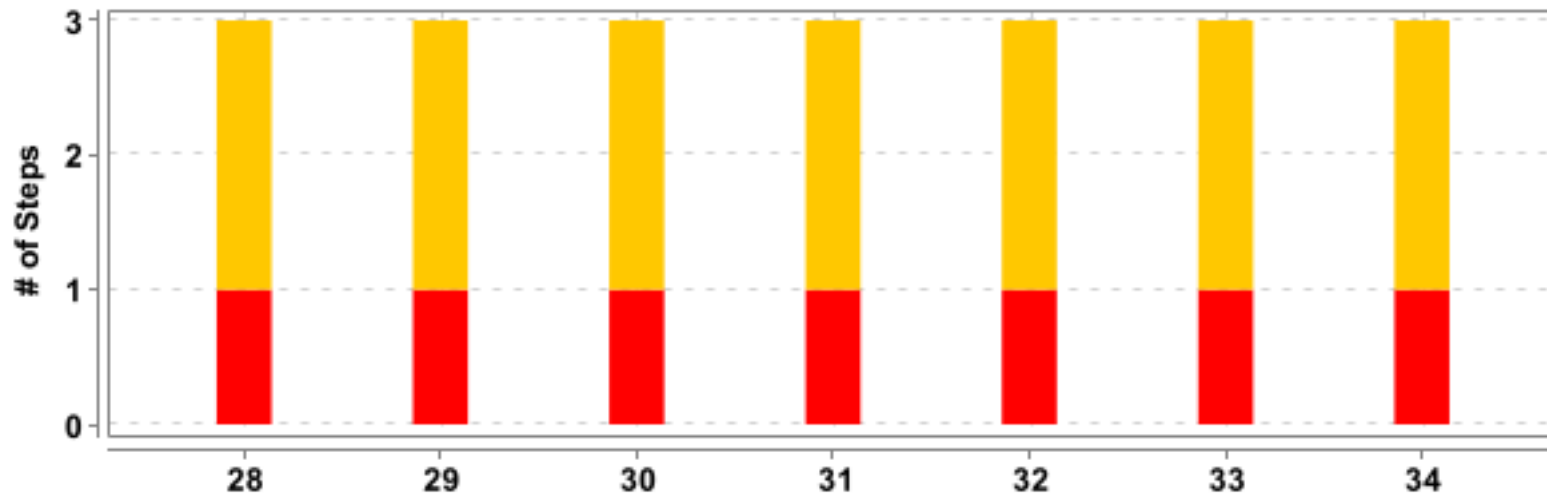
#	Feature Name	Scenario Name	T	P	F	S	Duration
7	<u>Validating Register page</u>	<u>The user is presented with error message for empty fields below confirm Password textbox</u>	3	0	1	2	4.956 s
8	<u>Validating Register page</u>	<u>The user is presented with error message for invalid username</u>	3	0	1	2	4.501 s
9	<u>Validating Register page</u>	<u>The user is presented with error message for password mismatch</u>	3	0	1	2	6.258 s
10	<u>Validating Register page</u>	<u>The user is presented with error message for password with characters less than 8</u>	3	0	1	2	4.554 s
11	<u>Validating Register page</u>	<u>The user is presented with error message for password with only numbers</u>	3	0	1	2	3.633 s



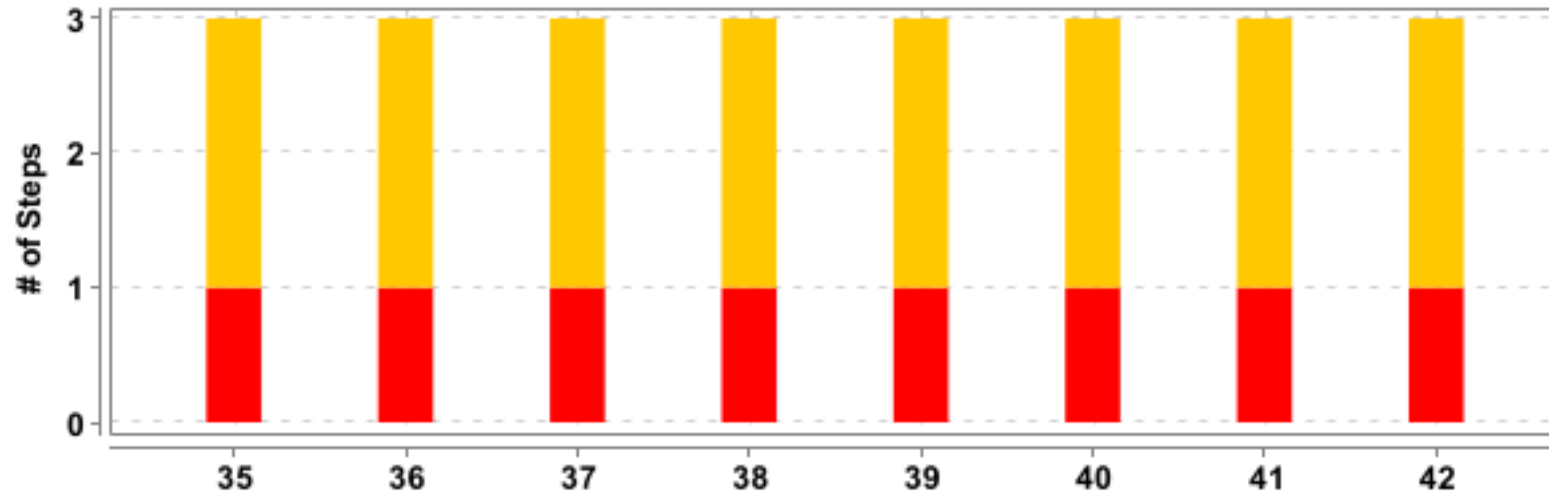
#	Feature Name	Scenario Name	T	P	F	S	Duration
12	<u>Validating Register page</u>	<u>The user is presented with error message for password too similar to your other personal information</u>	3	0	1	2	5.135 s
13	<u>Validating Register page</u>	<u>The user is presented with error message for commonly used password</u>	3	0	1	2	4.306 s
14	<u>Validating Register page</u>	<u>The user redirected to Homepage with valid details</u>	3	0	1	2	6.036 s
15	<u>Validating Register page</u>	<u>The user is presented with error message for existing username</u>	3	0	1	2	6.287 s
16	<u>User to signin</u>	<u>User missed to give credentials</u>	5	0	1	4	2.926 s
17	<u>User to signin</u>	<u>User failed to give valid username</u>	5	0	1	4	6.263 s
18	<u>User to signin</u>	<u>User failed to give valid password</u>	5	0	1	4	4.143 s
19	<u>User to signin</u>	<u>user signin</u>	5	0	1	4	7.324 s
20	<u>launching dsalgo application load Datastructure page</u>	<u>navigate to Time complexity from signin</u>	3	0	1	2	4.939 s



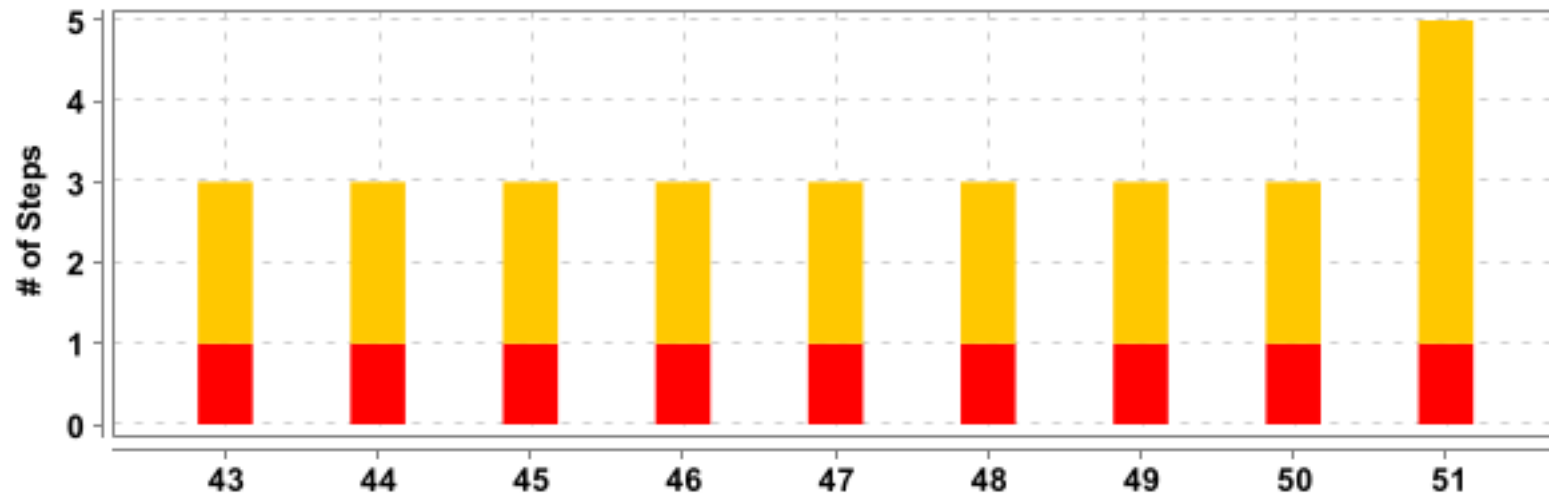
#	Feature Name	Scenario Name	T	P	F	S	Duration
21	<u>launching dsalgo application load Datastructure page</u>	<u>navigate to Time complexity and practice question page</u>	3	0	1	2	5.509 s
22	<u>launching dsalgo application load Array page</u>	<u>navigate to Arrays in Python from signin</u>	3	0	1	2	5.786 s
23	<u>launching dsalgo application load Array page</u>	<u>navigate to Arrays in Python and open editor</u>	3	0	1	2	16.148 s
24	<u>launching dsalgo application load Array page</u>	<u>navigate to Arrays using List from signin</u>	3	0	1	2	8.976 s
25	<u>launching dsalgo application load Array page</u>	<u>Open editor from Arrays using List page</u>	3	0	1	2	18.129 s
26	<u>launching dsalgo application load Array page</u>	<u>navigate to Basic Operations in List from signin</u>	3	0	1	2	5.387 s
27	<u>launching dsalgo application load Array page</u>	<u>Open editor from Basic Operations in List page</u>	3	0	1	2	21.230 s



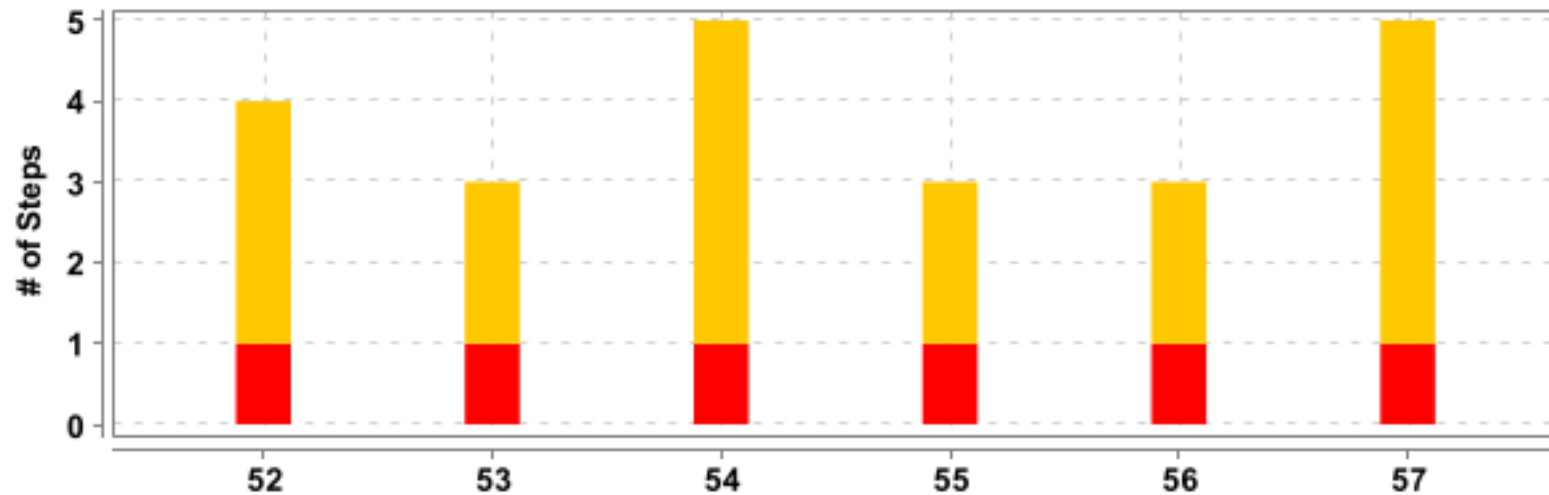
#	Feature Name	Scenario Name	T	P	F	S	Duration
28	<u>launching dsalgo application load Array page</u>	<u>navigate to Applications of Array from signin</u>	3	0	1	2	6.746 s
29	<u>launching dsalgo application load Array page</u>	<u>Open editor from Applications of Array page</u>	3	0	1	2	5.145 s
30	<u>launching dsalgo application load Array page</u>	<u>Launching Practice Questions page of an dsalgo project</u>	3	0	1	2	6.871 s
31	<u>launching dsalgo application load Array page</u>	<u>Launching Search array link of an dsalgo project</u>	3	0	1	2	16.584 s
32	<u>launching dsalgo application load Array page</u>	<u>Launching Max Consecutive Ones link of an dsalgo project</u>	3	0	1	2	8.592 s
33	<u>launching dsalgo application load Array page</u>	<u>Launching Find Numbers with Even Number of Digits link of an dsalgo project</u>	3	0	1	2	12.033 s
34	<u>launching dsalgo application load Array page</u>	<u>Launching Squares of a Sorted Array link of an dsalgo project</u>	3	0	1	2	17.663 s



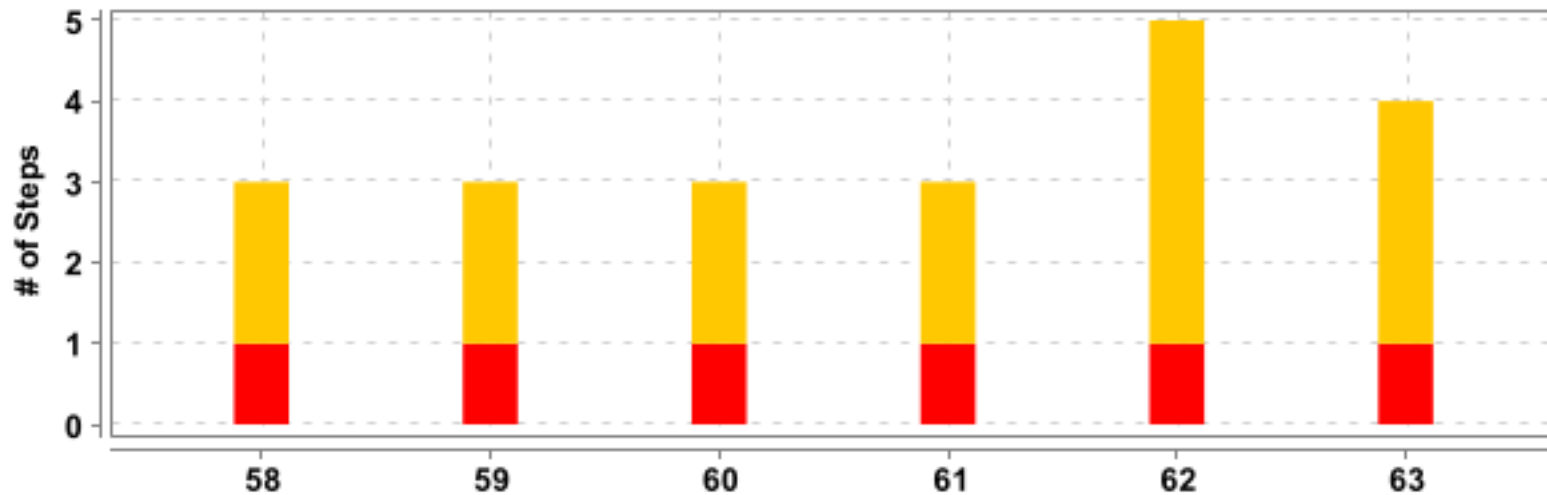
#	Feature Name	Scenario Name	T	P	F	S	Duration
35	<u>User Testing Linkedlist page</u>	<u>navigate to Introduction in Linked List page from signin</u>	3	0	1	2	16.598 s
36	<u>User Testing Linkedlist page</u>	<u>navigate to Introduction and open editor</u>	3	0	1	2	25.082 s
37	<u>User Testing Linkedlist page</u>	<u>navigate to Creating Linked List from signin</u>	3	0	1	2	4.735 s
38	<u>User Testing Linkedlist page</u>	<u>Open editor from Creating Linked List page</u>	3	0	1	2	4.254 s
39	<u>User Testing Linkedlist page</u>	<u>navigate to Types of Linked List from signin</u>	3	0	1	2	5.834 s
40	<u>User Testing Linkedlist page</u>	<u>Open editor from Types of Linked List page</u>	3	0	1	2	3.512 s
41	<u>User Testing Linkedlist page</u>	<u>navigate to Implement Linked List in Python from signin</u>	3	0	1	2	4.352 s
42	<u>User Testing Linkedlist page</u>	<u>Open editor from Implement Linked List in Python page</u>	3	0	1	2	4.826 s



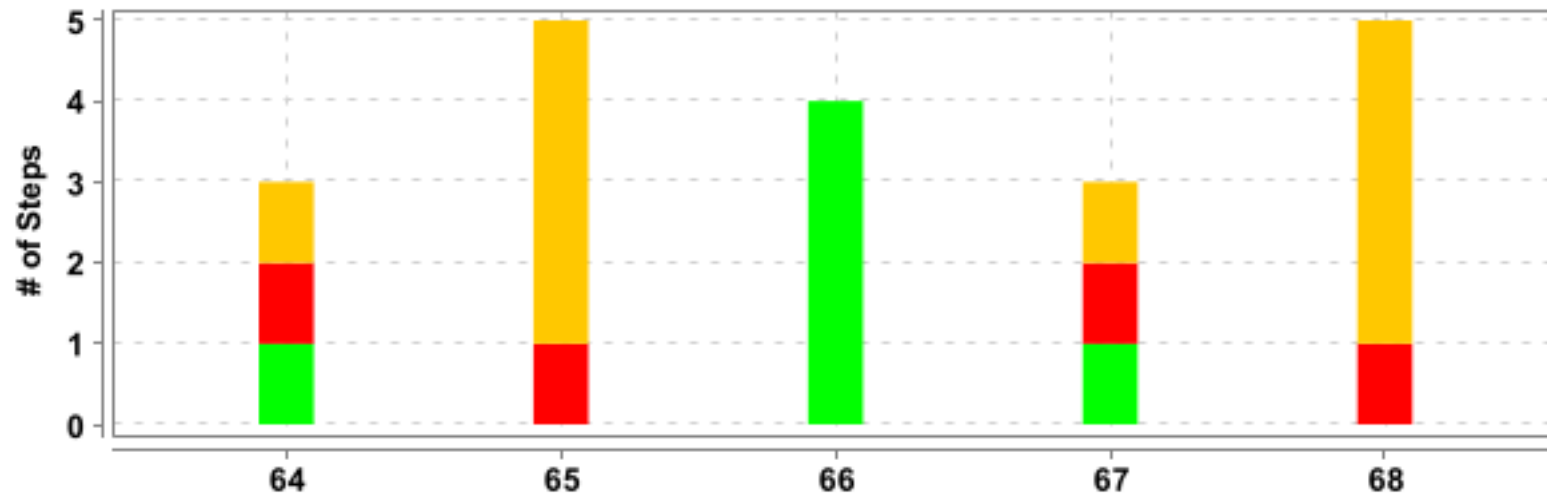
#	Feature Name	Scenario Name	T	P	F	S	Duration
43	<u>User Testing LinkedList page</u>	<u>navigate to Traversal from signin</u>	3	0	1	2	10.757 s
44	<u>User Testing LinkedList page</u>	<u>Open editor from Traversal page</u>	3	0	1	2	13.886 s
45	<u>User Testing LinkedList page</u>	<u>navigate to Insertion from signin</u>	3	0	1	2	4.428 s
46	<u>User Testing LinkedList page</u>	<u>Open editor from Insertion page</u>	3	0	1	2	3.669 s
47	<u>User Testing LinkedList page</u>	<u>navigate to Deletion from signin</u>	3	0	1	2	6.595 s
48	<u>User Testing LinkedList page</u>	<u>Open editor from Deletion page</u>	3	0	1	2	3.293 s
49	<u>Testing the stack page of the DS Algo application</u>	<u>The user should be on the stack page</u>	3	0	1	2	3.227 s
50	<u>Testing the stack page of the DS Algo application</u>	<u>The user is able to navigate to "operations in stack" page</u>	3	0	1	2	3.274 s
51	<u>Testing the stack page of the DS Algo application</u>	<u>The user is able to navigate to page having tryeditor from operations in stack page</u>	5	0	1	4	7.125 s



#	Feature Name	Scenario Name	T	P	F	S	Duration
52	<u>Testing the stack page of the DS Algo application</u>	<u>The user is presented with error message for invalid python code for operations in stack page</u>	4	0	1	3	4.322 s
53	<u>Testing the stack page of the DS Algo application</u>	<u>The user is able to navigate to stack page and click on "Implementation " link</u>	3	0	1	2	4.872 s
54	<u>Testing the stack page of the DS Algo application</u>	<u>The user is able to navigate to page having tryeditor from Implementation page</u>	5	0	1	4	8.471 s
55	<u>Testing the stack page of the DS Algo application</u>	<u>The user is presented with error message for invalid code for Implementation page</u>	3	0	1	2	7.387 s
56	<u>Testing the stack page of the DS Algo application</u>	<u>The user is able to navigate to stack page and click on "Applications " link</u>	3	0	1	2	6.801 s
57	<u>Testing the stack page of the DS Algo application</u>	<u>The user is able to navigate to page having tryeditor from Applications page</u>	5	0	1	4	3.419 s

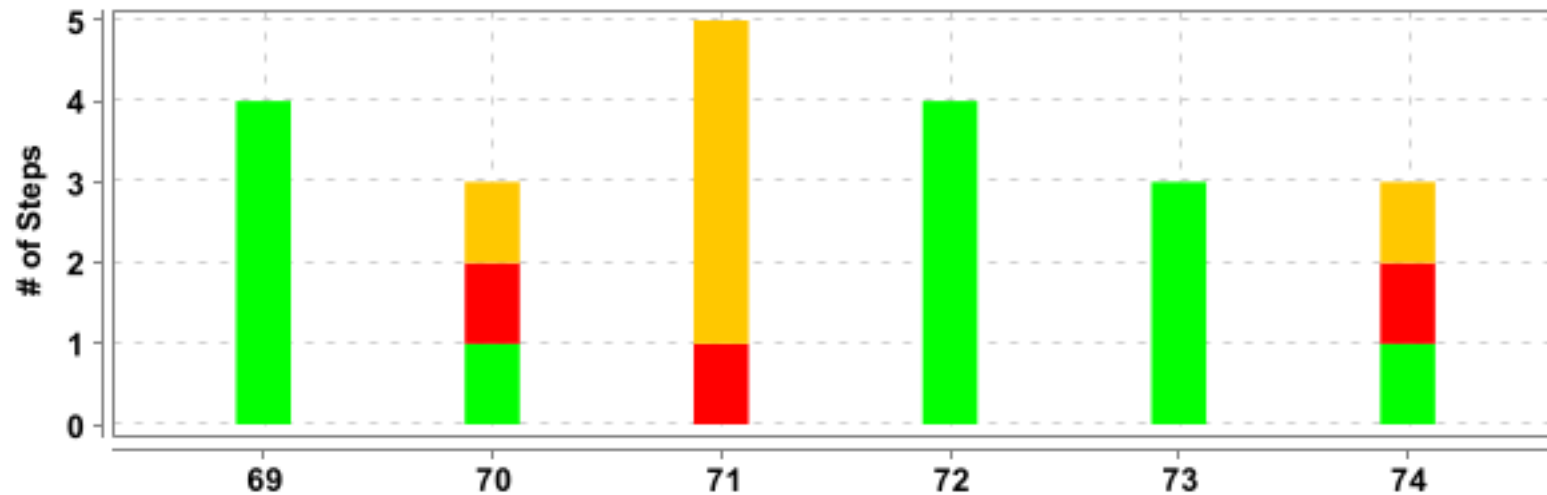


#	Feature Name	Scenario Name	T	P	F	S	Duration
58	<u>Testing the stack page of the DS Algo application</u>	<u>The user is presented with error message for invalid code in tryEditor page for Applications page</u>	3	0	1	2	4.841 s
59	<u>Testing the stack page of the DS Algo application</u>	<u>The user is able to navigate to "practice Questions" in stack page</u>	3	0	1	2	8.118 s
60	<u>User to sign in the dsalgo application and test Queue page</u>	<u>user is logged in into the dsalgo project to test Queue page</u>	3	0	1	2	16.504 s
61	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The user is able to navigate to Implementation of Queue in Python link page</u>	3	0	1	2	4.774 s
62	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The user should be directed to editor page with run button to test python code</u>	5	0	1	4	4.874 s
63	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u>	4	0	1	3	14.421 s

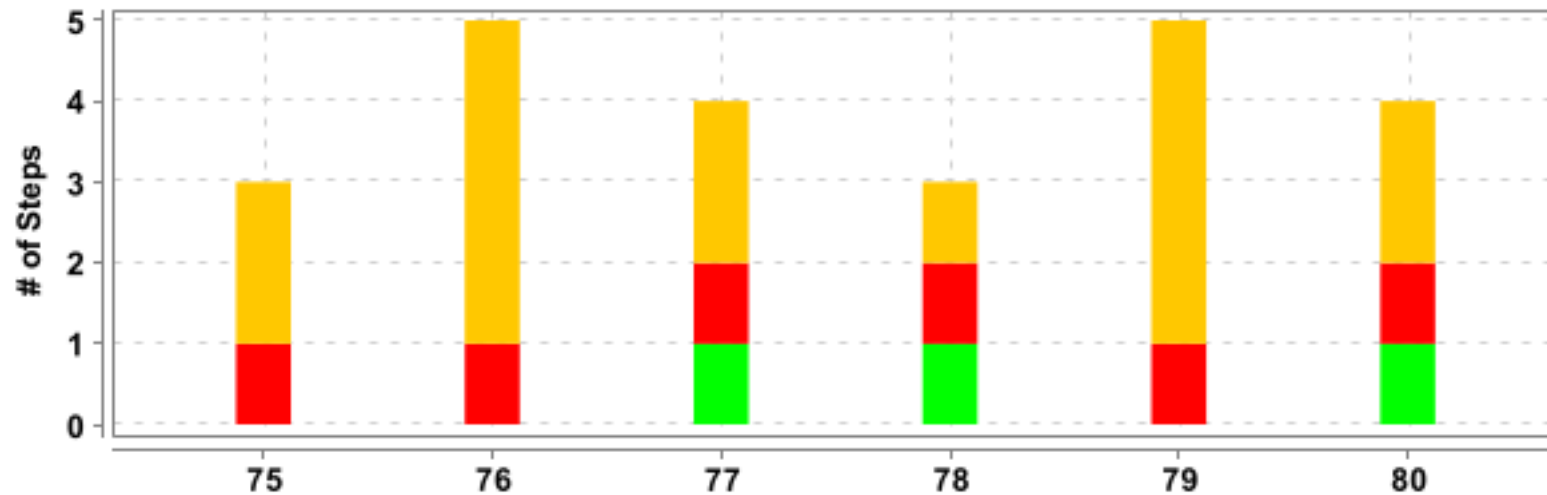


#	Feature Name	Scenario Name	T	P	F	S	Duration
64	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The user is able to navigate to queue page and click on Implementation using collections deque link</u>	3	1	1	1	44.742 s
65	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The user should be directed to editor page with run button to test python code from Implementation using collections *</u>	5	0	1	4	0.192 s
66	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The user is presented with error message for invalid code in Editor for Implementation using collections page</u>	4	4	0	0	11.071 s
67	<u>User to sign in the dsalgo application and test Queue page</u>	<u>User is able to navigate to queue page and click on Implementation using array link</u>	3	1	1	1	10.302 s
68	<u>User to sign in the dsalgo application and test Queue page</u>	<u>User should be directed to editor page with run button to test python code from Implementation using array link</u>	5	0	1	4	0.187 s

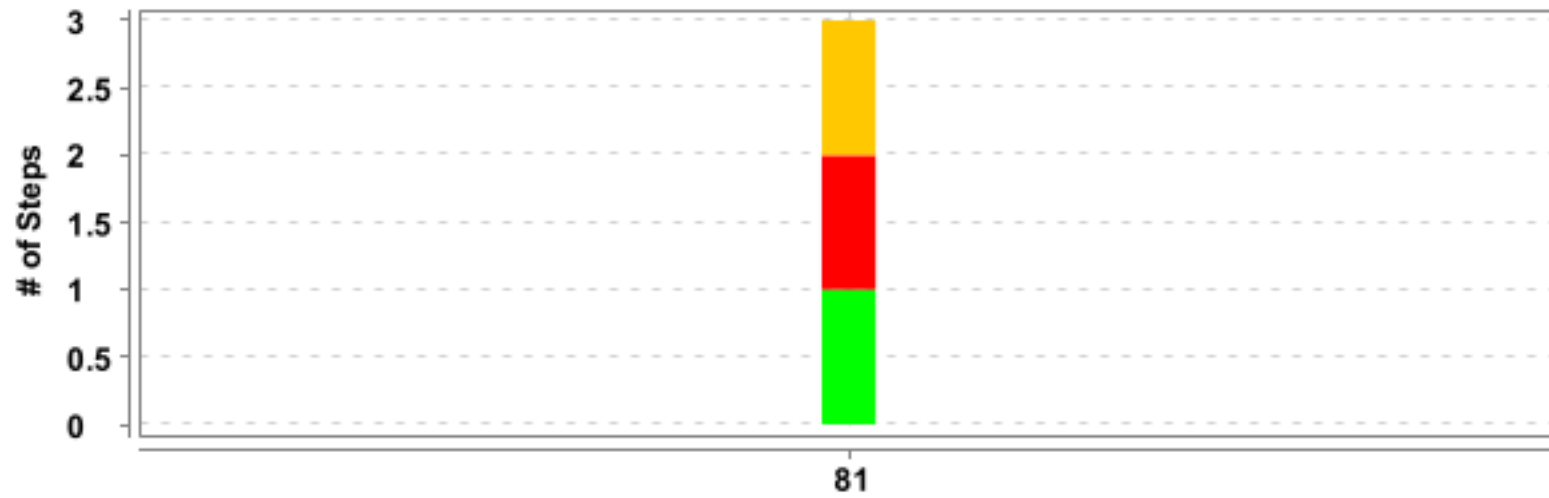
* The feature name and/or scenario name has been cropped to fit in the available space.



#	Feature Name	Scenario Name	T	P	F	S	Duration
69	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The User is presented with error message for invalid code in Editor for Implementation using array page</u>	4	4	0	0	3.617 s
70	<u>User to sign in the dsalgo application and test Queue page</u>	<u>User is able to navigate to queue page and click on Queue Operations link</u>	3	1	1	1	8.919 s
71	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The user should be directed to editor page with run button to test python code from Queue Operations link</u>	5	0	1	4	1.462 s
72	<u>User to sign in the dsalgo application and test Queue page</u>	<u>The User is presented with error message for invalid code in Editor for Queue Operations page</u>	4	4	0	0	11.420 s
73	<u>User to sign in the dsalgo application and test Queue page</u>	<u>User is able to navigate to Queue page and click on Practice Questions</u>	3	3	0	0	2.064 s
74	<u>User to sign in the dsalgo application and test Graph page</u>	<u>user is logged in into the dsalgo project to test Graph page</u>	3	1	1	1	10.536 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
75	<u>User to sign in the dsalgo application and test Graph page</u>	<u>User is able to navigate to graph page</u>	3	0	1	2	0.378 s
76	<u>User to sign in the dsalgo application and test Graph page</u>	<u>User should be directed to editor page with run button to test python code</u>	5	0	1	4	0.174 s
77	<u>User to sign in the dsalgo application and test Graph page</u>	<u>User is presented with error message for invalid code in Editor for graph link page</u>	4	1	1	2	1.407 s
78	<u>User to sign in the dsalgo application and test Graph page</u>	<u>User is able to navigate to graph page and click on graph representations</u>	3	1	1	1	3.912 s
79	<u>User to sign in the dsalgo application and test Graph page</u>	<u>User should be directed to editor page with run button to test python code from graph representations</u>	5	0	1	4	7.058 s
80	<u>User to sign in the dsalgo application and test Graph page</u>	<u>The user is presented with error message for invalid code in Editor for graph representations</u>	4	1	1	2	2.584 s

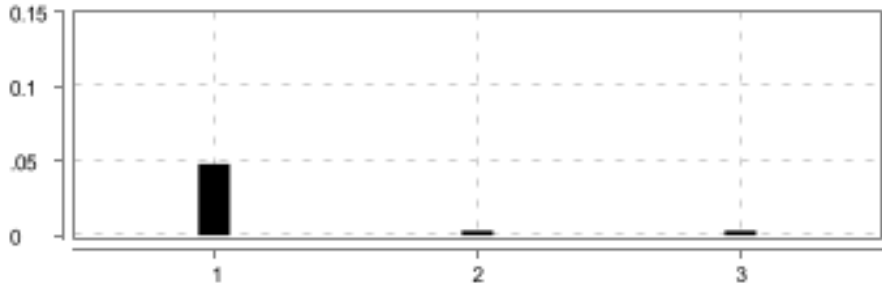



#	Feature Name	Scenario Name	T	P	F	S	Duration
81	<u>User to sign in the dsalgo application and test Graph page</u>	<u>User is able to navigate to graph representations page and click on Practice Questions</u>	3	1	1	1	4.039 s

To launching dsalgo application and to test Home page

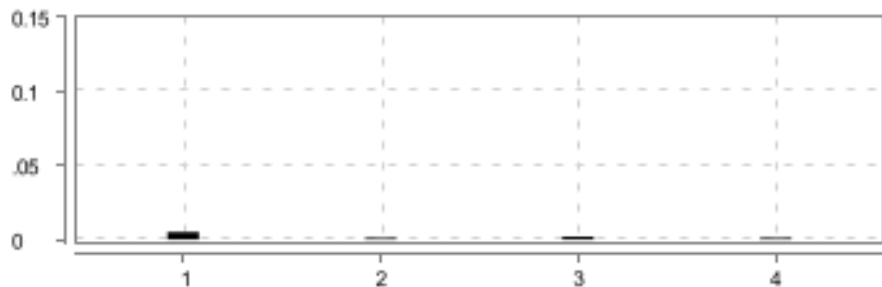

FAILED	DURATION - 28.373 s	Scenarios Total - 4 Pass - 0 Fail - 4 Skip - 0		Steps Total - 13 Pass - 0 Fail - 4 Skip - 9	
/ 12:02:31.042 PM // 12:02:59.415 PM /					

Launching home page of an dsalgo project

FAILED	DURATION - 14.066 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 12:02:31.051 PM // 12:02:45.117 PM /				
To launching dsalgo application and to test Home page				
@TestSuit_home @home				

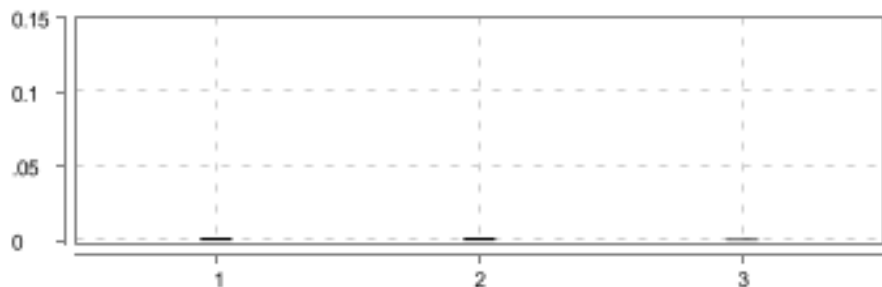

#	Step / Hook Details	Status	Duration
1	Given User opens DS Algo portal link java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.home_stepdef.user_opens_ds_algo_portal_link(home_stepdef.java:32) at ?.User opens DS Algo portal link(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/01_home.feature:6) * Not displayable characters are replaced by '?'. 	FAILED	0.048 s
2	When User clicks Get Started button	SKIPPED	0.003 s
3	Then User will be redirected to homepage	SKIPPED	0.003 s

From Home page user tries to click on dropdown without login in

<div>FAILED</div> <div>DURATION - 3.805 s</div>			<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:02:45.693 PM // 12:02:49.498 PM /				
To launching dsalgo application and to test Home page				
@TestSuit_home @home				

#	Step / Hook Details	Status	Duration
1	Given User is in Home page java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.home_stepdef.user_is_in_home_page(home_stepdef.java:62) at ?.User is in Home page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/01_home.feature:12) * Not displayable characters are replaced by '?'. 	FAILED	0.005 s
2	When User clicks on Data Structures dropdown	SKIPPED	0.001 s
3	And Select Array option	SKIPPED	0.002 s
4	Then User to get warning message to login	SKIPPED	0.001 s

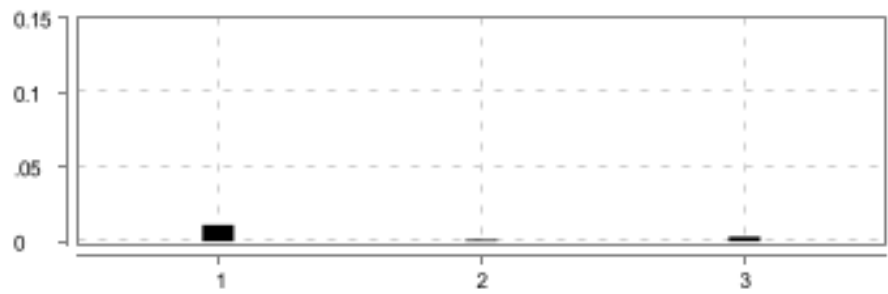

From Home page user clicks on signin link

FAILED	DURATION - 5.087 s		<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:02:49.670 PM // 12:02:54.757 PM /				
To launching dsalgo application and to test Home page				
@TestSuit_home @home				

#	Step / Hook Details	Status	Duration
1	Given User in Home page java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.home_stepdef.user_in_home_page(home_stepdef.java:90) at ?.User in Home page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/01_home.feature:19) * Not displayable characters are replaced by '?'. 	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
2	When User clicks on signin link	SKIPPED	0.002 s
3	Then User to go to login page	SKIPPED	0.001 s

From Home page user clicks on Register

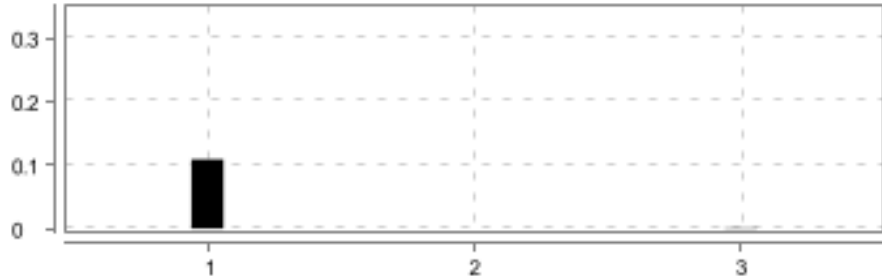

FAILED	DURATION - 4.559 s		<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:02:54.856 PM // 12:02:59.415 PM /				
To launching dsalgo application and to test Home page				
@TestSuit_home @home				

#	Step / Hook Details	Status	Duration
1	Given User is in Home page java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.home_stepdef.user_is_in_home_page(home_stepdef.java:62) at ?.User is in Home page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/01_home.feature:25) * Not displayable characters are replaced by '?'. 	FAILED	0.011 s
2	When User clicks on register link	SKIPPED	0.001 s
3	Then User to open Registration page	SKIPPED	0.003 s

Validating Register page

<div>FAILED</div> <div>DURATION - 57.609 s</div>		<div>Scenarios</div> <div>Total - 11</div> <div>Pass - 0</div> <div>Fail - 11</div> <div>Skip - 0</div>	<div><div></div><div>11</div></div>	<div>Steps</div> <div>Total - 33</div> <div>Pass - 0</div> <div>Fail - 11</div> <div>Skip - 22</div>	<div><div></div><div>33</div></div>
/ 12:02:59.716 PM // 12:03:57.325 PM /					

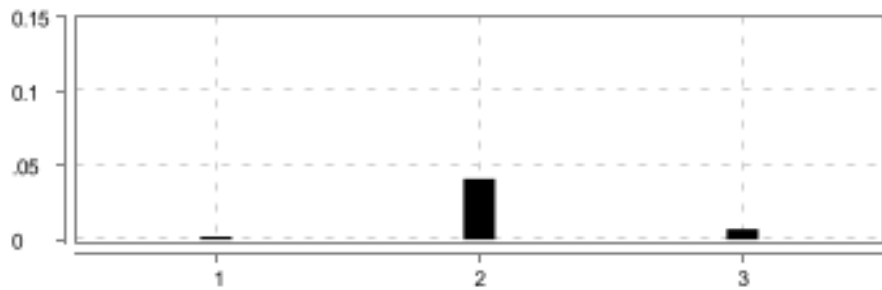

The user is presented with error message for empty fields below Username textbox

<div>FAILED</div> <div>DURATION - 5.784 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:02:59.717 PM // 12:03:05.501 PM /				
Validating Register page				
@Test_suit_register_02 @register				

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.109 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Register" button with all fields empty	SKIPPED	0.000 s
3	Then It should display an error message "Please fill out this field." below Username textbox	SKIPPED	0.001 s

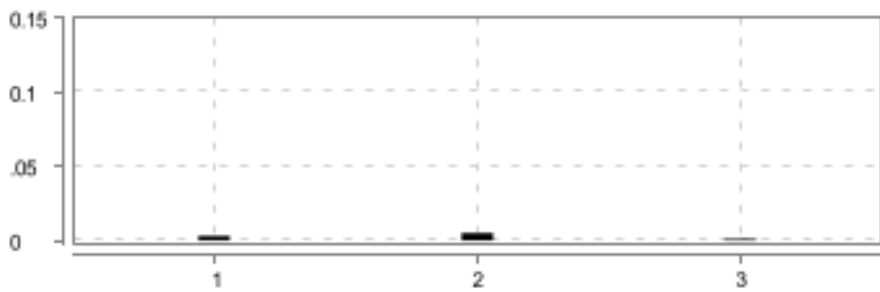

The user is presented with error message for empty fields below Password textbox

<div>FAILED</div> <div>DURATION - 4.996 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:03:05.633 PM // 12:03:10.629 PM /				
Validating Register page				
@Test_suit_register_03 @register				

#	Step / Hook Details	Status	Duration
1	Given The user opens Register Page io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Register" button after entering username with other fields empty <div> <div>username</div> <div>MajestyPalm1</div> </div>	SKIPPED	0.041 s
3	Then It should display an error message "Please fill out this field." below Password textbox	SKIPPED	0.007 s

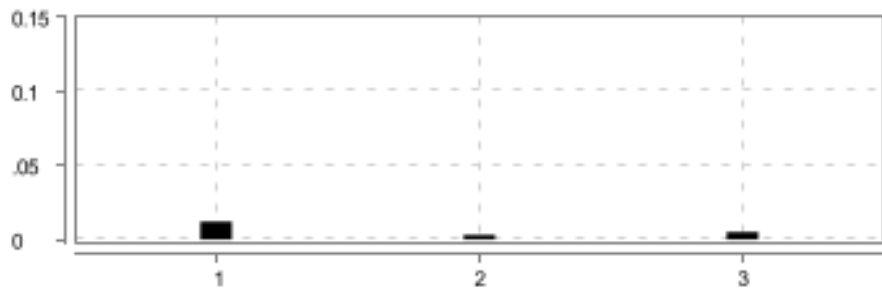

The user is presented with error message for empty fields below confirm Password textbox

<div>FAILED</div> <div>DURATION - 4.956 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:03:10.721 PM // 12:03:15.677 PM /				
Validating Register page				
@Test_suit_register_04 @register				

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration				
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>						
2	<div>When The user clicks "Register" button after entering "username" and "password" with Password Confirmation field empty</div> <table><tr><td>username</td><td>password</td></tr><tr><td>MajestyPalm1</td><td>testpassword</td></tr></table>	username	password	MajestyPalm1	testpassword	SKIPPED	0.005 s
username	password						
MajestyPalm1	testpassword						
3	Then It should display an error message "Please fill out this field." below Password Confirmation textbox	SKIPPED	0.001 s				

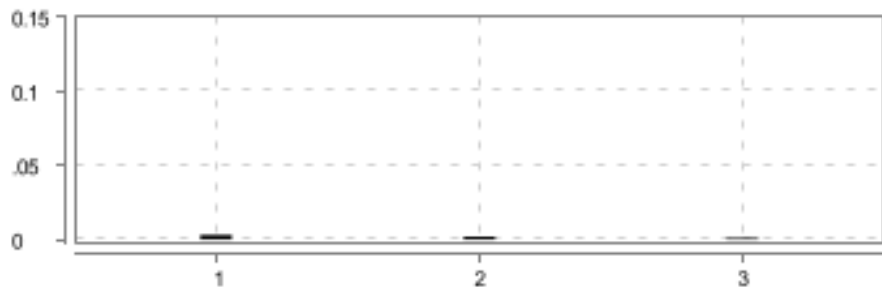

The user is presented with error message for invalid username

<div>FAILED</div> <div>DURATION - 4.501 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:03:15.831 PM // 12:03:20.332 PM /				
Validating Register page				
@Test_suit_register_05 @register				

#	Step / Hook Details	Status	Duration
1	Given The user opens Register Page io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.012 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user enters a "username" with characters other than Letters, digits and "@./+/-/_"</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>&**&**&</td><td>testpassword</td><td>testpassword</td></tr></table>	username	password	password confirmation	&**&**&	testpassword	testpassword	SKIPPED	0.003 s
username	password	password confirmation							
&**&**&	testpassword	testpassword							
3	<div>Then It should display an error message "Please enter a valid username"</div>	SKIPPED	0.005 s						

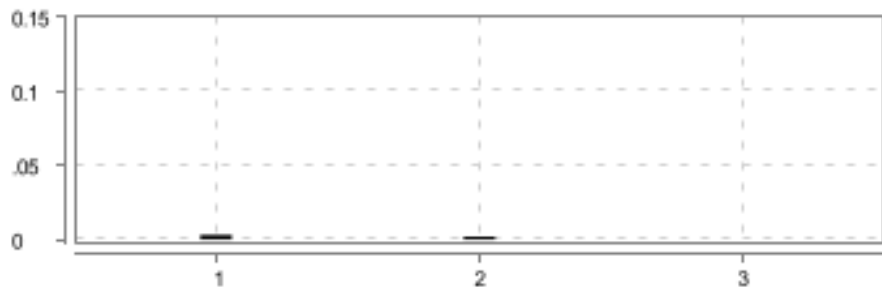

The user is presented with error message for password mismatch

<div>FAILED</div> <div>DURATION - 6.258 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:03:20.456 PM // 12:03:26.714 PM /				
Validating Register page				
@Test_suit_register_06 @register				

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user clicks "Register" button after entering valid "username" and different passwords in "password" and "password confirmation" fields</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>MajestyPalm1</td><td>testpassword</td><td>testpassword1</td></tr></table>	username	password	password confirmation	MajestyPalm1	testpassword	testpassword1	SKIPPED	0.002 s
username	password	password confirmation							
MajestyPalm1	testpassword	testpassword1							
3	Then It should display an error message "password_mismatch:The two password fields didn't match."	SKIPPED	0.001 s						

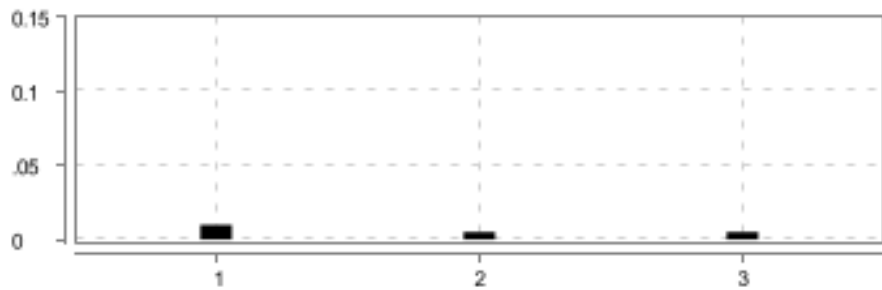

The user is presented with error message for password with characters less than 8

<div>FAILED</div> <div>DURATION - 4.554 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:03:26.821 PM // 12:03:31.375 PM /				
Validating Register page				
@register @Test_suit_register_07				

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user enters a valid "username" and "password" with characters less than 8</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>MajestyPalm1</td><td>a1b2c3d</td><td>a1b2c3d</td></tr></table>	username	password	password confirmation	MajestyPalm1	a1b2c3d	a1b2c3d	SKIPPED	0.002 s
username	password	password confirmation							
MajestyPalm1	a1b2c3d	a1b2c3d							
3	<div>Then It should display an error message "Password should contain at least 8 characters"</div>	SKIPPED	0.000 s						

The user is presented with error message for password with only numbers

<div>FAILED</div> <div>DURATION - 3.633 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:03:31.462 PM // 12:03:35.095 PM /				
Validating Register page				
@register @Test_suit_register_08				

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.010 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user enters a valid "username" and "password" with only numbers</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>MajestyPalm1</td><td>12345678</td><td>12345678</td></tr></table>	username	password	password confirmation	MajestyPalm1	12345678	12345678	SKIPPED	0.005 s
username	password	password confirmation							
MajestyPalm1	12345678	12345678							
3	<div>Then It should display an error message "Password can't be entirely numeric."</div>	SKIPPED	0.005 s						

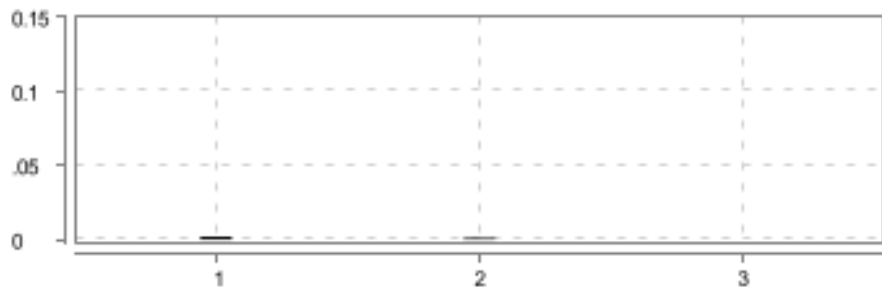

The user is presented with error message for password too similar to your other personal information

<div>FAILED</div> <div>DURATION - 5.135 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:03:35.264 PM // 12:03:40.399 PM /				
Validating Register page				
@register @Test_suit_register_09				

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user enters a valid "username" and "password" similar to username</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>MajestyPalm1</td><td>testPalm1</td><td>testPalm1</td></tr></table>	username	password	password confirmation	MajestyPalm1	testPalm1	testPalm1	SKIPPED	0.001 s
username	password	password confirmation							
MajestyPalm1	testPalm1	testPalm1							
3	Then It should display an error message "password can't be too similar to your other personal information."	SKIPPED	0.001 s						

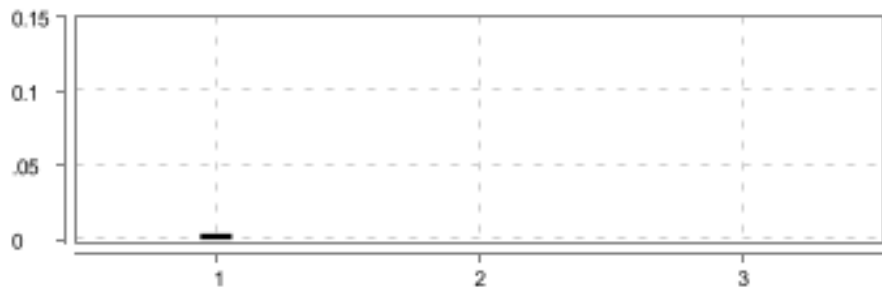

The user is presented with error message for commonly used password

<div>FAILED</div> <div>DURATION - 4.306 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:03:40.589 PM // 12:03:44.895 PM /				
Validating Register page				
@Test_suit_register_10 @register				

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user enters a valid "username" and commonly used password "password"</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>MajestyPalm1</td><td>Welcome1</td><td>Welcome1</td></tr></table>	username	password	password confirmation	MajestyPalm1	Welcome1	Welcome1	SKIPPED	0.001 s
username	password	password confirmation							
MajestyPalm1	Welcome1	Welcome1							
3	<div>Then It should display an error message "Password can't be commonly used password"</div>	SKIPPED	0.000 s						

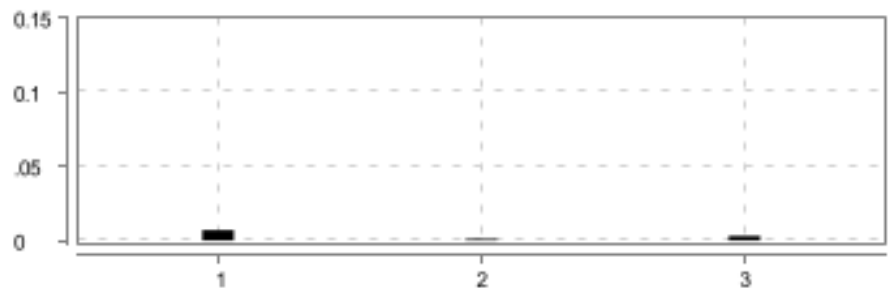

The user redirected to Homepage with valid details

<div>FAILED</div> <div>DURATION - 6.036 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:03:44.945 PM // 12:03:50.981 PM /				
Validating Register page				
@Test_suit_register_11 @register				

#	Step / Hook Details	Status	Duration
1	Given The user opens Register Page io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.004 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)</div> <div>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</div> <div>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</div> <div>at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)</div> <div>at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)</div> <div>at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</div> <div>at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)</div> <div>at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)</div> <div>at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)</div> <div>at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)</div> <div>at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)</div> <div>at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</div> <div>at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93)</div> <div>at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452)</div> <div>at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210)</div> <div>Caused by: java.lang.reflect.InvocationTargetException</div> <div>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77)</div> <div>at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)</div> <div>at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)</div> <div>at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)</div> <div>... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null</div> <div>at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25)</div> <div>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user enters a valid "username" and "password" and "password confirmation"</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>MajestyPalm3</td><td>Majesty@123</td><td>Majesty@123</td></tr></table>	username	password	password confirmation	MajestyPalm3	Majesty@123	Majesty@123	SKIPPED	0.000 s
username	password	password confirmation							
MajestyPalm3	Majesty@123	Majesty@123							
3	Then The user should be redirected to Homepage with the message "New Account Created. You are logged in as <username>"	SKIPPED	0.000 s						



The user is presented with error message for existing username

<div>FAILED</div> <div>DURATION - 6.287 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:03:51.038 PM // 12:03:57.325 PM /				
Validating Register page				
@Test_suit_register_12 @register				

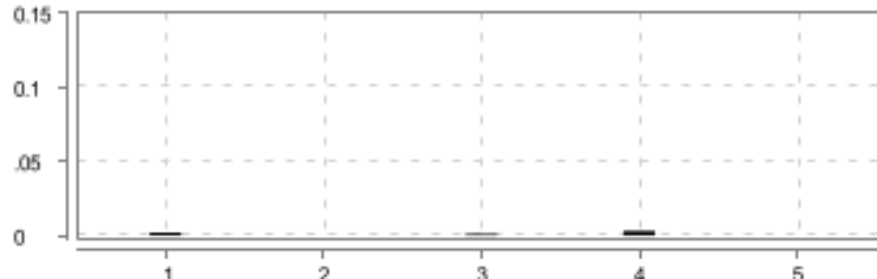

#	Step / Hook Details	Status	Duration
1	<p>Given The user opens Register Page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Registration_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.007 s

#	Step / Hook Details	Status	Duration						
	<div>at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Registration_Stepdef.<init>(Registration_Stepdef.java:25) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)</div>								
2	<div>When The user enters a valid existing "username" with "password" and "password confirmation"</div> <table><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>MajestyPalm3</td><td>Majesty@123</td><td>Majesty@123</td></tr></table>	username	password	password confirmation	MajestyPalm3	Majesty@123	Majesty@123	SKIPPED	0.001 s
username	password	password confirmation							
MajestyPalm3	Majesty@123	Majesty@123							
3	<div>Then It should display an error message "Username already exists"</div>	SKIPPED	0.003 s						

User to sign

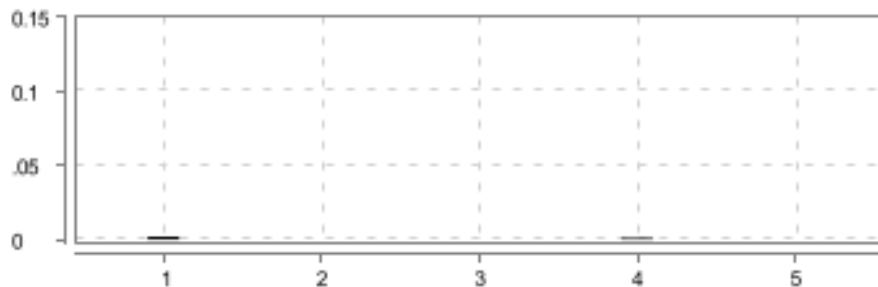

FAILED	DURATION - 20.966 s	Scenarios Total - 4 Pass - 0 Fail - 4 Skip - 0		Steps Total - 20 Pass - 0 Fail - 4 Skip - 16	
/ 12:03:57.573 PM // 12:04:18.539 PM /					

User missed to give credentials

<div>FAILED</div> <div>DURATION - 2.926 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:03:57.573 PM // 12:04:00.499 PM /				
User to signin				
@Test_suit_signin01				

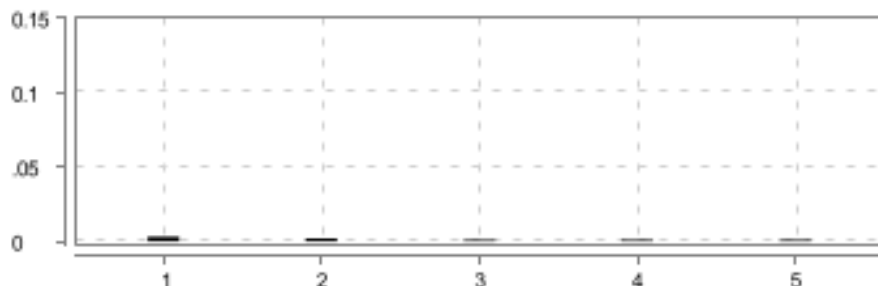

#	Step / Hook Details	Status	Duration
1	Given User is in signin page regone java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.Signin_stepdef.LoadLoginPage(Signin_stepdef.java:25) at step_definitions.Signin_stepdef.user_is_in_signin_page_regone(Signin_stepdef.java:35) at ?.User is in signin page regone(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/03_Signin.feature:5) * Not displayable characters are replaced by '?'.	FAILED	0.002 s
2	When User not giving valid userId regone	SKIPPED	0.000 s
3	And User not giving valid password regone	SKIPPED	0.001 s
4	And User clicks on signin button regone	SKIPPED	0.003 s
5	Then Error enter valid username & password regone	SKIPPED	0.000 s

User failed to give valid username

FAILED	DURATION - 6.263 s		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 12:04:00.544 PM // 12:04:06.807 PM /				
User to signin				
@Test_suit_signin02				

#	Step / Hook Details	Status	Duration
1	Given User is in signin page regtwo java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.Signin_stepdef.LoadLoginPage(Signin_stepdef.java:25) at step_definitions.Signin_stepdef.user_is_in_signin_page_regtwo(Signin_stepdef.java:66) at ?.User is in signin page regtwo(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/03_Signin.feature:13) * Not displayable characters are replaced by '?'. 	FAILED	0.002 s
2	When User not giving valid userId regtwo	SKIPPED	0.000 s
3	And User giving valid password regtwo	SKIPPED	0.000 s
4	And User clicks on sign button regtwo	SKIPPED	0.001 s
5	Then Error no special characters and numbers allowed regtwo	SKIPPED	0.000 s

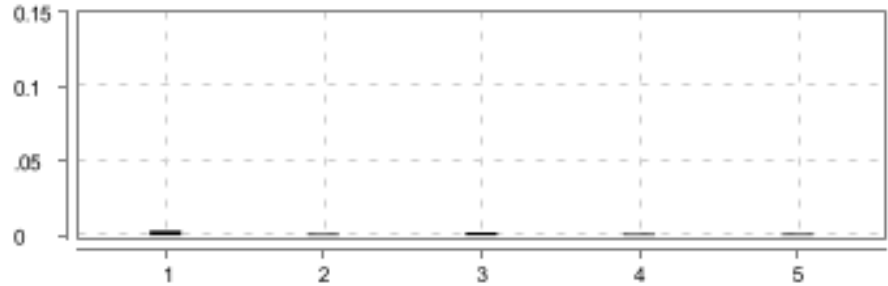

User failed to give valid password

FAILED	DURATION - 4.143 s		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 12:04:07.008 PM // 12:04:11.151 PM /				
User to signin				
@Test_suit_signin03				

#	Step / Hook Details	Status	Duration
1	Given User is in signin page regthree java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.Signin_stepdef.LoadLoginPage(Signin_stepdef.java:25) 	FAILED	0.003 s



#	Step / Hook Details	Status	Duration
	at step_definitions.Signin_stepdef.user_is_in_signin_page_regthree(Signin_stepdef.java:94) at ?.User is in signin page regthree(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/03_Signin.feature:21) * Not displayable characters are replaced by '?'.		
2	When User giving valid userId regthree	SKIPPED	0.002 s
3	And User not giving valid password regthree	SKIPPED	0.001 s
4	And User clicks on signin button regthree	SKIPPED	0.001 s
5	Then Error enter valid password regthree	SKIPPED	0.001 s

user signin

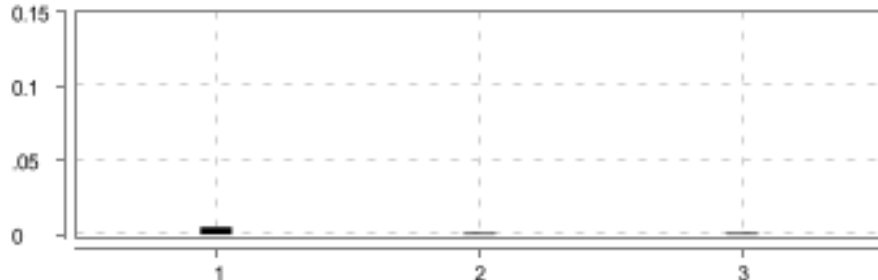

<div>FAILED</div> <div>DURATION - 7.324 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
/ 12:04:11.215 PM // 12:04:18.539 PM /				
User to signin				
@Test_suit_signin04				

#	Step / Hook Details	Status	Duration
1	Given User is in signin page regfive java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.get(String)" because "this.driver" is null at step_definitions.Signin_stepdef.LoadLoginPage(Signin_stepdef.java:25) at step_definitions.Signin_stepdef.user_is_in_signin_page_regfive(Signin_stepdef.java:122) at ?.User is in signin page regfive(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/03_Signin.feature:29) * Not displayable characters are replaced by '?'.	FAILED	0.003 s
2	When User to give valid userId regfive	SKIPPED	0.001 s
3	And User to give valid password regfive	SKIPPED	0.002 s
4	And User clicks on signin button regfive	SKIPPED	0.001 s
5	Then Validate success message regfive	SKIPPED	0.001 s

launching dsalgo application load Datastructure page

FAILED	DURATION - 10.522 s	Scenarios Total - 2 Pass - 0 Fail - 2 Skip - 0		Steps Total - 6 Pass - 0 Fail - 2 Skip - 4	
/ 12:04:18.626 PM // 12:04:29.148 PM /					

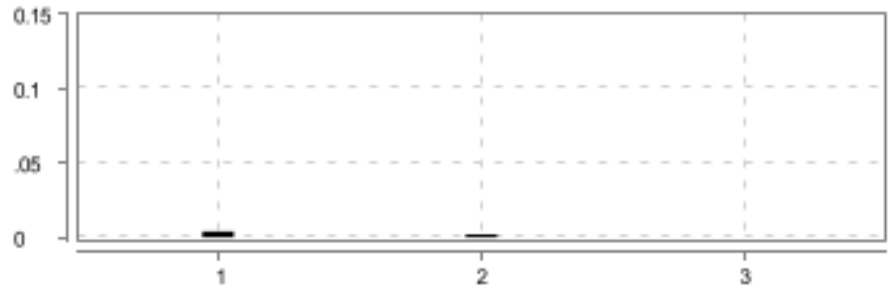

navigate to Time complexity from signi

FAILED	DURATION - 4.939 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 12:04:18.628 PM // 12:04:23.567 PM /				
launching dsalgo application load Datastructure page				
@Datastructure @TestSuit_Datastructure_01				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Datastructure page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Datastructure_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Datastructure_Stepdef.<init>(Datastructure_Stepdef.java:35) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Time complexity" button datastu	SKIPPED	0.001 s
3	Then user should be redirected to Time complexity pagedatastu	SKIPPED	0.001 s



navigate to Time complexity and practice question page

<div>FAILED</div> <div>DURATION - 5.509 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:04:23.639 PM // 12:04:29.148 PM /				
launching dsalgo application load Datastructure page				
@Datastructure @TestSuit_Datastructure_02				

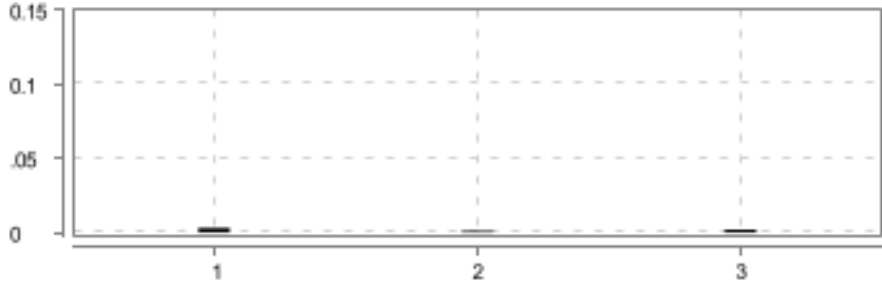

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Time complexity page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Datastructure_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Datastructure_Stepdef.<init>(Datastructure_Stepdef.java:35) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Time complexity page	SKIPPED	0.002 s
3	Then user displayed with a page have an tryEditor with a Run button to test and navigate to practice question page	SKIPPED	0.000 s

launching dsalgo application load Array page

FAILED	DURATION - 2 m 50.097 s	Scenarios Total - 13 Pass - 0 Fail - 13 Skip - 0		Steps Total - 39 Pass - 0 Fail - 13 Skip - 26	
/ 12:04:30.683 PM // 12:07:20.780 PM /					

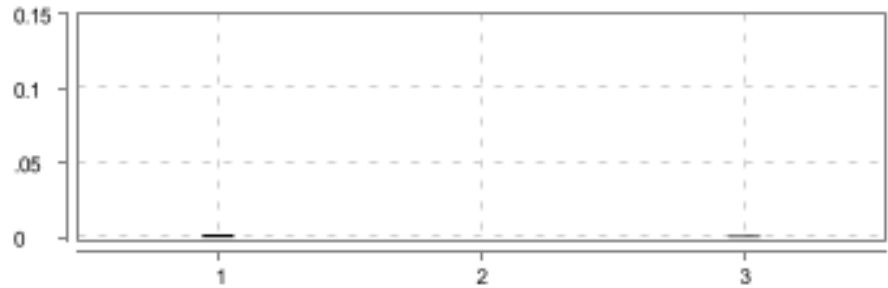

navigate to Arrays in Python from signin

FAILED	DURATION - 5.786 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 12:04:30.683 PM // 12:04:36.469 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_01 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Array page after logged in</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) </pre>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Arrays in Python" button	SKIPPED	0.001 s
3	Then user should be redirected to "arrays-in-python" page	SKIPPED	0.002 s

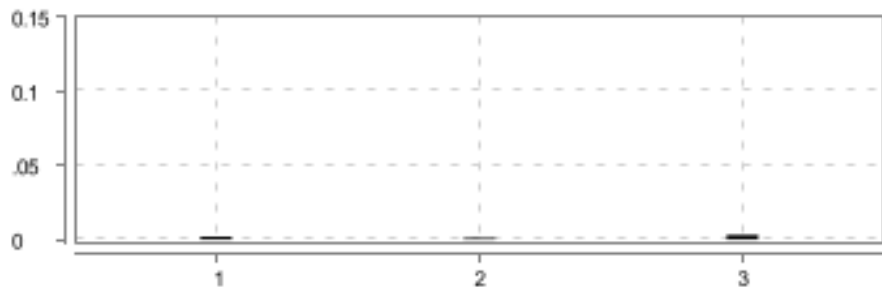

navigate to Arrays in Python and open editor

<div>FAILED</div> <div>DURATION - 16.148 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:04:42.070 PM // 12:04:58.218 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_02 @home				

#	Step / Hook Details	Status	Duration
1	Given user is in Arrays in Python page after logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Arrays in Python page	SKIPPED	0.000 s
3	Then user should be redirected to a page having an tryEditor with a Run button to test	SKIPPED	0.001 s

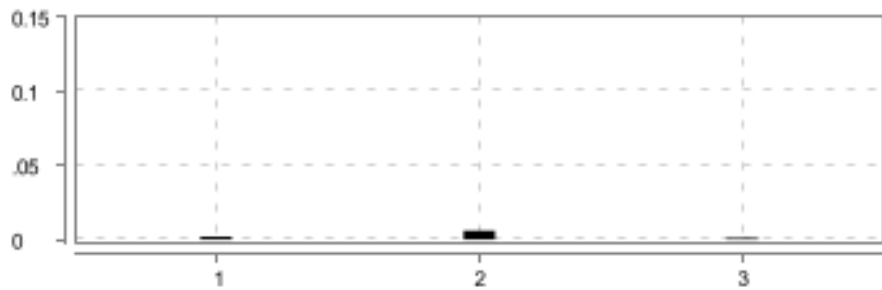

navigate to Arrays using List from signin

<div>FAILED</div> <div>DURATION - 8.976 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:04:58.264 PM // 12:05:07.240 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_03 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Array page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Arrays using List" button	SKIPPED	0.001 s
3	Then user should be redirected to "arrays-using-list" page	SKIPPED	0.003 s

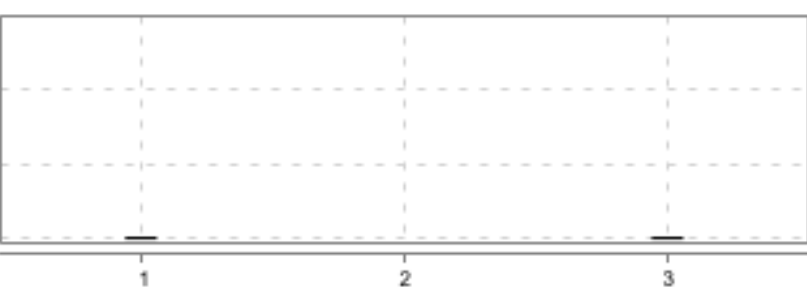

Open editor from Arrays using List page

<div>FAILED</div> <div>DURATION - 18.129 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:05:07.280 PM // 12:05:25.409 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_04 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Arrays using List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Arrays using List page	SKIPPED	0.006 s
3	Then user should be redirected to a page having an tryEditor with a Run button to test	SKIPPED	0.001 s

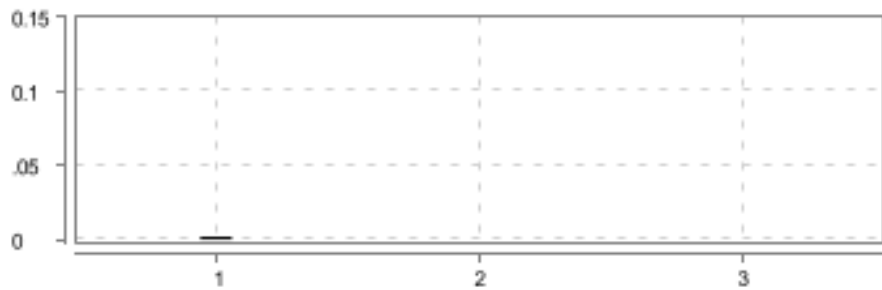

navigate to Basic Operations in List from signin

<div>FAILED</div> <div>DURATION - 5.387 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:05:25.830 PM // 12:05:31.217 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_05 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Array page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Basic Operations in List" button	SKIPPED	0.000 s
3	Then user should be redirected to "basic-operations-in-lists" page	SKIPPED	0.002 s

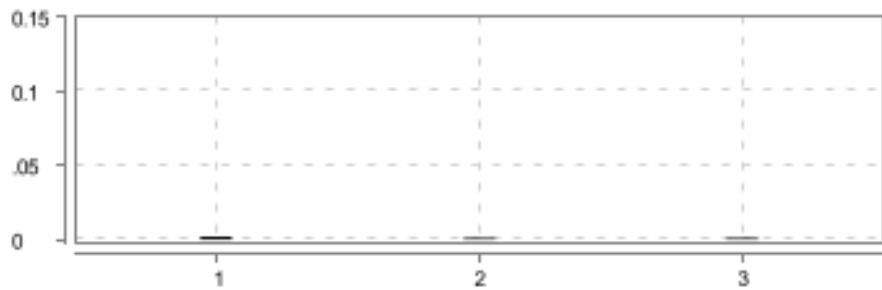

Open editor from Basic Operations in List page

<div>FAILED</div> <div>DURATION - 21.230 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:05:31.282 PM // 12:05:52.512 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_06 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Basic Operations in List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Arrays using List page	SKIPPED	0.000 s
3	Then user should be redirected to a page having an tryEditor with a Run button to test	SKIPPED	0.000 s

navigate to Applications of Array from signin

<div>FAILED</div> <div>DURATION - 6.746 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:05:52.549 PM // 12:05:59.295 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_07 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Array page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Applications of Array" button	SKIPPED	0.001 s
3	Then user should be redirected to "applications-of-array" page	SKIPPED	0.001 s

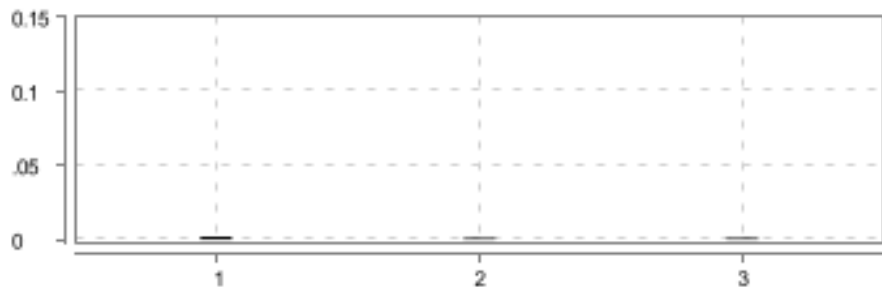

Open editor from Applications of Array page

<div>FAILED</div> <div>DURATION - 5.145 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:05:59.323 PM // 12:06:04.468 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_08 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Applications of Array page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Applications of Arrays page	SKIPPED	0.001 s
3	Then user should be redirected to a page having an tryEditor with a Run button to test	SKIPPED	0.001 s

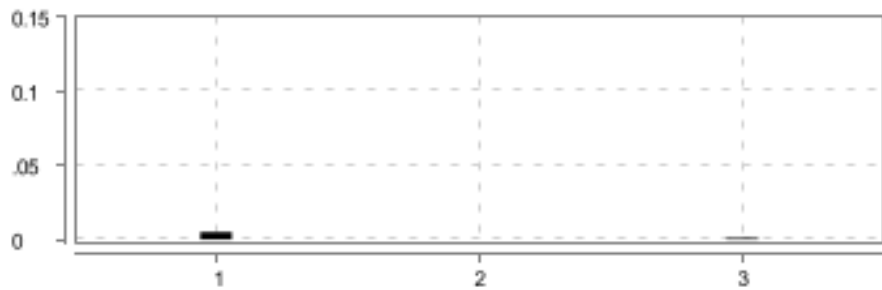

Launching Practice Questions page of an dsalgo project

<div>FAILED</div> <div>DURATION - 6.871 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:06:04.506 PM // 12:06:11.377 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_09 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Array page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Practice Questions" button	SKIPPED	0.001 s
3	Then user should be redirected to "practice" page	SKIPPED	0.001 s

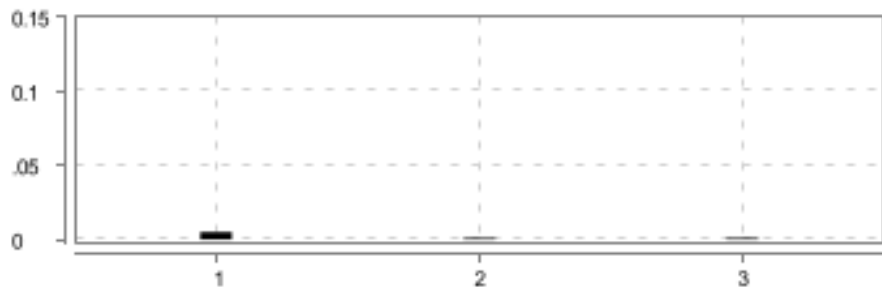

Launching Search array link of an dsalgo project

<div>FAILED</div> <div>DURATION - 16.584 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:06:11.580 PM // 12:06:28.164 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_10 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Practice page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Search the array" link	SKIPPED	0.000 s
3	Then user should be redirected to "Question" page contains questions,an tryEditor to write code with Run and Submit buttons	SKIPPED	0.001 s

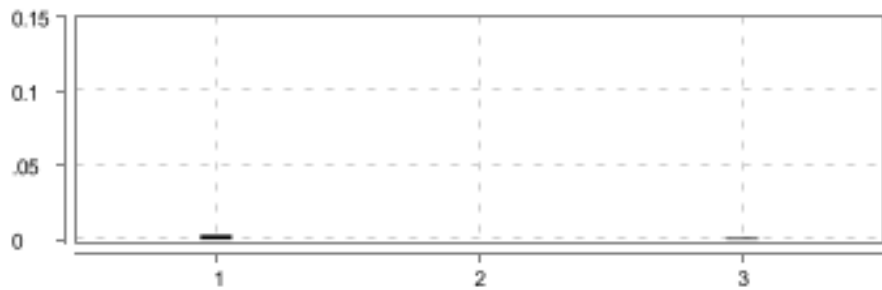

Launching Max Consecutive Ones link of an dsalgo project

<div>FAILED</div> <div>DURATION - 8.592 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:06:29.103 PM // 12:06:37.695 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_11 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Practice page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Max Consecutive Ones" link	SKIPPED	0.001 s
3	Then user should be redirected to "Question" page contains questions,an tryEditor to write code with Run and Submit buttons	SKIPPED	0.001 s

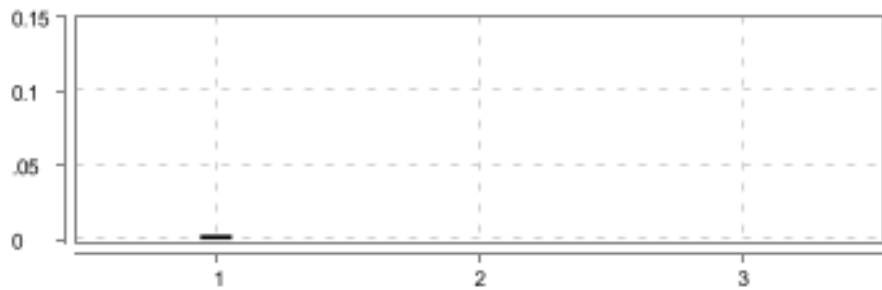

Launching Find Numbers with Even Number of Digits link of an dsalgo project

<div>FAILED</div> <div>DURATION - 12.033 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:06:37.750 PM // 12:06:49.783 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_12 @home				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Practice page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Find Numbers with Even Number of Digits" link	SKIPPED	0.000 s
3	Then user should be redirected to "Question" page contains questions,an tryEditor to write code with Run and Submit buttons	SKIPPED	0.001 s



Launching Squares of a Sorted Array link of an dsalgo project

<div>FAILED</div> <div>DURATION - 17.663 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:07:03.117 PM // 12:07:20.780 PM /				
launching dsalgo application load Array page				
@TestSuit_Array_13 @home				

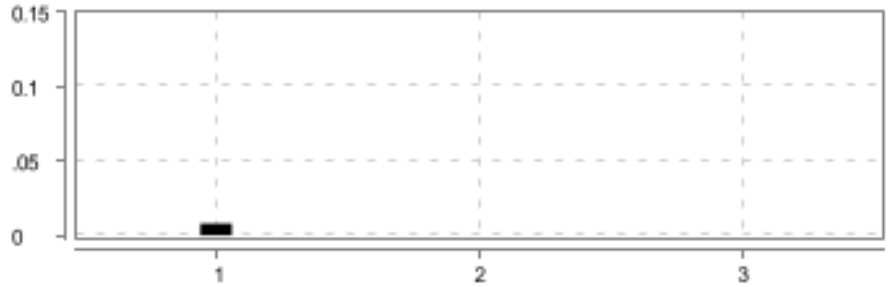

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Practice page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Array_Stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Array_Stepdef.<init>(Array_Stepdef.java:33) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Squares of a Sorted Array" link	SKIPPED	0.000 s
3	Then user should be redirected to "Question" page contains questions,an tryEditor to write code with Run and Submit buttons	SKIPPED	0.000 s

User Testing Linkedlist page

FAILED / 12:07:21.695 PM // 12:09:16.889 PM /	DURATION - 1 m 55.194 s	Scenarios Total - 14 Pass - 0 Fail - 14 Skip - 0		Steps Total - 42 Pass - 0 Fail - 14 Skip - 28	
---	-------------------------	--	---	---	---

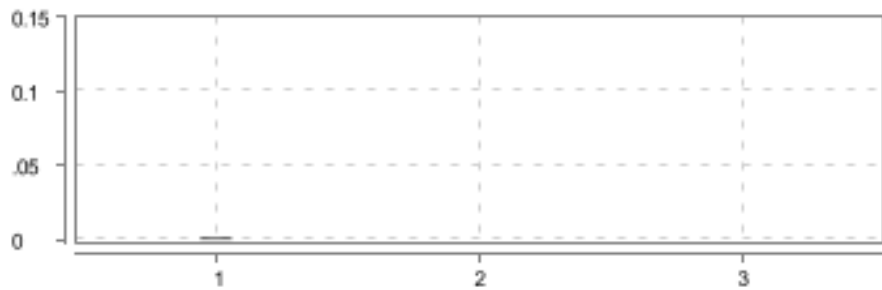

navigate to Introduction in Linked List page from signin

FAILED	DURATION - 16.598 s		Steps Total - 3 Pass - 0 Fail - 1 Skip - 2	
/ 12:07:21.695 PM // 12:07:38.293 PM /				
User Testing LinkedList page				
@LinkedList @TS_II_01				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Linked List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)</p>	FAILED	0.008 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Introduction" button	SKIPPED	0.000 s
3	Then user should be redirected to "Introduction" page	SKIPPED	0.000 s

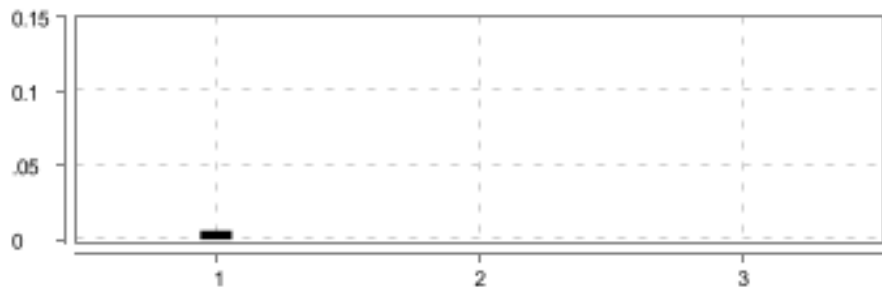

navigate to Introduction and open editor

<div>FAILED</div> <div>DURATION - 25.082 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:07:38.324 PM // 12:08:03.406 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_02				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Introduction page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Introduction page	SKIPPED	0.000 s
3	Then user should be redirected to Introduction tryEditor with a Run button to test	SKIPPED	0.000 s

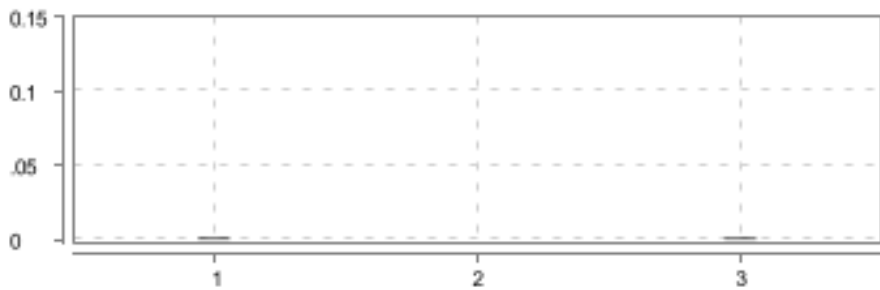

navigate to Creating Linked List from signin

<div>FAILED</div> <div>DURATION - 4.735 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:03.436 PM // 12:08:08.171 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_03				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Linked List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Creating Linked List" button	SKIPPED	0.000 s
3	Then user should be redirected to "Creating-Linked-List" page	SKIPPED	0.000 s

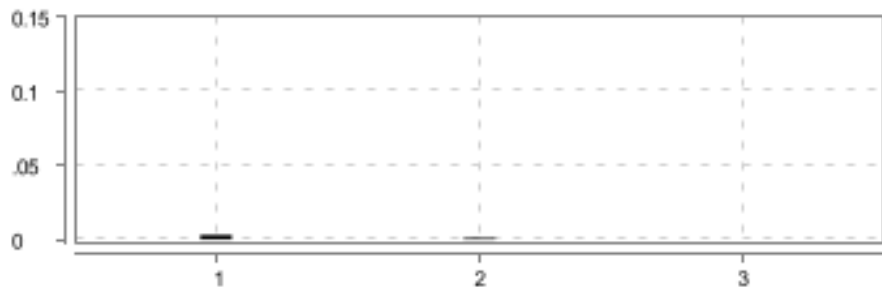

Open editor from Creating Linked List page

<div>FAILED</div> <div>DURATION - 4.254 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:08.407 PM // 12:08:12.661 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_04				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Creating Linked List after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Creating Linked List Page	SKIPPED	0.000 s
3	Then user should be redirected to Creating Linked List tryEditor with a Run button to test	SKIPPED	0.001 s

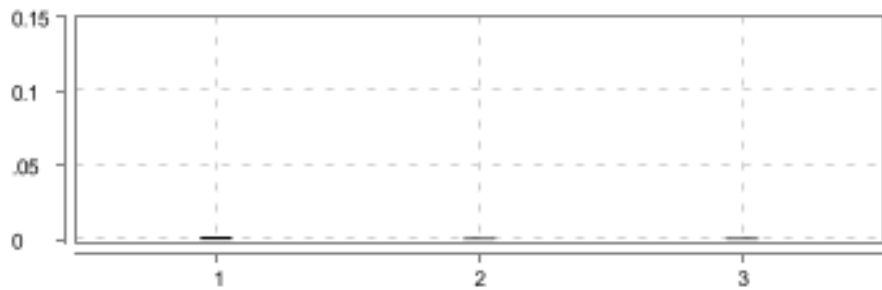

navigate to Types of Linked List from signin

<div>FAILED</div> <div>DURATION - 5.834 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:12.686 PM // 12:08:18.520 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_05				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Linked List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Types of Linked List " button	SKIPPED	0.001 s
3	Then user should be redirected to "Types-of-Linked-List " page	SKIPPED	0.000 s

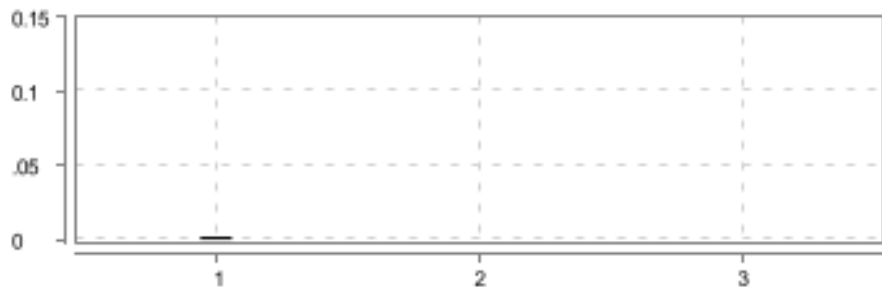

Open editor from Types of Linked List page

<div>FAILED</div> <div>DURATION - 3.512 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:18.550 PM // 12:08:22.062 PM /				
User Testing Linkedlist page				
@TS_II_06 @Linkedlist				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Types of Linked List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Types of Linked List page	SKIPPED	0.001 s
3	Then user should be redirected to a page Types of Linked List an tryEditor with a Run button to test	SKIPPED	0.001 s

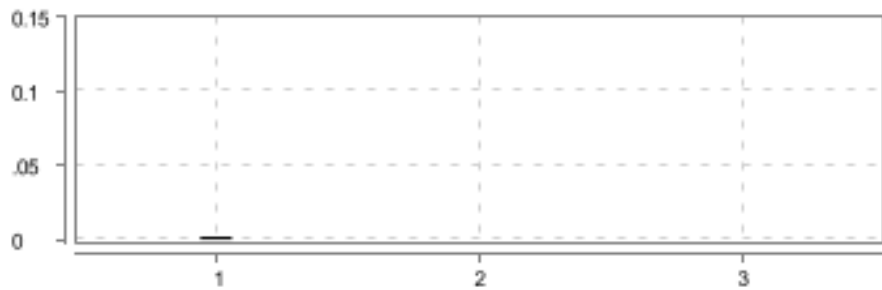

navigate to Implement Linked List in Python from sign in

<div>FAILED</div> <div>DURATION - 4.352 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:22.103 PM // 12:08:26.455 PM /				
User Testing Linkedlist page				
@TS_II_07 @Linkedlist				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Linked List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Implement Linked List in Python" button	SKIPPED	0.000 s
3	Then user should be redirected to "Implement-Linked-List-in-Python" page	SKIPPED	0.000 s

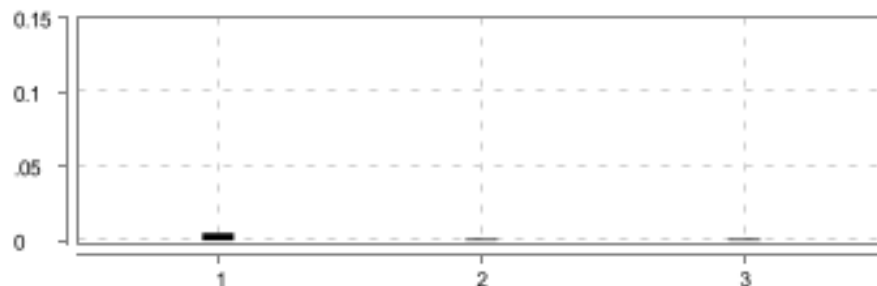

Open editor from Implement Linked List in Python page

<div>FAILED</div> <div>DURATION - 4.826 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:26.498 PM // 12:08:31.324 PM /				
User Testing Linkedlist page				
@TS_II_08 @Linkedlist				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Implement Linked List in Python after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks "Try Here" button in Implement Linked List in Python page	SKIPPED	0.000 s
3	Then user should be redirected to a page Implement Linked List an tryEditor with a Run button to test	SKIPPED	0.000 s

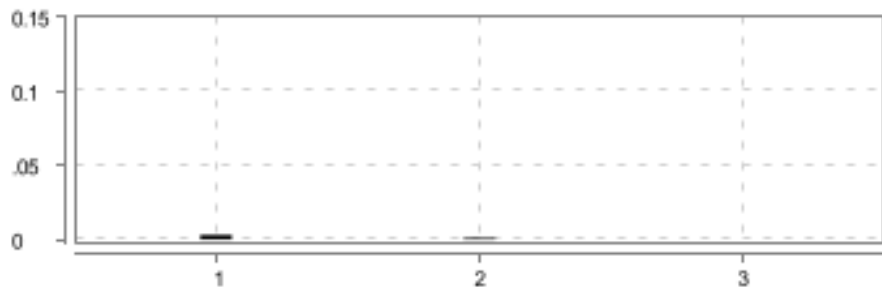

navigate to Traversal from signin

<div>FAILED</div>	<div>DURATION - 10.757 s</div>	<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
<div>/ 12:08:31.357 PM // 12:08:42.114 PM /</div>				
<div>User Testing Linkedlist page</div>				
<div>@Linkedlist @TS_II_09</div>				

#	Step / Hook Details	Status	Duration
1	Given user is in Linked List page after logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Traversal" button	SKIPPED	0.001 s
3	Then user should be redirected to "Traversal" page	SKIPPED	0.001 s

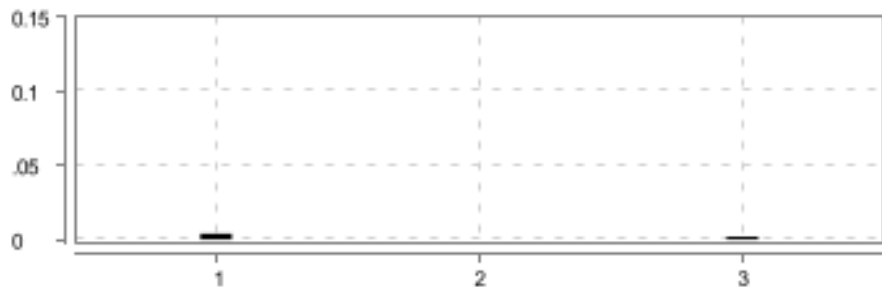

Open editor from Traversal page

<div>FAILED</div> <div>DURATION - 13.886 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:44.612 PM // 12:08:58.498 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_10				

#	Step / Hook Details	Status	Duration
1	Given user is in Traversal after logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Try Here" button in Traversal page	SKIPPED	0.001 s
3	Then user should be redirected to a page Traversal tryEditor with a Run button to test	SKIPPED	0.000 s

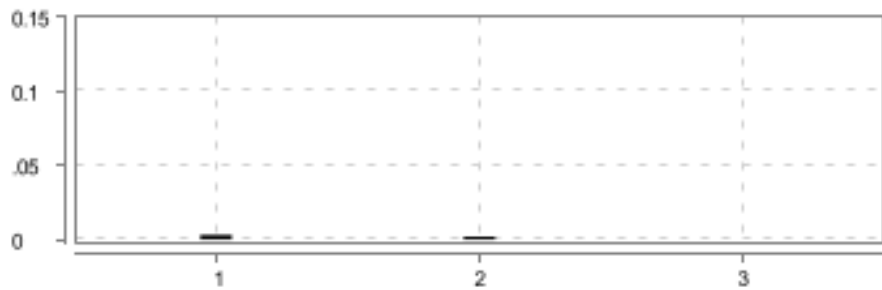

navigate to Insertion from signin

<div>FAILED</div> <div>DURATION - 4.428 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:08:58.585 PM // 12:09:03.013 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_11				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Linked List page after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Insertion" button	SKIPPED	0.000 s
3	Then user should be redirected to "Insertion" page	SKIPPED	0.002 s

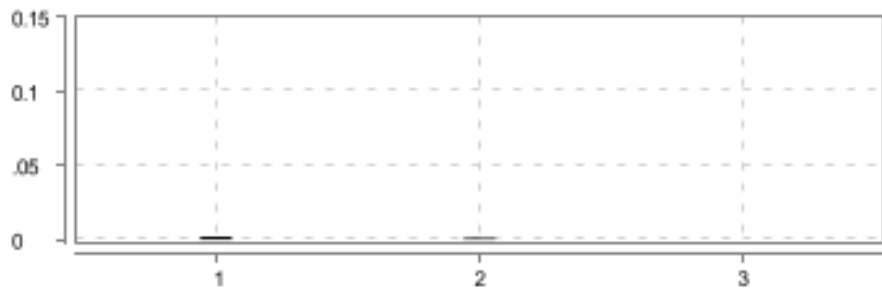

Open editor from Insertion page

<div>FAILED</div> <div>DURATION - 3.669 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:09:03.049 PM // 12:09:06.718 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_12				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Insertion after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Try Here" button in Insertion page	SKIPPED	0.002 s
3	Then user should be redirected to insertion tryEditor page to Run button to test	SKIPPED	0.000 s

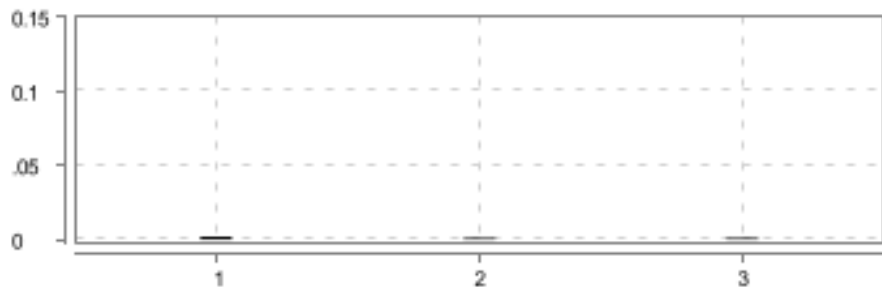

navigate to Deletion from signin

<div>FAILED</div> <div>DURATION - 6.595 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:09:06.753 PM // 12:09:13.348 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_13				

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Insertion after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Deletion" button	SKIPPED	0.001 s
3	Then user should be redirected to "Deletion" page	SKIPPED	0.000 s

Open editor from Deletion page

<div>FAILED</div> <div>DURATION - 3.293 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:09:13.596 PM // 12:09:16.889 PM /				
User Testing Linkedlist page				
@Linkedlist @TS_II_14				

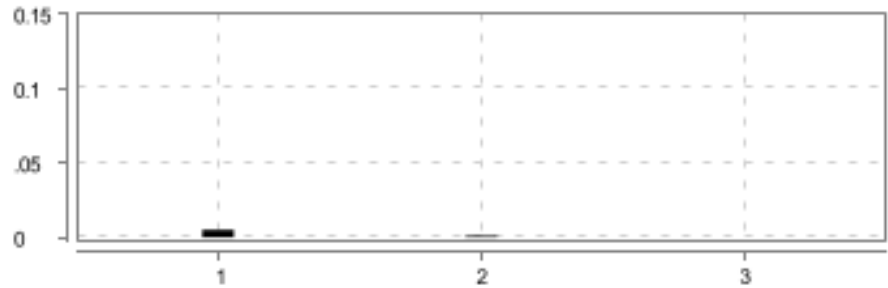

#	Step / Hook Details	Status	Duration
1	<p>Given user is in Deletion after logged in</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.LinkedList_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.LinkedList_stepdef.<init>(LinkedList_stepdef.java:38) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks "Try Here" button in Deletion page	SKIPPED	0.001 s
3	Then user should be redirected to Deletion tryEditor to Run button to test and Submit button	SKIPPED	0.001 s

Testing the stack page of the DS Algo application

FAILED		DURATION - 1 m 2.909 s		Scenarios		Steps	
/ 12:09:17.167 PM // 12:10:20.076 PM /		Total - 11		Total - 40		Total - 40	
		Pass - 0		Pass - 0		Pass - 0	
		Fail - 11		Fail - 11		Fail - 11	
		Skip - 0		Skip - 0		Skip - 29	

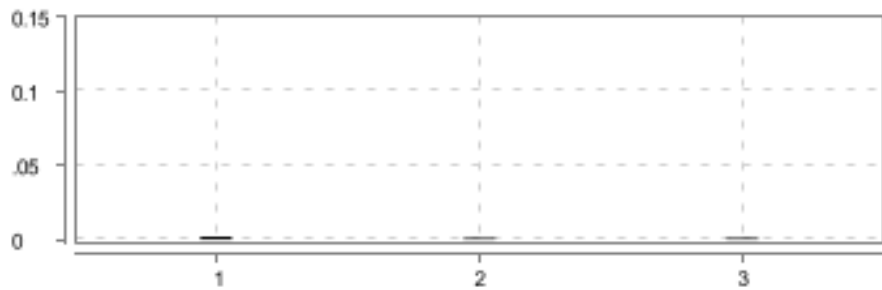

The user should be on the stack page

<div>FAILED</div> <div>DURATION - 3.227 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:09:17.167 PM // 12:09:20.394 PM /				
Testing the stack page of the DS Algo application				
@StackSutie @TestDemo_Stack_01				

#	Step / Hook Details	Status	Duration
1	Given The user landed on the home page after logged in io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user selects the stack option from the dropdown menu or clicks on Get Started button under Stack	SKIPPED	0.001 s
3	Then The user should be redirected to stack page	SKIPPED	0.000 s

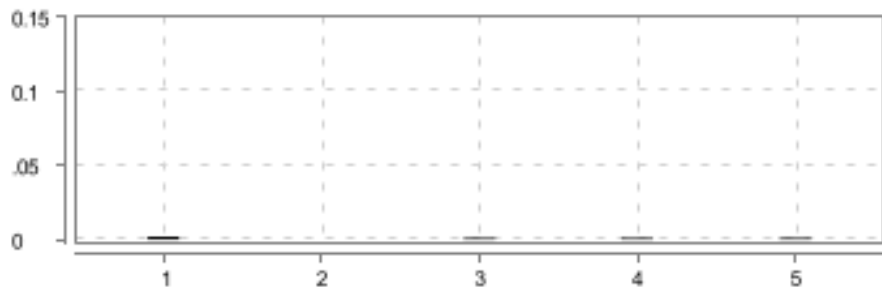

The user is able to navigate to "operations in stack" page

<div>FAILED</div> <div>DURATION - 3.274 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:09:20.476 PM // 12:09:23.750 PM /				
Testing the stack page of the DS Algo application				
@StackSutie @TestDemo_Stack_02				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is on the stack page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on the operations in the stack link	SKIPPED	0.001 s
3	Then The user should be redirected to operations in stack page	SKIPPED	0.001 s

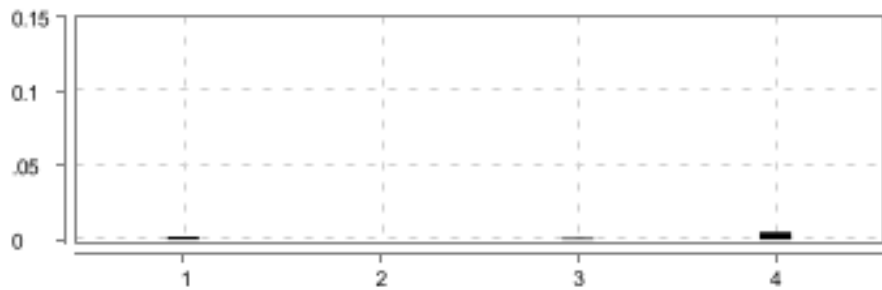

The user is able to navigate to page having tryeditor from operations in stack page

<div>FAILED</div> <div>DURATION - 7.125 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:09:23.885 PM // 12:09:31.010 PM /				
Testing the stack page of the DS Algo application				
@StackSutie @TestDemo_Stack_03				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is on the operations in stack page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on Try here button for operations in stack page	SKIPPED	0.000 s
3	Then The user should be redirected to page having an tryEditor with a Run button for operations in stack page	SKIPPED	0.001 s
4	And The user enter the valid python code in tryeditor page and click on Run button	SKIPPED	0.001 s
5	Then The user is presented with result for operations in stack	SKIPPED	0.001 s

The user is presented with error message for invalid python code for operations in stack page

<div>FAILED</div> <div>DURATION - 4.322 s</div>		<div></div>	<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	<div></div>
/ 12:09:31.051 PM // 12:09:35.373 PM /				
Testing the stack page of the DS Algo application				
@TestDemo_Stack_04 @StackSutie				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is on the tryEditor page for operations in stack page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user enter the invalid python code for operations in stack page	SKIPPED	0.000 s
3	And The user click on the run button for operations in stack page	SKIPPED	0.001 s
4	Then The user will get an error message for operations in stack page	SKIPPED	0.005 s

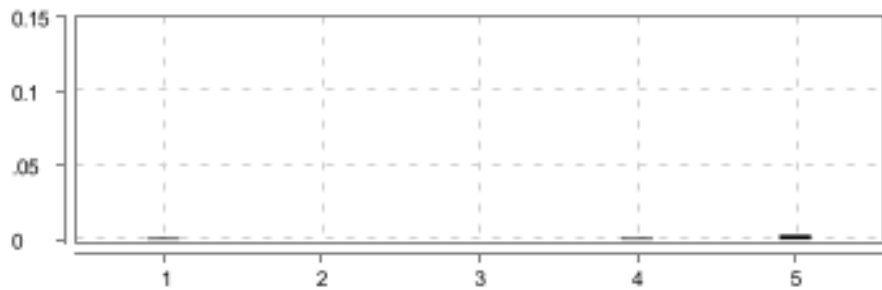

The user is able to navigate to stack page and click on "Implementation " link

<div>FAILED</div> <div>DURATION - 4.872 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:09:35.400 PM // 12:09:40.272 PM /				
Testing the stack page of the DS Algo application				
@TestDemo_Stack_05 @StackSutie				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is in editor page and navigates to the stack page for implementation page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on the Implementation link	SKIPPED	0.001 s
3	Then The user should be redirected to Implementation page	SKIPPED	0.001 s

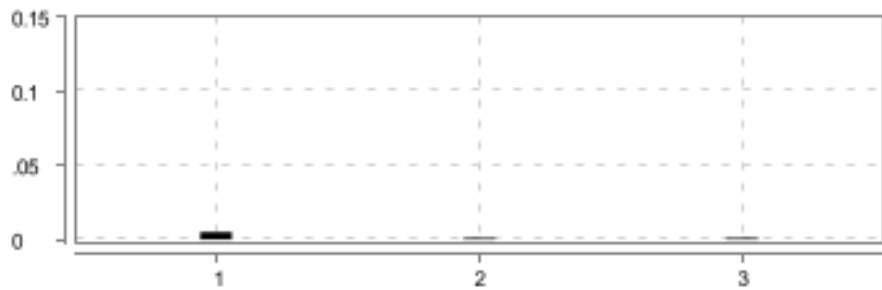

The user is able to navigate to page having tryeditor from Implementation page

<div>FAILED</div> <div>DURATION - 8.471 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:09:40.465 PM // 12:09:48.936 PM /				
Testing the stack page of the DS Algo application				
@TestDemo_Stack_06 @StackSutie				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is on the Implementation page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on Try here button for Implementation page	SKIPPED	0.000 s
3	Then The user should be redirected to page having an tryEditor with a Run button and enter valid python code for Implementation page	SKIPPED	0.000 s
4	And The user click on the run button for implementation page	SKIPPED	0.001 s
5	Then The user is presented with result for implementation page	SKIPPED	0.003 s

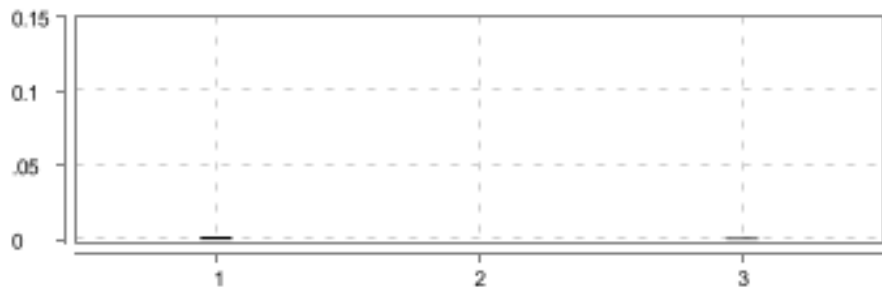

The user is presented with error message for invalid code for Implementation page

<div>FAILED</div> <div>DURATION - 7.387 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:09:48.971 PM // 12:09:56.358 PM /				
Testing the stack page of the DS Algo application				
@TestDemo_Stack_07 @StackSutie				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is on the tryEditor page for Implementation page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.005 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user enter the invalid python code in tryeditor page and click run button for Implementation page	SKIPPED	0.001 s
3	Then The user will get an error message for Implementation page	SKIPPED	0.001 s

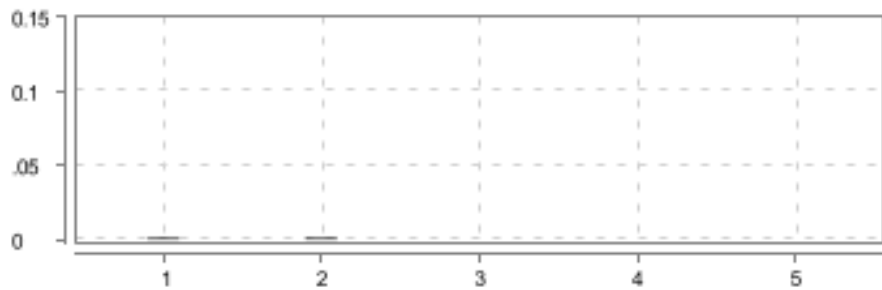

The user is able to navigate to stack page and click on "Applications " link

<div>FAILED</div> <div>DURATION - 6.801 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:09:56.388 PM // 12:10:03.189 PM /				
Testing the stack page of the DS Algo application				
@TestDemo_Stack_08 @StackSutie				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is in tryeditor page and navigates to stack page for application page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on the Applications link	SKIPPED	0.000 s
3	Then The user should be redirected to Applications page	SKIPPED	0.001 s

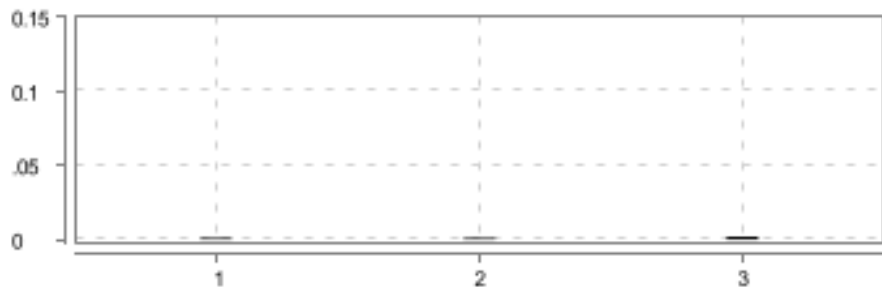

The user is able to navigate to page having tryeditor from Applications page

<div>FAILED</div> <div>DURATION - 3.419 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 12:10:03.309 PM // 12:10:06.728 PM /				
Testing the stack page of the DS Algo application				
@TestDemo_Stack_09 @StackSutie				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is on the Applications page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on Try here button for for Applications page	SKIPPED	0.001 s
3	Then The user should be redirected to page having an tryEditor with a Run button and enter python code for Applications page	SKIPPED	0.000 s
4	And user click on run button for applications page	SKIPPED	0.000 s
5	Then The user is presented with the result for applications page	SKIPPED	0.000 s

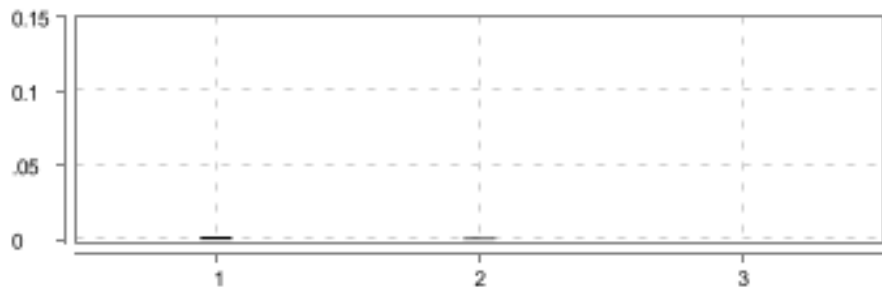

The user is presented with error message for invalid code in tryEditor page for Applications page

<div>FAILED</div> <div>DURATION - 4.841 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:10:07.013 PM // 12:10:11.854 PM /				
Testing the stack page of the DS Algo application				
@StackSutie @TestDemo_Stack_10				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is on the tryEditor page for Applications page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user enter the invalid python code in tryeditor and clickon run button for Applications page	SKIPPED	0.001 s
3	Then The user will get an error message for Applications page	SKIPPED	0.002 s



The user is able to navigate to "practice Questions" in stack page

<div>FAILED</div> <div>DURATION - 8.118 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:10:11.958 PM // 12:10:20.076 PM /				
Testing the stack page of the DS Algo application				
@StackSutie @TestDemo_Stack_11				

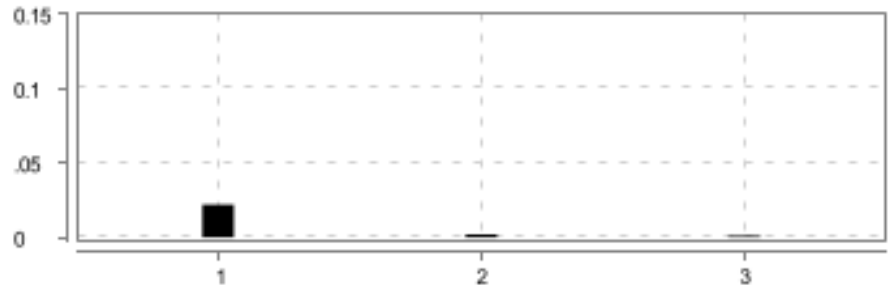

#	Step / Hook Details	Status	Duration
1	<p>Given The user is in tryeditor page and navigates to applications page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Stack_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.002 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Stack_stepdef.<init>(Stack_stepdef.java:34) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on the practice Questions button	SKIPPED	0.001 s
3	Then The user should be directed to practice questions	SKIPPED	0.000 s

User to sign in the dsalgo application and test Queue page

<div>FAILED</div>	<div>DURATION - 2 m 24.201 s</div>	<div>Scenarios</div> <div>Total - 14</div> <div>Pass - 4</div> <div>Fail - 10</div> <div>Skip - 0</div>	<div></div>	<div>Steps</div> <div>Total - 54</div> <div>Pass - 18</div> <div>Fail - 10</div> <div>Skip - 26</div>	<div></div>
<div>/ 12:10:21.172 PM // 12:12:45.373 PM /</div>					

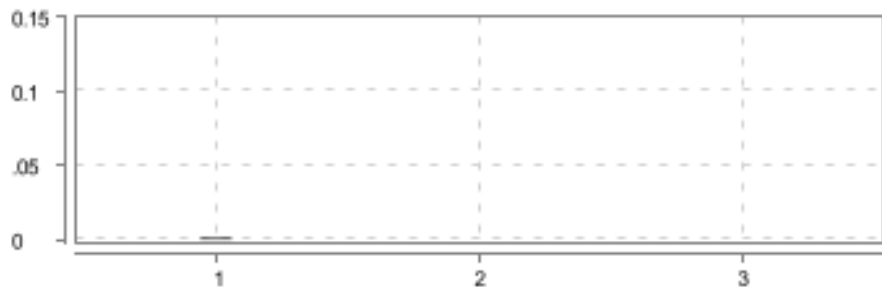

user is logged in into the dsalgo project to test Queue page

<div>FAILED</div> <div>DURATION - 16.504 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
<div>/ 12:10:21.172 PM // 12:10:37.676 PM /</div>				
<div>User to sign in the dsalgo application and test Queue page</div>				
<div>@TestDemo_Queue_01 @QueueSuite</div>				

#	Step / Hook Details	Status	Duration
1	Given user is logged into the home page io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Queue_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413)	FAILED	0.022 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Queue_stepdef.<init>(Queue_stepdef.java:36) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks on get started button or dropdown for queue	SKIPPED	0.002 s
3	Then user directed to the queue page	SKIPPED	0.001 s

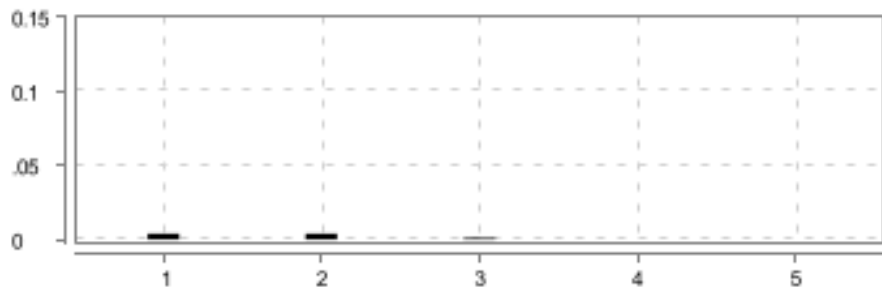

The user is able to navigate to Implementation of Queue in Python link page

<div>FAILED</div> <div>DURATION - 4.774 s</div>		<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
<div>/ 12:10:37.718 PM // 12:10:42.492 PM /</div>			
<div>User to sign in the dsalgo application and test Queue page</div>			
<div>@QueueSuite @TestSuite_queue_02</div>			

#	Step / Hook Details	Status	Duration
1	<p>Given The user in queue page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Queue_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Queue_stepdef.<init>(Queue_stepdef.java:36) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When user clicks on Implementation of Queue in Python link page	SKIPPED	0.000 s
3	Then user should be directed to Implementation of Queue in Python link page	SKIPPED	0.000 s

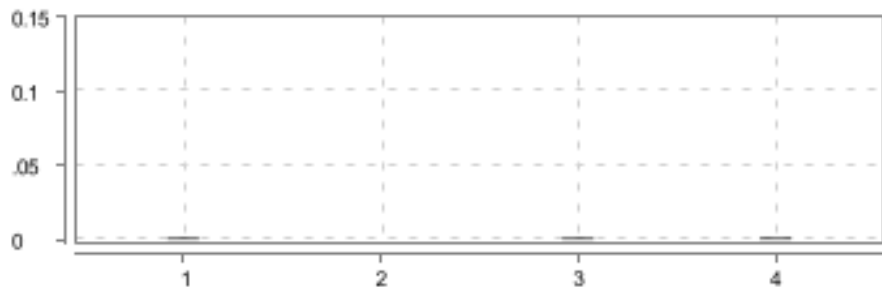

The user should be directed to editor page with run button to test python code

<div>FAILED</div> <div>DURATION - 4.874 s</div>		<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
<div>/ 12:10:45.106 PM // 12:10:49.980 PM /</div>			
<div>User to sign in the dsalgo application and test Queue page</div>			
<div>@QueueSuite @TestSuite_queue_03</div>			

#	Step / Hook Details	Status	Duration
1	<p>Given The user is in Implementation of queue in python link page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Queue_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Queue_stepdef.<init>(Queue_stepdef.java:36) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user clicks on Tryhere link for Implementation of queue in python	SKIPPED	0.004 s
3	Then The user navigates to Editor page to enter valid python code for Implementation of queue in python	SKIPPED	0.001 s
4	And user clicks on the run button for Implementation of queue in python	SKIPPED	0.000 s
5	Then The user is presented with the result after run button is clicked for Implementation of queue in python	SKIPPED	0.000 s

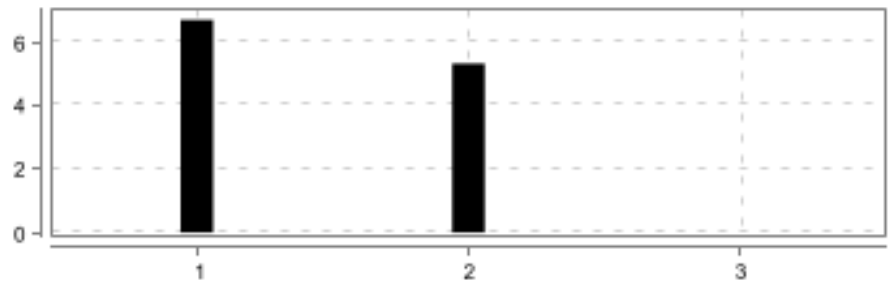

The user is presented with error message for invalid code in Editor for Implementation of queue page

FAILED	DURATION - 14.421 s		<div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div>	
/ 12:10:54.340 PM // 12:11:08.761 PM /				
User to sign in the dsalgo application and test Queue page				
@QueueSuite @TestSuite_queue_04				

#	Step / Hook Details	Status	Duration
1	<p>Given The user is in a page having an Editor with a Run button to test for Implementation of queue in python</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class step_definitions.Queue_stepdef at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:85) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:129) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:129) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.001 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 45 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "this.driver" is null at step_definitions.Queue_stepdef.<init>(Queue_stepdef.java:36) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) </pre>		
2	When The user enters invalid python code for Implementation of queue in python	SKIPPED	0.000 s
3	And clicks run button for Implementation of queue	SKIPPED	0.001 s
4	Then The user gets an error message for Implementation of queue	SKIPPED	0.001 s

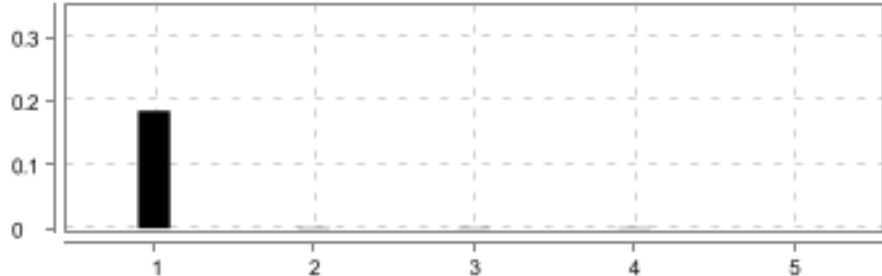

The user is able to navigate to queue page and click on Implementation using collections deque link

<div>FAILED</div> <div>DURATION - 44.742 s</div>		<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	
<div>/ 12:11:08.799 PM // 12:11:53.541 PM /</div>			
<div>User to sign in the dsalgo application and test Queue page</div>			
<div>@QueueSuite @TestSuite_queue_05</div>			

#	Step / Hook Details	Status	Duration
1	Given User in editor page and navigates to the queue page for Implementation using collections deque link	PASSED	6.691 s
2	When User clicks on Implementation using collections deque link org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"link text","selector":"Implementation using collections.deque"} (Session info: MicrosoftEdge=110.0.1587.69) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [123d59dc4f3b1acc56a9d5dd94c63cc4, findElement {using=link text, value=Implementation using collections.deque}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 110.0.1587.69, ms:edgeOptions: {debuggerAddress: localhost:65294}, msedge: {msedgedriverVersion: 110.0.1587.69 (f970cc122bfe..., userDataDir: C:\Users\HP\AppData\Local\T..., networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:65294/devtoo..., se:cdpVersion: 110.0.1587.69, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 123d59dc4f3b1acc56a9d5dd94c63cc4 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:351) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:343) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.click(Unknown Source) at page_objects.QueuePage.clickOnImpUsingCollLink(QueuePage.java:160) at step_definitions.Queue_stepdef.user_clicks_on_implementation_using_collections_deque_link(Queue_stepdef.java:177)	FAILED	5.315 s

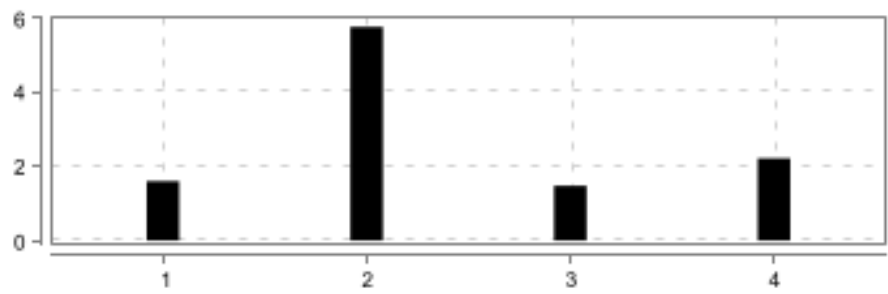

#	Step / Hook Details	Status	Duration
	at ?.User clicks on Implementation using collections deque link(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/08_Queue.feature:34) * Not displayable characters are replaced by '?'. 3 Then User should be redirected to Implementation using collections deque page		
3	Then User should be redirected to Implementation using collections deque page	SKIPPED	0.000 s

The user should be directed to editor page with run button to test python code from Implementation using collections delque link

FAILED	DURATION - 0.192 s		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
/ 12:11:53.601 PM // 12:11:53.793 PM /				
User to sign in the dsalgo application and test Queue page				
@QueueSuite @TestSuite_queue_06				

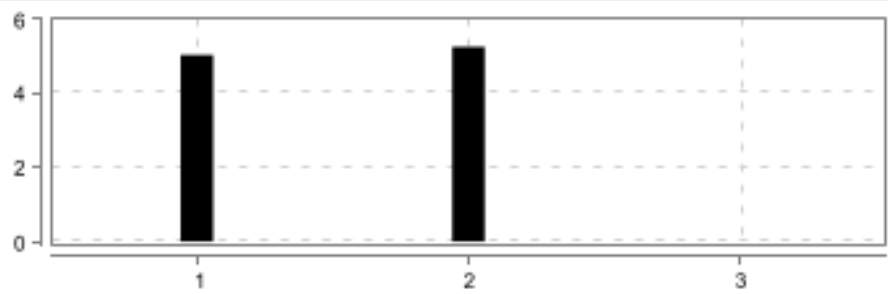

#	Step / Hook Details	Status	Duration
1	Given User in implementation using collections page java.lang.AssertionError: Title not matched expected [Implementation using collections.deque] but found [NumpyNinja] at org.testng.Assert.fail(Assert.java:110) at org.testng.Assert.failNotEquals(Assert.java:1413) at org.testng.Assert.assertEqualsImpl(Assert.java:149) at org.testng.Assert.assertEquals(Assert.java:131) at org.testng.Assert.assertEquals(Assert.java:655) at step_definitions.Queue_stepdef.user_in_implementation_using_collections_page(Queue_stepdef.java:193) at ?.User in implementation using collections page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/08_Queue.feature:39) * Not displayable characters are replaced by '?'. 2 When User clicks on Tryhere link for collections page 3 Then User navigates to Editor page to enter valid python code for collections page 4 And User clicks on the run button for collections page 5 Then The user is presented with the result after run button is clicked for collections page	FAILED	0.184 s
2	When User clicks on Tryhere link for collections page	SKIPPED	0.001 s
3	Then User navigates to Editor page to enter valid python code for collections page	SKIPPED	0.001 s
4	And User clicks on the run button for collections page	SKIPPED	0.001 s
5	Then The user is presented with the result after run button is clicked for collections page	SKIPPED	0.000 s

The user is presented with error message for invalid code in Editor for Implementation using collections page

<div>PASSED</div>	<div>DURATION - 11.071 s</div>	<div></div>	<div>Steps</div> <div>Total - 4</div> <div>Pass - 4</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 12:11:53.858 PM // 12:12:04.929 PM /</div>				
<div>User to sign in the dsalgo application and test Queue page</div>				
<div>@QueueSuite @TestSuite_queue_07</div>				

#	Step / Hook Details	Status	Duration
1	Given User is in a page having an Editor with a Run button to test for collection page	PASSED	1.603 s
2	When User enters invalid python code in Editor for collections page	PASSED	5.763 s
3	And clicks run button for collection page link	PASSED	1.482 s
4	Then The user gets an error message for collection page	PASSED	2.215 s

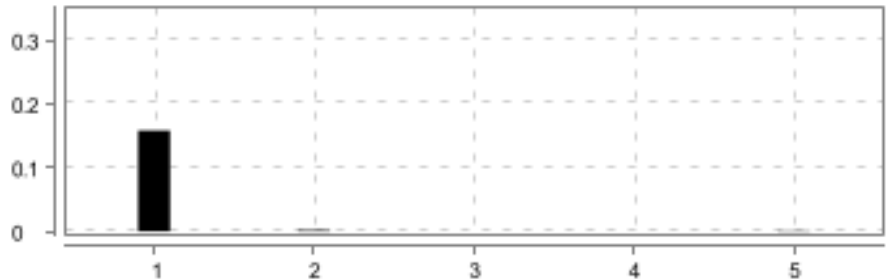

User is able to navigate to queue page and click on Implementation using array link

<div>FAILED</div> <div>DURATION - 10.302 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
<div>/ 12:12:05.059 PM // 12:12:15.361 PM /</div>				
<div>User to sign in the dsalgo application and test Queue page</div>				
<div>@QueueSuite @TestSuite_queue_08</div>				

#	Step / Hook Details	Status	Duration
1	Given User in editor page and navigates to the queue page for Implementation using array link	PASSED	5.031 s
2	When The user clicks on Implementation using array link org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"link text","selector":"Implementation using array"} (Session info: MicrosoftEdge=110.0.1587.69) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [123d59dc4f3b1acc56a9d5dd94c63cc4, findElement {using=link text, value=Implementation using array}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 110.0.1587.69, ms:edgeOptions: {debuggerAddress: localhost:65294}, msedge: {msedgedriverVersion: 110.0.1587.69 (f970cc122bfe..., userDataDir: C:\Users\HP\AppData\Local\T..., networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:65294/devtoo..., se:cdpVersion: 110.0.1587.69, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true,	FAILED	5.254 s

#	Step / Hook Details	Status	Duration
	webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 123d59dc4f3b1acc56a9d5dd94c63cc4 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:351) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:343) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.click(Unknown Source) at page_objects.QueuePage.clickOnImpUsingArray(QueuePage.java:167) at step_definitions.Queue_stepdef.the_user_clicks_on_implementation_using_array_link(Queue_stepdef.java:277) at ?.The user clicks on Implementation using array link(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/08_Queue.feature:55) * Not displayable characters are replaced by '?'.		
3	Then The user should be redirected to Implementation using array page	SKIPPED	0.001 s

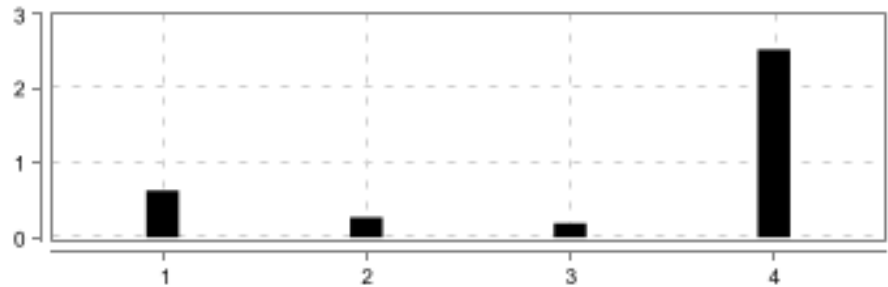

User should be directed to editor page with run button to test python code from Implementation using array link

FAILED DURATION - 0.187 s / 12:12:15.496 PM // 12:12:15.683 PM / User to sign in the dsalgo application and test Queue page @QueueSuite @TestSuite_queue_09		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
---	--	--	---

#	Step / Hook Details	Status	Duration
1	Given User in Implementation using array link java.lang.AssertionError: Title not matched expected [Implementation using array] but found [NumpyNinja]	FAILED	0.158 s

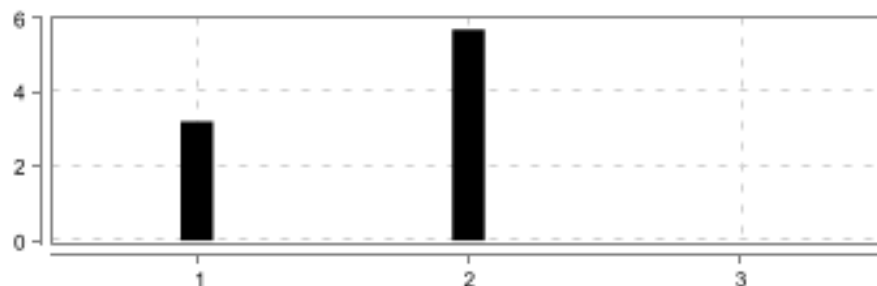

#	Step / Hook Details	Status	Duration
	<pre> at org.testng.Assert.fail(Assert.java:110) at org.testng.Assert.failNotEquals(Assert.java:1413) at org.testng.Assert.assertEqualsImpl(Assert.java:149) at org.testng.Assert.assertEquals(Assert.java:131) at org.testng.Assert.assertEquals(Assert.java:655) at step_definitions.Queue_stepdef.user_in_implementation_using_array_link(Queue_stepdef.java:293) at ?.User in Implementation using array link(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/08_Queue.feature:60) * Not displayable characters are replaced by '?'. </pre>		
2	When User clicks on Tryhere link from Implementation using array link	SKIPPED	0.002 s
3	Then User navigates to Editor page to enter valid python code for array link	SKIPPED	0.000 s
4	And User clicks on the run button for array link	SKIPPED	0.000 s
5	Then User is presented with the result after run button is clicked for array link	SKIPPED	0.001 s

The User is presented with error message for invalid code in Editor for Implementation using array page

<div>PASSED</div> <div>DURATION - 3.617 s</div>	<div></div>	<div><div>Steps</div><div>Total - 4</div><div>Pass - 4</div><div>Fail - 0</div><div>Skip - 0</div></div> <div></div>
<div>/ 12:12:17.110 PM // 12:12:20.727 PM /</div>		
<div>User to sign in the dsalgo application and test Queue page</div>		
<div>@QueueSuite @TestSuite_queue_10</div>		

#	Step / Hook Details	Status	Duration
1	Given User is in a page having an Editor with a Run button to test for array page	PASSED	0.627 s
2	When User enters invalid python code in Editor for array page.	PASSED	0.267 s
3	And clicks run button for array page	PASSED	0.191 s
4	Then The user gets an error message for array page	PASSED	2.523 s

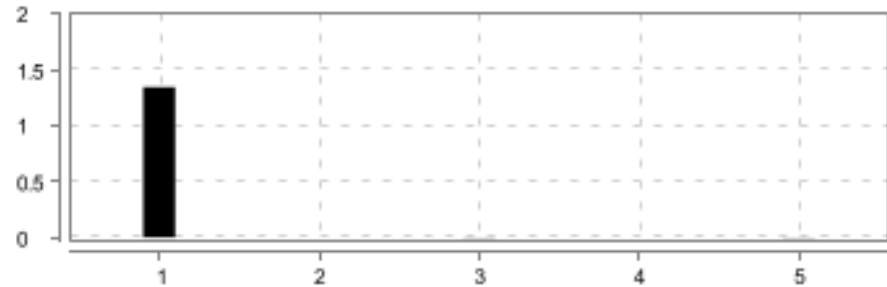

User is able to navigate to queue page and click on Queue Operations link

<div>FAILED</div> <div>DURATION - 8.919 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
<div>/ 12:12:20.838 PM // 12:12:29.757 PM /</div>				
<div>User to sign in the dsalgo application and test Queue page</div>				
<div>@QueueSuite @TestSuite_queue_11</div>				

#	Step / Hook Details	Status	Duration
1	Given User in editor page and navigates to the queue page for Queue Operations link	PASSED	3.209 s
2	When The user clicks on Queue Operations link org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"link text","selector":"Queue Operations"} (Session info: MicrosoftEdge=110.0.1587.69) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.7.2', revision: '4d4020c3b7' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.1' Driver info: org.openqa.selenium.edge.EdgeDriver Command: [123d59dc4f3b1acc56a9d5dd94c63cc4, findElement {using=link text, value=Queue Operations}] Capabilities {acceptInsecureCerts: false, browserName: msedge, browserVersion: 110.0.1587.69, ms:edgeOptions: {debuggerAddress: localhost:65294}, msedge: {msedgedriverVersion: 110.0.1587.69 (f970cc122bfe..., userDataDir: C:\Users\HP\AppData\Local\T...}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:65294/devtoo..., se:cdpVersion: 110.0.1587.69, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 123d59dc4f3b1acc56a9d5dd94c63cc4 at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:535) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:351) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:343) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.click(Unknown Source) at page_objects.QueuePage.clickOnQueueOperlink(QueuePage.java:173) at step_definitions.Queue_stepdef.the_user_clicks_on_queue_operations_link(Queue_stepdef.java:379)	FAILED	5.691 s

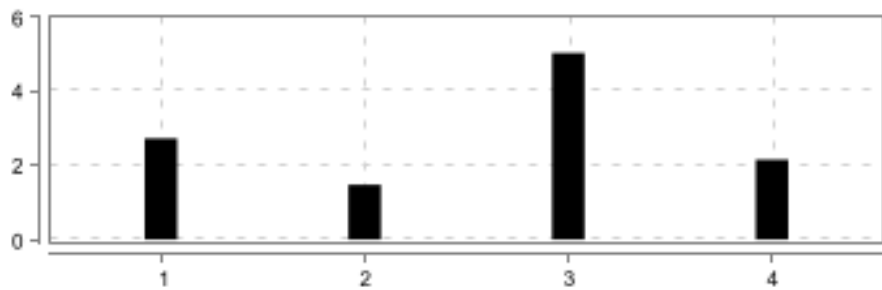

#	Step / Hook Details	Status	Duration
	at ?.The user clicks on Queue Operations link(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/08_Queue.feature:76) * Not displayable characters are replaced by '?'.		
3	Then The user should be redirected to Queue Operations page	SKIPPED	0.001 s

The user should be directed to editor page with run button to test python code from Queue Operations link

FAILED DURATION - 1.462 s / 12:12:30.109 PM // 12:12:31.571 PM / User to sign in the dsalgo application and test Queue page @QueueSuite @TestSuite_queue_12		Steps Total - 5 Pass - 0 Fail - 1 Skip - 4	
--	--	--	---

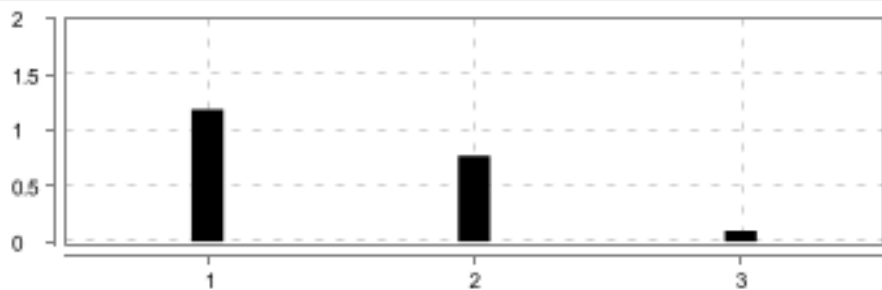

#	Step / Hook Details	Status	Duration
1	Given User in Queue Operations link java.lang.AssertionError: Title not matched expected [Queue Operations] but found [NumpyNinja] at org.testng.Assert.fail(Assert.java:110) at org.testng.Assert.failNotEquals(Assert.java:1413) at org.testng.Assert.assertEqualsImpl(Assert.java:149) at org.testng.Assert.assertEquals(Assert.java:131) at org.testng.Assert.assertEquals(Assert.java:655) at step_definitions.Queue_stepdef.user_in_queue_operations_link(Queue_stepdef.java:394) at ?.User in Queue Operations link(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/08_Queue.feature:81) * Not displayable characters are replaced by '?'.	FAILED	1.345 s
2	When User clicks on Tryhere link from Queue Operations link	SKIPPED	0.000 s
3	Then User navigates to Editor page to enter valid python code for Queue Operations link	SKIPPED	0.002 s
4	And User clicks on the run button for Queue Operations link	SKIPPED	0.001 s
5	Then User is presented with the result after run button is clicked for Queue Operations link	SKIPPED	0.002 s

The User is presented with error message for invalid code in Editor for Queue Operations page

<div>PASSED</div>	<div>DURATION - 11.420 s</div>	<div></div>	<div>Steps</div> <div>Total - 4</div> <div>Pass - 4</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 12:12:31.754 PM // 12:12:43.174 PM /</div>				
<div>User to sign in the dsalgo application and test Queue page</div>				
<div>@QueueSuite @TestSuite_queue_13</div>				



#	Step / Hook Details	Status	Duration
1	Given User is in a page having an Editor with a Run button to test for Queue Operations page	PASSED	2.730 s
2	When User enters invalid python code in Editor for Queue Operations page	PASSED	1.480 s
3	And clicks run button for Queue Operations page	PASSED	5.036 s
4	Then The user gets an error message for Queue Operations page	PASSED	2.153 s

User is able to navigate to Queue page and click on Practice Questions

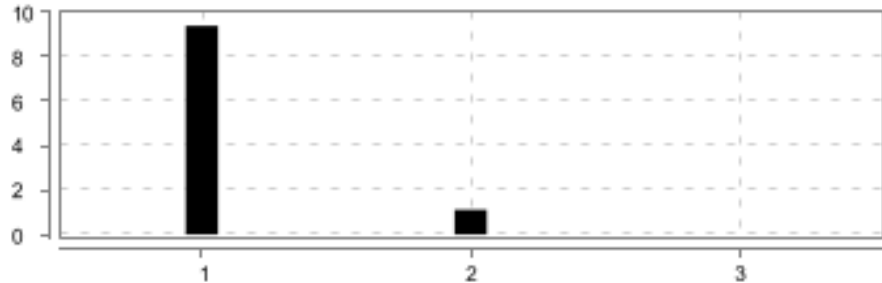

<div>PASSED</div> <div>DURATION - 2.064 s</div>	<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 3</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 12:12:43.309 PM // 12:12:45.373 PM /</div>			
<div>User to sign in the dsalgo application and test Queue page</div>			
<div>@QueueSuite @TestSuite_queue_14</div>			

#	Step / Hook Details	Status	Duration
1	Given User is in Editor page and navigates to Queue operation page	PASSED	1.187 s
2	When User clicks on Practice Questions	PASSED	0.771 s
3	Then User is directed to Practice page	PASSED	0.097 s

User to sign in the dsalgo application and test Graph page

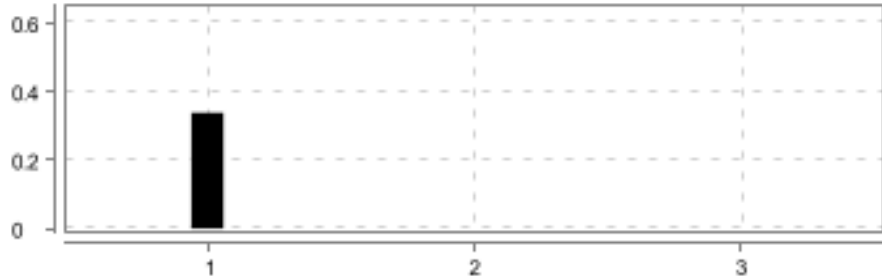

FAILED	DURATION - 30.620 s	Scenarios Total - 8 Pass - 0 Fail - 8 Skip - 0		Steps Total - 30 Pass - 5 Fail - 8 Skip - 17	
/ 12:12:45.415 PM // 12:13:16.035 PM /					

user is logged in into the dsalgo project to test Graph page

<div>FAILED</div> <div>DURATION - 10.536 s</div>	<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
<div>/ 12:12:45.415 PM // 12:12:55.951 PM /</div>			
<div>User to sign in the dsalgo application and test Graph page</div>			
<div>@GraphSuite @TestDemo_Graph_01</div>			

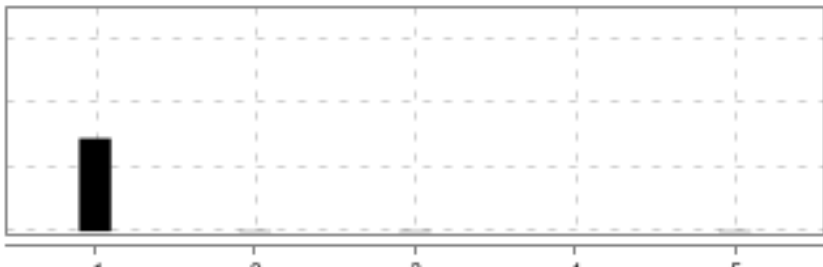

#	Step / Hook Details	Status	Duration
1	Given After signin user is in home page	PASSED	9.379 s
2	When User clicks on get started button or dropdown for graph java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.SearchContext.findElement(org.openqa.selenium.By)" because "this.searchContext" is null at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.click(Unknown Source) at page_objects.GraphPage.graphgetstartedbutton(GraphPage.java:63) at step_definitions.Graph_stepdef.user_clicks_on_get_started_button_or_dropdown_for_graph(Graph_stepdef.java:52) at ?.User clicks on get started button or dropdown for graph(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:7) * Not displayable characters are replaced by '?'.	FAILED	1.109 s
3	Then user directed to the graph page	SKIPPED	0.005 s

User is able to navigate to graph page

<div>FAILED</div> <div>DURATION - 0.378 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div>	
/ 12:12:55.996 PM // 12:12:56.374 PM /				
User to sign in the dsalgo application and test Graph page				
@GraphSuite @TestDemo_Graph_02				

#	Step / Hook Details	Status	Duration
1	Given User in graph page java.lang.AssertionError: Title not matched expected [Graph] but found [NumpyNinja] at org.testng.Assert.fail(Assert.java:110) at org.testng.Assert.failNotEquals(Assert.java:1413) at org.testng.Assert.assertEqualsImpl(Assert.java:149) at org.testng.Assert.assertEquals(Assert.java:131) at org.testng.Assert.assertEquals(Assert.java:655) at step_definitions.Graph_stepdef.user_in_graph_page(Graph_stepdef.java:67) at ?.User in graph page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:12) * Not displayable characters are replaced by '?'.	FAILED	0.338 s
2	When User clicks on graph link button	SKIPPED	0.000 s
3	Then User should be directed to graph link page	SKIPPED	0.000 s

User should be directed to editor page with run button to test python code

<div>FAILED</div> <div>DURATION - 0.174 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
<div>/ 12:12:56.414 PM // 12:12:56.588 PM /</div>				
<div>User to sign in the dsalgo application and test Graph page</div>				
<div>@GraphSuite @TestDemo_Graph_03</div>				

#	Step / Hook Details	Status	Duration
1	Given User is in graph link page java.lang.AssertionError: Title not matched expected [Graph] but found [NumpyNinja]	FAILED	0.146 s

#	Step / Hook Details	Status	Duration
	<pre> at org.testng.Assert.fail(Assert.java:110) at org.testng.Assert.failNotEquals(Assert.java:1413) at org.testng.Assert.assertEqualsImpl(Assert.java:149) at org.testng.Assert.assertEquals(Assert.java:131) at org.testng.Assert.assertEquals(Assert.java:655) at step_definitions.Graph_stepdef.user_is_in_graph_link_page(Graph_stepdef.java:87) at ?.User is in graph link page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:18) * Not displayable characters are replaced by '?'. </pre>		
2	When User clicks on Tryhere link for graph link page	SKIPPED	0.001 s
3	Then User navigates to Editor page to enter valid python code for graph link page	SKIPPED	0.001 s
4	And User clicks on the run button for graph link page	SKIPPED	0.000 s
5	Then User is presented with the result after run button is clicked for graph link page	SKIPPED	0.001 s

User is presented with error message for invalid code in Editor for graph link page

FAILED DURATION - 1.407 s / 12:12:56.684 PM // 12:12:58.091 PM / User to sign in the dsalgo application and test Graph page @TestDemo_Graph_04 @GraphSuite		Steps Total - 4 Pass - 1 Fail - 1 Skip - 2	
--	--	--	--

#	Step / Hook Details	Status	Duration
1	Given User is in a page having an Editor with a Run button to test for graph link page	PASSED	1.279 s
2	When User enters invalid python code for graph link page <pre> java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.SearchContext.findElement(org.openqa.selenium.By)" because "this.searchContext" is null at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.sendKeys(Unknown Source) at page_objects.GraphPage.EnterPhytonCode(GraphPage.java:93) at step_definitions.Graph_stepdef.user_enters_invalid_python_code_for_graph_link_page(Graph_stepdef.java:147) at ?.User enters invalid python code for graph link page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:27) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.112 s

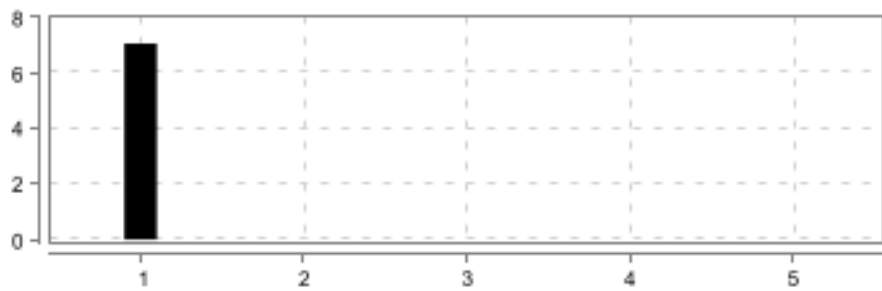

#	Step / Hook Details	Status	Duration
3	And clicks run button for graph link page	SKIPPED	0.000 s
4	Then The user gets an error message for graph link page	SKIPPED	0.000 s

User is able to navigate to graph page and click on graph representations

<div>FAILED</div> <div>DURATION - 3.912 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
<div>/ 12:12:58.137 PM // 12:13:02.049 PM /</div>				
<div>User to sign in the dsalgo application and test Graph page</div>				
<div>@GraphSuite @TestDemo_Graph_05</div>				

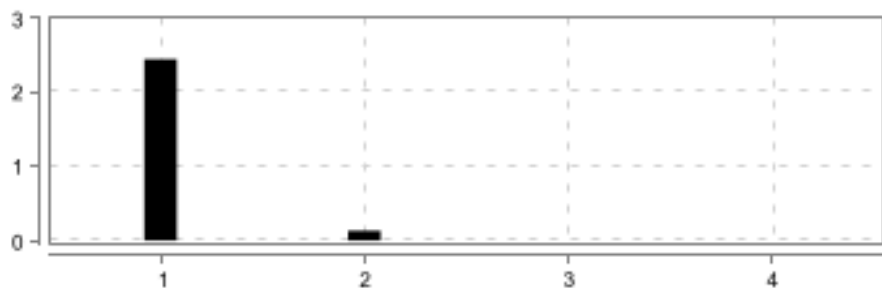

#	Step / Hook Details	Status	Duration
1	Given User in editor page and navigates to the graph page for graph representations	PASSED	3.905 s
2	When User clicks on graph representations link <pre>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.SearchContext.findElement(org.openqa.selenium.By)" because "this.searchContext" is null at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.click(Unknown Source) at page_objects.GraphPage.clickOngraphrepresentations(GraphPage.java:141) at step_definitions.Graph_stepdef.user_clicks_on_graph_representations_link(Graph_stepdef.java:175) at ?.User clicks on graph representations link(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:34) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.001 s
3	Then User should be redirected to graph representations	SKIPPED	0.000 s

User should be directed to editor page with run button to test python code from graph representations

<div>FAILED</div> <div>DURATION - 7.058 s</div>		<div></div>	<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	<div></div>
<div>/ 12:13:02.230 PM // 12:13:09.288 PM /</div>				
<div>User to sign in the dsalgo application and test Graph page</div>				
<div>@TestDemo_Graph_06 @GraphSuite</div>				

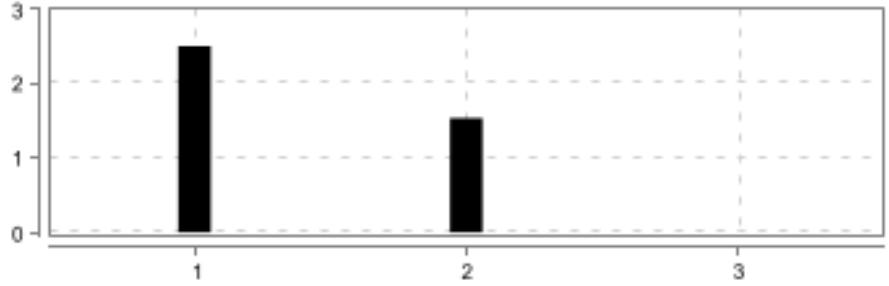

#	Step / Hook Details	Status	Duration
1	Given User is in graph representations <pre>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.SearchContext.findElement(org.openqa.selenium.By)" because "this.searchContext" is null at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.click(Unknown Source) at page_objects.GraphPage.clickOngraphrepresentations(GraphPage.java:141) at step_definitions.Graph_stepdef.user_is_in_graph_representations(Graph_stepdef.java:189) at ?.User is in graph representations(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:39) * Not displayable characters are replaced by '?'. </pre>	FAILED	7.052 s
2	When User clicks on Tryhere link for graph representations	SKIPPED	0.000 s
3	Then User navigates to Editor page to enter valid python code for graph representations	SKIPPED	0.001 s
4	And User clicks on the run button for graph representations	SKIPPED	0.000 s
5	Then The user is presented with the result after run button is clicked for graph representations	SKIPPED	0.000 s

The user is presented with error message for invalid code in Editor for graph representations

<div>FAILED</div> <div>DURATION - 2.584 s</div>		<div></div>	<div>Steps</div> <div>Total - 4</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
/ 12:13:09.314 PM // 12:13:11.898 PM /				
User to sign in the dsalgo application and test Graph page				
@TestDemo_Graph_07 @GraphSuite				

#	Step / Hook Details	Status	Duration
1	Given User is in a page having an Editor with a Run button to test for graph representations	PASSED	2.447 s
2	When User enters invalid python code in Editor for graph representations <pre>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.SearchContext.findElement(org.openqa.selenium.By)" because "this.searchContext" is null at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.sendKeys(Unknown Source) at page_objects.GraphPage.EnterPhytonCode(GraphPage.java:93) at step_definitions.Graph_stepdef.user_enters_invalid_python_code_in_editor_for_graph_representations(Graph_stepdef.java:254) at ?.User enters invalid python code in Editor for graph representations(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:48) * Not displayable characters are replaced by '?'. </pre>	FAILED	0.131 s
3	And clicks run button for graph representations	SKIPPED	0.001 s
4	Then The user gets an error message for graph representations	SKIPPED	0.000 s

User is able to navigate to graph representations page and click on Practice Questions

FAILED DURATION - 4.039 s / 12:13:11.996 PM // 12:13:16.035 PM / User to sign in the dsalgo application and test Graph page @TestDemo_Graph_08 @GraphSuite		Steps Total - 3 Pass - 1 Fail - 1 Skip - 1	
--	---	--	---

#	Step / Hook Details	Status	Duration
1	Given User is in Editor page and navigates to graph representations page	PASSED	2.502 s
2	When User clicks on Practice Questions from graph representations page <pre>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.SearchContext.findElement(org.openqa.selenium.By)" because "this.searchContext" is null at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy38.click(Unknown Source) at page_objects.GraphPage.clickOnPracticeQuestionsLink(GraphPage.java:152) at step_definitions.Graph_stepdef.user_clicks_on_practice_questions_from_graph_representations_page(Graph_stepdef.java:282) at ?.User clicks on Practice Questions from graph representations page(file:///C:/Users/HP/Desktop/Dsalgo_The-Xpathers/Dsalgo_The-Xpathers/src/test/resources/features/09_graph.feature:55) </pre>	FAILED	1.533 s

#	Step / Hook Details	Status	Duration
	* Not displayable characters are replaced by '?'. Then User is directed to the Practice page		
3	Then User is directed to the Practice page	SKIPPED	0.000 s