

Exp. No. 7	Implement Keyboard Event Monitoring
Date:	

AIM:

ALGORITHM:

231401043

PROGRAM:

```
import tkinter as tk
from datetime import datetime
monitoring = False
def start_monitoring():
    global monitoring
    monitoring = True
    status_label.config(text="Status: Monitoring")
    input_box.focus_set()

def stop_monitoring():
    global monitoring
    monitoring = False
    status_label.config(text="Status: Stopped")

def monitor_key(event):
    if monitoring:
        key = event.keysym
        time = datetime.now().strftime("%H:%M:%S")

        output_box.config(state="normal")
        output_box.insert(
            tk.END,
            f'{time} Key Pressed: {key}\n'
```

```
)  
    output_box.config(state="disabled")  
  
root = tk.Tk()  
root.title("Keyboard Event Monitoring")  
root.geometry("600x450")  
  
title = tk.Label(  
    root,  
    text="Keyboard Event Monitoring",  
    font=("Arial", 18, "bold"))  
title.pack(pady=15)  
  
tk.Label(  
    root,  
    text="Type something here:"  
).pack()  
  
input_box = tk.Text(  
    root,  
    height=5,  
    width=60)  
input_box.pack(pady=10)  
input_box.bind("<KeyPress>", monitor_key)  
  
start_button = tk.Button(  
    root,  
    text="Start Monitoring",  
    command=start_monitoring)
```

```
start_button.pack(pady=5)
```


```
stop_button = tk.Button(  
    root,  
    text="Stop Monitoring",  
    command=stop_monitoring)  
stop_button.pack(pady=5)
```

```
status_label = tk.Label(  
    root,  
    text="Status: Stopped")  
status_label.pack(pady=10)
```

```
tk.Label(  
    root,  
    text="Keyboard Events").pack()
```

```
output_box = tk.Text(  
    root,  
    height=10,  
    width=65,  
    state="disabled")  
output_box.pack(pady=10)  
root.mainloop()
```

OUTPUT:

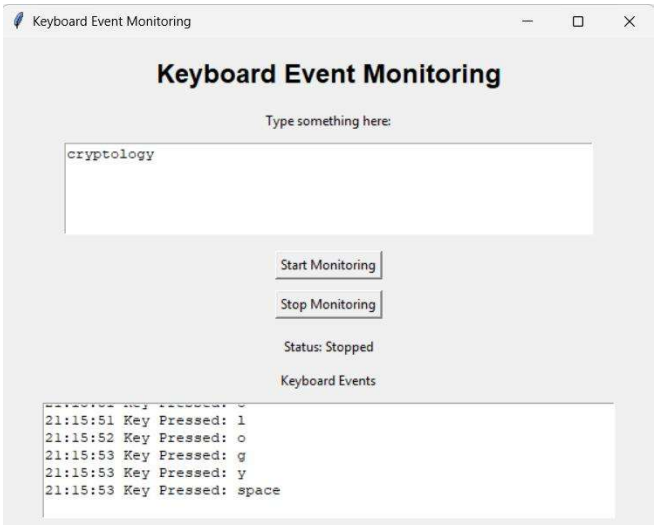

RESULT: