

Wearables: other functional approaches

ENAR 2021

Overview

- Multi-level functional methods
- Multi-level methods for generalized (e.g binary) functional curves
- Registration of generalized (e.g. binary) functional curves

Multi-level functional principal component analysis (MFPCA)

NIMH Family Study of Affective Spectrum Disorders

- 350 participants; ages from 10 to 84
- 5 diagnosis groups: BPI, BPIL, MDD, Other and Control

Data:

- 2 weeks of follow-up measurements
- minute-by-minute activity counts
- 4945 person-days; 7,120,800 data points

Goal:


Extract representative patterns that comprise daily activity

Quantify multilevel variations after adjusting age and disease effects


- Subject heterogeneity
- Day-to-day variation
- Age and disease effects in mean and variance components

Daily Activity Profiles


$$Y_{ij}(t), i = 1, 2, \dots, I; j = 1, 2, \dots, J_i$$

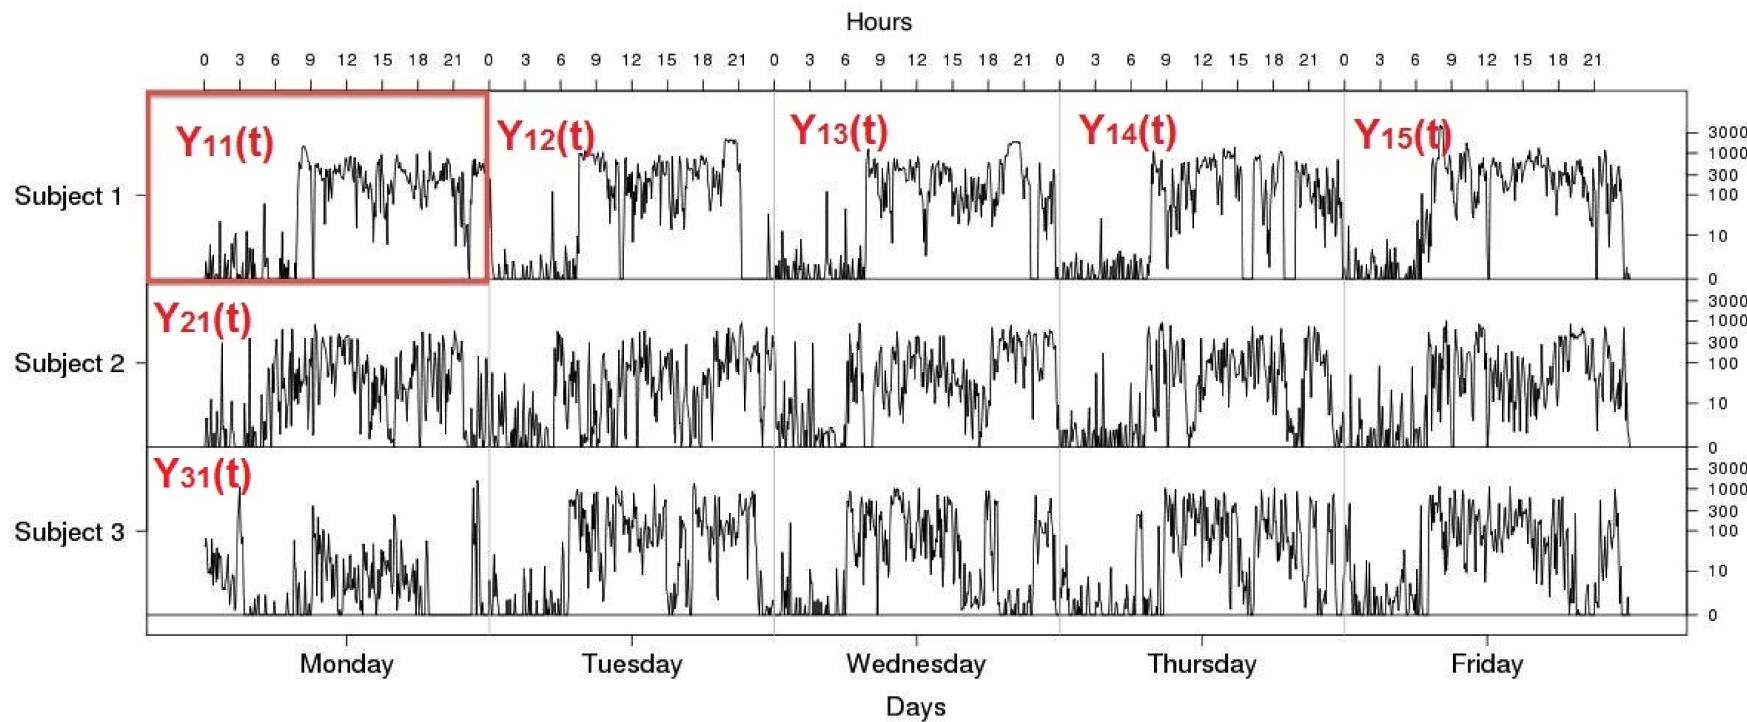


Control and age 67 (> 60)

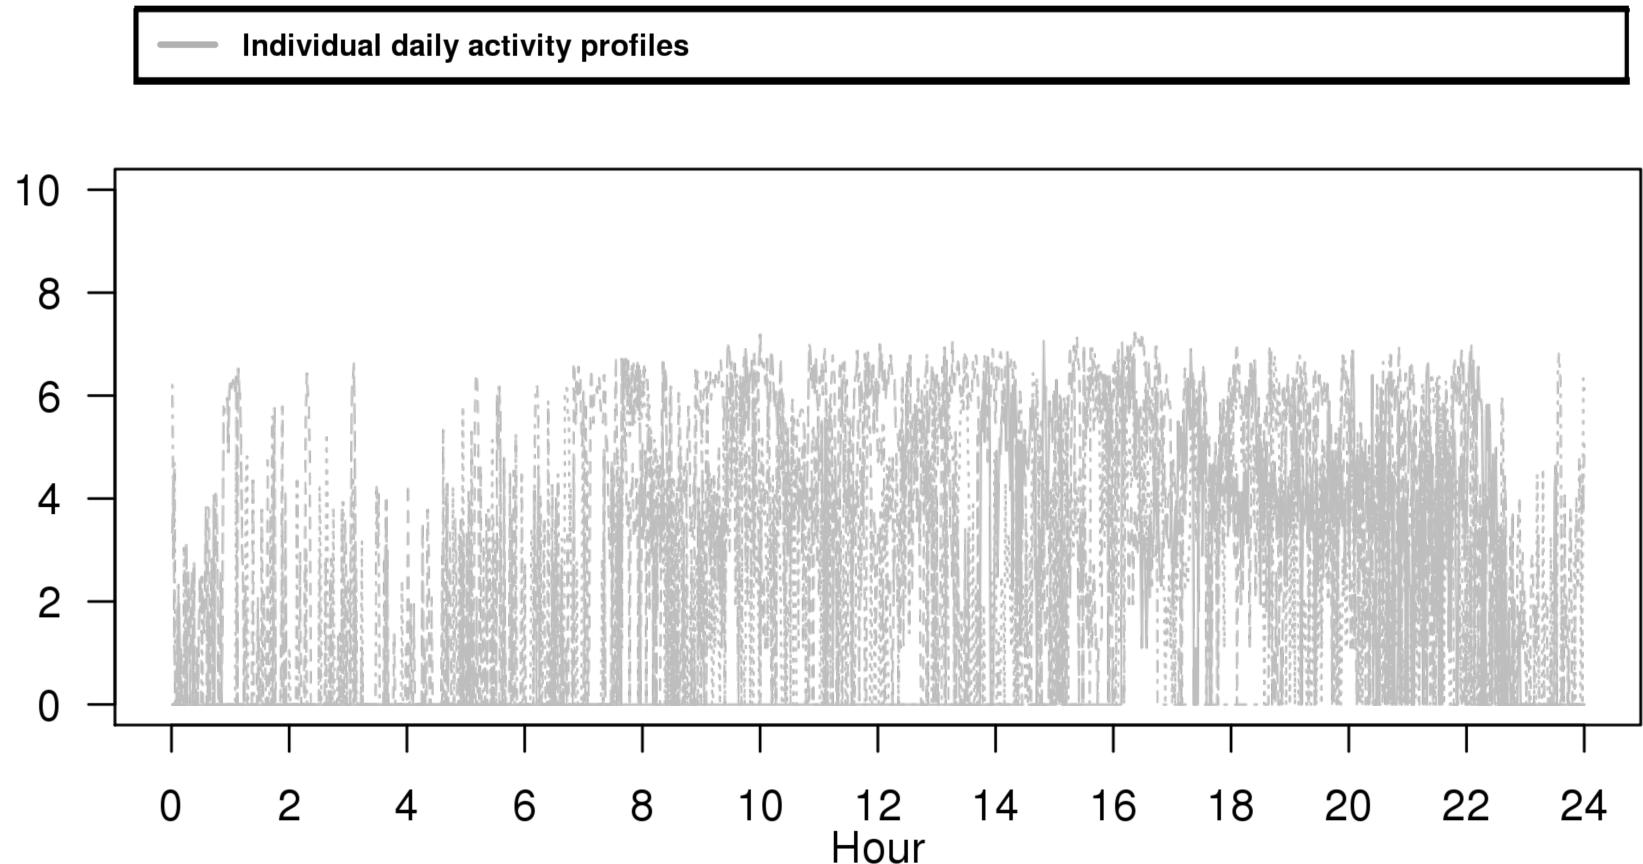

Control and age 67 (> 60)

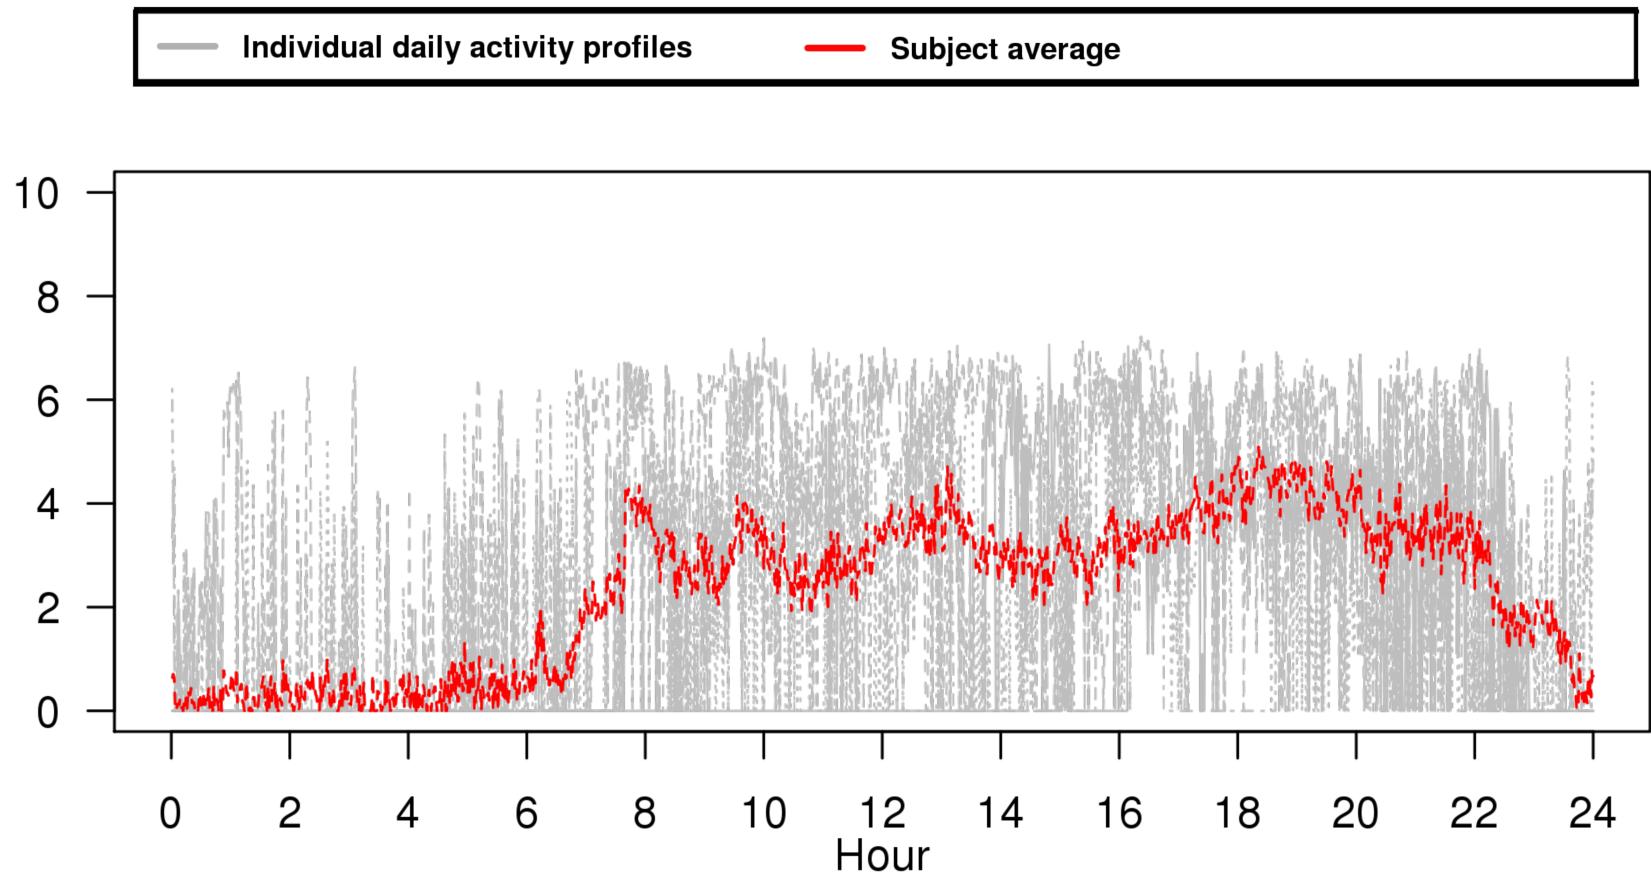

Control and age > 60

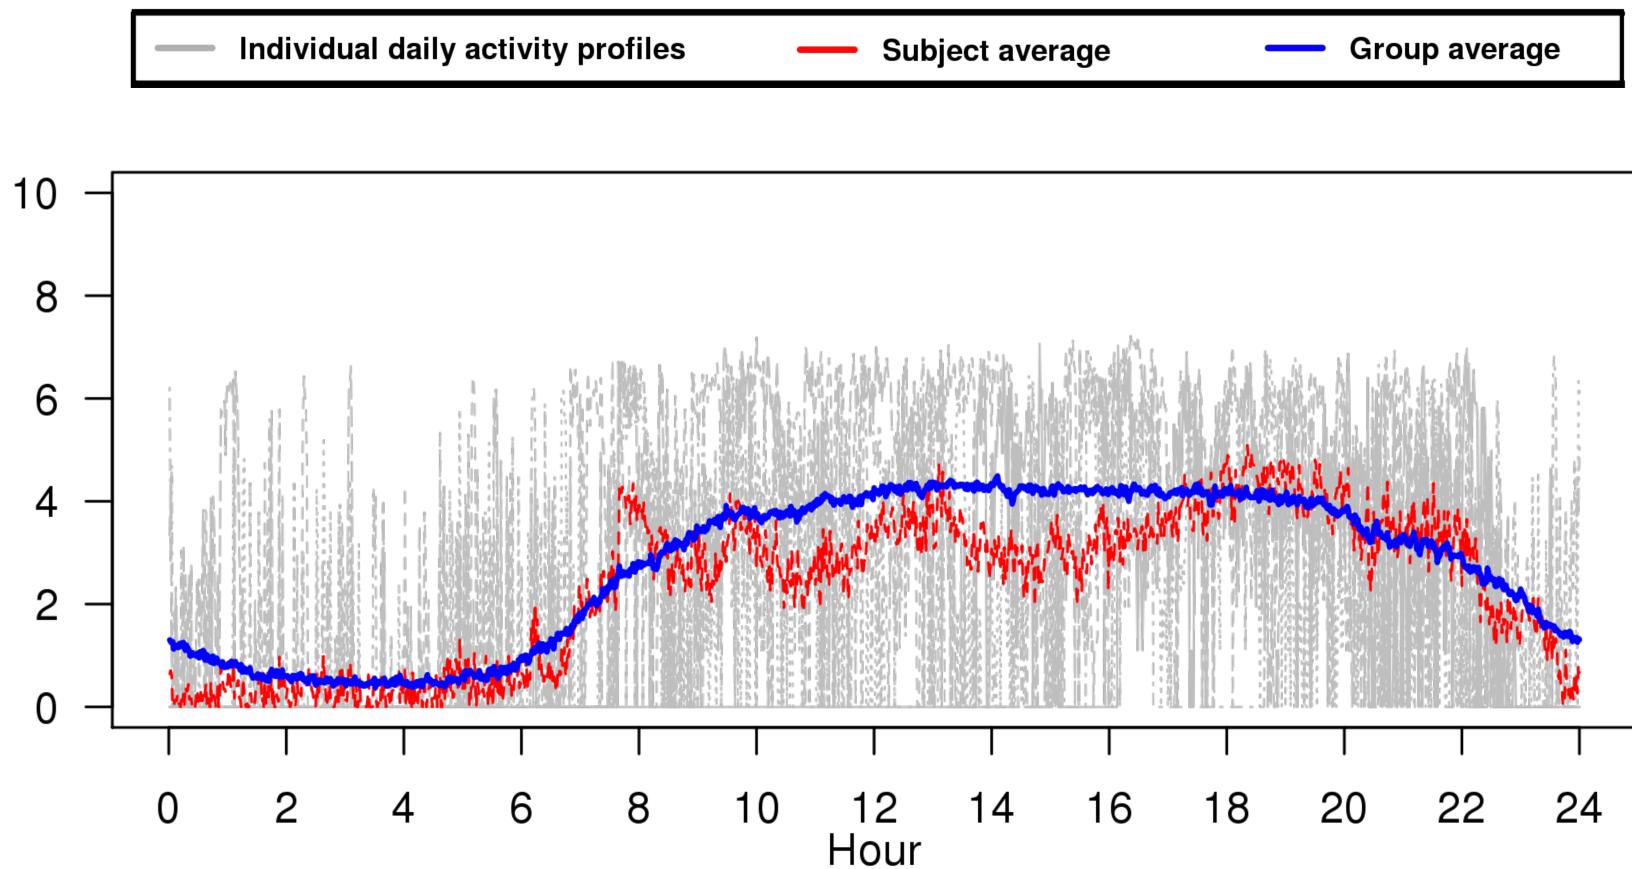

Without loss of generality, assume $Y_{ij}(t) = Y'_{ij}(t) - \mu(t, v_i)$

- Decomposability and additivity

$$Y_{ij}(t) = X_i(t) + U_{ij}(t)$$

- Identifiability


Latent processes are mean zero and mutually uncorrelated.

- Data correlation captured by covariance operators

$$E\{Y_{ij}(t) - Y_{kl}(t)\}\{(Y_{ij}(s) - Y_{kl}(s)\}^T = \begin{cases} 2K_U(t, s) & i = k, j \neq l \\ 2\{K_X(t, s) + K_U(t, s)\} & i \neq k \end{cases}$$

where $K_X(t, s) := \text{Cov}\{X(t), X(s)\}$, similar definitions for K_U .

- Subject heterogeneity accounts for 10.1% of total variability
- The first 4 principal components explain 87.8% of the subject heterogeneity
- Day-specific deviation and random noise along the curve together accounts for the remaining 89.9% of total variability
- The first 5 principal components explain 81.8% of day-to-day variation

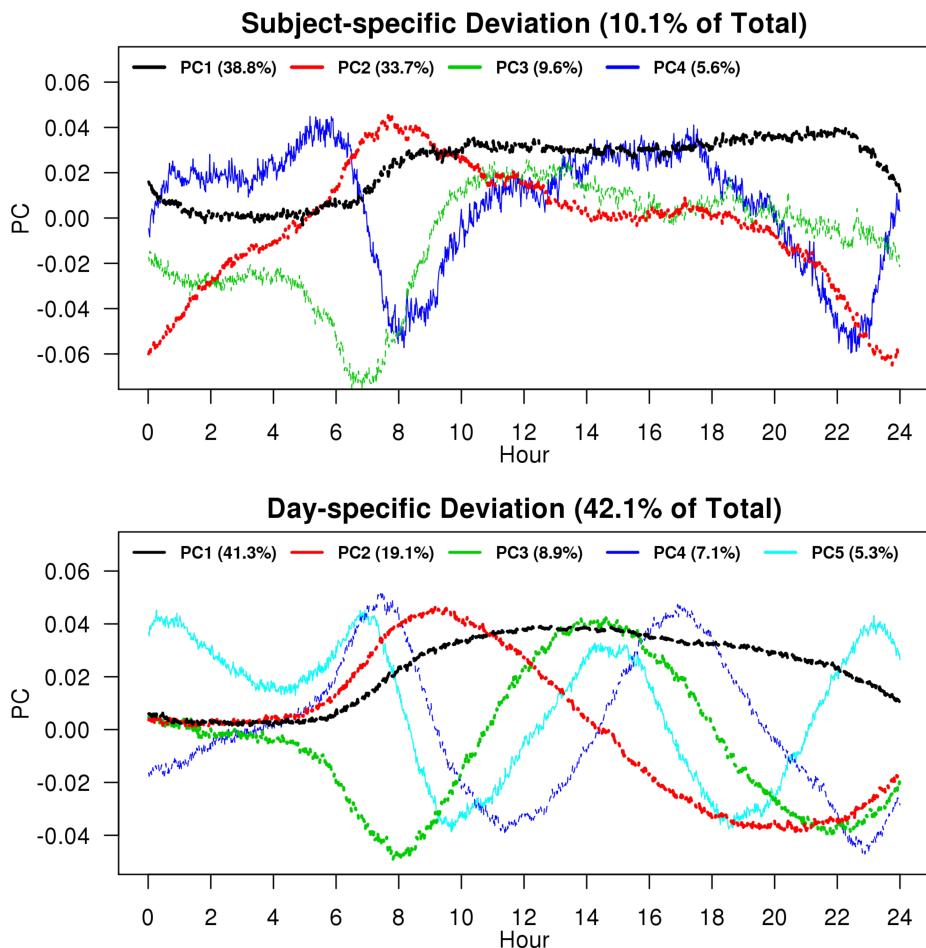


References

- Di, C.Z., Crainiceanu, C.M., Caffo, B.S. and Punjabi, N.M., 2009. Multilevel functional principal component analysis. *The annals of applied statistics*, 3(1), p.458.
- Zipunnikov V., Caffo B.S., Yousem D.M, Davatzikos C., Schwartz B.S., Crainiceanu C. (2011),Multilevel Functional Principal Component Analysis for High-Dimensional Data. *Journal of Computational and Graphical Statistics*, 20(4), pp. 852-873
- Shou, H., Zipunnikov, V., Crainiceanu C., Greven, S. (2015) Structured Functional Principal Component Analysis
Biometrics, 71 (1), pp. 247-757

Multi-level Generalized Function-on-Scalar Regression and Principal Component Analysis

- ▶ Binary time series $Y_{ij}(t)$: activity/inactivity
- ▶ Covariates $x_{ij,k}$: age, gender, BMI, etc



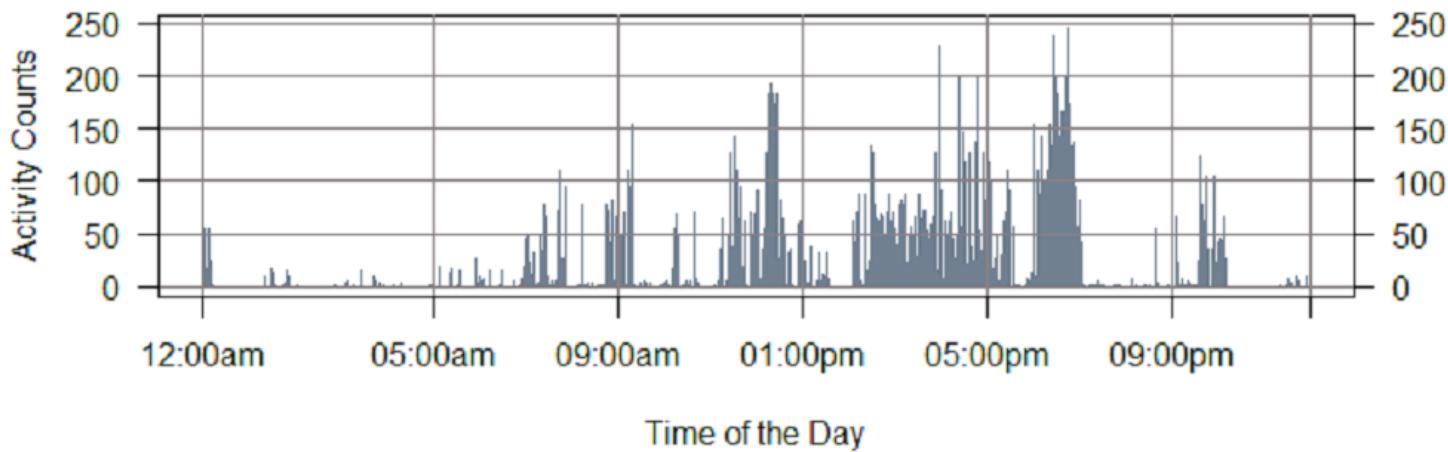


- Generalized Multilevel Functional-on-Scalar Regression



- $Y_{ij}(t)$ is a generalized response curve
- $Y_{ij}(t)$ comes from an exponential family

$$\begin{aligned}
 \text{E}[Y_{ij}(t)|b_i(t), v_{ij}(t)] &= \mu_{ij}(t) \\
 g(\mu_{ij}(t)) &= \beta_0(t) + \sum_{k=1}^p x_{ij,k} \beta_k(t) + b_i(t) + v_{ij}(t) \\
 &\approx \beta_0(t) + \sum_{k=1}^p x_{ij,k} \beta_k(t) + \sum_{k=1}^{K^{(1)}} c_{ik}^{(1)} \psi_k^{(1)}(t) + \sum_{k=1}^{K^{(2)}} c_{ijk}^{(2)} \psi_k^{(2)}(t).
 \end{aligned}$$

- Generalized Multilevel Functional-on-Scalar Regression
 - ▶ Estimated functional mean, bmi, and age effects

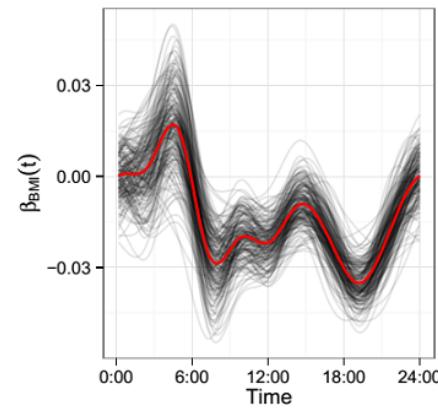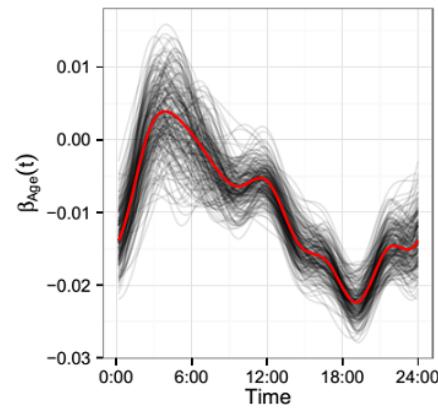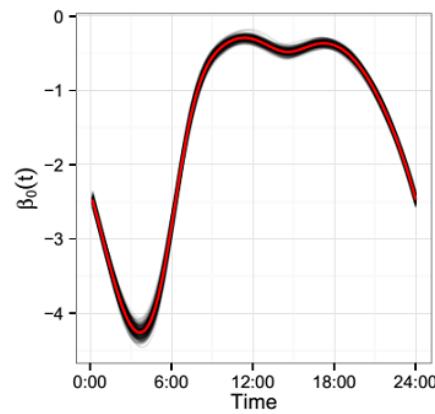

- ▶ Estimated functional mean, bmi, and age effects

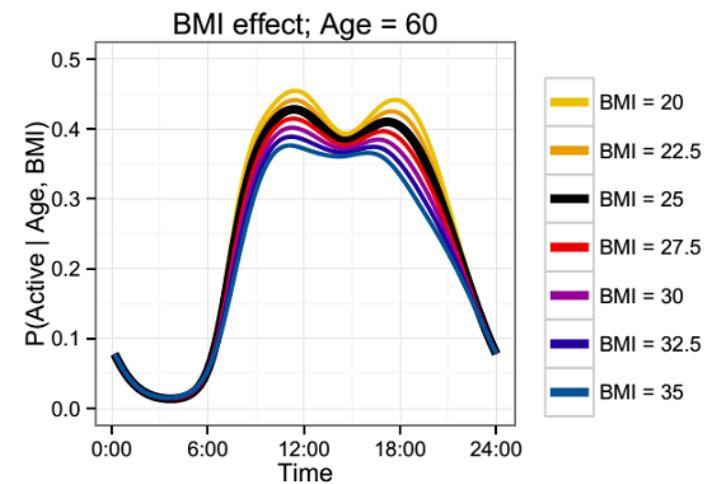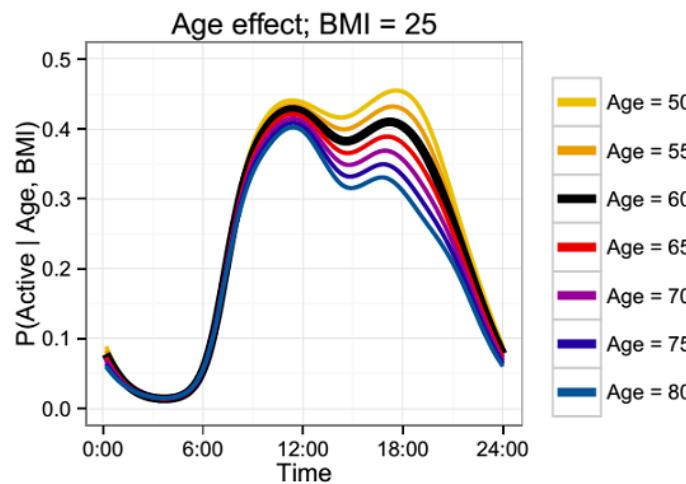


References:

- Goldsmith, J., Zipunnikov, V, Schrack, J., Generalized Multilevel Function-on-Scalar Regression and Principal Component Analysis
Biometrics, 71 (2), pp. 344-353


Registration of binary (0/1) actigraphy profiles

Binary “activity”

Subject

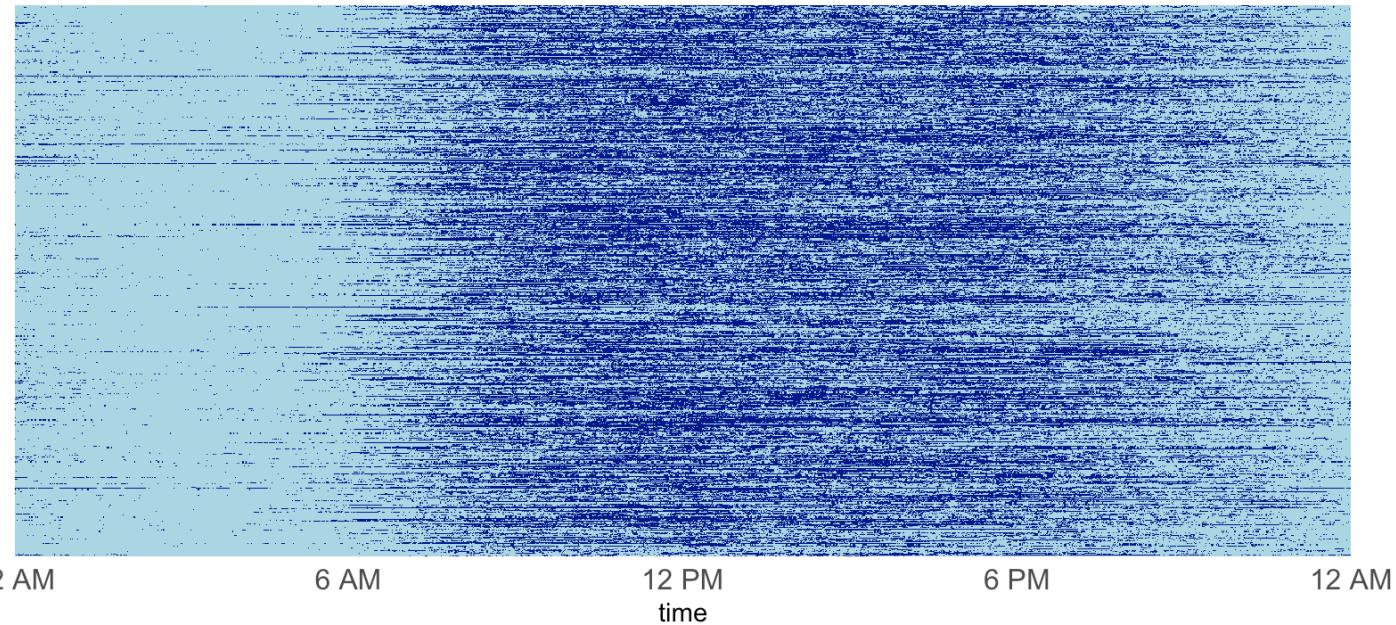


Registration

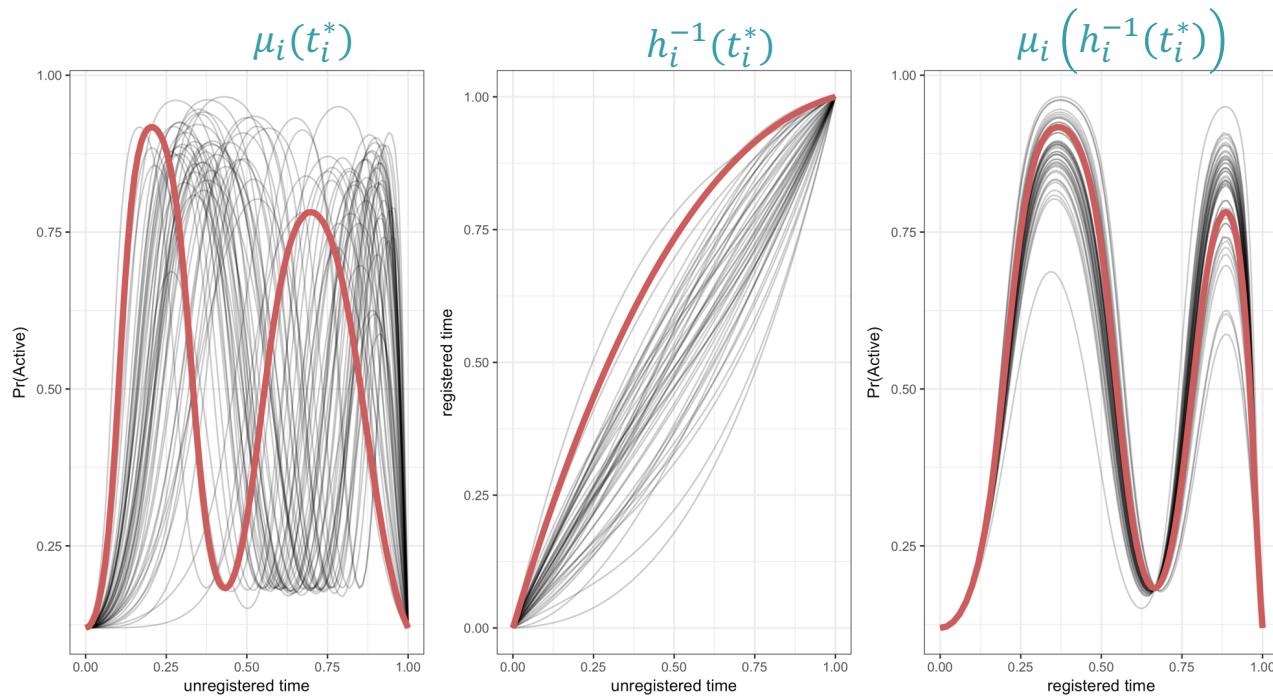

Exponential family registration

- Step 1
 - Underlying probability of being active is registration ‘template’
 - Estimate template, $\mu_i(t)$, conditional on current estimate of time $\hat{t} = \hat{h}_i^{-1}(t_i^*)$
- Step 2
 - Inverse warping functions $h_i^{-1}(t_i^*)$ map from observed to registered time
 - Estimate inverse warping function, $h_i^{-1}(t_i^*) = t$
 - Warping step is MLE conditional on template estimate $\hat{\mu}_i(t)$
- Iterate between step (1) and step (2) until alignment
- Focus on computational efficiency

BLSA – post-registration

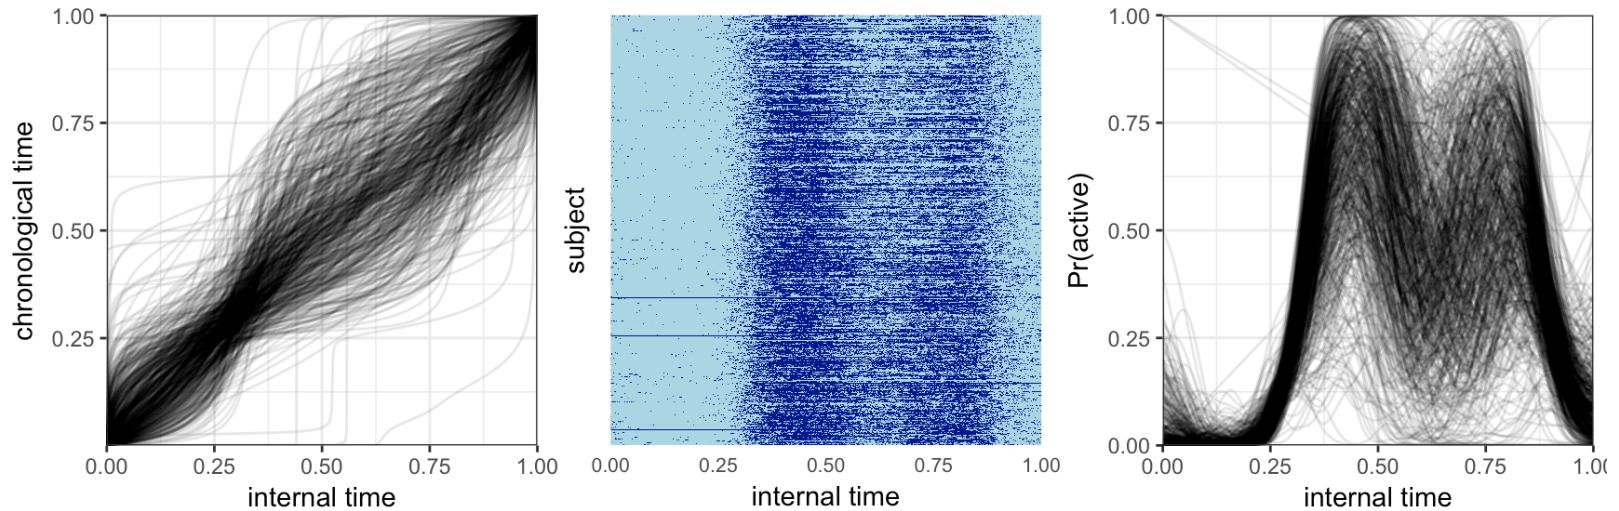

References:

- Wrobel, J., Zipunnikov, V., Schrack, J. and Goldsmith, J., 2019. Registration for exponential family functional data. *Biometrics*, 75(1), pp.48-57.