


## IBM Blockchain Platform

### ← [B6: Exercising the network](#)



## Tutorial B7: Connecting applications to the network

---

Estimated time: **30 minutes**

Blockchain client applications are the primary method for member organizations to interact with a Hyperledger Fabric blockchain. Depending on their role, different organizations might use different applications in order to interact with the shared data.

In this tutorial we will:

- Assemble the required network details that will allow our client applications to connect
- Build and run an application that displays the history of drivenet assets
- Learn about immutability in the blockchain and how transactions are persisted

In order to successfully complete this tutorial, you must have recently completed tutorial [B6: Exercising the network](#) on the drivenet network.

### Blockchain client applications vs. end-user applications

We'll now create a simple blockchain client application that interacts directly with the drivenet blockchain.

This is different to an end-user application. A typical end-user might not even know or care that the application they are using interacts with a blockchain, only that the information they see is trustworthy and that any transactions they initiate are completed successfully.

End-user applications typically consist of a mobile or web front end, and would probably interact with a blockchain via a portal of some kind, which would ultimately map to some business logic that submits any transactions on the end-user's behalf. Again, such a pattern requires users to place trust in the organization that is hosting these business services.

As an example, consider a blockchain for settling payments between banks. As an individual end-user or organization, we might interact with our bank using a mobile application and use it to send payments to a third party. Reconciliation of the account ledgers would take place between the banks; our end-user app will have no blockchain interaction whatsoever and merely submit transaction requests to our bank as a consumer.

Building a layered architecture such as this is beyond the scope of these tutorials. For our purposes, we'll look at the client applications that will interact directly with the drivenet blockchain.

 **B7.1:** Expand the first section below to get started.

---


## ► Export wallet

As we've seen several times throughout these tutorials, in order to connect to a Hyperledger Fabric network, applications need both a connection profile and a wallet containing an identity.


We downloaded our connection profile in tutorial [B4: Acquiring network connection details](#). We will use this directly from our application.

In the same tutorial, we downloaded our identity and used it to create a wallet within the VS Code workspace. We will now export that wallet to the file system, so that we have a wallet that is accessible to our application.


**B7.2:** In the Fabric Wallets view of the IBM Blockchain Platform VS Code extension, right click 'drivenet\_wallet' and select 'Export Wallet'.

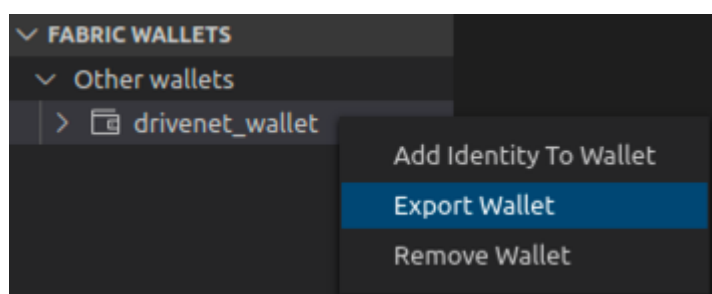

**B7.3:** Navigate to the folder that contains your downloaded connection profile and identity, and click Export.

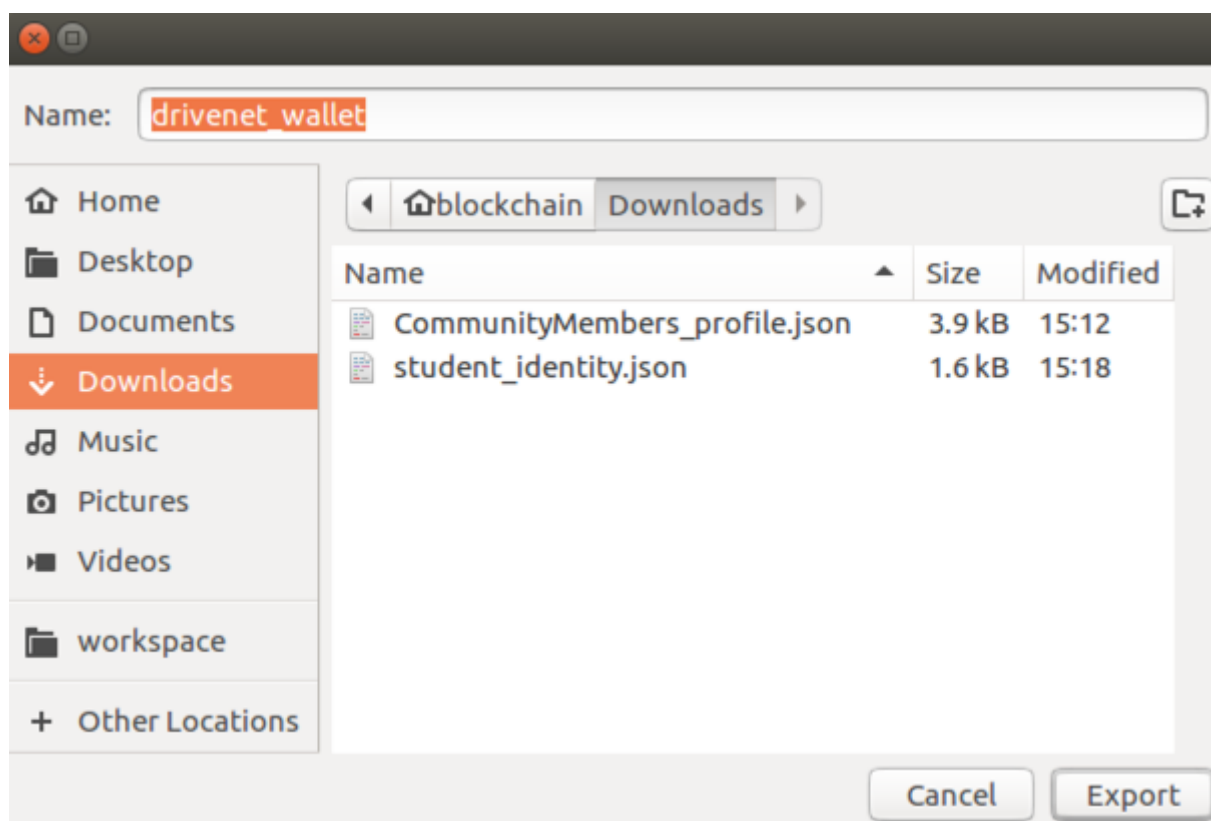

You'll see a notification to tell you that the export was successful.





**B7.4:** Expand the next section to continue.

## ► Build an application


Our application will report the ownership history for a car. It will take an optional input that is an ID of the form *CARnnn*, with an appropriate default value. It will then query the drivenet blockchain for the transactions associated with an asset with that ID. Finally, it will display the list of owners and the times those ownership changes occurred.

The process for building our application will be the same as the process for building any Hyperledger Fabric application. This is documented in one of our developer tutorials "A5: Invoking a smart contract from an external application"; we'll cover the general process here, but if you need precise guidance, check out the developer tutorial provided in the VS Code Blockchain Tutorial Gallery that we introduced in tutorial 1 of this series.

**B7.5:** From VS Code click on the Explorer icon. Choose the option 'Add Folder to Workspace'. From the "Add Folder to Workspace" window that opens up, click on the +Folder icon on the top right corner. Create a new folder called 'drivenet-app' and click the Add button to add it to your VS Code workspace.

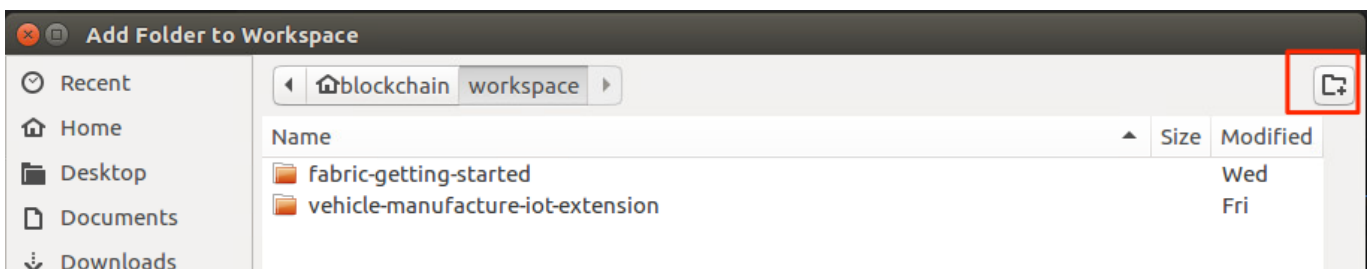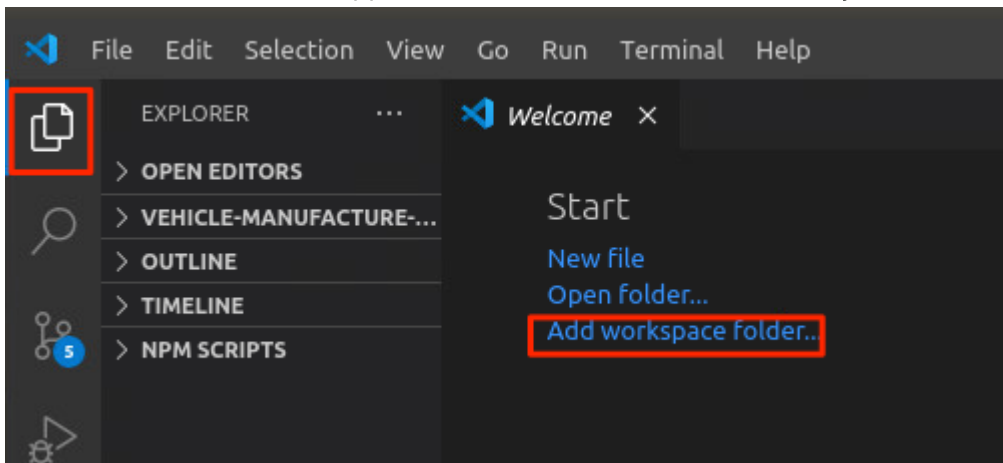


You should now see the new folder in your workspace.

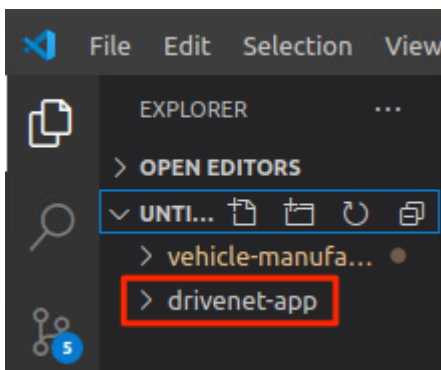


**B7.6:** Using the Ubuntu file viewer (file cabinet on left panel menu) or command line, copy both the exported wallet folder ('drivenet\_wallet') and the connection profile ('CommunityMembers\_profile.json') from


your downloads folder into the newly created ~/workspace/drivenet-app folder.

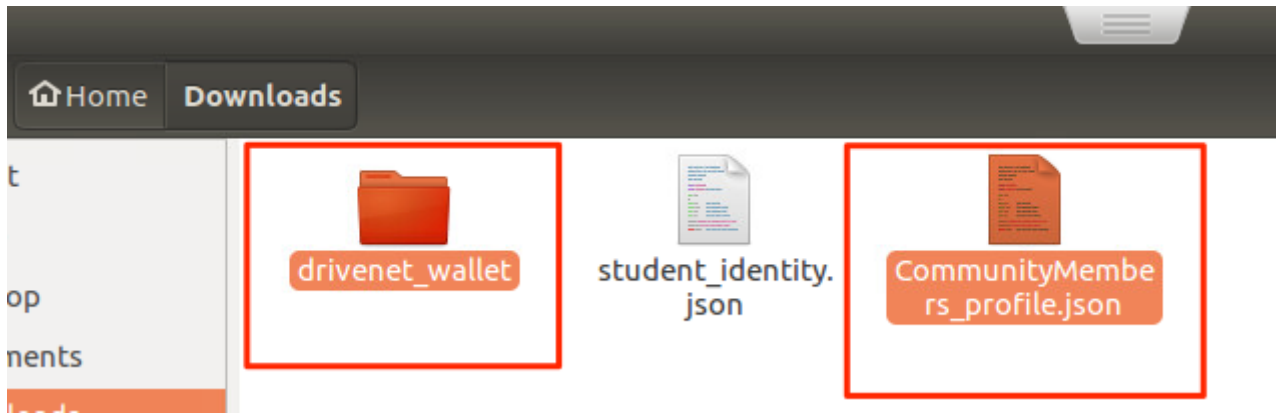

**B7.7:** In VS Code right click the drivenet-app folder and Create a new folder called 'src' inside drivenet-app.

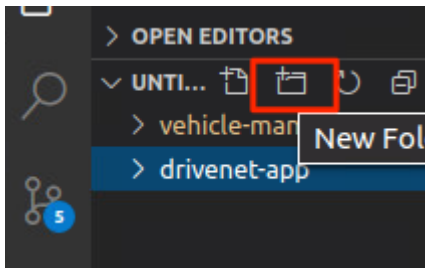

Your folder should currently look like this:

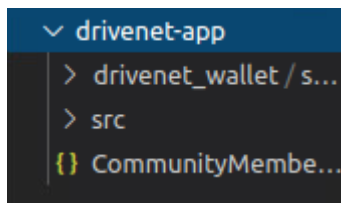

**B7.8:** Inside 'src' create a file called 'ownerhistory.ts' with the following contents (73 lines) (You can also find the source in ~/desktop/lab-snippets folder):

```
import { FileSystemWallet, Gateway, Network, Contract } from 'fabric-network';
import * as path from 'path';
import 'source-map-support/register';

interface Car {
  make: string;
  model: string;
  color: string;
  owner: string;
}

interface History {
  previousOwnerCount: number;
  previousOwners: string[];
  previousOwnershipChangeDates: string[];
  currentOwnershipChangeDate: string;
  currentOwner: string;
}
```

```

let carid: string;
let ownerSequenceNum = 0;
const DELETED_CAR_OWNER_IDENTIFIER = 'CAR KEY DELETED';

async function main() {
  try {
    // The ID of the car to look up (can be overridden by the first
    // commandline argument)
    carid = process.argv[2] !== undefined ? process.argv[2] : 'CARXXX'; //
    // TODO change

    // Create a new file system based wallet for managing identities.
    const walletPath: string = path.join(process.cwd(),
    'drivenet_wallet');
    const wallet: FileSystemWallet = new FileSystemWallet(walletPath);

    // Create a new gateway for connecting to our peer node.
    const gateway: Gateway = new Gateway();
    const connectionProfile: string = path.resolve(
      __dirname,
      '..',
      'CommunityMembers_profile.json'
    );
    const connectionOptions = {
      wallet,
      identity: 'student',
      discovery: { enabled: true, asLocalhost: false },
    };
    await gateway.connect(connectionProfile, connectionOptions);

    // Get to the drivenet network and smart contract
    const network: Network = await gateway.getNetwork('drivenet');
    const contract: Contract = network.getContract('fabcar');

    // Get current car details and owner history
    const carDetailsBuffer = await contract.evaluateTransaction(
      'queryCar',
      carid
    );
    const car: Car = JSON.parse(carDetailsBuffer.toString()) as Car;
    const previousOwnersBuffer = await contract.evaluateTransaction(
      'getPreviousOwners',
      carid
    );
    const history: History = JSON.parse(
      previousOwnersBuffer.toString()
    ) as History;
    console.log(
      `Owner history of ${carid} (currently ${car.color} ${car.make}
      ${car.model}):`
    );

    // Display the previous owners

```

```

    if (history.previousOwnerCount > 0) {
      for (let i = 0; i < history.previousOwners.length; i++) {
        const txTime = new Date(
          history.previousOwnershipChangeDates[i]
        ).toUTCString();
        if (history.previousOwners[i] === DELETED_CAR_OWNER_IDENTIFIER) {
          console.log(`${txTime}: The car record was deleted`);
        } else {
          console.log(
            `${txTime}: ${
              history.previousOwners[i]
            } became owner #${++ownerSequenceNum}`
          );
        }
      }
    }

    // Display the current owner
    const txTime = new
Date(history.currentOwnershipChangeDate).toUTCString();
    console.log(
      `${txTime}: ${history.currentOwner} became owner
#${++ownerSequenceNum}`
    );

    // Disconnect from the gateway
    gateway.disconnect();
  } catch (error) {
    console.error('Failed to call transaction:', error);
    process.exit(1);
  }
}
void main();

```

**B7.9:** Around line 27, change the ID of the default car to be the one you ended up owning in tutorial [B5: Exercising the network](#). Save your edits.

```

26 // The ID of the car to look up (can be overridden by the first cmdline argument)
27 carid = (process.argv[2] != undefined) ? process.argv[2] : 'CAR_';


```

(Note the other literal strings in this source file too; if you entered any non-default values when creating your wallet, identity and connection profiles (for example, the 'student' display name in tutorial [B3: Enrolling with the network](#)), remember to modify them here too.)

Some red underlines will appear, which indicate unresolved references in the source. This is fine; we'll fix these shortly.

**B7.10:** Create and save a file directly inside 'drivenet-app' (NOT the src folder) called 'tsconfig.json', with the following contents (25 lines). You can also find this file in the ~/Desktop/lab-snippets folder:

```
{
  "compilerOptions": {
    "target": "es6",
    "module": "commonjs",
    "allowJs": true,
    "sourceMap": true,
    "outDir": "./dist/",
    "strict": true,
    "noImplicitAny": true,
    "strictNullChecks": true,
    "strictFunctionTypes": true,
    "strictBindCallApply": true,
    "strictPropertyInitialization": true,
    "noImplicitThis": true,
    "alwaysStrict": true,
    "esModuleInterop": true,
    "forceConsistentCasingInFileNames": true
  },
  "include": ["./src/**/*.ts"],
  "exclude": ["node_modules"]
}
```

 **B7.11:** Create and save a file directly inside 'drivenet-app' (NOT the src folder) called 'package.json', with the following contents (74 lines):


```
{
  "name": "drivenet-app",
  "version": "1.0.0",
  "description": "DriveNet client application",
  "main": "dist/index.js",
  "typings": "dist/index.d.ts",
  "engines": {
    "node": ">=8",
    "npm": ">=5"
  },
  "scripts": {
    "lint": "tslint -c tslint.json 'src/**/*.ts'",
    "pretest": "npm run lint",
    "test": "nyc mocha -r ts-node/register src/**/*.spec.ts",
    "resolve": "npx npm-force-resolutions",
    "build": "tsc",
    "build:watch": "tsc -w",
    "prepublishOnly": "npm run build",
    "start": "node ./dist/ownerhistory.js",
    "ownerhistory": "node ./dist/ownerhistory.js",
    "blockhistory": "node ./dist/blockhistory.js",
    "changeowner": "node ./dist/changeowner.js"
  },
  "engineStrict": true,
  "author": "Hyperledger",
  "license": "Apache-2.0",
}
```

```

"dependencies": {
  "fabric-network": "~1.4.0"
},
"devDependencies": {
  "@types/chai": "^4.2.0",
  "@types/mocha": "^5.2.7",
  "@types/node": "^10.12.10",
  "@types/sinon": "^7.0.13",
  "@types/sinon-chai": "^3.2.3",
  "chai": "^4.2.0",
  "chai-as-promised": "^7.1.1",
  "jsrsasign": "^8.0.13",
  "minimist": "^1.2.5",
  "mocha": "^6.2.0",
  "nyc": "^14.1.1",
  "sinon": "^7.4.1",
  "sinon-chai": "^3.3.0",
  "ts-node": "^8.3.0",
  "tslint": "^5.19.0",
  "typescript": "^3.6.2",
  "source-map-support": "^0.5.19"
},
"nyc": {
  "extension": [".ts", ".tsx"],
  "exclude": ["coverage/**", "dist/**"],
  "reporter": ["text-summary", "html"],
  "all": true,
  "check-coverage": true,
  "statements": 100,
  "branches": 100,
  "functions": 100,
  "lines": 100
},
"resolutions": {
  "minimist": "^1.2.5",
  "mkdirp": "^1.0.4",
  "jsrsasign": "^8.0.13"
}
}


```

Your folder structure should look like this:

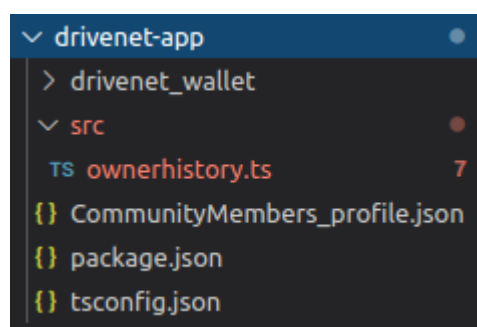



- ❑ **B7.12:** Right-click 'drivenet-app', select 'Open in integrated Terminal' and run the command `npm install`.

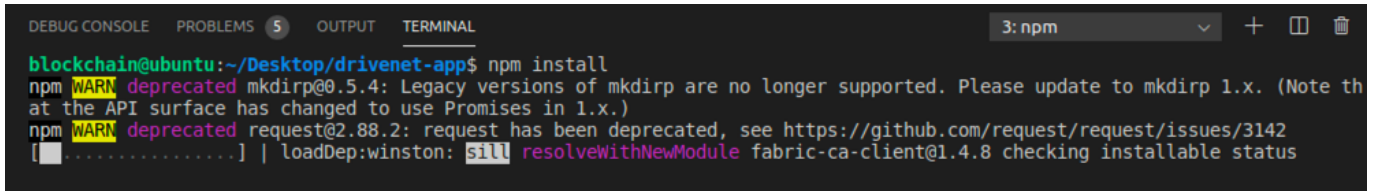


```
DEBUG CONSOLE  PROBLEMS 5  OUTPUT  TERMINAL  3: npm
blockchain@ubuntu:~/Desktop/drivenet-app$ npm install
npm WARN deprecated mkdirp@0.5.4: Legacy versions of mkdirp are no longer supported. Please update to mkdirp 1.x. (Note th
at the API surface has changed to use Promises in 1.x.)
npm WARN deprecated request@2.88.2: request has been deprecated, see https://github.com/request/request/issues/3142
[... ] | loadDep:winston: sill resolveWithNewModule fabric-ca-client@1.4.8 checking installable status
```


Wait for this command to complete; it might take a few minutes. If any vulnerabilities are found, you can run `npm run resolve` to resolve them.

The red underlines for the unresolved references should disappear.

- ❑ **B7.13:** In the main VS Code menu, click 'Terminal' -> 'Run Build Task...' and run the task 'tsc: watch - tsconfig.json drivenet-app'. Continue without scanning the task output.

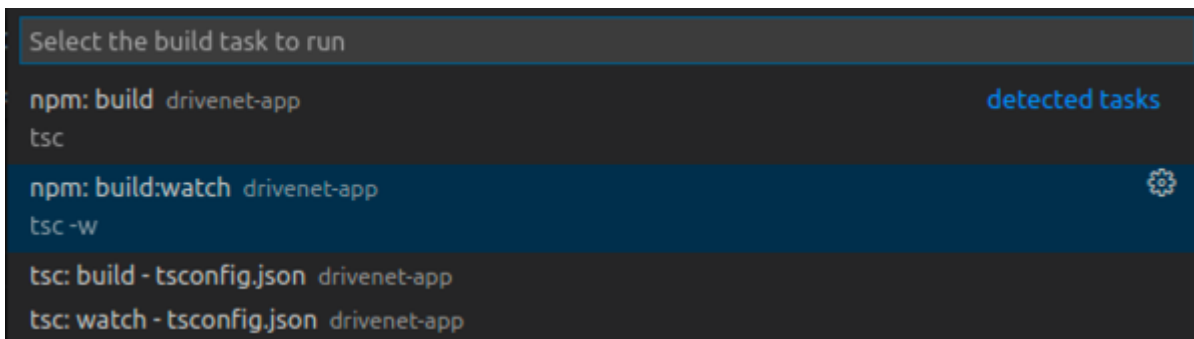

Your application should now build without errors, and the compiler will enter watch mode. This means that any changes to the source will cause an automatic rebuild of the application.

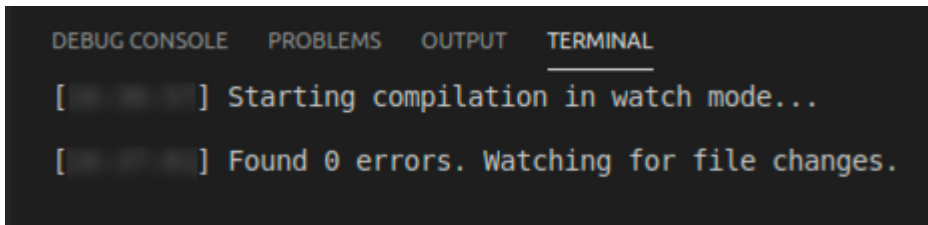

Our application is able to override the default key with a parameter on the commandline. (for example, `npm start CARXXX`). So let's configure the VS Code task menu to prompt us for a commandline parameter; this will allow us to look up additional records without recompilation.

- ❑ **B7.14:** In the main VS Code menu, click 'Terminal' -> 'Run Task...'. Find the task 'npm: ownerhistory drivenet-app' (click the 'npm' category if necessary) but **instead of** running it, click the Settings icon that appears to the right.

```
Select the task to run

npm: blockhistory drivenet-app
node ./dist/blockhistory.js

npm: build drivenet-app
tsc

npm: build:watch drivenet-app
tsc -w

npm: changeowner drivenet-app
node ./dist/changeowner.js

npm: install drivenet-app
install dependencies from package

npm: lint drivenet-app
tslint -c tslint.json 'src/**/*.ts'

npm: ownerhistory drivenet-app
node ./dist/ownerhistory.js
```

An editor window appears for a VS Code configuration file called 'tasks.json'.

- ☐ **B7.15:** Replace the contents of tasks.json with the following, remembering to update **CARXXX** in the description field to match the default you set earlier.

```
{
  // See https://go.microsoft.com/fwlink/?LinkId=733558
  // for the documentation about the tasks.json format
  "version": "2.0.0",
  "tasks": [
    {
      "type": "npm",
      "script": "start ${input:recordID}",
      "problemMatcher": []
    }
  ],
  "inputs": [
    {
      "id": "recordID",
      "type": "promptString",
      "description": "The unique key of the car record (default: CARXXX)"
    }
  ]
}
```

- ☐ **B7.16:** Save the file ('File' -> 'Save').


We will now try the new application out.

- ☐ **B7.17:** Expand the next section to continue.

---


## ► Run the application

- **B7.18:** With the drivenet-app folder selected in the explorer from the main VS Code menu, click 'Terminal' -> 'Run Task...' and select the task 'npm: start \${input:recordID} drivenet-app'.

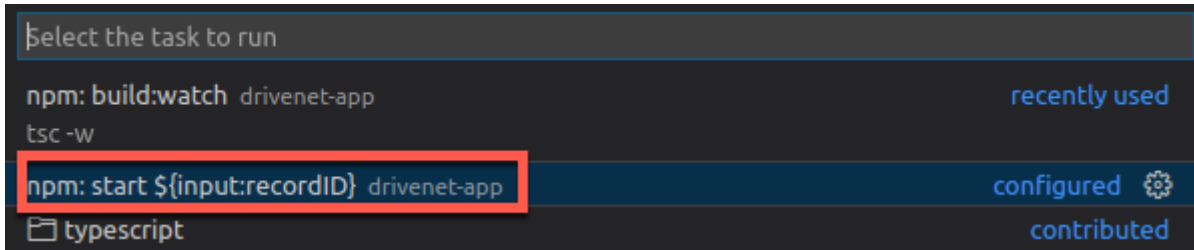


We'll now be prompted for input parameters, just like we configured. For now however, it's fine to accept our defaults.

- **B7.19:** Press Enter to accept the default lookup key. Then continue without scanning the task output.

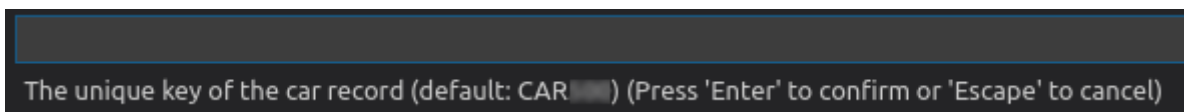

The new application will now run. After a brief pause, the ownership history will be shown in the Output view.

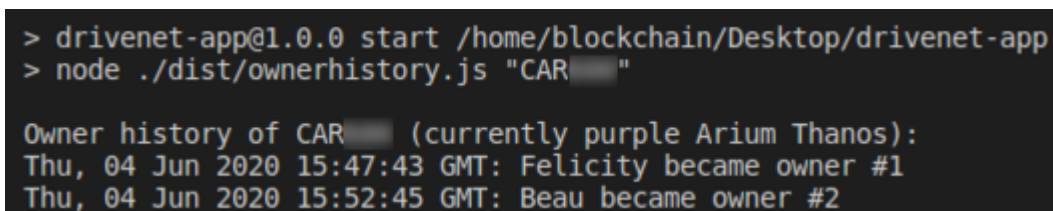

Feel free to re-run the task with alternative input parameters, to view the ownership history of other car records.

## Blockchain provenance

As we introduced in this workshop one of the strengths of blockchain is that it maintains a tamper-evident history of the assets described within it; we call this *provenance*. Viewing the ownership history is an example of something that provenance gives us.

To achieve provenance, each block of transactions is cryptographically linked to the one before it. Specifically, each new block contains a hash of the previous block; if any transactions were to be tampered with, peers would notice because the hashes would no longer match. This means that the transaction history cannot be deleted or later falsified.

In other words, even if an asset record is deleted in the world state, the history of transactions involving the asset is retained on the blockchain.

### Want to find out more?

Learn how blocks are linked together by reading the [Ledger topic](#) in the Hyperledger Fabric documentation.

We'll now demonstrate this property by deleting an asset record and attempting to create a new one with the same ID.

- B7.20:** Using the Fabric Gateways view of the IBM Blockchain Platform VS Code extension, submit a deleteCar transaction against the car that you currently own.

```
["CAR "]
optional: What are the arguments to the transaction, (e.g. ["arg1", "arg2"]) (Press 'Enter' to confirm or 'Escape' to cancel)
```

This transaction should succeed.

- B7.21:** Submit a createCar transaction with the **same ID** as before. The other values can be the same as before, or different.

```
["CAR ","Rancher","Orlando","red","Beardo"]
optional: What are the arguments to the transaction, (e.g. ["arg1", "arg2"]) (Press 'Enter' to confirm or 'Escape' to cancel)
```

While the transaction should succeed and the car record recreated, its history is retained.

- B7.22:** Re-run the history application.

You'll see an updated history for the car record, including the break in ownership history where the record was deleted.

```
> drivenet-app@1.0.0 start /home/blockchain/Desktop/drivenet-app
> node ./dist/ownerhistory.js "CAR "

Owner history of CAR (currently purple Arium Thanos):
Thu, 04 Jun 2020 15:47:43 GMT: Felicity became owner #1
Thu, 04 Jun 2020 15:52:45 GMT: Beau became owner #2
Thu, 04 Jun 2020 16:02:04 GMT: The car record was deleted
Thu, 04 Jun 2020 16:02:34 GMT: Beardo became owner #3
```

While the application shows the complete ownership *history*, only the *current* make, model and color is shown. There is no reason why the smart contract couldn't show the history of other modified fields too; all transaction details are available on the blockchain. You can browse these by navigating the blocks in the web console.

## Summary

In this tutorial we created an application that connects to drivenet and reports on the ownership history of assets.

If you compare the shape of this application to one you can create in our developer tutorial series A5: Invoking a smart contract from an external application, you'll see that interacting with a remote, multi-party network is conceptually identical to interacting with a local network. The network characteristics are hidden from the application developer; the location and credentials are completely encapsulated in the connection profile and wallet. This separation of concerns allows our applications to be more resilient to network changes.

We also looked more at the idea of provenance in the blockchain, and how transaction history is persisted even though individual asset records might not.

In the next tutorial we will extend our application to use the event framework, so that we can notified when the owner history changes. We'll also investigate some advanced uses of events for finding out when arbitrary transactions occur.

---

→ **B8: Listening for network events**