


debug buildunknown	coverage89%	Slack	
18 Example <code>worker.js</code>: <pre>var debug = require('debug')('worker'); setInterval(function() { debug('doing some work'); }, 1000); The DEBUG environment variable is then used to enable these based on space or comma-delimited names. Here are some examples:</pre>	7 <pre>debug('booting %s', name); http.createServer(function(req, res) { debug(req.method + ' ' + req.url); res.end('hello\n'); }).listen(3000, function() { debug('listening'); }); // fake worker of some kind require('./worker');</pre>	63 <pre>var debug = require('debug')('http') , http = require('http') , name = 'My App'; // fake app Example <code>app.js</code>: return a decorated version of console.error for you to pass debug statements to. This will allow you to toggle the debug output for different parts of your module as well as the module as a whole.</pre>	5 Usage <pre>\$ npm install debug</pre> Installation A tiny node.js debugging utility modelled after node core's debugging technique. Discussion around the V3 API is under way here
debug http and worker debug http and worker debug worker debug worker Windows note On Windows the environment variable is set using the set command. set DEBUG=*,-not_this 6	Note that PowerShell uses different syntax to set environment variables. \$env:DEBUG = "*, -not_this" Then, run the program to be debugged as usual. Millisecond diff When actively developing an application it can be useful to see when the time spent between one debug() call and the next. 10	Suppose for example you invoke debug() before requesting a resource, and after as well, the "+NNNms" will show you how much time was spent between calls. When stdout is not a TTY, Date#toUTCString() is used, making it more useful for logging the debug information as shown below: Conventions If you're using this in one or more of your libraries, you <i>should</i> use the name of your 11	library so that developers may toggle debugging as desired without guessing names. If you have more than one debuggers you <i>should</i> prefix them with your library name and use ":" to separate features. For example "bodyParser" from Connect would then be "connect:bodyParser". Wildcards The * character may be used as a wildcard. Suppose for example your library has debuggers named "connect:bodyParser", 12
Options object that gets used with %o/%O formatters. See the Node.js documentation for util.inspect() for the complete list. Formatters Debug uses print-style formatting. Below are the officially supported formatters: Formatter Representation Pretty-print an Object on multiple lines. %o %O	Whether or not to use colors in the debug output. DEBUG_COLORS Object inspection depth. DEBUG_DEPTH Shows hidden properties on inspected objects. DEBUG_SHOW_HIDDEN Note: The environment variables beginning with <code>DEBUG_</code> end up being converted into an 15	When running through Node.js, you can set a few environment variables that will change the behavior of the debug logging: Purpose Enables/disables specific debugging namespaces. DEBUG 14	"connect:compress", "connect:session", instead of listing all three with DEBUG=connect:bodyParser, connect:compress, or to run everything using this module simply use DEBUG=*. You can also exclude specific debuggers by prefixing them with a "-" character. For example, DEBUG=*,-connect: would include all debuggers except those starting with "connect:". 13


[illegible]



33

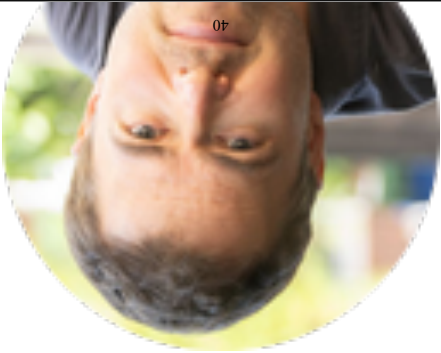

34

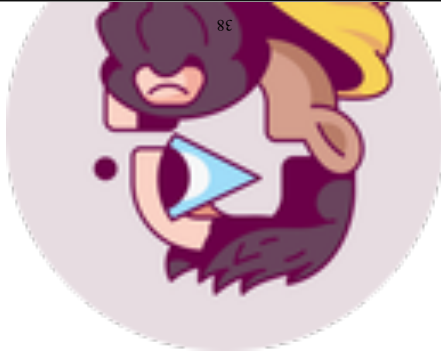


35




36

Become a
Backer

41




48




42

47



43

46



44

45

49	50	51	52
56	55	54	53
57	58	59	60
64	63	62	61

65	66	67	68
72	71	70	69
73	74	75	76
88	79	78	77

81	82	83	84
88	87	98	85
		Sponsors Become a sponsor and get your logo on our README on Github with a link to your site. [Become a sponsor]	
89	90	16	92
96	95	94	93

97	98	99	100
101	103	102	101
105	106	107	108
112	111	110	601

113	114	115	116
120	119	118	117
121	122	123	124
128	127	126	125

129	130	131	132
136	135	134	133
137	138	License (The MIT License) Copyright (c) 2014-2016 TJ Holowaychuk <tj@vision-media.ca> Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the 'Software'), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or	sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions: The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. THE SOFTWARE IS PROVIDED 'AS IS', WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
144	143	142	141
			AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.